

1. Description


1.1. Project

Project Name	F103C8T6_Mini_Board
Board Name	custom
Generated with:	STM32CubeMX 5.3.0
Date	09/16/2019

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

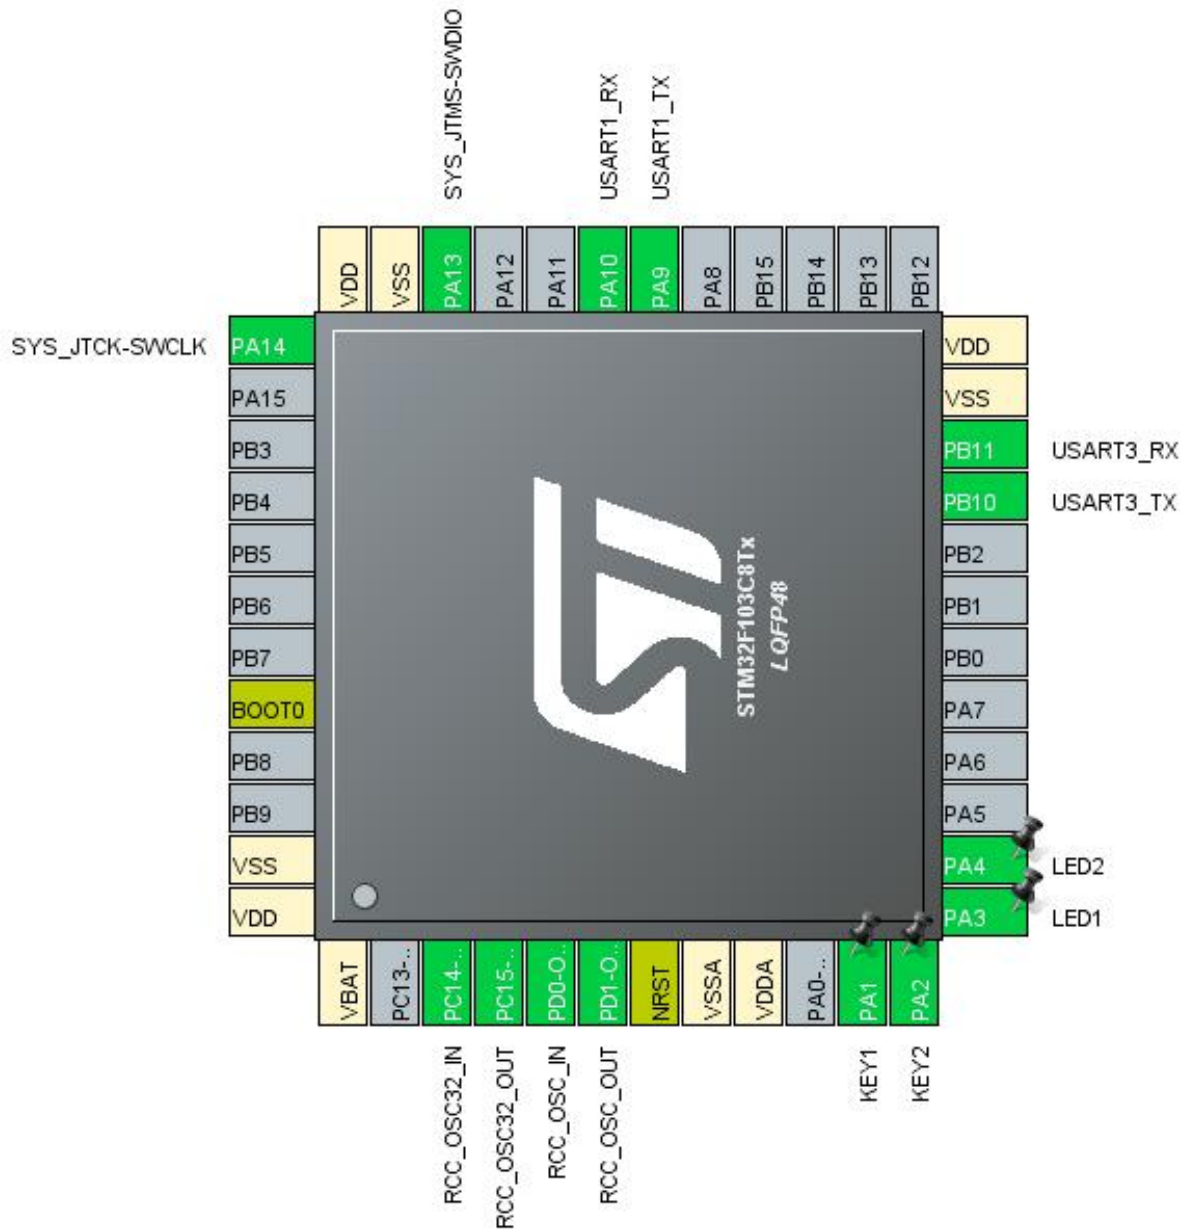


(Rotated -90°)

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
11	PA1 *	I/O	GPIO_Input	KEY1
12	PA2 *	I/O	GPIO_Input	KEY2
13	PA3 *	I/O	GPIO_Output	LED1
14	PA4 *	I/O	GPIO_Output	LED2
21	PB10	I/O	USART3_TX	
22	PB11	I/O	USART3_RX	
23	VSS	Power		
24	VDD	Power		
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

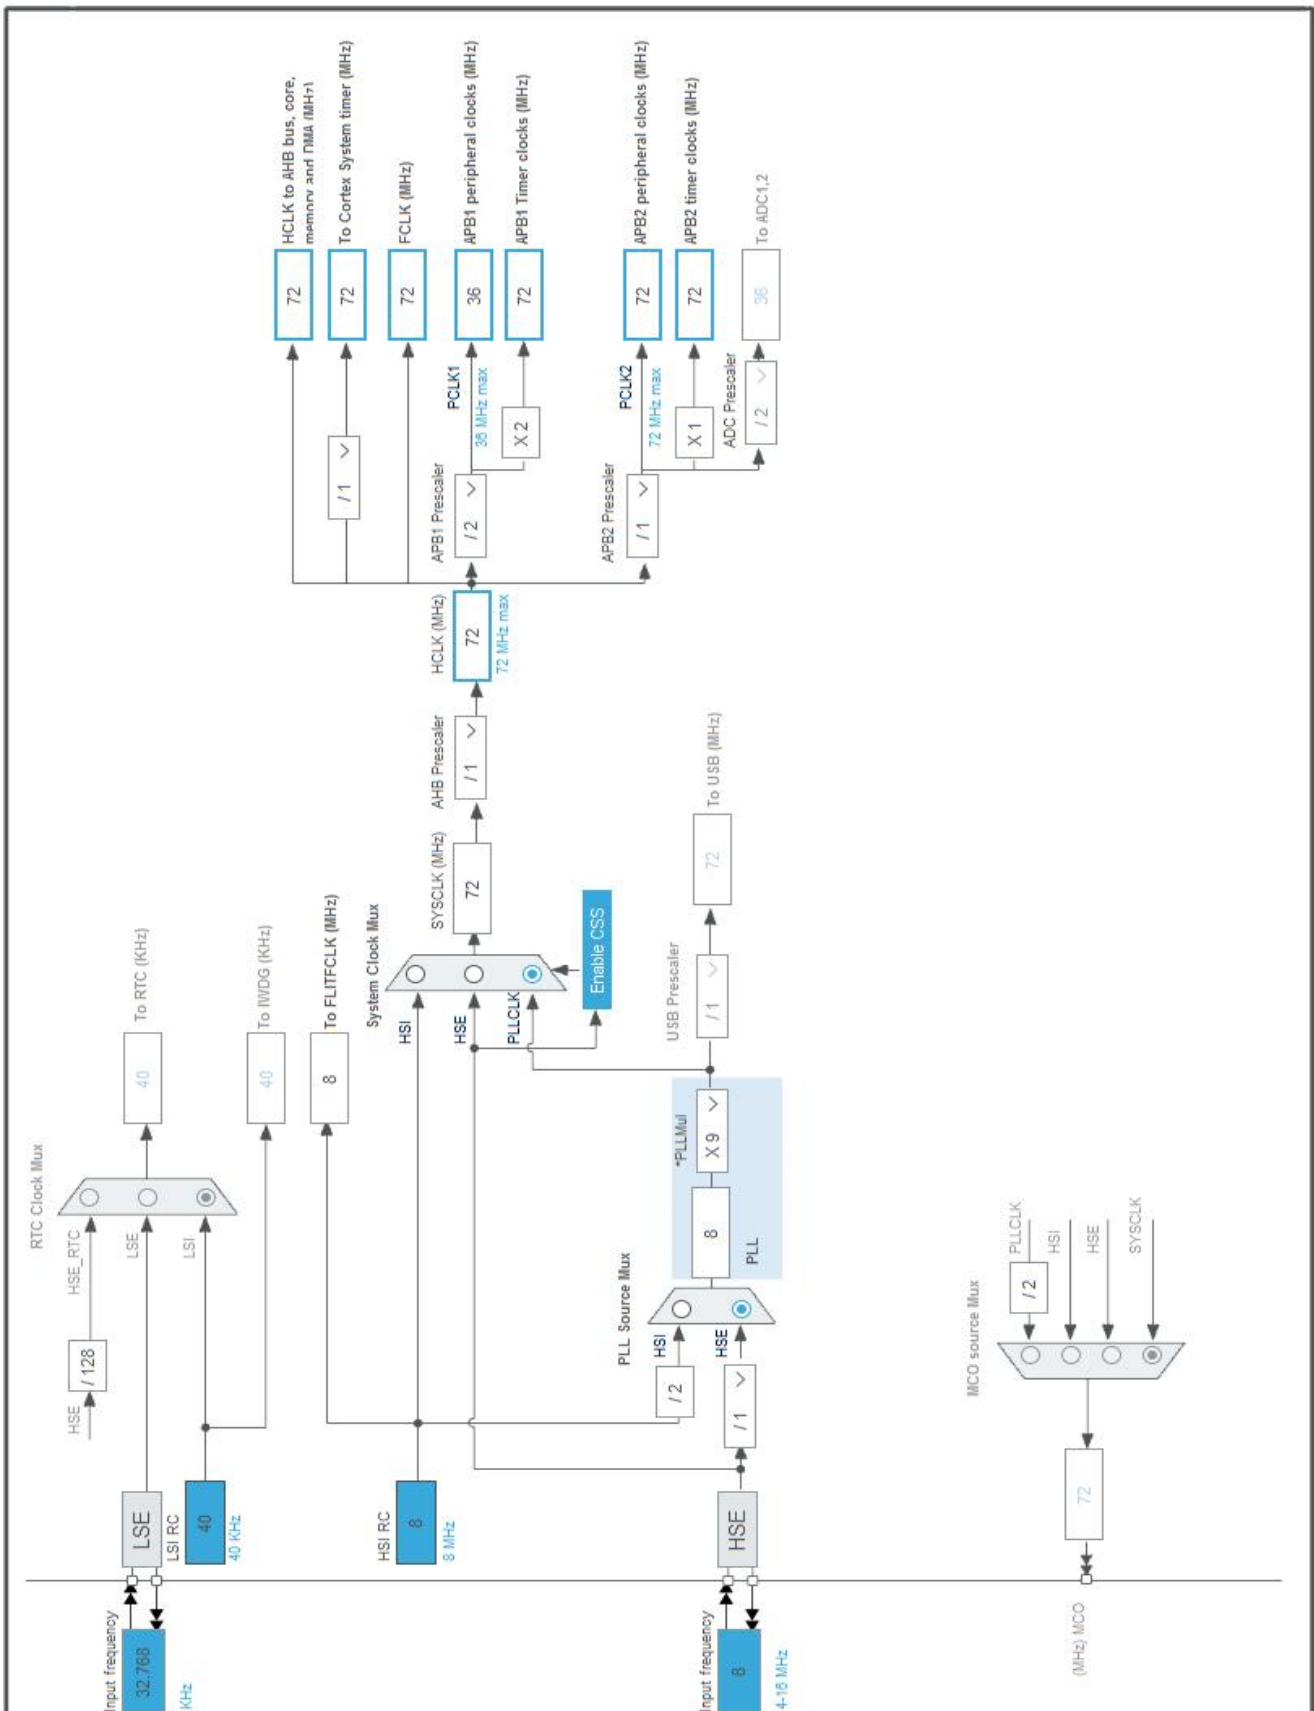

5. Software Project

5.1. Project Settings

Name	Value
Project Name	F103C8T6_Mini_Board
Project Folder	C:\Users\Administrator\Desktop\F103C8T6_Mini_Board
Toolchain / IDE	EWARM V8
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Add necessary library files as reference in the toolchain project configuration file
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

6.2. Parameter Selection

Temperature	25
Vdd	3.3

7. IPs and Middleware Configuration

7.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.2. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.3. USART1

Mode: Asynchronous

7.3.1. Parameter Settings:

Basic Parameters:

Baud Rate	38400 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.4. USART3

Mode: Asynchronous

7.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	38400 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
USART3	PB10	USART3_TX	Alternate Function Push Pull	n/a	High *	
	PB11	USART3_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PA1	GPIO_Input	Input mode	Pull-up *	n/a	KEY1
	PA2	GPIO_Input	Input mode	Pull-up *	n/a	KEY2
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED1
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED2

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART1 global interrupt	true	0	0
USART3 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		

* User modified value

9. Software Pack Report