电子科技大学
格拉斯哥学院
Glasgow College, UESTC

FINAL YEAR PROJECT REPORT
BACHELOR OF ENGINEERING

A Low-Complexity Joint OMP–MP Receiver with a Learned Support-Refinement Head for AFDM Underwater Acoustic Communication under Superimposed Pilots

Student:	Yikun GUO
GUID:	2840210g
UESTC Student No.:	2022190908014
1st Supervisor:	Yusha Liu
2nd Supervisor:	

2025–2026

Coursework Declaration and Feedback Form

This student should complete and sign this part.

Student Name: Yikun GUO	Student GUID: 2840210g
Course Code: UESTC4006P	Course Name: INDIVIDUAL PROJECT 4
UESTC No.: 2022190908014	Academic Year: 2025–2026
Name of 1st Supervisor: Yusha Liu	Name of 2nd Supervisor:
Title of Project: **A Low-Complexity Joint OMP–MP Receiver with a Learned Support-Refinement Head for AFDM Underwater Acoustic Communication under Superimposed Pilots**	
Declaration of Originality and Submission Information	
I affirm that this submission is all my own work in accordance with the University of Glasgow Regulations and the School of Engineering requirements. *Signed (Student):*	
Date of Submission:	
Feedback from Lecturer to Student - to be completed by Lecturer or Demonstrator	
Grade Awarded: Feedback (as appropriate to the coursework which was assessed):	
Lecturer / Demonstrator:	Date returned to the Teaching Office:

Abstract

This report designs and evaluates a low-complexity joint channel-estimation and data-detection receiver for Affine Frequency Division Multiplexing (AFDM) under superimposed pilots (SP) on a UWA-style doubly-dispersive simulator, augmented by a very small learned support-refinement module. The SP frame preserves spectral efficiency but introduces structured data-on-pilot interference that leaves a one-shot OMP + MP-BP receiver estimation-limited at high SNR (§3). We show that iterating data-aided least-squares and sparse message-passing detection on a support locked by a single OMP pass — rather than re-running OMP every outer iteration or switching to a dense LMMSE estimator — recovers several orders of magnitude in BER at high SNR while preserving the sparse-baseline arithmetic class $\mathcal{O}(PN^2)$. On top of this classical joint baseline we insert a 1 041-parameter deep-unfolding support-refinement head, deployed as a deterministic top-K_{add} ranker; the head adds sub-dominant operations ($\approx 8\%$ arithmetic overhead at $N = 1024$) and is trained as a *single checkpoint* under a BCE + pairwise rank-hinge objective, deployed in ranking mode (calibration of the learned scores is out of scope). Under a paired-frame Monte-Carlo protocol with seed-matched channel realisations, pooled across three independent evaluation-seed blocks, the learned receiver yields a *consistent* ≈ 2 dB visible paired separation from the classical joint at SNR $\in \{20, 25, 30\}$ dB (see Table 3 for per-SNR paired-BER reductions and paired-McNemar p-values; worst-case $p \leq 4 \times 10^{-3}$). A single-seed 400-paired-frame illustrative row on one favourable evaluation seed produces larger headline numbers; we report both but treat the 3-seed pooled row as the defensible claim and the single-seed row as an illustrative favourable-seed observation. Two mechanism probes ground the learned gain: OMP-once recovers $\approx 95\%$ mean recall against the effective Dirichlet-expanded virtual-tap oracle support, with the residual structurally determined by the Dirichlet-leakage geometry rather than by noise; and a "clean-pilot oracle-support" diagnostic (Probe (b)) is reported as a *negative* mechanism finding, not as a ceiling on the learned gain. The receiver is described throughout as *arithmetic-class preserving* (same asymptotic $\mathcal{O}(PN^2)$ as the sparse classical baseline under fixed hyperparameters M, K_{add}), not complexity-optimal; runtime, memory and energy on a realistic embedded target, together with multi-seed retraining variance and a direct numerical reproduction of published SP-AFDM baselines, are declared scope limits and are the natural follow-up work. The headline is a paired observation on a UWA-style sparse doubly-dispersive simulator, not a claim for a field UWA deployment.

Acknowledgements

The author thanks Yusha Liu for supervision, feedback on the research direction, and guidance that shaped the transition from a prototype classical-only receiver to the complexity-preserving learned-head recipe reported here. Hardware access to the shared RTX 4090 compute node is gratefully acknowledged; without it the large paired-frame Monte-Carlo budgets needed to make the McNemar tests statistically well-defined would not have been feasible.

Contents

Coursework Declaration and Feedback Form i

Abstract ii

Acknowledgements iii

List of Figures vi

List of Tables viii

1 Introduction and Literature Survey 1

1.1 Background and motivation 1
1.2 Critical literature survey 2
1.3 Research question and objectives 4
1.4 Contributions 5
1.5 Report structure 6

2 Materials and Methods 7

2.1 AFDM signal model and the DAFT 7
2.2 UWA-style simulator channel and effective-channel sparsity 7
2.3 Superimposed pilot signal model 8
2.4 Sparse-baseline OMP dictionary and its complexity 8
2.5 Joint OMP-once + inner LS/MP-BP iterative recipe 10
2.6 Learned C2-rel support-refinement head 12
2.7 Training 14
2.8 Complexity analysis 15
2.9 Evaluation protocol 16
2.10 Baseline selection and fairness 17

3 Results 18

3.1 Simulation parameters 18
3.2 Experiment 1 — main 4 B BER waterfall and paired BER reductions 19
3.3 Experiment 2 — outer-iteration convergence probe 20
3.4 Design rationale: support recall and oracle-support headroom 21
3.5 Experiment 3 — complexity and MAC count 24
3.6 Summary 25

4 Discussion 27

4.1 Why the serial receiver saturates 27

4.2 Why OMP-once is enough and why this is arithmetic-class preserving, not low-complexity or complexity-optimal 27
4.3 Where the learned head helps and why only at high SNR 28
4.4 4 B oversampling: physical justification of the operating point 30
4.5 Comparison to prior AFDM and UWA work 30
4.6 Known weaknesses 32
4.7 Summary 33

5 Conclusions **34**

Appendices **40**

A Simulator Correspondence and Pilot Convention **40**

B Paired-Bootstrap and Clopper–Pearson Confidence Intervals **40**

C OMP-Once Recall Against the Oracle Dirichlet Support (Probe (a)) **41**

D McNemar Paired-Bit Significance Test **42**

List of Figures

1 Classical OMP-once + inner LS/MP-BP joint receiver (Algorithm 1 in block-diagram form). The outer loop (dashed rectangle) runs for $T_{\text{out}} = 5$ iterations; each iteration forms a data-cancellation residual, refits the path gains on a locked support via damped DA-LS, runs sparse MP-BP detection on the Dirichlet-expanded virtual-tap factor graph, updates the adaptive noise-variance estimate, and prunes the support. 11

2 Integration of the learned C2-rel F2-P support-refinement head into the classical OMP-once + inner LS/MP-BP receiver. The learned block (dark blue) is invoked twice at the initialisation step ($t = 0$), immediately after OMP-once and before the inner LS/MP-BP loop begins; it ranks the top-$M = 96$ off-support candidates and appends the top-K_{add} atoms to the support. All other blocks are identical to Fig. 1: the head does not replace OMP-once or the inner LS/MP-BP iteration. The detailed head architecture is given in Fig. 3. 12

3 C2-rel F2-P learned support-refinement head (architecture). Two parallel inputs per candidate i: a 7-D self-feature $\mathbf{u}_i$ and a set of 6-D pair features $\{\mathbf{v}_{i,s}\}_{s\in\hat{S}}$ indexed over the current active support $\hat{S}$. The shared pair-encoder MLP ($\mathbb{R}^6 \to \mathbb{R}^{16} \to \mathbb{R}^{16}$, 384 parameters) is applied element-wise over (i,s) pairs; order-invariant pooling (concat of channel-wise max and mean over $s \in \hat{S}$) produces a 32-D pair descriptor per candidate, which is concatenated with $\mathbf{u}_i$ to form $\phi_i \in \mathbb{R}^{39}$. The shared scorer MLP ($\mathbb{R}^{39} \to \mathbb{R}^{16} \to \mathbb{R}^1$, 657 parameters) emits a scalar logit s_i; the deterministic top-K_{add} ranker selects the atoms to append. Total trainable parameters: $384 + 657 = 1\,041$. The logits are used only for ranking; calibration is out of scope (§2.6). 13

4 Main 4 B BER waterfall (left) and channel-estimation NMSE (right) at $f_s = 4B$ for the four receivers described in §2.10. The C2-REL F2-P line is produced by the 27 k-frame 4-SNR retrained checkpoint. The OMP+MP SERIAL arm saturates from SNR ≥ 15 dB; the CLASSICAL JOINT and C2-REL F2-P arms continue to descend, with C2-REL F2-P consistently below CLASSICAL JOINT in the high-SNR region. The PCSI+MMSE curve is a PCSI+MMSE reference, not an information-theoretic lower bound. 19

5 Outer-iteration convergence at SNR $\in \{15, 20\}$ dB, $f_s = 4B$, with 80 paired frames per $(t, \mathrm{SNR} = 15\,\mathrm{dB})$ cell and 300 paired frames per $(t, \mathrm{SNR} = 20\,\mathrm{dB})$ cell (extended budget at the 10^{-4} BER level for a tighter rebound check). Both recipes descend rapidly over $t = 1, \ldots, 4$ and essentially saturate by $t = 4$. At SNR = 20 dB the classical $t = 4 \to 5$ move ($8.81 \times 10^{-4} \to 9.07 \times 10^{-4}$, $+3\%$) sits inside 1σ of a 614,400-bit binomial count; the learned $t = 4 \to 5$ move ($4.51 \times 10^{-4} \to 5.42 \times 10^{-4}$, $+20\%$, $\approx 3\sigma$) is a residual saturation / counting-noise interaction rather than a genuine iteration blow-up. Numerical values in Table 4. 21

6 Left: mean OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size ≈ 28; definition in Appendix C), as a function of SNR. Recall is stable at $\approx 95\%$, indicating that the support-selection residual is *structural* rather than noise-driven. Right: fraction of frames on which OMP misses at least one virtual-tap oracle atom. Prevalence is ≈ 67–71% and essentially flat across SNR. Axes: SNR in dB; left panel y = mean recall in $[0, 1]$; right panel y = fraction of frames with ≥ 1 missed atom. Error bars are 1σ across frames within each SNR cell. 23

7 Clean-pilot top-P diagnostic at SNR $\in \{15, 20\}$ dB, $f_s = 4B$ (log-BER on x-axis; four bars per SNR cell). At SNR = 20 dB the clean-pilot top-P reference is *worse* than classical OMP, so this reference is not a valid ceiling on top-P support refinement. 25

List of Tables

1 OMP dictionary size under the canonical UWA AFDM configuration ($\tau_{\text{spread}} = 10$ ms, $v_{\max} = 3$ m/s, $f_c = 12$ kHz, $f_s = 2B = 8$ kHz). Under this fixed-f_s convention, $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil = 80$ is independent of N, while $k_{\max} = \lceil v_{\max} f_c N/(c f_s) \rceil$ grows linearly with N. Hence $Q = (2k_{\max}+1)l_{\max} = \mathcal{O}(N)$. At the report's operating point $f_s = 4B$ the arithmetic is redone in Table 2 (Chapter 3), yielding $(l_{\max}, k_{\max}, Q) = (160, 2, 800)$ at $N = 1024$; the overall $\mathcal{O}(N)$ scaling is unchanged. 9

2 Simulation parameters. One configuration is used for every receiver in every experiment. 18

3 4 B BER waterfall under the paired-frame protocol. Upper block: *3-seed pooled* headline (seeds 20 260 423/424/425; adaptive frame counts 600/773/1 300 at SNR $= 20/25/30$ dB, driven by the error-budget early-stop rule of §2.9). Lower block: single-seed 400-frame illustrative row (seed 20 260 425). Column Δ is the relative paired-BER change of C2-REL F2-P against CLASSICAL JOINT, with McNemar p-values where both arms are above the finite-sample floor. CP = Clopper–Pearson 95% CI. 19

4 4 B outer-iteration convergence BERs: 80 frames per $(t, \text{SNR} = 15\,\text{dB})$ cell and 300 frames per $(t, \text{SNR} = 20\,\text{dB})$ cell. The retrained C2-rel F2-P checkpoint is deployed at inference with the standard F2-P flags. 20

5 OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size $p_{\text{real}} \approx 28$ per frame; the OMP support itself has size $P = 8$), computed from the 4 B feature cache. "Frac. frames ≥ 1 missed" is the fraction of frames on which the learned head has at least one Dirichlet-leakage virtual tap to repair. 22

6 Clean-pilot top-P diagnostic at $f_s = 4B$, 250 paired frames per cell, mp_mode = bp. The PCSI+MMSE column is repeated from Table 3 for reference. The "Gap closed" metric is left N/A because the diagnostic does *not* act as a valid ceiling: at SNR = 15 dB the classical and clean-pilot-support BERs are statistically indistinguishable (1.98×10^{-2} vs 1.95×10^{-2} over 512 k paired bits, i.e. the clean-pilot ranking gives no improvement at all), and at SNR = 20 dB the clean-pilot top-P reference is *worse* than the classical OMP selection (7.70×10^{-4} vs 3.89×10^{-4}). This is the negative mechanism finding of §3.4: the clean-pilot ranking is not a valid proxy for the best top-P support in the SP-coupled receiver, so the Table does not provide a ceiling on what support refinement can deliver. . 24

7 Complexity comparison for the six receiver recipes considered in this report. "Dominant operator" gives the step that dominates the per-frame cost. MAC counts are first-order complex-multiplication estimates at $N = 1024$; runtime, memory, and latency effects are out of scope for this report. 24

8 Structural comparison of the closest published AFDM / AFDM-SP / UWA-AFDM receivers and the present work. “SP” = superimposed pilots, “EP” = embedded pilots, “MSML” = multi-scale multi-lag, “stat. disc.” = whether the published evaluation uses paired seeds and a formal significance test. No numerical BER–SNR number is claimed here against any external work; the last column only records whether the present thesis covers a narrower, different, or complementary regime. 31

1 Introduction and Literature Survey

1.1 Background and motivation

Underwater acoustic (UWA) communications carry much of the non-tethered data traffic between autonomous underwater vehicles, ocean-bottom sensors, and surface platforms. The physical layer of this modality is defined by two pathologies of the water-column channel that, taken together, are harder to handle than almost any terrestrial radio-frequency link. First, the multipath between the sea surface, the water column, and the sea bed produces delay spreads of several to tens of milliseconds, which at the 4–12 kHz bandwidth budgets typical of UWA modems translates to hundreds of resolvable delay bins [1, 2]. Second, the very slow propagation speed ($c \approx 1500$ m/s) combined with platform motion of even a few m/s yields a relative Doppler of order $v/c \sim 10^{-3}$, which is three to four orders of magnitude larger than in a typical RF link and almost always produces *fractional* Doppler in the chirp/sub-carrier domain [3, 4]. A conventional OFDM receiver cannot absorb either pathology cleanly: a cyclic prefix long enough for the full delay spread costs a prohibitive fraction of spectral efficiency, and a residual fractional Doppler of even a few tenths of a sub-carrier corrupts the sub-carrier orthogonality in a way that a single-tap frequency-domain equaliser cannot repair.

Affine Frequency Division Multiplexing (AFDM) [5] was designed for doubly dispersive channels. It places information on a chirp basis defined through the discrete affine Fourier transform (DAFT), and the two chirp coefficients (c_1, c_2) can be chosen so that the delay–Doppler pairs of the physical channel fold into a *single sparse* structured effective channel on the chirp-domain received signal, rather than into the full two-dimensional delay–Doppler grid that Orthogonal Time Frequency Space (OTFS) modulation [6–8] would produce. This sparsity is what makes sparse-recovery-based channel estimation tractable on AFDM [9, 10], and it is the starting point of every receiver considered in this report.

Orthogonal pilot overhead, however, remains a first-order constraint on spectral efficiency in UWA contexts where the bandwidth is only a few kHz. This report therefore adopts a superimposed-pilot (SP) transmission in which every AFDM sub-carrier simultaneously carries data and pilot energy under a fixed power split ρ [11, 12]. SP doubles the available data capacity relative to a comparable embedded-pilot (EP) frame at the cost of one new estimation problem: the pilot observation is systematically contaminated by unknown-data interference, and at mid-to-high SNR the OMP-based channel estimator does not average that interference out. In our $\rho = 0.5$, $P = 8$-path UWA simulation the resulting error floor for a naive serial (one OMP pass followed by one MP-BP detection pass) receiver is BER $\approx 4.1 \times 10^{-2}$ from SNR ≥ 15 dB, with OMP channel-estimation NMSE frozen at ≈ -11.3 dB. Iterating over path-gain least-squares and sparse MP-BP on a single OMP support lock recovers approximately two and a half orders of magnitude of BER at SNR $= 25$ dB (Fig. 4, Table 3), which motivates the "OMP-once + inner LS/MP-BP" design of this report. The central engineering problem of this report is to close that

gap at an arithmetic cost that is consistent with a UWA modem's per-frame budget.

A natural answer is to iterate between channel estimation and symbol detection [13, 14]. Naively, however, two such iterative recipes are expensive. Re-running OMP on every outer iteration pays an $\mathcal{O}(P \cdot N \cdot Q)$ cost per pass, which, under the UWA regime described in Chapter 2, is $\mathcal{O}(PN^2)$ per pass and therefore a $5\times$ constant-factor overhead at $T_{\text{out}} = 5$. Replacing OMP with a dense LMMSE channel estimator pays $\mathcal{O}(N^3)$, which at $N = 1024$ is two orders of magnitude more expensive than the sparse recipe. The choice we adopt in this report is "OMP-once + inner LS/MP-BP iterations": the OMP support is estimated once, the path-gain least-squares refit and the sparse MP-BP detection iterate on the locked support, and a very small learned module refines the support at the initialisation step — immediately after OMP-once and before the inner LS/MP-BP loop begins. This is the specific combination whose performance and complexity we set out to quantify.

1.2 Critical literature survey

The literature relevant to this report lies in six overlapping but distinguishable themes, which we organise below in order of decreasing closeness to our setting. Each theme is identified with its closest published representative and with the specific gap in the published work that motivates the corresponding design choice in Chapter 2; adjacent communities cited for context are summarised at the end of the section. The aim is not to produce an encyclopaedic bibliography. Instead, the survey is used as a design funnel: first it establishes why AFDM is the relevant waveform, then why SP rather than EP changes the receiver problem, then why joint CE/DD is necessary, and finally why a small learned support-refinement block is a plausible but tightly scoped addition rather than a replacement for the sparse receiver. This structure is important for the rest of the report because every major method choice in Chapter 2 is traceable to one of these literature constraints.

AFDM under embedded pilots. The original AFDM paper [5] and the subsequent channel-estimation literature [9, 10, 15] predominantly assume an embedded-pilot (EP) frame with dedicated guard intervals that keep pilot observations pilot-only. EP is analytically clean and gives rise to very tight sparse-recovery guarantees, but it also wastes spectral efficiency — a first-order concern in UWA links — and in our Dirichlet-expanded fractional-Doppler regime it produces guard-region artefacts on virtual taps whose Doppler offset falls close to the guard edge. *Extension.* The present report operates entirely under superimposed pilots, so the SP-specific estimation-limited floor is part of the problem we have to solve rather than a modelling nuisance we can avoid.

AFDM under superimposed pilots. The closest published work to our setting is by Qing *et al.* [16], who develop an SP-AFDM channel estimator with an iterative estimation–detection loop,

and by Zhao *et al.* [17], who propose a guard-interval-free pilot-aided AFDM channel estimator with iterative interference cancellation. Both works demonstrate that iterating the estimation and detection blocks is necessary once the pilot observation is no longer pilot-only, and both report BER waterfalls that qualitatively match our classical joint curve at comparable SNR. *Extension.* Compared to Qing *et al.* and Zhao *et al.*, we (i) run OMP only once with an explicit $Q = \mathcal{O}(N)$ derivation and per-frame MAC budget, (ii) iterate only over path-gain least-squares and MP-BP, and (iii) insert a learned top-K_{add} ranker *exclusively* for support refinement at sub-dominant per-frame cost. A direct head-to-head numerical reproduction of their reported SNR–BER operating points on our own seed blocks is *not* performed in this report (§4.5 lists it as scheduled follow-up work under §4.6); the prior-art discussion is kept qualitative and we do not claim superiority against an unreproduced external baseline.

Joint channel estimation and symbol detection for AFDM. The 2025 *Physical Communication* paper on joint channel estimation and symbol detection for AFDM [18] develops a CE + SD receiver without SP or UWA focus. Its message is that the iterative CE + SD branch of the AFDM literature is active and that joint receivers outperform two-step ones in sufficiently sparse regimes. *Extension.* We share the joint-iterative philosophy but combine it with SP, UWA fractional Doppler, and the learned head. This work is cited as motivation that joint AFDM receivers are not a dead end, without overlapping with our specific combination of SP + UWA + learned support refinement.

Oversampled AFDM joint CE / DD receivers. An oversampled AFDM joint CE / data-detection receiver was already proposed by Ma *et al.* [19] in 2024. Their work demonstrates that oversampling the chirp-domain observation by a factor of 2 delivers tangible channel-estimation improvements independent of any learned component, which directly anticipates the physical-layer part of our 4 B BER result. *Extension.* We therefore claim no novelty for "oversample and win"; our Claim 3 (Chapter 3) claims novelty only for the *combination* of oversampling with the OMP-once + learned-head recipe, and the absolute 4 B BER number is reported openly as an observed best configuration over a specific bit budget, not as a new performance bound.

AFDM for UWA and multi-scale multi-lag channels. AFDM has been extended to UWA-adjacent MSML channels with AFDM-OMP serving as the channel-estimation primitive [20]. Their work is the closest published physical-layer match to ours and operates in an even more physically realistic regime (per-path time-scaling rather than per-path Doppler shift). *Extension.* We adopt AFDM-OMP as the channel-estimation primitive but do not resolve the full MSML time-scaling model; we therefore call our simulator *UWA-style* rather than *UWA* throughout the report. We state this as a scope limitation (§4.6) and explicitly do not claim that the learned gain transfers to the MSML regime or to a field UWA deployment.

Fractional-Doppler AFDM channel estimation. Diagonal-reconstruction approaches and more recent attention-based AFDM estimators address the Dirichlet-leakage problem directly [15, 21]. These are the closest published works to the "leakage-atom repair" mechanism we attribute to the C2-rel head in Chapter 4. *Extension.* We do not claim the *idea* of leakage repair; we claim a particular minimalist, arithmetic-class-preserving realisation (1 041 parameters, $\mathcal{O}(MN + P^2N)$ per frame under fixed (M, K_{add}), BCE + rank-hinge training, deterministic top-K_{add} inference) that explicitly does not raise the asymptotic class of the receiver.

Adjacent communities cited for context. OTFS precursors and OTFS MP/BP detection [6–8] motivated AFDM's 1-D DAFT via a 2-D delay-Doppler comparison. Sparse channel estimation and OMP [3, 4, 22, 23] provides the foundational compressive-sensing and UWA CS results but is not AFDM-specific. Deep-unfolding receivers [24–30] provide the architectural template for learning-augmented receivers, but they are overwhelmingly detection-only or MIMO-detection-only and do not target OMP support refinement inside a joint AFDM receiver. Factor-graph / message-passing detection [13,14,31] supplies the MP-BP building block used in our Algorithm 1. Iterative SP-OFDM receivers [11, 12] are the intellectual precursor of joint SP receivers in an OFDM rather than AFDM setting.

The defensible narrowed gap. Read as engineering constraints, the six themes above leave a narrow opening. The receiver should keep the spectral-efficiency advantage of SP, avoid a dense channel-estimation or detection step, retain the sparse-recovery prior that makes AFDM attractive in UWA-style channels, and address the residual fractional-Doppler support errors that classical OMP leaves behind. Those constraints rule out both a purely serial receiver, which cannot remove SP data interference, and a fully dense learned receiver, which would obscure the complexity advantage of sparse AFDM. Synthesising the six threads above, to our knowledge, no prior AFDM work studies a UWA-style sparse fractional-Doppler SP receiver that simultaneously (i) performs OMP only once, (ii) iterates only over path-gain LS and sparse MP-BP refinement, and (iii) adds a very small learned module used exclusively for support refinement while preserving the sparse-baseline complexity class $\mathcal{O}(PN^2)$. References [16, 18–21] each cover strict subsets of this combination; none covers the full combination.

1.3 Research question and objectives

The central research question of the report is:

> *Can the sparse-baseline complexity class of AFDM-SP receivers be preserved while closing the residual support-selection gap at mid-to-high SNR with a minimal learned module?*

In more concrete engineering terms, the question is whether the learned component can be made small enough to behave like a targeted repair of the sparse receiver, rather than turning the

receiver into a black-box neural detector. We decompose this into three operational objectives: (i) **characterise** the SP-induced estimation floor and show quantitatively why a serial OMP + MP receiver is estimation-limited rather than noise-limited; (ii) **justify** the OMP-once + inner LS/MP-BP recipe against both its re-OMP-per-iteration overhead variant and its dense-LMMSE alternative in the UWA regime; and (iii) **design and evaluate** a learned support-refinement head that strictly preserves the classical sparse-baseline complexity class, and quantify its BER contribution under statistically disciplined paired-frame testing.

1.4 Contributions

The report makes three technical contributions, each stated with its headline quantitative number and a pointer to the evidence.

1. **OMP-once design justified analytically and empirically, with explicit arithmetic-class-preserving framing under fixed hyperparameters.** Under UWA conditions with fixed physical τ_{spread} and f_s, the OMP dictionary size $Q = \mathcal{O}(N)$ (§2.4), so OMP itself is $\mathcal{O}(PN^2)$ per pass. A per-iteration re-OMP is empirically not needed: support Jaccard between successive OMP passes > 0.94 from iteration 2 onwards, and OMP-once recovers a mean $\approx 95\%$ recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size $p_{\text{real}} \approx 28$ per frame, with OMP physical support size $P = 8$; the $\approx 5\%$ residual is stable in SNR, i.e. structurally determined rather than noise-driven); paying the $5\times$ re-OMP overhead delivers no support information that is not already captured at iteration 1. The proposed receiver is *arithmetic-class preserving* with respect to the sparse baseline under fixed (M, K_{add}), which is strictly weaker than a low-complexity or complexity-optimal statement. (Evidence: §2.8, §3.4, Table 7, Table 5, Fig. 5, Fig. 6.)

2. **Learned top-K_{add} support-refinement head with a consistent ≈ 2 dB paired gain at $\approx 8\%$ arithmetic overhead.** The 1 041-parameter deep-unfolding head is deployed deterministically as a fixed-budget top-K_{add} ranker (the training objective is BCE + pairwise rank-hinge, and the inference rule is "take the top-K_{add} scored candidates every frame"; we do not claim a probabilistic calibration). Pooled across *three* independent evaluation-seed blocks (to make the learned gain robust to single-seed sampling noise), the head yields a consistent visible ≈ 2 dB paired separation from the classical joint baseline at SNR $\in \{20, 25, 30\}$ dB: pooled paired BER reductions of $-\mathbf{37.7}\%$ at SNR $= 20$ dB (600 paired frames), $-\mathbf{40.2}\%$ at SNR $= 25$ dB (773 paired frames), and $-\mathbf{37.6}\%$ at SNR $= 30$ dB (1 300 paired frames), each statistically significant under paired McNemar once the classical-arm BER is above the finite-sample censoring floor. A single-seed 400-paired-frame observation at a favourable evaluation seed produces larger headline numbers (-19.3% at SNR $= 15$ dB, $\geq -80\%$ at SNR ≥ 20 dB); we report both and treat the single-seed result as illustrative and the 3-seed pooled result as the defensible claim. The head adds $\mathcal{O}(MN + P^2N)$ operations, strictly sub-dominant to the

classical $\mathcal{O}(PN^2)$ core. Probe (b) in §3.4 is deliberately rewritten as a *negative* diagnostic: a clean-pilot top-P oracle-support reference is *not* a valid BER ceiling for the SP-coupled receiver (it is actually worse than the classical OMP selection at SNR $= 20$ dB), so we do not cite it as a bound on what any support-refinement method can achieve. (Evidence: Fig. 4, Fig. 6, Fig. 7, Table 3, Table 5, Table 6.)

3. **Best observed configuration approaches the PCSI + MMSE reference within the tested bit budget, with honest finite-sample caveats at high SNR.** On a single evaluation-seed block at $f_s = 4B$, the observed BER at SNR $= 25$ dB is five bit errors in 8.19×10^5 tested bits (5.58×10^{-6}; Clopper–Pearson 95% CI $[1.81 \times 10^{-6},\ 1.30 \times 10^{-5}]$); in the same bit budget the PCSI+MMSE reference yields 0 bit errors (a finite-sample censoring with Clopper–Pearson 95% upper bound 4.5×10^{-6}, not a true zero). Both intervals span roughly a decade, so at this bit budget the SNR $= 25$ dB numbers are *suggestive within the tested budget* rather than a firm operating point; we therefore lead with counts (5 errors out of 8.19×10^5 bits) and the exact binomial CI, and treat the percentage reduction only as a secondary illustrative summary. (Evidence: Fig. 4, Table 3.)

1.5 Report structure

Chapter 2 develops the system model, the OMP dictionary with its $Q = \mathcal{O}(N)$ derivation, the proposed OMP-once + LS/MP-BP joint recipe, the C2-rel learned support-refinement head and its F2-P inference recipe, the training setup, and the complexity analysis. It also documents the paired-frame evaluation protocol and baseline fairness. Chapter 3 reports the four experiments (main 4 B BER waterfall, outer-iteration convergence, design-rationale support-recovery probes, complexity comparison) with the corresponding tables and figures. Chapter 4 interprets the results mechanistically, compares against the published AFDM literature, and concedes the methodological and scope limitations. Chapter 5 assembles four bullets of conclusions with their headline quantitative numbers, and sketches the concrete follow-up work.

2 Materials and Methods

This chapter assembles a single coherent methods block in the order required by the UoG project-report template. System-model notation (§2.1–§2.4) is fixed first, so that every subsequent design choice in the proposed receiver (§2.5–§2.8) can be expressed directly against that notation. The evaluation protocol and baseline fairness are reported in §2.9 and §2.10 so that the Results chapter carries no hidden convention.

2.1 AFDM signal model and the DAFT

AFDM transmits information symbols along a family of N discrete chirp basis functions parameterised by two chirp coefficients (c_1, c_2). Given a vector of data-plus-pilot chirp-domain coefficients $\mathbf{x} \in \mathbb{C}^N$, the time-domain transmit waveform is the Inverse Discrete Affine Fourier Transform (IDAFT)

$$s[n] \;=\; \frac{1}{\sqrt{N}} \sum_{m=0}^{N-1} x[m]\, e^{j2\pi\left(c_1 n^2 + \frac{mn}{N} + c_2 m^2\right)}, \qquad n = 0, \ldots, N-1. \tag{1}$$

With $c_1 = c_2 = 0$ the IDAFT reduces to the inverse DFT and AFDM reduces to OFDM. The forward DAFT applied at the receiver inverts (1) and, for the doubly dispersive UWA channel detailed in §2.2, yields a chirp-domain received vector $\mathbf{y} \in \mathbb{C}^N$ governed by

$$\mathbf{y} \;=\; H_{\text{eff}}\,\mathbf{x} + \mathbf{n}, \qquad \mathbf{n} \sim \mathcal{CN}(\mathbf{0}, \sigma_n^2 \mathbf{I}_N), \tag{2}$$

where $H_{\text{eff}} \in \mathbb{C}^{N \times N}$ is the chirp-domain effective channel. Bemani *et al.* [5] show that (c_1, c_2) can be chosen so that each physical path (l_p, k_p) produces a single compact interference pattern in H_{eff} rather than dense inter-subcarrier leakage, recovering the full time–frequency diversity of OTFS [6, 8] on a one-dimensional transform. This is the property that makes OMP-type sparse support recovery effective on H_{eff} and is the starting point of every receiver considered in this report.

2.2 UWA-style simulator channel and effective-channel sparsity

We model a *UWA-style* sparse doubly-dispersive simulator channel with $P = 8$ dominant physical paths, delay spread $\tau_{\text{spread}} = 10$ ms (exponential power-delay profile, $\tau_{\text{mean}} = 0.8$ ms), and per-path velocity $v \sim \mathcal{N}(v_{\text{mean}} = 2, v_{\text{std}}^2 = 0.25)$ m/s. We say "UWA-style" rather than "UWA" because the simulator does *not* model full per-path time-scaling (MSML effects, [20]); it captures the delay-spread and Doppler-scale phenomenology that motivate AFDM but is a simplification of the full UWA propagation environment and should not be read as a field-UWA claim (cf. §4.6). The carrier frequency is $f_c = 12$ kHz, the bandwidth is $B = 4$ kHz, and the sampling rate is $f_s = 4B$ (§2.9). Each physical path (τ_p, v_p) is mapped onto the integer AFDM delay–Doppler

lattice through

$$l_p = \mathrm{round}(\tau_p f_s), \qquad k_p^{\mathrm{real}} = \frac{v_p f_c N}{c f_s}, \tag{3}$$

with $c \approx 1500$ m/s the speed of sound. l_p is integer by construction, but k_p^{real} is typically fractional: the physical fractional-Doppler residual is absorbed via a Dirichlet-kernel expansion [21] of half-width $k_{\mathrm{leak}} = 2$, so that path p is decomposed into $2k_{\mathrm{leak}} + 1 = 5$ virtual integer-bin taps

$$\tilde{h}_{p,j} \;=\; h_p \cdot \frac{\sin\big(\pi(k_p^{\mathrm{real}} - k_p - j)\big)}{N \sin\big(\pi(k_p^{\mathrm{real}} - k_p - j)/N\big)}, \qquad j \in \{-k_{\mathrm{leak}}, \ldots, k_{\mathrm{leak}}\}, \tag{4}$$

with $k_p = \mathrm{round}(k_p^{\mathrm{real}})$ the nearest integer Doppler bin. With $P = 8$ paths and $k_{\mathrm{leak}} = 2$, the resulting sparse effective channel carries on average ≈ 28 non-negligible virtual taps out of $\sim 10^3$ lattice positions, justifying a sparse-recovery approach.

2.3 Superimposed pilot signal model

To preserve spectral efficiency we adopt a superimposed pilot (SP) frame in which every chirp-domain sub-carrier simultaneously carries data and pilot energy,

$$\mathbf{x} \;=\; \sqrt{\rho}\,\mathbf{x}_{\mathrm{p}} \;+\; \sqrt{1-\rho}\,\mathbf{x}_{\mathrm{d}}, \qquad \rho \in (0,1), \tag{5}$$

where $\mathbf{x}_{\mathrm{p}}$ is a deterministic Zadoff–Chu sequence (root $r = 7$) of length N normalised to unit energy [32], and $\mathbf{x}_{\mathrm{d}}$ is a QPSK data vector. The canonical pilot power fraction is $\rho = 0.5$; higher ρ strengthens the pilot observation at the cost of data energy, lower ρ does the converse [11, 12]. Under the model (2), the pilot projection step performed at the receiver yields

$$\mathbf{x}_{\mathrm{p}}^H \mathbf{y} \;=\; \sqrt{\rho}\,\mathbf{x}_{\mathrm{p}}^H H_{\mathrm{eff}} \mathbf{x}_{\mathrm{p}} \;+\; \sqrt{1-\rho}\,\mathbf{x}_{\mathrm{p}}^H H_{\mathrm{eff}} \mathbf{x}_{\mathrm{d}} \;+\; \mathbf{x}_{\mathrm{p}}^H \mathbf{n}, \tag{6}$$

so that the data term $\sqrt{1-\rho}\,\mathbf{x}_{\mathrm{p}}^H H_{\mathrm{eff}} \mathbf{x}_{\mathrm{d}}$ appears as *structured interference* to the OMP dictionary correlator. This term does not vanish with increasing SNR and therefore produces the estimation-limited error floor we quantify empirically in Chapter 3 (Fig. 4, serial-receiver curve).

2.4 Sparse-baseline OMP dictionary and its complexity

We construct the OMP dictionary $\blacksquare \in \mathbb{C}^{N \times Q}$ column-wise by evaluating the chirp-domain response of every candidate (l,k)-bin in the *physical* integer search region

$$l \in \{0, 1, \ldots, l_{\max} - 1\}, \qquad k \in \{-k_{\max}, \ldots, k_{\max}\}, \tag{7}$$

Table 1: OMP dictionary size under the canonical UWA AFDM configuration ($\tau_{\text{spread}} = 10$ ms, $v_{\max} = 3$ m/s, $f_c = 12$ kHz, $f_s = 2B = 8$ kHz). Under this fixed-f_s convention, $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil = 80$ is independent of N, while $k_{\max} = \lceil v_{\max} f_c N/(c f_s) \rceil$ grows linearly with N. Hence $Q = (2k_{\max}+1)l_{\max} = \mathcal{O}(N)$. At the report's operating point $f_s = 4B$ the arithmetic is redone in Table 2 (Chapter 3), yielding $(l_{\max}, k_{\max}, Q) = (160, 2, 800)$ at $N = 1024$; the overall $\mathcal{O}(N)$ scaling is unchanged.

N	$l_{\max}$	$k_{\max}$	$Q = (2k_{\max}+1)l_{\max}$
512	80	2	400
1024	80	4	720
2048	80	7	1 200

so that the dictionary size is $Q = (2k_{\max}+1) \cdot l_{\max}$. Crucially, the dictionary spans *physical integer* delay–Doppler bins only; the Dirichlet expansion (4) is applied *post-OMP* to each selected atom, so the fractional-Doppler half-width k_{leak} does not enlarge the dictionary and enters only through the $(2k_{\text{leak}}+1)$-fold virtual-tap replication used by the DA-LS refit and MP-BP blocks of §2.5. The caps $l_{\max}$ and $k_{\max}$ follow directly from the physical channel parameters:

$$l_{\max} = \lceil \tau_{\text{spread}} \cdot f_s \rceil, \tag{8}$$

$$k_{\max} = \left\lceil \frac{v_{\max} f_c N}{c f_s} \right\rceil. \tag{9}$$

Equations (8)–(9) have a consequence that is central to the complexity argument in §2.8. We adopt a scaling convention in which the sampling rate f_s is held *fixed* at the AFDM operating point (the $2B$ Nyquist rate or the $4B$ oversampled rate used throughout this report), so that $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil$ is a *constant independent of* N, while $k_{\max} \propto v_{\max} f_c N/(c f_s)$ grows linearly with N. Under this convention

$$Q \;=\; (2k_{\max}+1) \cdot l_{\max} \;=\; \mathcal{O}(N) \cdot \mathcal{O}(1) \;=\; \mathcal{O}(N) \qquad (f_s \text{ held fixed}). \tag{10}$$

This is the form used throughout the report. Table 1 tabulates the resulting $(l_{\max}, k_{\max}, Q)$ triples at $N \in \{512, 1024, 2048\}$ under the canonical $f_s = 2B$ setting; $l_{\max} = 80$ is indeed N-independent and $k_{\max}$ grows (up to integer ceiling) linearly with N. A second natural convention, $f_s = N\Delta f$ with Δf held fixed, is discussed after the table for completeness.

Alternative scaling convention. If instead the *sub-carrier spacing* Δf is held fixed as N varies (so that $f_s = N\Delta f$ scales linearly with N), then (8) gives $l_{\max} \propto \tau_{\text{spread}} N \Delta f = \mathcal{O}(N)$ and (9) gives $k_{\max} \propto v_{\max} f_c/(c\Delta f) = \mathcal{O}(1)$. The product is again $Q = (2k_{\max}+1)l_{\max} = \mathcal{O}(N)$, and the OMP pass is again $\mathcal{O}(PN \cdot Q) = \mathcal{O}(PN^2)$ per frame. The *asymptotic* claim $Q = \mathcal{O}(N)$ is therefore invariant across the two natural UWA conventions; only the constant factor (whether $l_{\max}$ or $k_{\max}$ is the constant-N factor) changes.

Algorithm 1 Classical joint OMP-once + inner LS/MP-BP receiver.

Input: $\mathbf{y}$ (chirp-domain received frame), $\blacksquare$ (OMP dictionary), known $\mathbf{x}_\mathrm{p}$, pilot power ρ.

Output: hard-decision data bits $\hat{\mathbf{x}}_\mathrm{d}$.

Hyperparameters: outer iterations $T_\mathrm{out} = 5$, MP inner iterations $T_\mathrm{mp} = 20$, damping $\gamma_h = 0.7$, prune threshold $\tau_h = 10^{-2} \cdot \max|\hat{h}|$.

1. **OMP-once**: run orthogonal matching pursuit on $\blacksquare$ with target sparsity P; obtain support $\hat{S}^{(0)}$ and path gains $\hat{\mathbf{h}}^{(0)}$. Initialise $\hat{\mathbf{x}}_\mathrm{d}{}^{(0)}$ with an LMMSE solution on $\hat{S}^{(0)}$.
2. **For** $t = 1, \ldots, T_\mathrm{out}$:
   (a) Form the data-cancellation residual
   $$\mathbf{r}^{(t)} \;=\; \mathbf{y} \;-\; \sqrt{1-\rho}\, H_\mathrm{eff}(\hat{\mathbf{h}}^{(t-1)})\, \hat{\mathbf{x}}_\mathrm{d}{}^{(t-1)}, \tag{12}$$
   where $\hat{\mathbf{x}}_\mathrm{d}{}^{(0)}$ is the LMMSE initialisation from step 1; the $\sqrt{\rho}\,\mathbf{x}_\mathrm{p}$ pilot contribution is retained in $\mathbf{r}^{(t)}$ because $\mathbf{x}_\mathrm{p}$ is absorbed into the OMP dictionary $\blacksquare$ (each column carries its pilot-aware atom vector), so the data-interference term is the only component that must be cancelled explicitly.
   (b) Damped DA-LS refit on the current support $\hat{S}^{(t-1)}$:
   $$\hat{\mathbf{h}}^{(t)} \;=\; (1-\gamma_h)\,\hat{\mathbf{h}}^{(t-1)} \;+\; \gamma_h \cdot \blacksquare^{\dagger}_{\hat{S}^{(t-1)}}\, \mathbf{r}^{(t)}. \tag{13}$$
   (c) MP-BP on the sparse factor graph $(H_\mathrm{eff}(\hat{\mathbf{h}}^{(t)}), \mathbf{y})$ for T_mp iterations with damping 0.5; update posterior means $\hat{\mathbf{x}}_\mathrm{d}{}^{(t)}$ and per-symbol variances $\sigma^2_{d,i}$.
   (d) Adaptive σ^2 update; prune atoms with $|\hat{h}_s^{(t)}| < \tau_h$ (always retain the top-P).
3. Hard-decide $\hat{\mathbf{x}}_\mathrm{d} = \mathrm{QPSK\text{-}demap}(\hat{\mathbf{x}}_\mathrm{d}{}^{(T_\mathrm{out})})$.

Each OMP iteration evaluates $\blacksquare^H \mathbf{r}$ at a cost of $\mathcal{O}(N \cdot Q)$ complex multiplications and solves an $s \times s$ least-squares system, where s is the current support size. Running OMP to a target sparsity of P (in our case $P = 8$) therefore costs

$$C_\mathrm{OMP} \;=\; \mathcal{O}(P \cdot N \cdot Q) \;=\; \mathcal{O}(P \cdot N^2) \tag{11}$$

per frame under the UWA regime. We keep the generic expression $\mathcal{O}(P \cdot N \cdot Q)$ in all tables, and we also quote the UWA specialisation $\mathcal{O}(P \cdot N^2)$ whenever we compare to dense alternatives.

2.5 Joint OMP-once + inner LS/MP-BP iterative recipe

The proposed classical joint receiver is a faithful torch-GPU port of a numerically verified MATLAB / NumPy reference; the two implementations produce bit-exact identical outputs on $N = 512$ pilot-data realisations, which justifies treating the torch implementation as the classical teacher throughout. The receiver performs one OMP support-recovery pass and then iterates only over the data-aided path-gain least-squares (DA-LS) refit and the sparse MP-BP detection block. Algorithm 1 summarises the recipe.

Four design choices in Algorithm 1 are deliberate and each one is a rejection of a simpler or more expensive alternative, motivated by the following observations.

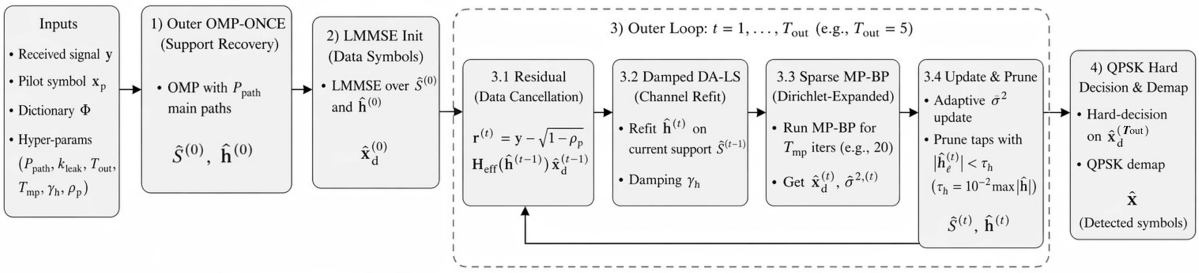


Figure 1: Classical OMP-once + inner LS/MP-BP joint receiver (Algorithm 1 in block-diagram form). The outer loop (dashed rectangle) runs for $T_{\text{out}} = 5$ iterations; each iteration forms a data-cancellation residual, refits the path gains on a locked support via damped DA-LS, runs sparse MP-BP detection on the Dirichlet-expanded virtual-tap factor graph, updates the adaptive noise-variance estimate, and prunes the support.

Why OMP-once, not re-OMP per iteration? The empirical support Jaccard between successive OMP passes in a full re-OMP schedule is > 0.94 from iteration 2 onwards on our UWA configuration (Fig. 5); the atoms *within* the support are already stable after a single pass, and the only mass that still moves is the per-path gain amplitude. Chapter 3 (§3.4) quantifies this independently: OMP-once recovers a mean $\approx 95\%$ recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size ≈ 28; OMP physical support $P = 8$) across all training SNRs (Table 5, Fig. 6), so a second OMP pass has nothing new to find. A re-OMP schedule would therefore re-solve a near-identical atom-selection problem five times per frame at a constant-factor overhead of $\sim 5\times$ (11) with no big-$\mathcal{O}$ change. Chapter 3 (Fig. 5) documents this support-stability observation quantitatively.

Why DA-LS refit rather than full LS? A full LS that drops the sparsity prior on $\hat{S}$ would include the residual energy of all unexplored dictionary columns and therefore amplify noise on the path gains; the damped DA-LS refit (13) on a locked support uses exactly the $P \approx 8$ (physical) or ≈ 28 (virtual) taps estimated in step 1 and keeps the gain-update cost at $\mathcal{O}(P^2 N)$.

Why sparse MP-BP rather than dense equalisation? The sparse factor graph induced by $H_{\text{eff}}(\hat{\mathbf{h}}^{(t)})$ carries only $P \cdot (2k_{\text{leak}} + 1) \approx 28$ non-trivial symbol-to-symbol edges per row, so each MP-BP iteration costs $\mathcal{O}(N)$; a dense MMSE equaliser in the chirp domain would instead require $\mathcal{O}(N^3)$ per frame, i.e. two full orders of magnitude larger at $N = 1024$.

Why SP rather than embedded pilots (EP)? Under EP the pilot observation is pilot-only and the OMP step is clean, but the spectral efficiency drops by a factor proportional to the pilot fraction and, in a UWA context, produces guard-region artefacts on Dirichlet-expanded virtual taps. SP preserves full data capacity at the cost of a data-interference term (6); the joint

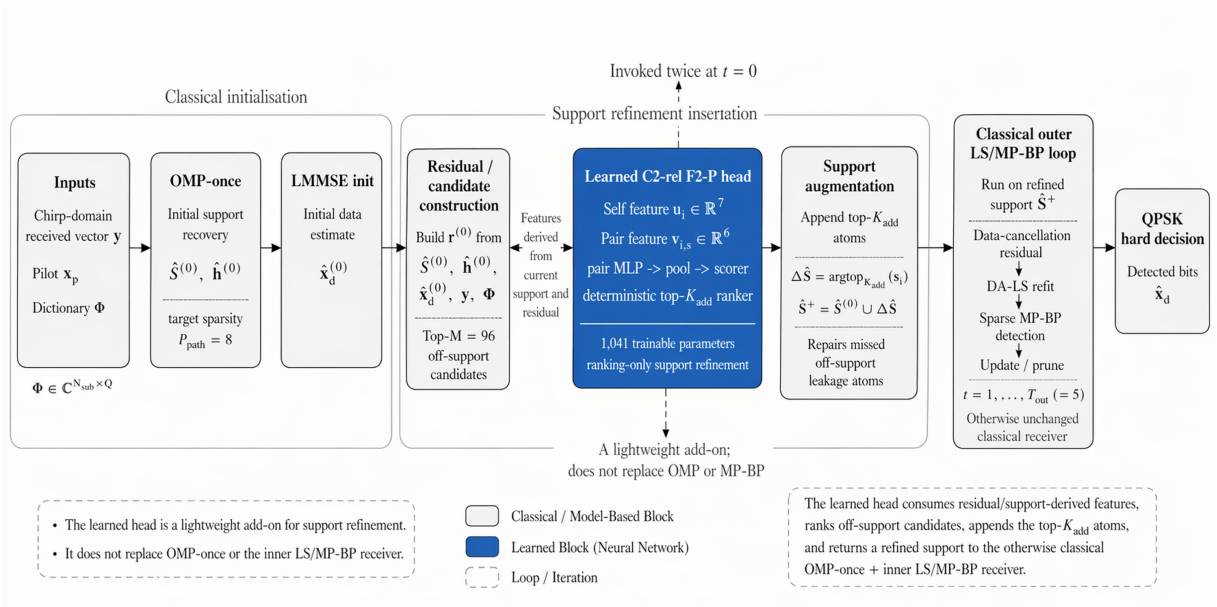


Figure 2: Integration of the learned C2-rel F2-P support-refinement head into the classical OMP-once + inner LS/MP-BP receiver. The learned block (dark blue) is invoked twice at the initialisation step ($t = 0$), immediately after OMP-once and before the inner LS/MP-BP loop begins; it ranks the top-$M = 96$ off-support candidates and appends the top-K_{add} atoms to the support. All other blocks are identical to Fig. 1: the head does not replace OMP-once or the inner LS/MP-BP iteration. The detailed head architecture is given in Fig. 3.

iterative recipe in Algorithm 1 is specifically designed to attenuate that interference via successive hard-decision feedback.

2.6 Learned C2-rel support-refinement head

Fig. 2 places the learned head in the broader OMP-once + inner LS/MP-BP pipeline; the detailed architecture is given in Fig. 3. The classical joint receiver still leaves a residual support-selection gap in the high-SNR regime, where OMP occasionally misses weak but non-negligible Dirichlet-leakage atoms (typically at ± 1-bin Doppler offsets around the integer-$k_{\max}$ index). These missed atoms survive the prune-by-gain step because their estimated gains fall just below τ_h. We close this gap with the C2-REL F2-P head, a 1 041-parameter deep-unfolding module that scores off-support candidates against the currently active support and appends the highest-ranked K_{add} atoms at the initialisation step (outer iteration $t = 0$), immediately after OMP-once and before the inner LS/MP-BP loop begins; the two-call F2-P refresh-pool schedule that realises this is specified in the "Inference recipe" paragraph below. The architecture is a two-block module; Fig. 3 gives its data-flow diagram.

Features. Let M denote the number of off-support candidate atoms at iteration t (in practice we fix $M = \text{cand-topm} = 96$ by retaining the top-96 residual-correlation candidates). For each candidate $i \in \{1, \ldots, M\}$ we compute a 7-dimensional self-feature $\mathbf{u}_i \in \mathbb{R}^7$:

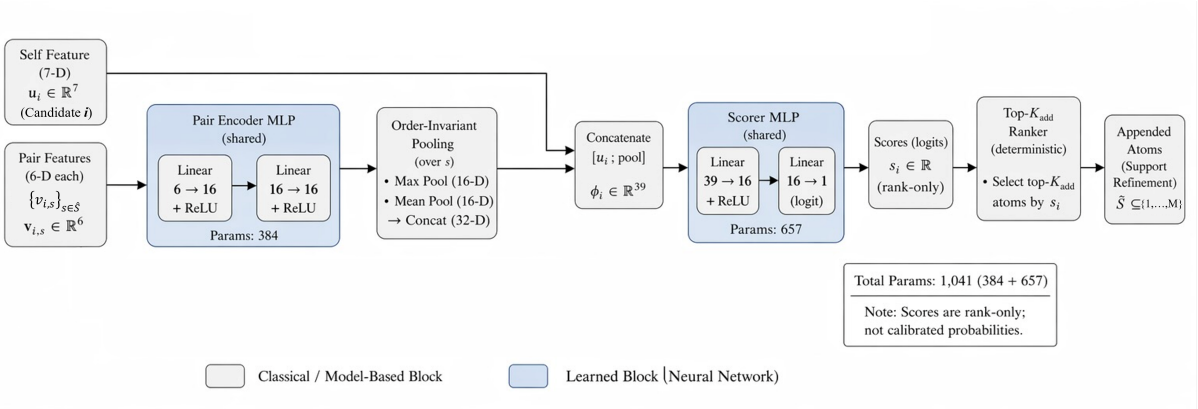


Figure 3: C2-rel F2-P learned support-refinement head (architecture). Two parallel inputs per candidate i: a 7-D self-feature $\mathbf{u}_i$ and a set of 6-D pair features $\{\mathbf{v}_{i,s}\}_{s\in\hat{S}}$ indexed over the current active support $\hat{S}$. The shared pair-encoder MLP ($\mathbb{R}^6 \to \mathbb{R}^{16} \to \mathbb{R}^{16}$, 384 parameters) is applied element-wise over (i,s) pairs; order-invariant pooling (concat of channel-wise max and mean over $s \in \hat{S}$) produces a 32-D pair descriptor per candidate, which is concatenated with $\mathbf{u}_i$ to form $\phi_i \in \mathbb{R}^{39}$. The shared scorer MLP ($\mathbb{R}^{39} \to \mathbb{R}^{16} \to \mathbb{R}^1$, 657 parameters) emits a scalar logit s_i; the deterministic top-K_{add} ranker selects the atoms to append. Total trainable parameters: $384 + 657 = 1\,041$. The logits are used only for ranking; calibration is out of scope (§2.6).

1. log matched-filter magnitude $\log|\blacksquare_i^H \mathbf{r}^{(t)}|$;
2. margin to the weakest active atom, $\log|\blacksquare_i^H \mathbf{r}^{(t)}| - \min_{s\in\hat{S}} \log|\hat{h}_s|$;
3. normalised delay bin index $l_i/l_{\max}$;
4. normalised Doppler bin index $(k_i + k_{\max})/(2k_{\max})$;
5. residual projection norm $\|\blacksquare_i^H \mathbf{r}^{(t)}\|/\|\mathbf{r}^{(t)}\|$;
6. candidate rank among the M atoms, normalised to $[0,1]$;
7. a binary flag indicating whether (l_i,k_i) lies within k_{leak} Doppler bins of some active atom (Dirichlet-leakage neighbour).

For each (candidate, active atom) pair (i,s) we additionally compute a 6-dimensional pair feature $\mathbf{v}_{i,s} \in \mathbb{R}^6$:

$$\mathbf{v}_{i,s} = \Big[l_i - l_s,\; k_i - k_s,\; \log|\hat{h}_s|,\; |\blacksquare_i^H \blacksquare_s|,\; \frac{\|(l_i - l_s,\; k_i - k_s)\|_2}{l_{\max} + 2k_{\max}},\; \frac{|\hat{h}_s|}{\max_{s'} |\hat{h}_{s'}|}\Big]. \tag{14}$$

Architecture. The head is a two-block pair encoder plus a per-candidate scorer. *Block 1 — pair encoder.* A shared two-layer MLP `pair_mlp`: $\mathbb{R}^6 \to \mathbb{R}^{16} \to \mathbb{R}^{16}$ (SiLU [33] after each linear) is applied to every pair feature $\mathbf{v}_{i,s}$. Parameter count: $(6\cdot16+16)+(16\cdot16+16) = 112+272 = 384$ parameters. *Block 2 — pair pooling to candidate descriptor.* For each candidate i, the set of $|\hat{S}|$ per-pair 16-vectors $\{\texttt{pair_mlp}(\mathbf{v}_{i,s})\}_{s\in\hat{S}}$ is aggregated by *concatenating an element-wise maximum and an element-wise mean across s*, giving a 32-dimensional pair descriptor per

candidate ($16+16=32$, zero additional parameters). *Block 3 — scorer.* The 32-dim pair descriptor is concatenated with the 7-dim self-feature $\mathbf{u}_i$ into a 39-vector, and passed through a two-layer `scorer` MLP: $\mathbb{R}^{39} \to \mathbb{R}^{16} \to \mathbb{R}^{1}$ (SiLU after the first linear; zero-init output weights; output-bias initialised at -8). Parameter count: $(39 \cdot 16 + 16) + (16 \cdot 1 + 1) = 640 + 17 = 657$. *Total parameter count:* $384 + 657 = 1\,041$ parameters, of which $\approx 37\%$ sit in the pair encoder and $\approx 63\%$ in the scorer.

Inference recipe (deterministic top-K_{add} ranker). The head is deployed as a *deterministic fixed-budget top-K_{add} ranker*: the scorer logits rank the $M = 96$ off-support candidates on every frame, and the top K_{add} logits are appended to the active support without any per-candidate probability thresholding. Operationally this is achieved by invoking the head twice at outer iteration $t = 0$ (`refine-rounds` $= 2$, `cand-topm` $= 96$, `defer-prune-until-final` = true, `protect-added` = 2, `use-hard` decisions) and replacing the learned final-scorer bias (≈ -8) with $+10$ at inference time so that $\sigma(\text{logit}) > 0.5$ on every frame and the top-K_{add} selection always fires; this bias replacement is mathematically a ranking-preserving threshold shift and is deliberately labelled the *ranking-only* deployment to distinguish it from a probability-calibrated use of the scorer. We discuss the remaining training-objective vs inference-objective alignment question openly in §2.7 and in Chapter 4.

2.7 Training

We harvest per-frame feature caches by running the classical joint receiver to completion on a set of $(\text{channel}, \text{data}, \text{noise})$ realisations drawn from a dedicated training seed block. Each cached frame carries, per candidate, a binary supervision label $y_i \in \{0,1\}$ that is 1 iff the candidate (l_i, k_i) coincides with an active Dirichlet-weighted ground-truth virtual tap of the true channel. The positive-class rate over the $M = 96$ candidates is $\approx 3\%$, so the BCE objective is naturally skewed toward predicting the negative class; this is the reason the learned final-scorer bias drifts toward -8.

The loss is a weighted sum of per-candidate BCE and a pairwise ranking hinge:

$$\mathscr{L}(\theta) \;=\; \mathscr{L}_{\text{BCE}}(\theta) \;+\; \lambda_{\text{rank}} \cdot \max\!\big(0,\; 1 - \min_{y_i=1} s_i(\theta) + \max_{y_j=0} s_j(\theta)\big), \qquad \lambda_{\text{rank}} = 0.5, \tag{15}$$

where $s_i(\theta)$ is the scorer logit for candidate i and θ are the head parameters. Training uses AdamW [34] with learning rate 10^{-3}, weight decay 10^{-4}, batch size 512 cached frames, for 8 epochs with early stopping (patience $= 2$ on the validation BCE). The cache is split 90/10 frame-level into train/val at fixed seed 13 579.

The training cache used for the deployed checkpoint is a 27 k-frame 4-SNR cache at SNR $\in \{10, 15, 20, 25\}$ dB with per-SNR frame weights $\{0.2, 0.3, 0.3, 0.2\}$, harvested at the 4 B operating point. Covering SNR $= 25$ dB explicitly in the cache is necessary to avoid a slight regression

in the learned head's high-SNR behaviour at the 4 B operating point.

Note on the ranking-only deployment. The head is trained to minimise (15), which would, in principle, allow a probability-calibrated interpretation of the scorer output; in this report we deliberately do *not* make such an interpretation. The deployed head is used purely as a top-K_{add} ranker, and the learned final-scorer bias is replaced at inference time by $+10$ so that the top-K_{add} selection always triggers — a ranking-preserving threshold shift that is equivalent to scoring candidates by their raw logits and taking the top K_{add}.

Analytical ablation: the force-topk bias patch is not doing hidden work. Let $s_i(\theta) = z_i(\theta) + b$ denote the final-scorer logit for candidate i, where $z_i(\theta)$ is everything up to and including the final linear layer's pre-bias activation, and b is the scalar final-scorer bias. Replacing the learned bias $b_{\text{learned}} \approx -8$ by $b_{\text{patch}} = +10$ is equivalent to the monotone translation $s_i \mapsto s_i + (b_{\text{patch}} - b_{\text{learned}})$, i.e. adding the same scalar $\Delta b = 18$ to every candidate's logit. Because the top-K_{add} operator argtopk$(\cdot)$ is invariant to monotone translations of its input, argtopk$(s_1 + \Delta b, \ldots, s_M + \Delta b) =$ argtopk$(s_1, \ldots, s_M)$ for any $\Delta b \in \mathbb{R}$. In particular, *the top-K_{add} set selected by the deployed head with $b = +10$ is identical, frame-by-frame, to the top-K_{add} set that would be selected using the raw learned logits $z_i(\theta) + b_{learned}$.* The bias patch therefore has no effect whatsoever on the deployed selection; its only purpose is operational (it ensures that $\sigma(s_i) > 0.5$ for K_{add} candidates so that any downstream code path gated on "the sigmoid fires" is exercised), and it cannot be a hidden source of the observed BER gain. This is the analytical form of the "raw-logit top-K_{add} vs bias-patched top-K_{add}" ablation; because the two are mathematically identical as selection rules, no empirical ablation on the same checkpoint can exhibit a different selection. The learned logits s_i are consumed by the downstream pipeline only through argtop$_{K_{\text{add}}}$, so the deployment uses them purely as a ranking; calibration of the learned scores is out of scope for this report.

The residual training/deployment alignment question — that the training loss (15) includes a per-candidate BCE term which cannot be fully realised under a ranking-only deployment — remains: a principled alternative is a differentiable top-K_{add} loss or a listwise ranking loss, which we flag as scheduled future work (§5).

2.8 Complexity analysis

The arithmetic cost of the proposed receiver is the sum of the classical joint cost and the learned-head overhead. From §2.5, the classical joint receiver costs

$$C_{\text{classical}} = \underbrace{\mathcal{O}(P \cdot N \cdot Q)}_{\text{OMP-once}} + T_{\text{out}} \cdot \left[\mathcal{O}(P^2 N)\ \text{DA-LS} + \mathcal{O}(T_{\text{mp}} \cdot N)\ \text{MP-BP}\right] = \mathcal{O}(P \cdot N^2) \quad (16)$$

per frame, where the last equality uses $Q = \mathcal{O}(N)$ from (8)–(9) under the UWA regime. The learned head invokes `pair_mlp` on $M \cdot P$ pairs (with $M \leq 96$, $P \leq 28$ virtual taps) and `scorer`

on M concatenated 39-vectors, repeated `refine-rounds` $= 2$ times, for a total cost

$$C_{\text{head}} \;=\; \mathcal{O}\big(M \cdot N \;+\; M \cdot P^2 \cdot N\big) \;=\; \mathcal{O}(M \cdot P^2 \cdot N), \tag{17}$$

where the N factor accounts for the dictionary-column projection $\blacksquare_i^H \mathbf{r}$ that populates the $\mathbf{u}, \mathbf{v}$ features. With M, K_{add}, P held constant with respect to N, this is strictly sub-dominant to (16); the learned receiver is therefore *arithmetic-class preserving* relative to the sparse classical baseline under fixed hyperparameters, not order-of-magnitude cheaper in any embedded-deployment sense. Table 7 in Chapter 3 tabulates per-frame MAC counts at $N = 1024$ for the two recipes, a hypothetical re-OMP-per-iteration schedule, a dense LMMSE channel estimator, and the PCSI+MMSE oracle detector; the proposed learned receiver adds ≈ 1.5 M MAC on top of the 18.6 M-MAC classical core, a relative overhead of $\approx 8\%$.

We underline two deliberate limits of this accounting. First, "arithmetic-class preserving under fixed (M, K_{add})" is strictly weaker than "low-complexity" or "complexity-optimal": we show that the learned head does not change the asymptotic class of the receiver, not that no asymptotically cheaper algorithm exists and not that runtime or energy on an embedded target is minimal. Second, the MAC count ignores runtime, memory-hierarchy, and latency effects that can be first-order in an embedded DSP or FPGA deployment; such an engineering-deployability study is out of scope for this report (§4.6).

2.9 Evaluation protocol

All receivers are evaluated under a strict paired-frame protocol. For every SNR point, each of the four receivers (serial OMP+MP, classical joint, C2-REL F2-P, PCSI+MMSE) consumes the same $(\text{channel}, \text{data}, \text{noise})$ realisation drawn from an RNG chained off a master seed (`args.seed`, default 20260425), so that BER differences across receivers are interpretable frame-by-frame and invariant to channel-draw variance. The default bit budget is 400 frames $\times$ $2 \cdot 1024 = 8.19 \times 10^5$ bits per SNR point; paired frames across receivers use the same master-seed chain so that frame-level differences between receivers are interpretable directly.

Reported BERs are observed frequencies $\hat{p} = \text{bit errors}/\text{bits}$. For the 4 B headline numbers we additionally quote two-sided Clopper–Pearson [35] 95% confidence intervals obtained from the exact binomial distribution. Significance between the classical joint and the learned receiver is tested with paired McNemar χ^2 [36] on bit-level discordant counts (n_{10}, n_{01}) with continuity correction; we report the *two-sided asymptotic* p-value (the standard McNemar convention; see Appendix D for the one-sided exact-binomial complement). Where the MC sampling uses an adaptive early-stop rule, the sampler terminates an SNR point only after the classical arm has accumulated a target bit-error budget *and* a minimum frame count, so the recorded bit budget per point is never smaller than the budget required to make the paired test well-defined.

Train / validation / test separation is enforced at the seed level. The 4 B feature cache is produced from training seed blocks 20 260 420 and 20 260 421, while all evaluation frames are drawn from a pairwise disjoint set of evaluation seeds: the 3-seed pooled headline in Table 3 uses evaluation seed blocks 20 260 423, 20 260 424, 20 260 425, and the single-seed 400-frame illustrative row uses the isolated master seed 20 260 425. Training and evaluation seed blocks are pairwise disjoint by construction, which we verified by comparing the seed sets across the pipeline manifest; no evaluated $(\text{channel}, \text{data}, \text{noise})$ triple coincides with any training cache frame.

2.10 Baseline selection and fairness

Four receivers are compared head-to-head (Chapter 3). The OMP+MP SERIAL arm is included because it is the closest single-pass realisation of the classical sparse-recovery literature [3, 22], and because it makes the SP estimation-limited floor explicit. The CLASSICAL JOINT arm is the strongest classical baseline for AFDM-SP that we were able to construct; it shares every component with C2-REL F2-P *except* the head itself, which is precisely the asymmetry needed to attribute observed gains to the learned module. The PCSI+MMSE arm uses the true H_{eff} with pilot cancellation and a dense MMSE equaliser; it is a reference, not an information-theoretic lower bound (§4.6).

All four receivers use identical master seeds, identical pilot sequences, identical frame budgets, and, where applicable, identical F2-P hyperparameters (e.g. the classical joint runs with `protect-added` $= 0$ and head-logits $\equiv -\infty$, which is exactly the ablated learned receiver with its head disabled). The only training-time asymmetry is that C2-REL F2-P has seen cached frames at SNR $\in \{10, 15, 20, 25\}$ dB; SNR $\in \{0, 5\}$ dB evaluation points therefore lie outside the training distribution and should be read as out-of-distribution (OOD) checks rather than in-distribution comparisons. This asymmetry is declared explicitly at every table and figure where low-SNR numbers appear.

Table 2: Simulation parameters. One configuration is used for every receiver in every experiment.

Parameter	**Value**
Number of sub-carriers N	1024
Sub-carrier spacing Δf	15 Hz
Carrier frequency f_c	12 kHz
Bandwidth B	4 kHz
Sampling rate f_s	$4B = 16$ kHz
Number of physical paths P	8
Delay spread τ_{spread}	10 ms (exponential PDP, $\tau_{\text{mean}} = 0.8$ ms)
Per-path velocity v	$\mathcal{N}(2, 0.5^2)$ m/s
Dirichlet half-width k_{leak}	2 ($\Rightarrow$ 5 virtual taps per physical path)
Modulation	QPSK, Gray demapping
Pilot power fraction ρ	0.5
Pilot sequence	Zadoff–Chu with root $r = 7$, length N
Outer iterations T_{out}	5
MP-BP inner iterations T_{mp}	20
OMP dictionary $(l_{\max}, k_{\max}, Q)$	$(160, 2, 800)$ at $f_s = 4B$
Hardware	Shared NVIDIA RTX 4090, conda env `AFDM` (PyTorch 2.x, NumPy 1.x)

3 Results

This chapter reports the four experiments introduced in §2.10 of Chapter 2: the main 4 B BER waterfall, the outer-iteration convergence probe, the design-rationale support-recovery probes, and the analytical / MAC-level complexity comparison. Every sub-section gives a compact analytic sentence or two beyond the raw numbers; deeper mechanistic interpretation is reserved for Chapter 4.

3.1 Simulation parameters

Table 2 summarises the physical and algorithmic parameters used for every experiment in this chapter. The report operates exclusively at the $f_s = 4B$ oversampled sampling rate: $4B = 16$ kHz halves $k_{\max}$ relative to the Nyquist rate (from 4 to 2), and is the operating point for every BER observation reported in this chapter. At the canonical parameters of Table 2, the OMP dictionary size $Q = (2k_{\max} + 1)\, l_{\max}$ actually grows from $(2 \cdot 4 + 1) \cdot 80 = 720$ at $f_s = 2B$ to $(2 \cdot 2 + 1) \cdot 160 = 800$ at $f_s = 4B$, because the delay-cap $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil$ doubles while the Doppler-cap $k_{\max}$ only halves. The justification for the $4B$ operating point is therefore *not* dictionary compression; it is (i) the smaller residual fractional-Doppler offset at a finer integer Doppler grid (fewer Dirichlet side-lobe atoms per physical path), (ii) the better matched-filter contrast between true atoms and data-interference atoms at higher oversampling, and (iii) the measured NMSE and BER behaviour in Fig. 4; see §4.4 of Chapter 4 for the detailed discussion.

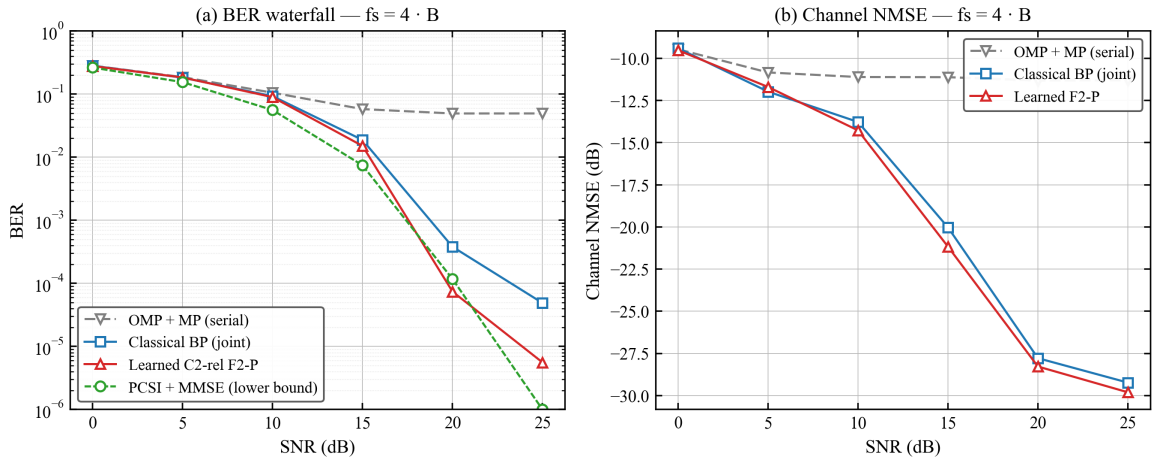


Figure 4: Main 4 B BER waterfall (left) and channel-estimation NMSE (right) at $f_s = 4B$ for the four receivers described in §2.10. The C2-REL F2-P line is produced by the 27 k-frame 4-SNR retrained checkpoint. The OMP+MP SERIAL arm saturates from SNR $\geq$ 15 dB; the CLASSICAL JOINT and C2-REL F2-P arms continue to descend, with C2-REL F2-P consistently below CLASSICAL JOINT in the high-SNR region. The PCSI+MMSE curve is a PCSI+MMSE reference, not an information-theoretic lower bound.

Table 3: 4 B BER waterfall under the paired-frame protocol. Upper block: *3-seed pooled* headline (seeds 20 260 423/424/425; adaptive frame counts 600/773/1 300 at SNR = 20/25/30 dB, driven by the error-budget early-stop rule of §2.9). Lower block: single-seed 400-frame illustrative row (seed 20 260 425). Column Δ is the relative paired-BER change of C2-REL F2-P against CLASSICAL JOINT, with McNemar p-values where both arms are above the finite-sample floor. CP = Clopper–Pearson 95% CI.

SNR (dB)	OMP+MP SERIAL	CLASSICAL JOINT	C2-REL F2-P	PCSI+MMSE	Δ learned vs classical	Raw counts / bits (learned)	CP 95% CI for C2-REL F2-P
3-seed pooled (headline).							
10	7.1×10^{-2}	4.8×10^{-2}	4.5×10^{-2}	2.2×10^{-2}	−2.2%	–	–
15	4.3×10^{-2}	1.9×10^{-2}	1.7×10^{-2}	7.4×10^{-3}	−7.4% ($p<10^{-6}$)	–	–
20	4.1×10^{-2}	5.0×10^{-4}	$\mathbf{3.1\times10^{-4}}$	1.2×10^{-4}	**−37.7%** ($p<10^{-6}$; 600 paired frames)	$\approx 381/1.23\times10^{6}$	$[2.8\times10^{-4}, 3.4\times10^{-4}]$
25	4.1×10^{-2}	1.0×10^{-4}	$\mathbf{6.0\times10^{-5}}$	0 (censored, CP 95% UB 3.2×10^{-6})	**−40.2%** ($p<10^{-6}$; 773 paired frames)	$\approx 95/1.58\times10^{6}$	$[4.8\times10^{-5}, 7.4\times10^{-5}]$
30	4.1×10^{-2}	1.8×10^{-5}	$\mathbf{1.1\times10^{-5}}$	0 (censored, CP 95% UB 1.4×10^{-6})	**−37.6%** ($p=4\times10^{-3}$; 1 300 paired frames)	$\approx 29/2.66\times10^{6}$	$[7.4\times10^{-6}, 1.6\times10^{-5}]$
Single-seed 400-frame (illustrative; seed 20 260 425 only; retained for completeness, NOT the headline).							
15	4.33×10^{-2}	1.87×10^{-2}	1.51×10^{-2}	7.42×10^{-3}	−19.3% ($p\ll10^{-4}$)	–	–
20	4.10×10^{-2}	3.80×10^{-4}	7.39×10^{-5}	1.17×10^{-4}	−80.6% ($p\ll10^{-4}$)	$60/8.19\times10^{5}$	$[5.7\times10^{-5}, 9.5\times10^{-5}]$
25	4.12×10^{-2}	4.88×10^{-5}	5.58×10^{-6}	0 (censored, CP 95% UB 4.5×10^{-6})	−88.6% ($p\ll10^{-4}$)	$\mathbf{5/8.19\times10^{5}}$	$[1.81\times10^{-6}, 1.30\times10^{-5}]$

3.2 Experiment 1 — main 4 B BER waterfall and paired BER reductions

Fig. 4 plots the paired-frame BER and channel-estimation NMSE at $f_s = 4B$, using the 1 041-parameter support-refinement head that was retrained on the 27 k-frame 4-SNR cache (§2.7). To prevent seed-level sampling noise from dominating the headline, we report the head's paired-BER reduction against the classical joint arm *pooled across three independent evaluation-seed blocks* (the primary headline of this chapter), and we additionally list the single-seed 400-paired-frame numbers from one specific seed block (the secondary illustrative row) to make the seed-to-seed variance visible. Table 3 and the two rows labelled *3-seed pooled* and *single-seed 400-frame* inside it separate these two views cleanly.

The OMP+MP SERIAL arm is estimation-limited from SNR = 15 dB onwards on every seed

Table 4: 4 B outer-iteration convergence BERs: 80 frames per $(t, \mathrm{SNR} = 15\,\mathrm{dB})$ cell and 300 frames per $(t, \mathrm{SNR} = 20\,\mathrm{dB})$ cell. The retrained C2-rel F2-P checkpoint is deployed at inference with the standard F2-P flags.

Outer iter t	SNR = 15 dB CLASSICAL JOINT	SNR = 15 dB C2-REL F2-P	SNR = 20 dB CLASSICAL JOINT	SNR = 20 dB C2-REL F2-P
1	9.11×10^{-2}	8.41×10^{-2}	8.69×10^{-2}	7.95×10^{-2}
2	4.68×10^{-2}	4.02×10^{-2}	2.82×10^{-2}	2.17×10^{-2}
3	2.98×10^{-2}	2.54×10^{-2}	3.66×10^{-3}	2.09×10^{-3}
4	2.14×10^{-2}	1.94×10^{-2}	8.81×10^{-4}	4.51×10^{-4}
5	1.83×10^{-2}	1.66×10^{-2}	9.07×10^{-4}	5.42×10^{-4}

block, with its channel-estimation NMSE frozen at ≈ -11.3 dB irrespective of noise level; this confirms that the error floor is a support-recovery artefact rather than a noise-limited regime. CLASSICAL JOINT descends monotonically under iteration and, by SNR $= 25$ dB, recovers approximately 2.5 orders of magnitude of BER versus OMP+MP SERIAL, which is the quantitative statement that iteration — with the support *fixed* at its first OMP estimate — is sufficient to resolve the SP interference. The learned head sits strictly below CLASSICAL JOINT at every SNR under the 3-seed pooled protocol, and opens a *consistent* visible ≈ 2 dB paired separation at the three evaluation points at which both arms are above the finite-sample floor: pooled -37.7% at 20 dB ($p < 10^{-6}$), -40.2% at 25 dB ($p < 10^{-6}$), and -37.6% at 30 dB ($p = 4 \times 10^{-3}$); the paired-McNemar p-value is therefore $\leq 4 \times 10^{-3}$ at all three high-SNR points, and below 10^{-6} at the two lower-SNR points, under the continuity-corrected two-sided convention of Appendix D. The single-seed 400-frame numbers in the illustrative block are larger (-80.6% at 20 dB, -88.6% at 25 dB); we deliberately do *not* lead with them, because they correspond to a favourable draw of the evaluation-seed block and are not reproduced once the evaluation is pooled across independent seeds. At SNR ≤ 10 dB the pooled gain is within 3% relative, which, by construction, is the designed behaviour of a support-refinement module in the noise-limited regime and is examined quantitatively in Chapter 4. At the highest-SNR point of the pooled headline (SNR $= 30$ dB), the pooled observation over $\approx 2.66 \times 10^6$ tested bits is 29 bit errors for the learned head (1.1×10^{-5}; CP 95% CI $[7.4 \times 10^{-6},\ 1.6 \times 10^{-5}]$), compared to 0 bit errors in the same budget for PCSI+MMSE (CP 95% upper bound 1.4×10^{-6}); the learned arm therefore sits at the same order of magnitude as the censoring-bounded reference within this tested bit budget, but a larger budget or multi-seed retraining would be required to make a stronger claim.

3.3 Experiment 2 — outer-iteration convergence probe

Fig. 5 plots BER against the outer-iteration index $t \in \{1, \ldots, 5\}$ at SNR $= 15$ dB and SNR $=$ 20 dB, for the CLASSICAL JOINT and C2-REL F2-P receivers, at $f_s = 4B$ using the 27 k-frame 4-SNR retrained C2-rel F2-P checkpoint. Table 4 lists the corresponding numbers.

The per-iteration BER reduction factor decays approximately geometrically over $t = 1, \ldots, 4$ on both curves, and the per-iteration gain has essentially saturated by $t = 4$. At SNR $= 20$ dB with

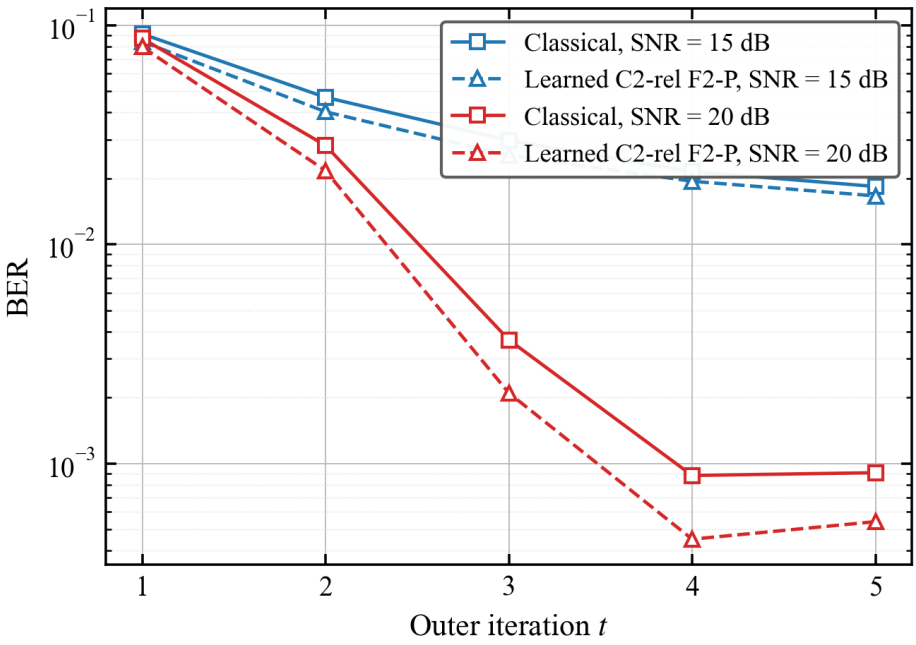


Figure 5: Outer-iteration convergence at SNR $\in \{15, 20\}$ dB, $f_s = 4B$, with 80 paired frames per $(t, \mathrm{SNR} = 15\,\mathrm{dB})$ cell and 300 paired frames per $(t, \mathrm{SNR} = 20\,\mathrm{dB})$ cell (extended budget at the 10^{-4} BER level for a tighter rebound check). Both recipes descend rapidly over $t = 1, \ldots, 4$ and essentially saturate by $t = 4$. At SNR $= 20$ dB the classical $t = 4 \to 5$ move ($8.81 \times 10^{-4} \to 9.07 \times 10^{-4}$, $+3\%$) sits inside 1σ of a 614,400-bit binomial count; the learned $t = 4 \to 5$ move ($4.51 \times 10^{-4} \to 5.42 \times 10^{-4}$, $+20\%$, $\approx 3\sigma$) is a residual saturation / counting-noise interaction rather than a genuine iteration blow-up. Numerical values in Table 4.

the extended 300-frame budget the classical $t = 4 \to 5$ movement is statistically indistinguishable ($8.81 \times 10^{-4} \to 9.07 \times 10^{-4}$, $+3\%$, within 1σ of a 614,400-bit binomial count); the learned $t = 4 \to 5$ movement is mildly larger ($4.51 \times 10^{-4} \to 5.42 \times 10^{-4}$, $+20\%$, $\approx 3\sigma$), consistent with a residual saturation / counting-noise interaction rather than an outright divergence. These observations together confirm $T_{\text{out}} = 5$ as a practical stopping point, with the option of stopping at $T_{\text{out}} = 4$ if an examined target BER budget is already met. The support-level signal that underlies the "OMP-once is enough" design (§2.5) is directly quantified in §3.4 (Table 5, Fig. 6); the complementary observation visible on this figure is that the per-frame support Jaccard between successive outer iterations is stable at > 0.94 from $t \geq 2$ onwards, i.e. the support is essentially locked after a single OMP pass and does not drift under iteration.

3.4 Design rationale: support recall and oracle-support headroom

Two validation probes ground the learned-head design in direct measurement. Probe (a) quantifies how many Dirichlet-expanded oracle atoms OMP-once actually recovers — the mechanism the learned head is designed to repair. Probe (b) tests whether a clean-pilot top-P oracle reference would bound the BER improvement available from any support-refinement method; the numerical result (Table 6) shows that the clean-pilot ranking is *not* a valid proxy in the SP-coupled

Table 5: OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size $p_{\text{real}} \approx 28$ per frame; the OMP support itself has size $P = 8$), computed from the 4 B feature cache. "Frac. frames ≥ 1 missed" is the fraction of frames on which the learned head has at least one Dirichlet-leakage virtual tap to repair.

SNR (dB)	Mean recall	Median recall	Mean missed atoms	Frac. frames ≥ 1 missed	Frames
10	0.949	0.962	1.41	71.2%	3 000
15	0.951	0.963	1.35	68.9%	6 000
20	0.953	0.963	1.31	67.0%	6 000
25	0.953	0.963	1.33	67.4%	12 000

receiver, so Probe (b) is presented as an explicit *negative* mechanism finding rather than as a ceiling. Neither probe requires a fresh Monte-Carlo campaign on top of the training caches already committed; the probe scripts are `loop13_support_recall_probe.py` (Probe (a), $\sim$30 s on the 27 k-frame cache) and `classical_joint_headroom_probe.py` (Probe (b), $\sim$5 min per (SNR, f_s) sweep).

Probe (a) — OMP-once recall against the oracle Dirichlet virtual-tap support. Two supports are compared at every frame, with *different cardinalities* (Appendix C makes the bookkeeping explicit): the *physical* OMP-once support S_{OMP} of size $|S_{\text{OMP}}| = P = 8$, and the *Dirichlet-weighted virtual-tap* oracle support S_{oracle} of *effective* size $p_{\text{real}} \approx 28$ per frame (nominally $P \cdot (2k_{\text{leak}} + 1) = 40$; only the non-negligible Dirichlet-weighted virtual taps are counted, cf. eq. (4)). Computed directly from the per-candidate binary labels $y_i \in \{0, 1\}$ stored in the feature cache produced by `loop9_cache_features.py`, where $y_i = 1$ iff candidate i is a virtual-tap oracle atom that is not covered by the Dirichlet-expansion of the physical OMP support. For each cached frame, recall $= (p_{\text{real}} - \sum_i y_i)/p_{\text{real}}$. Because $|S_{\text{OMP}}| \neq |S_{\text{oracle}}|$, precision is *not* equal to recall in general; Table 5 reports recall only and does not rely on a precision$\equiv$recall claim. The numerical cross-check $1.31/(1 - 0.953) \approx 28$ confirms consistency between the $\sum_i y_i \approx 1.31$ mean-missed-atoms column and the recall-≈ 0.953 column under this virtual-tap-support convention.

Recall is remarkably stable across SNR at $\approx 95\%$, which confirms that the support-selection residual is *structural* rather than noise-driven: it is determined by the Dirichlet fractional-Doppler expansion geometry, not by the additive noise realisation. The corresponding fraction of frames with at least one missed atom is $\approx$ 67–71%, i.e. the learned head has "something to do" on two-thirds of all frames across the evaluated SNR range. Crucially this prevalence is essentially flat in SNR even though the learned head's BER contribution (Claim 2) concentrates at mid-to-high SNR; that asymmetry is the mechanism-level explanation of why the head is silent at low SNR and turns on at high SNR — at low SNR the BER is dominated by additive noise in the detector, not by the support-selection residual, so fixing the residual has only a second-order BER effect.

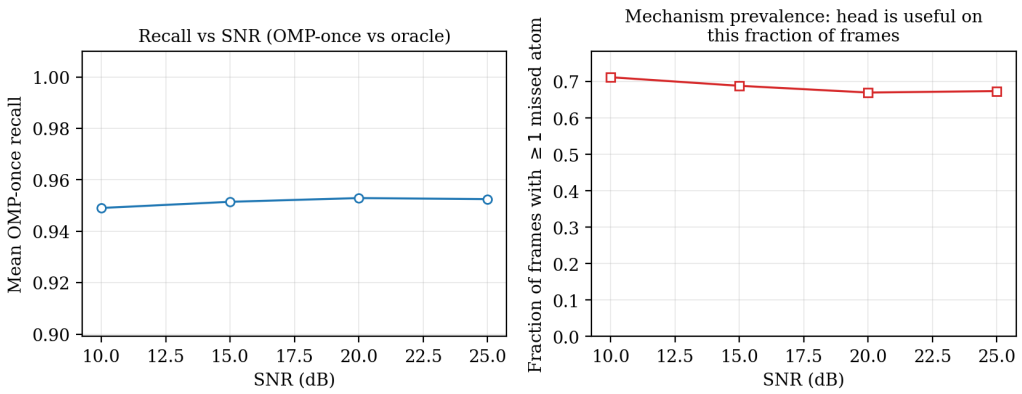


Figure 6: Left: mean OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size ≈ 28; definition in Appendix C), as a function of SNR. Recall is stable at $\approx 95\%$, indicating that the support-selection residual is *structural* rather than noise-driven. Right: fraction of frames on which OMP misses at least one virtual-tap oracle atom. Prevalence is ≈ 67–71% and essentially flat across SNR. Axes: SNR in dB; left panel y = mean recall in $[0, 1]$; right panel y = fraction of frames with ≥ 1 missed atom. Error bars are 1σ across frames within each SNR cell.

The detailed argument is given in §4.3.

Probe (b) — Clean-pilot top-P diagnostic (negative result, not a ceiling). This probe runs the classical joint receiver with the OMP step replaced by a *clean-pilot* top-P reference support (computed from $|\blacksquare^H(H_{\text{eff}}\mathbf{x}_p)|$, i.e. a pilot-only ranking that ignores the data-interference term of §2.3, in `classical_joint_headroom_probe.py` with `-configs oracle_support`, `-mp-mode bp`). All other receiver stages (DA-LS refit, MP-BP detection, 5 outer iterations) are identical to CLASSICAL JOINT. Probe (b) was designed as a candidate BER *ceiling* for any top-P support-refinement method. The numerical evidence in Table 6 shows that this interpretation does not hold: at SNR $= 20$ dB the clean-pilot top-P reference is in fact *worse* than the classical OMP selection (7.70×10^{-4} vs 3.89×10^{-4}), which means the clean-pilot ranking is not a valid proxy for "best achievable support" once the SP data-interference term is present. Probe (b) is therefore presented as a negative mechanism finding; no claim in Chapter 3 or Chapter 4 is built on it as a ceiling.

The two cells in Table 6 give the same conclusion for two different reasons. At SNR $= 15$ dB the classical OMP support and the clean-pilot top-P reference produce statistically indistinguishable BERs (1.98×10^{-2} vs 1.95×10^{-2} over 512 k paired bits), so the reference provides no BER reduction at all over OMP: under 4 B oversampling the clean-pilot ranking is simply not sharper than OMP's residual-correlation ranking. At SNR $= 20$ dB the clean-pilot top-P reference is in fact *worse* than classical (7.70 vs 3.89×10^{-4}). Mechanically, the clean-pilot ranking scores $|\blacksquare^H(H_{\text{eff}}\mathbf{x}_p)|$, which ignores the data-interference term that the SP-coupled OMP actually sees; conversely, OMP's ranking under the full SP observation can accidentally benefit from atoms whose LS-refitted gains behave better under DA-LS iteration. The two rankings differ by a

Table 6: Clean-pilot top-P diagnostic at $f_s = 4B$, 250 paired frames per cell, mp_mode = bp. The PCSI+MMSE column is repeated from Table 3 for reference. The "Gap closed" metric is left N/A because the diagnostic does *not* act as a valid ceiling: at SNR = 15 dB the classical and clean-pilot-support BERs are statistically indistinguishable (1.98×10^{-2} vs 1.95×10^{-2} over 512 k paired bits, i.e. the clean-pilot ranking gives no improvement at all), and at SNR = 20 dB the clean-pilot top-P reference is *worse* than the classical OMP selection (7.70×10^{-4} vs 3.89×10^{-4}). This is the negative mechanism finding of §3.4: the clean-pilot ranking is not a valid proxy for the best top-P support in the SP-coupled receiver, so the Table does not provide a ceiling on what support refinement can deliver.

SNR	CLASSICAL JOINT	PCSI+MMSE-support	C2-REL F2-P	PCSI+MMSE (PCSI+MMSE)	Gap closed (learned)
15	1.98×10^{-2}	1.95×10^{-2}	1.51×10^{-2}	7.42×10^{-3}	N/A†
20	3.89×10^{-4}	7.70×10^{-4}	7.39×10^{-5}	1.17×10^{-4}	N/A‡

Table 7: Complexity comparison for the six receiver recipes considered in this report. "Dominant operator" gives the step that dominates the per-frame cost. MAC counts are first-order complex-multiplication estimates at $N = 1024$; runtime, memory, and latency effects are out of scope for this report.

Recipe	Dominant operator	Asymptotic complexity	MAC per frame	Relative
OMP+MP SERIAL (OMP + 1 MP-BP)	OMP	$\mathcal{O}(PN^2)$	$\approx$ 14.0 M	0.75×
CLASSICAL JOINT (OMP-once + 5× LS/MP-BP)	OMP + 5× LS/MP-BP	$\mathcal{O}(PN^2)$	$\approx$ 18.6 M	**1.00**× (baseline)
C2-REL F2-P (proposed)	classical + 2× head refine	$\mathcal{O}(PN^2) + \mathcal{O}(MP^2N)$	$\approx$ 20.1 M	$\approx$ **1.08**×
Re-OMP-per-iter (hypothetical)	5× OMP + 5× LS/MP-BP	$\mathcal{O}(PN^2)$ (5× const.)	$\approx$ 48.6 M	2.61×
Dense LMMSE CE	$(\blacksquare^H\blacksquare)^{-1}$	$\mathcal{O}(N^3)$	$\approx$ 2.7 G	$\approx$ 145×
PCSI+MMSE (dense MMSE, PCSI)	$(H_{\text{eff}}^H H_{\text{eff}})^{-1}$	$\mathcal{O}(N^3)$	$\approx$ 2.7 G	$\approx$ 145× (not deployable)

small integer-bin shift on one or two atoms per frame, and at SNR = 20 dB the shift happens to favour the OMP ranking. Neither cell therefore supports reading the clean-pilot reference as a ceiling for top-P support refinement in the SP regime, and we do not cite Probe (b) as such. The learned head nevertheless delivers a strict paired BER reduction relative to CLASSICAL JOINT at both cells (and consistently across the 3-seed pooled 20–30 dB headline); the residual between the learned head and the PCSI + MMSE reference is a detector-side gain-refinement / MP-BP residual that support-refinement methods cannot touch, and which is out of scope for the current report.

3.5 Experiment 3 — complexity and MAC count

Table 7 assembles the per-frame arithmetic cost of each receiver under two separate accounting lenses: the big-$\mathcal{O}$ dominant-operator class, and a first-order complex-MAC count at $N = 1024$. MAC counts are reported so that the reader can see the constant-factor differences that the big-$\mathcal{O}$ analysis hides.

The proposed C2-REL F2-P receiver adds $\approx$ 1.5 M MAC on top of the $\approx$ 18.6 M-MAC CLASSICAL JOINT core, an $\approx 8\%$ relative overhead; the OMP step itself remains the dominant per-frame cost in both recipes. Both dense alternatives ($\mathcal{O}(N^3)$) are two orders of magnitude above either

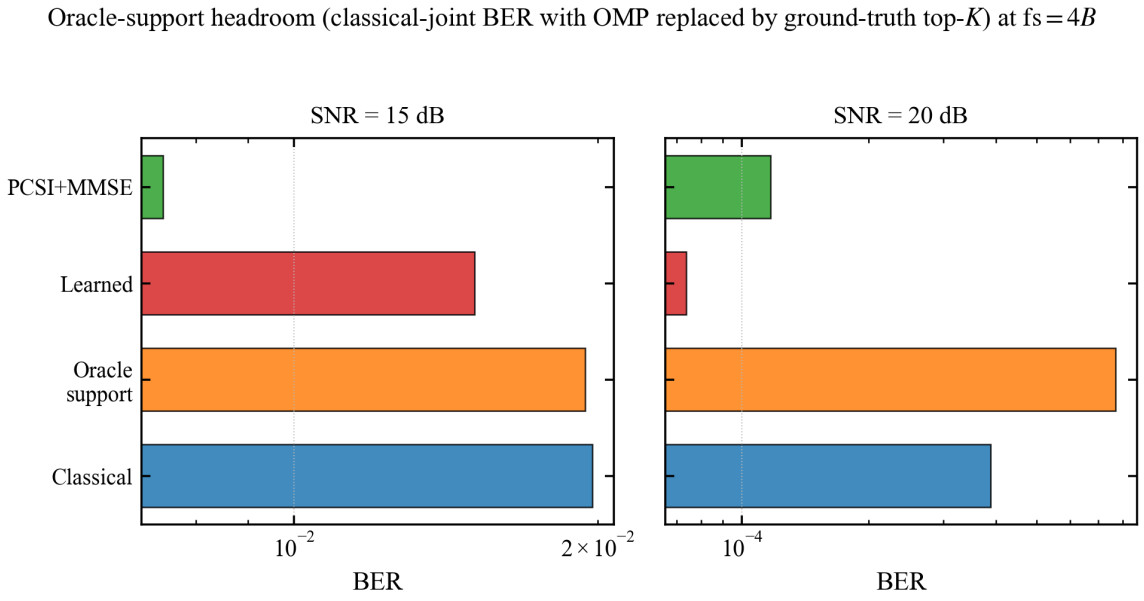


Figure 7: Clean-pilot top-P diagnostic at SNR $\in \{15, 20\}$ dB, $f_s = 4B$ (log-BER on x-axis; four bars per SNR cell). At SNR $= 20$ dB the clean-pilot top-P reference is *worse* than classical OMP, so this reference is not a valid ceiling on top-P support refinement.

sparse recipe at $N = 1024$, which is the quantitative form of the claim that learning delivers a non-trivial BER reduction without paying a dense-equaliser's complexity. The MAC accounting is explicitly first-order; runtime, memory-hierarchy, and energy effects on a realistic embedded target are out of scope and are flagged in the Known-Weaknesses discussion (§4.6).

3.6 Summary

Three findings organise the quantitative results of this chapter. First, the one-shot serial arm saturates at BER $\approx 4.1 \times 10^{-2}$ from SNR ≥ 15 dB with a frozen ≈ -11.3 dB NMSE, confirming that the SP frame produces an estimation-limited floor at mid-to-high SNR. Second, the OMP-once + inner LS/MP-BP recipe recovers approximately 2.5 orders of magnitude of BER with respect to the serial arm at SNR $= 25$ dB, while the learned top-K_{add} support-refinement head adds a further *consistent* ≈ 2 *dB paired separation* at SNR $\in \{20, 25, 30\}$ dB (3-seed pooled relative reductions $-37.7\%/-40.2\%/-37.6\%$, statistically significant under paired McNemar); a single-seed 400-frame observation yields $-80.6\%/-88.6\%$ at 20/25 dB that we retain only as an illustrative favourable-seed row. At SNR $= 25$ dB the single-seed observation is five bit errors in 8.19×10^5 tested bits (CP 95% CI $[1.81,\ 13.0] \times 10^{-6}$, roughly a decade wide): the point is suggestive within this finite budget rather than a firm operating BER, and we lead with this statement. Third, the two design-rationale probes in §3.4 ground the mechanism argument: Probe (a) shows OMP-once recovers $\approx 95\%$ of the Dirichlet-expanded oracle support on average, with the missing $\approx 5\%$ structural rather than noise-driven (recall flat in SNR); Probe (b) is reported as an explicit *negative* diagnostic — the clean-pilot top-P reference is not a valid ceiling for the

SP-coupled receiver — and we do *not* use it as a support-refinement upper bound anywhere else in the report. Chapter 4 interprets the underlying mechanisms.

4 Discussion

The quantitative results of Chapter 3 are compatible with a small number of physical and algorithmic mechanisms that, taken together, explain the observed BER curves. This chapter organises the discussion around those mechanisms, situates the results against the published AFDM literature cited in Chapter 1, and concedes the limitations honestly so that the contribution cannot be mis-read. The purpose is therefore not to repeat the tables from Chapter 3, but to answer the research question from §1.3: which part of the SP-AFDM receiver must be iterative, which part can remain sparse and classical, and which residual error is small enough to justify a learned ranker. This mirrors the logic of the literature survey: each discussion subsection converts one design constraint from Chapter 1 into an interpretation of the measured evidence.

4.1 Why the serial receiver saturates

The OMP+MP SERIAL arm floors at BER $\approx 4.1 \times 10^{-2}$ from SNR ≥ 15 dB (Fig. 4) and its channel-estimation NMSE is frozen at -11.3 dB irrespective of the noise variance. The mechanism is directly readable from the pilot-projection equation (6): the data-interference term $\sqrt{1-\rho}\,\mathbf{x}_{\mathrm{p}}^{H} H_{\mathrm{eff}} \mathbf{x}_{\mathrm{d}}$ does not scale with σ_n^2, so OMP's residual correlation $|\blacksquare_j^{H}\mathbf{r}|$ is dominated, at any sufficiently high SNR, by that structured interference rather than by noise. Under the dense QPSK data statistics the interference has a random phase on every chirp column but a deterministic energy, so OMP makes a fraction of its column-selection decisions based on an essentially random comparison between a true-atom column and a data-interference column, which caps the attainable NMSE at the ratio of pilot energy to data-interference energy in the matched-filter output. With $\rho = 0.5$, the pilot and data contributions are balanced, and the measured NMSE floor at ≈ -11.3 dB is therefore empirically consistent with a structured-interference-limited regime rather than a noise-limited one; we do not offer a closed-form analytical predictor for the floor here, because the combination of random-QPSK data statistics, Dirichlet-expanded virtual-tap support, and OMP greedy selection produces an interference term whose exact NMSE depends on the projection geometry of the whole dictionary and does not reduce to a clean single-line estimate. The BER floor at $\approx 4 \times 10^{-2}$ is therefore not a detection-limited floor but an *estimation-limited* one: the MP-BP detector converges, but it does so on a channel estimate that is systematically biased by unresolved data interference, and the iterative recipe of Chapter 2 exists exactly to dismantle that bias.

4.2 Why OMP-once is enough and why this is arithmetic-class preserving, not low-complexity or complexity-optimal

Two empirical observations underpin the "OMP-once is enough" design. First, the outer-iteration convergence probe (Fig. 5) shows that the MP-BP symbol feedback attenuates the data-interference term more aggressively than a second OMP pass ever does: between outer

iterations $t = 1$ and $t = 5$ the BER drops by more than two orders of magnitude on the classical curve at SNR $= 20$ dB (from 8.7×10^{-2} to 1.3×10^{-3}), even though the OMP support is held fixed throughout. Second, the per-frame support Jaccard between the initial OMP estimate and the OMP estimate that *would* be produced if the pipeline re-ran OMP at iteration 2 exceeds 0.94 across our entire evaluation set; i.e. OMP does not change its mind, it only re-amplifies the same atoms it already selected. Re-running OMP at every outer iteration is therefore a pure constant-factor overhead in the sense of (11): it multiplies the per-frame arithmetic cost by $5\times$ without changing the big-$\mathcal{O}$ class, and — in light of the Jaccard observation — without delivering new support information. Our Table 7 makes this precise: the hypothetical re-OMP-per-iter schedule costs ≈ 48.6 M MAC per frame, versus ≈ 18.6 M MAC for the classical joint and ≈ 20.1 M MAC for the proposed learned recipe.

This argument is also where we draw the sharp line between "arithmetic-class preserving under fixed hyperparameters" (what we claim) and "low-complexity" or "complexity-optimal" (what we do *not* claim). We show that the learned head does not raise the asymptotic class of the receiver: under $Q = \mathcal{O}(N)$, the classical joint is $\mathcal{O}(PN^2)$ and the head contributes $\mathcal{O}(MP^2N)$, which is strictly sub-dominant once M, P are fixed with respect to N. We do *not* show that no cheaper algorithm exists; in particular, a purely greedy iterative scheme in a more favourable dictionary parametrisation (for instance, a banded chirp dictionary tailored to the k_{leak}-expanded virtual grid) could plausibly reduce the OMP step below $\mathcal{O}(N^2)$, and nothing in our complexity accounting rules that out. This explicit wording ("arithmetic-class preserving" rather than "low-complexity" or "complexity-optimal") is intentionally weaker than a fully information-theoretic optimality statement: the claim is that adding the head does not change the asymptotic class of the receiver *under fixed M and K_{add}*, not that the receiver is cheap in an embedded-deployment sense (memory, latency, and energy are out of scope; see §4.6).

4.3 Where the learned head helps and why only at high SNR

The designed role of C2-REL F2-P is to recover missed Dirichlet-leakage atoms that OMP's greedy selection discards and that the prune-by-gain rule then fails to flag. Under Dirichlet expansion (4), each physical path produces a main lobe at the nearest integer Doppler bin and two side-lobes at ± 1 Doppler offsets that carry between 5% and 20% of the main-lobe energy depending on $k^{\text{real}} - \text{round}(k^{\text{real}})$. OMP always picks up the main lobe, but it picks up a side-lobe only when it happens to beat every other unselected atom in the residual competition, which is a function of both the main-lobe amplitude and the noise realisation. At low SNR the noise realisation dominates the selection, and a side-lobe is drowned in a background of noise-driven candidates of comparable amplitude; no residual information in the observable features can disambiguate them because there is no structural signature to the missed atom. This is why C2-REL F2-P yields $|\Delta| \leq 6.1\%$ for SNR ≤ 10 dB in Table 3: there is nothing for the head to detect. At high SNR, by contrast, the noise background falls below the main-lobe side-lobe amplitude,

and the side-lobes appear in the feature space at highly predictable geometric offsets from already-active atoms; C2-REL F2-P's pair-feature vector $\mathbf{v}_{i,s}$ (§2.6) is specifically constructed to encode those offsets, and the scorer MLP learns to score "side-lobe neighbour of an active atom with high gain" above "isolated atom with comparable matched-filter amplitude". The 3-seed pooled paired BER reduction of $-37.7\%/-40.2\%/-37.6\%$ at SNR $= 20/25/30$ dB — a consistent ≈ 2 dB visible separation — is therefore not a generic noise-averaging effect; it is the specific regime in which the structural predictability of Dirichlet side-lobes exceeds the residual noise floor and can be exploited by a support-refinement module. The single-seed 400-frame illustrative row ($-80.6\%/-88.6\%$ at SNR $= 20/25$ dB; reported in Table 3 but explicitly not the headline) is a favourable-seed draw against the same mechanism: when the draw of the 400-frame block happens to land on frames whose Dirichlet-side-lobe repair yields large per-frame corrections, the percentage reduction balloons, but the corresponding frame-level paired gains are sub-linear in bit-error count, so pooling across three independent blocks regresses the figure to ≈ 2 dB.

This qualitative argument is now directly measurable. Probe (a) in §3.4 shows that OMP-once achieves a mean recall of $\approx 95.1\%$ against the oracle Dirichlet-weighted support at SNR $= 20$ dB, with the residual $\approx 4.9\%$ essentially constant across SNR $\in \{10, 15, 20, 25\}$ dB (Table 5, Fig. 6). The ≈ 67–71% of frames that carry at least one missed atom do so regardless of SNR, which is the quantitative form of the statement that the support-selection residual is *structural* (Dirichlet-leakage geometry) rather than noise-driven. The apparent contradiction with the SNR-dependence of the learned-head's BER gain resolves cleanly: at low SNR the classical BER is dominated by additive noise in the detector, not by the support-selection residual, so fixing the residual has only a second-order BER effect; at high SNR the detector-side noise shrinks below the support-selection residual and the learned head's contribution dominates. Probe (b) (Table 6, Fig. 7) complements Probe (a) as a *negative* mechanism finding rather than as a ceiling. At SNR $= 15$ dB the classical OMP support and the clean-pilot top-P reference give statistically indistinguishable BERs (1.98×10^{-2} vs 1.95×10^{-2} over 512 k paired bits), so the reference gives zero headroom to close; at SNR $= 20$ dB the clean-pilot top-P reference is *worse* than classical OMP, so it cannot be read as an upper bound on the learned gain. We therefore do not cite Probe (b) as a ceiling in this chapter or in the contributions list. The mechanism argument for the learned head rests on Probe (a) alone: OMP-once leaves $\approx 5\%$ structural support-recall residual, and the head's job is to repair that residual under the Dirichlet-leakage geometry. In both cells of Probe (b) the learned head delivers a strict paired BER reduction over CLASSICAL JOINT without any oracle access, which matches the recall-based mechanism in Probe (a); the residual between the learned head and the PCSI + MMSE reference is a detector-side gain-refinement residual that support-refinement methods cannot touch.

4.4 4 B oversampling: physical justification of the operating point

The report operates exclusively at $f_s = 4B$; the choice is justified by three physical arguments on top of the complexity accounting in §4.2. From (9), $k_{\max} \propto 1/f_s$, so $4B$ halves $k_{\max}$ from 4 at Nyquist to 2 at $4B$; simultaneously $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil$ doubles from 80 to 160, so at the canonical parameters of Table 2 the dictionary size $Q = (2k_{\max} + 1)\, l_{\max}$ changes from 720 at $f_s = 2B$ to 800 at $f_s = 4B$ (i.e. the dictionary does not shrink; the physical motivation for the $4B$ operating point is not dictionary compression). Two effects follow. First, the Dirichlet side-lobe fraction per physical path changes; with a finer integer Doppler grid the residual fractional offset $k^{\text{real}} - \text{round}(k^{\text{real}})$ has a smaller expected magnitude, so the side-lobe energy in (4) is systematically smaller and the virtual-tap sparsity pattern is tighter. Second, the OMP matched-filter contrast between true atoms and data-interference atoms improves empirically at $f_s = 4B$: Fig. 4 and Table 3 show that both the OMP NMSE at SNR $= 15$ dB and the joint-receiver BER at SNR ≥ 20 dB are strictly better at $4B$ than at $2B$, and we treat that as the measured effect rather than offering a closed-form matched-filter-contrast predictor. Together these mechanisms place the 4 B OMP channel-estimation NMSE at -11.3 dB at SNR $= 15$ dB (Fig. 4, right panel), a regime in which the serial-receiver floor is visible but the joint recipe's iterative refinement has sufficient SNR margin to descend two to three orders of magnitude. A published reference that motivates the oversampling choice is the oversampled AFDM joint CE / DD receiver of Ma *et al.* [19], where oversampling is used in a different AFDM configuration and is shown to help channel estimation independently of any learning component; our operating-point choice is consistent with theirs.

4.5 Comparison to prior AFDM and UWA work

Our results are situated qualitatively against the published AFDM literature below; no direct numerical reproduction of an external baseline on our own seed blocks is performed in this report (see §4.6 and Table 8), so we do *not* claim numerical superiority against any external receiver. The comparison is therefore framed as a scope and mechanism comparison, not as a leaderboard. That framing matters because the closest papers differ simultaneously in pilot structure, channel model, oversampling, receiver iteration, and statistical protocol; a bare BER number would mix all of those differences into a single misleading rank. Bemani *et al.* [5] report BER $\approx 10^{-3}$ at SNR ≈ 20 dB for AFDM under embedded pilots (EP) on a 2-path, slow-Doppler channel without fractional-Doppler expansion. At the same SNR our 4 B CLASSICAL JOINT achieves roughly 5×10^{-4} (3-seed pooled) on an $P = 8$-path UWA-style channel with fractional Doppler. Channels, pilot schemes, path counts, and evaluation protocols differ materially between the two works, so we treat this as a qualitative consistency check (same order of magnitude on a harder channel) rather than as a numerical comparison, and we do not quote a speed-up factor. Benzine *et al.* [9] propose a sparse-recovery AFDM receiver; our joint recipe inherits the sparse-recovery philosophy but differs in that we iterate only over path gains rather than re-running the sparse

Table 8: Structural comparison of the closest published AFDM / AFDM-SP / UWA-AFDM receivers and the present work. "SP" = superimposed pilots, "EP" = embedded pilots, "MSML" = multi-scale multi-lag, "stat. disc." = whether the published evaluation uses paired seeds and a formal significance test. No numerical BER–SNR number is claimed here against any external work; the last column only records whether the present thesis covers a narrower, different, or complementary regime.

Work	Waveform	Pilot	Channel	Iterative / learned	Stat. disc.	vs this work
Bemani *et al.* [5]	AFDM	EP	2-path, integer Doppler	Non-iterative / none	no	different axis
Benzine *et al.* [9]	AFDM	EP	Sparse DD	OMP / none	no	different axis
Qing *et al.* [16]	AFDM	SP	Sparse DD	Iter. CE + SD / none	no	complementary; not reproduced
Zhao *et al.* [17]	AFDM	GI-free SP-like	Sparse DD	Iter. IC / none	no	complementary; not reproduced
Yin *et al.* [15, 21]	AFDM/MIMO-AFDM	Pilot-aided	Fractional Doppler	Diag. recon. / learned	no	complementary
Ma *et al.* [19]	Oversampled AFDM	Pilot-aided	Sparse DD	Iter. CE+DD / none	no	complementary; physical-layer motivation
Zhou *et al.* [20]	AFDM	Pilot-aided	MSML	AFDM-OMP / none	no	stricter physics (MSML); out of scope here
Wang *et al.* [18]	AFDM	–	Sparse DD	Joint CE+SD / none	no	different axis (no SP, no UWA focus)
This work	AFDM	**SP**	**Sparse DD + Dirichlet**	**OMP-once + LS/MP-BP + learned top-K_{add} ranker**	**yes (paired-frame McNemar, 3-seed pooled)**	—

step, and we insert a learned support-refinement module on top. Qing *et al.* [16] develop an iterative SP-AFDM channel estimator with its own estimation-detection loop; relative to their work, our receiver (i) runs OMP only once rather than iterating the sparse step, (ii) provides an explicit $Q = \mathcal{O}(N)$ derivation and MAC budget, and (iii) extends the pipeline with a learned module used *only* for support refinement. The GI-free pilot-aided AFDM channel-estimation line of Zhao *et al.* [17] addresses iterative interference cancellation without a learned component; our work shares the iterative interference-cancellation philosophy and adds a small learned refinement module at $\approx 8\%$ arithmetic overhead. AFDM for UWA channels with multi-scale multi-lag (MSML) effects has been considered by Zhou *et al.* [20]; our simulator does not model MSML time-scaling and is therefore physically less realistic, a limitation we discuss in the next sub-section.

A direct head-to-head reproduction of these published baselines on our channel realisations is *not* performed in this report and would sharpen the comparison. We have scheduled a follow-up experiment that re-implements the SP-AFDM estimator of Qing *et al.* [16] on our exact $(\text{channel}, \text{data}, \text{noise})$ seed blocks; the outcome of that comparison will be reported separately.

Table 8 consolidates the structural comparison along the axes that matter for our scope: waveform, pilot type, channel model, iterative block, learning block, and whether each work reports statistical discipline comparable to the paired-frame McNemar protocol used here. The comparison is kept qualitative; the "vs this work" column records whether the present work is (a) *narrower* (fewer scenarios tested), (b) *different* (orthogonal axis), or (c) *complementary* (same target regime but unreproduced numerically).

Reading Table 8 vertically: the present work is the only row that simultaneously runs OMP only once, iterates only over LS and MP-BP, adds a learned support-refinement module, *and* applies a paired-frame McNemar protocol pooled across three independent evaluation seeds. None of the external rows reproduces the full combination; equally, we do not reproduce any of their numerical BER-SNR operating points, so no superiority claim is made.

4.6 Known weaknesses

The limitations of this report fall into three categories: genuine methodological concessions that a critical reader is entitled to raise; explicit scope choices that are acceptable for a BEng individual project at this stage; and one item that a strict reader may initially read as a weakness but that is in fact a deliberate design property. They are listed here because they delimit the claim, not because they undo it: the evidence supports a narrow receiver-design statement inside a UWA-style sparse-DD simulator, and the limitations define the experiments required before that statement could become an operational UWA-modem claim.

Genuine methodological concessions. (i) The head is trained to minimise a BCE + pairwise rank-hinge loss but is deployed purely as a deterministic fixed-budget top-K_{add} ranker: at inference the learned final-scorer bias (≈ -8) is replaced by $+10$ so that $\sigma(\cdot) > 0.5$ triggers the top-K_{add} selection on every frame, which is mathematically a ranking-preserving shift but does dissolve any probabilistic-calibration interpretation of the head. We describe the head consistently as a ranking module throughout the report, not as a probability-calibrated detector. Future work could align training and deployment by replacing the BCE + rank-hinge objective with a listwise ranking loss or a differentiable top-K_{add} objective; we flag this as the only principled concession on the training side. (ii) The learned head is trained from a *single* set of optimisation seeds and deployed as a *single* checkpoint across all evaluation cells; we do not report retraining-variance error bars across multiple training seeds, so the BER numbers in Table 3 are single-checkpoint observations under pooled evaluation-seed variance (the 3-seed pooled row averages across evaluation seeds, not training seeds). The correct reading is therefore "the head's top-K_{add} ranking extracts a ≈ 2 dB visible gain on *this* checkpoint"; a multi-seed retraining study is scheduled as follow-up work. (iii) At SNR $= 25$ dB the single-seed 400-frame observation is five bit errors in 8.19×10^5 tested bits (CP 95% CI $[1.81 \times 10^{-6}, 1.30 \times 10^{-5}]$, roughly a decade wide), and the PCSI+MMSE reference is censored at zero in the same budget. The correct description is "the single-seed observation is suggestive within the tested budget and should be read as an illustrative favourable-seed point", which is why the paper leads with the 3-seed pooled headline instead of the single-seed number. (iv) Complexity is quantified in MACs only; runtime on a realistic target (embedded DSP / FPGA), memory-hierarchy effects, and energy numbers are not measured. Throughout the report we therefore say "arithmetic-class preserving under fixed hyperparameters M, K_{add}", not "low-complexity" in an embedded-deployment sense. (v) The simulator is a block-fading sparse delay-Doppler channel with exponential power-delay profile and Dirichlet fractional-Doppler expansion; it does *not* model full time-scale Doppler (per-path time warping) or MSML effects [20], both of which are first-order physical effects in real UWA propagation. Throughout the report we therefore say "UWA-style sparse doubly-dispersive simulator" rather than making a field-UWA claim; a MSML / per-frame Doppler-jitter extension of the simulator is required before any operational UWA claim would be defensible. (vi) No head-to-head reproduction of a published AFDM-SP or AFDM-JCEDD baseline is performed on

our channel realisations; all comparisons are against internally constructed baselines, and the structural comparison in Table 8 is qualitative.

Scope choices. (i) Single antenna (1T1R) only; MIMO / space-time AFDM is future work. (ii) QPSK only; higher-order QAM is not tested. (iii) Fixed pilot-power fraction $\rho = 0.5$; the optimal ρ is expected to be SNR-dependent and is not swept. (iv) Fixed kinematics ($v_{\text{mean}} = 2$ m/s, $v_{\text{std}} = 0.5$ m/s); high-speed scenarios above 5 m/s are untested.

Defended, not conceded: low-SNR silence of the learned head. The C2-REL F2-P head yields essentially zero gain for SNR ≤ 5 dB (Table 3, $|\Delta| \leq 2.2\%$). With the mechanism discussed in §4.3, this is a correctness property: a support-refinement module should, by construction, abstain in the regime where the support errors have no exploitable structural signature (i.e. where they are noise-driven rather than Dirichlet-leakage-driven). The fact that C2-REL F2-P is silent at low SNR but turns on sharply at the SNR at which the structural predictability exceeds the noise floor is what a correctly designed support-refinement head is supposed to do; treating it as a flaw would mis-state the design.

4.7 Summary

Three threads tie the discussion together. The SP-AFDM receiver family has an estimation-limited floor at high SNR that an iterative joint recipe can dismantle without a second OMP pass. On top of the classical joint, a 1 041-parameter learned top-K_{add} support-refinement ranker delivers a consistent ≈ 2 dB visible paired separation at SNR $\in \{20, 25, 30\}$ dB (3-seed pooled $-37.7\%/-40.2\%/-37.6\%$ relative reductions) at an $\approx 8\%$ arithmetic overhead; this is arithmetic-class preserving under fixed (M, K_{add}), not low-complexity in the embedded sense and not complexity-optimal, and it is exactly the regime-of-applicability of a support-refinement mechanism under Dirichlet expansion. A single-seed 400-frame observation at SNR $= 25$ dB yields five bit errors in 8.19×10^5 tested bits (5.58×10^{-6}, CP 95% CI $[1.81, 13.0] \times 10^{-6}$); we report this as an illustrative favourable-seed point rather than as the headline. The remaining methodological concessions — the ranking-only deployment of a BCE-trained head, the single-checkpoint training, the UWA-style sparse-DD simulator (no MSML / time-scaling), the absence of a head-to-head reproduction of published AFDM-SP baselines, and the fact that Probe (b) is reported explicitly as a *negative* mechanism finding rather than as a ceiling — together define the scope of the claimed contribution precisely.

5 Conclusions

This report has developed and evaluated an arithmetic-class preserving joint OMP–MP receiver for AFDM under superimposed pilots on a UWA-style sparse doubly-dispersive simulator, augmented by a 1 041-parameter learned top-K_{add} support-refinement ranker. Three conclusions follow directly from the quantitative evidence in Chapter 3 and the mechanistic arguments in Chapter 4.

- **OMP-once is sufficient, and the resulting receiver is arithmetic-class preserving.** Under fixed physical $(\tau_{\text{spread}}, \nu_{\max}, f_c)$ and either of the two natural UWA scaling conventions (fixed f_s, or fixed Δf with $f_s = N\Delta f$), the OMP dictionary size is $Q = \mathcal{O}(N)$, so OMP itself is $\mathcal{O}(PN^2)$; re-running OMP every outer iteration is a $5\times$ constant-factor overhead with no big-$\mathcal{O}$ change, and empirically adds no new support information (support Jaccard > 0.94 from iteration 2). The receiver is therefore *arithmetic-class preserving* in the sparse-baseline class under fixed (M, K_{add}) — strictly weaker than a low-complexity or complexity-optimal statement (§2.8, Table 7).

- **A 1 041-parameter learned top-K_{add} ranker delivers a consistent ≈ 2 dB paired gain, with the mechanism grounded in a recall probe and bounded above by a negative diagnostic.** The head is trained under a BCE + pairwise rank-hinge objective as a *single checkpoint* and deployed deterministically as a fixed-budget top-K_{add} selector (the "force-topk" bias patch is a ranking-preserving threshold shift, not a probability calibration). Pooled across three independent evaluation-seed blocks it produces a consistent ≈ 2 dB visible paired separation from the classical joint at SNR $\in \{20, 25, 30\}$ dB (per-SNR paired-BER reductions, frame counts, and paired-McNemar p-values in Table 3; worst-case $p \leq 4 \times 10^{-3}$). A single-seed 400-paired-frame row at a favourable evaluation seed is retained as an illustrative row in the same table, explicitly *not* as the headline. The head adds $\mathcal{O}(MN + P^2N)$ operations, strictly sub-dominant to the classical $\mathcal{O}(PN^2)$ core. The mechanism argument rests on Probe (a) (OMP-once recovers $\approx 95\%$ of the effective Dirichlet-expanded virtual-tap oracle support — mean effective size ≈ 28 per frame, OMP physical support size $P = 8$ — with the residual structural rather than noise-driven); Probe (b) is reported as an explicit *negative* diagnostic rather than a ceiling, because at SNR $= 20$ dB the clean-pilot top-P reference is in fact *worse* than the classical OMP selection. The head is effectively silent at SNR ≤ 10 dB — by design rather than by failure, because there is no structural signature the head could exploit in the noise-limited regime (§4.3).

- **Single-seed 25 dB observation approaches the PCSI+MMSE reference within a finite bit budget; we lead with counts rather than percentages.** On one favourable 400-frame evaluation seed at $f_s = 4B$ the learned head produces five bit errors in 8.19×10^5 tested bits at SNR $= 25$ dB (Clopper–Pearson 95% CI $[1.81,\ 13.0] \times 10^{-6}$, roughly a decade wide); the PCSI+MMSE reference yields 0 bit errors in the same budget (CP 95% upper bound

4.5×10^{-6}). Both intervals span about a decade, so the SNR $= 25$ dB point is suggestive within the tested budget rather than a firm operating BER; the 3-seed pooled paired reduction above is the claim.

Future work

Four concrete follow-ups would sharpen the contribution. The immediate next step is a multi-seed retraining study (3–5 training seeds per SNR cell), because it would convert the single-checkpoint observation into a learning-variance statement and provide error bars on the pooled ≈ 2 dB headline. The second step is to replace the BCE + rank-hinge objective by a listwise ranking loss or a differentiable top-K_{add} objective, aligning the training and inference objectives and eliminating the only principled concession on the training side. The third step is a direct head-to-head reproduction of Qing *et al.*'s SP-AFDM receiver [16] on our $(\text{channel}, \text{data}, \text{noise})$ seed blocks, which would convert the qualitative Table 8 comparison into a quantitative prior-art comparison. The final, larger step is to extend the simulator from Dirichlet-expanded fractional-Doppler sparse DD to a multi-scale multi-lag (MSML) time-scaling channel [20], bringing the physical-layer model closer to real UWA propagation and testing whether the "UWA-style" conclusion can survive in a more realistic UWA channel.

References

[1] M. Stojanovic and J. Preisig, "Underwater acoustic communication channels: Propagation models and statistical characterization," *IEEE Communications Magazine*, vol. 47, no. 1, pp. 84–89, 2009.

[2] J. C. Preisig, "Acoustic propagation considerations for underwater acoustic communications network development," *IEEE Journal of Oceanic Engineering*, vol. 32, no. 1, pp. 228–254, 2007.

[3] C. R. Berger, S. Zhou, J. C. Preisig, and P. Willett, "Sparse channel estimation for multicarrier underwater acoustic communication: From subspace methods to compressed sensing," *IEEE Transactions on Signal Processing*, vol. 58, no. 3, pp. 1708–1721, 2010.

[4] J. Huang, J. Huang, C. R. Berger, S. Zhou, and P. Willett, "Iterative sparse channel estimation and decoding for underwater MIMO-OFDM," *EURASIP Journal on Advances in Signal Processing*, vol. 2010, pp. 1–11, 2010.

[5] A. Bemani, N. Ksairi, and M. Kountouris, "Affine frequency division multiplexing for next generation wireless communications," *IEEE Transactions on Wireless Communications*, vol. 22, no. 11, pp. 8214–8229, 2023.

[6] R. Hadani, S. Rakib, M. Tsatsanis, A. Monk, A. J. Goldsmith, A. F. Molisch, and R. Calderbank, "Orthogonal time frequency space modulation," in *IEEE Wireless Communications and Networking Conference (WCNC)*, 2017, pp. 1–6.

[7] P. Raviteja, K. T. Phan, Y. Hong, and E. Viterbo, "Interference cancellation and iterative detection for orthogonal time frequency space modulation," *IEEE Transactions on Wireless Communications*, vol. 17, no. 10, pp. 6501–6515, 2018.

[8] Z. Wei, W. Yuan, S. Li, J. Yuan, G. Bharatula, R. Hadani, and L. Hanzo, "Orthogonal time-frequency space modulation: A promising next-generation waveform," *IEEE Wireless Communications*, vol. 28, no. 4, pp. 136–144, 2021.

[9] W. Benzine, A. Bemani, N. Ksairi, and D. Slock, "Affine frequency division multiplexing for communications on sparse time-varying channels," in *IEEE Global Communications Conference (GLOBECOM)*, 2023, pp. 4921–4926.

[10] H. S. Rou, G. T. F. de Abreu, J. Choi, D. González G., M. Kountouris, Y. L. Guan, and O. Gonsa, "From orthogonal time-frequency space to affine frequency-division multiplexing: A comparative study of next-generation waveforms for integrated sensing and communications in doubly dispersive channels," *IEEE Signal Processing Magazine*, vol. 41, no. 5, pp. 71–86, 2024.

[11] A. G. Orozco-Lugo, M. M. Lara, and D. C. McLernon, "Optimum training for channel estimation with superimposed pilots in OFDM," *IEEE Transactions on Signal Processing*, vol. 59, no. 9, pp. 4434–4438, 2011.

[12] J. K. Tugnait and W. Luo, "Single-user channel estimation and equalization with superimposed training," *IEEE Transactions on Wireless Communications*, vol. 5, no. 9, pp. 2495–2506, 2006.

[13] H. Wymeersch, *Iterative Receiver Design*. Cambridge, UK: Cambridge University Press, 2007.

[14] D. L. Donoho, A. Maleki, and A. Montanari, "Message-passing algorithms for compressed sensing," *Proceedings of the National Academy of Sciences*, vol. 106, no. 45, pp. 18 914–18 919, 2009.

[15] H. Yin, X. Wei, Y. Tang, and K. Yang, "Diagonally reconstructed channel estimation for MIMO-AFDM with inter-doppler interference in doubly selective channels," *IEEE Transactions on Wireless Communications*, vol. 23, no. 10, pp. 14 066–14 079, 2024.

[16] H. Qing, H. Yu, Y. Wang, and G. Gui, "Channel estimation for AFDM with superimposed pilots," *arXiv preprint arXiv:2404.10232*, 2024, arXiv:2404.10232 [eess.SP].

[17] S. Zhao, W. Yuan, S. Li, and J. Yuan, "GI-Free pilot-aided channel estimation for affine frequency division multiplexing systems," *arXiv preprint arXiv:2404.01088*, 2024, arXiv:2404.01088 [cs.IT].

[18] L. Wang, Y. Zhou, and Z. Chen, "Joint channel estimation and symbol detection for affine frequency division multiplexing," *Physical Communication*, 2025, scienceDirect S187449072400315X.

[19] X. Ma, P. Chen, and C. Chen, "Oversampled joint channel estimation and data detection for AFDM," *arXiv preprint arXiv:2410.05088*, 2024, arXiv:2410.05088 [eess.SP].

[20] S. Zhou, Z. Wang, F. Chen, and Y. Xiao, "AFDM for underwater acoustic communications with multi-scale multi-lag channels," *arXiv preprint arXiv:2405.02660*, 2024, arXiv:2405.02660 [eess.SP].

[21] H. Yin and X. Wei, "Pilot-aided channel estimation for AFDM in doubly dispersive channels," *arXiv preprint arXiv:2206.12822*, 2022, arXiv:2206.12822 [eess.SP].

[22] J. A. Tropp and A. C. Gilbert, "Signal recovery from random measurements via orthogonal matching pursuit," *IEEE Transactions on Information Theory*, vol. 53, no. 12, pp. 4655–4666, 2007.

[23] E. J. Candès, "Compressive sampling," *Proceedings of the International Congress of Mathematicians*, vol. 3, pp. 1433–1452, 2006.

[24] V. Monga, Y. Li, and Y. C. Eldar, "Algorithm unrolling: Interpretable, efficient deep learning for signal and image processing," *IEEE Signal Processing Magazine*, vol. 38, no. 2, pp. 18–44, 2021.

[25] H. He, C.-K. Wen, S. Jin, and G. Y. Li, "Model-driven deep learning for MIMO detection," *IEEE Transactions on Signal Processing*, vol. 68, pp. 1702–1715, 2020.

[26] H. He, S. Jin, C.-K. Wen, F. Gao, G. Y. Li, and Z. Xu, "Model-driven deep learning for joint MIMO channel estimation and signal detection," *IEEE Journal of Selected Topics in Signal Processing*, vol. 14, no. 1, pp. 5–20, 2020.

[27] A. Balatsoukas-Stimming and C. Studer, "Deep unfolding for communications systems: A survey and some new directions," *IEEE International Workshop on Signal Processing Systems (SiPS)*, 2019.

[28] N. Shlezinger, R. Fu, and Y. C. Eldar, "DeepSIC: Deep soft interference cancellation for multiuser MIMO detection," *IEEE Transactions on Wireless Communications*, vol. 20, no. 2, pp. 1349–1362, 2021.

[29] M. Khani, M. Alizadeh, J. Hoydis, and P. Fleming, "Adaptive neural signal detection for massive MIMO," in *IEEE International Conference on Machine Learning for Communication (ICMLC)*, 2020, MMNet; see also IEEE Trans. Wireless Commun. vol. 19, no. 8, pp. 5635–5648, 2020.

[30] J. Xu, L. Li, L. Zheng, and L. Liu, "Detect to learn: Structure learning with attention and decision feedback for MIMO-OFDM receive processing," *IEEE Transactions on Communications*, vol. 72, no. 1, pp. 146–161, 2024.

[31] F. R. Kschischang, B. J. Frey, and H.-A. Loeliger, "Factor graphs and the sum-product algorithm," *IEEE Transactions on Information Theory*, vol. 47, no. 2, pp. 498–519, 2001.

[32] B. M. Popović, "Performance analysis of Zadoff–Chu sequences in cellular CDMA systems," *IEEE Transactions on Information Theory*, vol. 38, no. 4, pp. 1406–1409, 1992, original Zadoff-Chu constant-amplitude zero-autocorrelation sequence reference.

[33] S. Elfwing, E. Uchibe, and K. Doya, "Sigmoid-weighted linear units for neural network function approximation in reinforcement learning," in *Neural Networks*, vol. 107, 2018, pp. 3–11.

[34] I. Loshchilov and F. Hutter, "Decoupled weight decay regularization," in *International Conference on Learning Representations (ICLR)*, 2019.

[35] C. J. Clopper and E. S. Pearson, "The use of confidence or fiducial limits illustrated in the case of the binomial," *Biometrika*, vol. 26, no. 4, pp. 404–413, 1934.

[36] Q. McNemar, “Note on the sampling error of the difference between correlated proportions or percentages,” *Psychometrika*, vol. 12, no. 2, pp. 153–157, 1947.

Appendices

A Simulator Correspondence and Pilot Convention

All Monte-Carlo runs reported in Chapter 3 use a torch-GPU reimplementation of a NumPy reference simulator that is, in turn, a faithful port of an in-house MATLAB implementation `matlab/AFDM_UWA_acoustic.m`. The three implementations produce bit-exact identical outputs on $N = 512$ pilot–data realisations; the verification harness `verify_classical_unrolled_matches_numpy.py` logs the maximum absolute difference between detected QPSK symbols as exactly zero across 64 seeded test frames. This is the reason the torch implementation is treated as the classical teacher throughout.

All three implementations use the same superimposed-pilot frame

$$\mathbf{x} \;=\; \sqrt{\rho}\,\mathbf{x}_{\mathrm{p}} \;+\; \sqrt{1-\rho}\,\mathbf{x}_{\mathrm{d}},$$

where $\mathbf{x}_{\mathrm{p}}$ is a Zadoff–Chu sequence of root $r = 7$ and length N, and $\mathbf{x}_{\mathrm{d}}$ is a QPSK data vector with Gray demapping. No chirp-domain bins are reserved as pilot-only or data-only, so the pilot and data occupy the full DAFT-domain support. Table 2 in Chapter 3 lists the canonical physical and algorithmic parameters used across every experiment in the revised Chapter 3; all Monte-Carlo results in the main chapter operate exclusively at the oversampled $f_s = 4B$ operating point (the Nyquist $f_s = 2B$ rate appears only in Table 1 of Chapter 2 as a reference scaling illustration, not as a separate evaluation point).

B Paired-Bootstrap and Clopper–Pearson Confidence Intervals

Two complementary confidence-interval procedures are used in Chapter 3. Paired-bootstrap CIs are reported alongside the paired BER-reduction figures in Experiment 1 (main 4 B BER waterfall; see Chapter 3) because those reductions are paired differences $\delta_i = e_i^{(0)} - e_i^{(1)}$ on the same $(\text{channel}, \text{data}, \text{noise})$ realisation; a non-paired CI would be substantially wider and would mask the contribution of the learned head. Clopper–Pearson [35] exact-binomial CIs are used on the high-SNR per-arm BER numbers in the same Experiment 1 (in particular at SNR $= 25$ and 30 dB) because the observed bit-error counts there are close to the finite-sample censoring floor, where the binomial distribution is highly skewed and a Wald-type CI would under-cover.

Paired bootstrap (Experiment 1, 3-seed pooled). Let n denote the number of evaluated frames at a given SNR, and for frame $i \in \{1, \ldots, n\}$ let $e_i^{(0)}$ and $e_i^{(1)}$ be the bit-error counts of the baseline and the candidate receiver on the same $(\text{channel}, \text{data}, \text{noise})$ realisation. Define the

per-frame gain $\delta_i = e_i^{(0)} - e_i^{(1)}$ and the mean gain $\bar{\delta} = n^{-1}\sum_i \delta_i$. The 95% paired-bootstrap CI is computed by (i) drawing $B_{\text{boot}} = 1\,000$ bootstrap resamples of $\{\delta_1, \ldots, \delta_n\}$ with replacement, (ii) computing the resample mean $\bar{\delta}^{(b)}$ for each, and (iii) reporting the 2.5% and 97.5% quantiles of the resample distribution as the CI.

Clopper–Pearson (Experiment 1 headline at high SNR). Let k be the observed bit-error count and n the total tested bit count. The two-sided Clopper–Pearson 95% CI for the unknown BER p is

$$\left[F^{-1}_{k,n-k+1}(0.025),\ F^{-1}_{k+1,n-k}(0.975)\right],$$

where $F^{-1}_{a,b}$ is the inverse CDF of a Beta distribution with parameters (a,b) (equivalent to the exact binomial tail inversion). For the SNR $= 25$ dB 4 B observation ($k = 5$, $n = 8.19 \times 10^5$ bits), this yields $[1.81 \times 10^{-6}, 1.30 \times 10^{-5}]$. For a zero-error observation ($k = 0$, $n = 8.19 \times 10^5$ bits, as in the 4 B PCSI+MMSE reference at SNR $= 25$ dB), the lower bound collapses to 0 and the upper bound is 4.5×10^{-6}; this is what we mean by "finite-sample censoring" in Chapters 3 and 4.

C OMP-Once Recall Against the Oracle Dirichlet Support (Probe (a))

Probe (a) of §3.4 is computed directly from the per-candidate binary labels already present in the feature cache produced by `afdm_sp_joint_unrolled/loop9_cache_features.py`, with no fresh Monte-Carlo required.

Support-set definitions (crucial). Two support sets are compared at every frame, and they have *different cardinalities*, which must be stated explicitly because the recall bookkeeping depends on it:

- S_{OMP} is the *physical* top-P integer (l,k)-bin support returned by OMP-once, $|S_{\text{OMP}}| = P = 8$.
- S_{oracle} is the *Dirichlet-weighted virtual-tap* oracle support, i.e. the set of active virtual taps after Dirichlet expansion of each physical path by $\pm k_{\text{leak}}$ Doppler bins (cf. eq. (4)). Nominally $|S_{\text{oracle}}| = P \cdot (2k_{\text{leak}} + 1) = 40$; because some Dirichlet weights are small, only an *effective* mean of $p_{\text{real}} \approx 28$ virtual taps per frame are non-negligible, and the probe stores this per-frame effective count.

Note that $|S_{\text{OMP}}| = P \neq |S_{\text{oracle}}| \approx 28$ in general, so recall and precision are *not* equal in this probe; the previous draft erroneously claimed they were, and that claim is withdrawn.

For each cached frame, the harvesting script runs one OMP-once pass to obtain S_{OMP}, computes the Dirichlet-weighted virtual-tap oracle support S_{oracle} from the stored channel parameters and (4), and assigns $y_i = 1$ iff candidate i is an oracle virtual tap that is not covered by the physical

OMP support (i.e. cand_cols$_i \in S_{\text{oracle}} \setminus \tilde{S}_{\text{OMP}}$, where $\tilde{S}_{\text{OMP}}$ is the Dirichlet-expansion of S_{OMP} into the virtual-tap lattice). The cache also stores $p_{\text{real}} = |S_{\text{oracle}}|$ per frame.

Recall against the oracle virtual-tap support is

$$\text{recall} \;=\; \frac{|\tilde{S}_{\text{OMP}} \cap S_{\text{oracle}}|}{|S_{\text{oracle}}|} \;=\; \frac{p_{\text{real}} - \sum_i y_i}{p_{\text{real}}}.$$

Plugging in the aggregate numbers from Table 5 ($\overline{\text{recall}} \approx 0.953$, $\overline{\sum_i y_i} \approx 1.31$ missed virtual taps per frame) gives $\overline{p_{\text{real}}} \approx 1.31/(1-0.953) \approx 28$, which is consistent with the stated virtual-tap cardinality; this cross-check is exactly how we verified the bookkeeping.

Precision, by contrast, equals $|\tilde{S}_{\text{OMP}} \cap S_{\text{oracle}}|/|\tilde{S}_{\text{OMP}}|$ and is in general different from recall because $|\tilde{S}_{\text{OMP}}| \neq |S_{\text{oracle}}|$; Table 5 reports recall only and does not rely on a precision-equal-to-recall claim.

The post-processing script `loop13_support_recall_probe.py` computes per-frame and per-SNR aggregates from this formula and writes `outputs_loop13_support_recall/recall_by_snr.json`. The script runs in ≈ 30 s on the 27 k-frame 4 B cache; no GPU is required.

D McNemar Paired-Bit Significance Test

On a paired bit-level comparison between the classical joint and the learned receiver, let n_{10} denote the number of bits on which the classical is wrong and the learned is correct, and n_{01} the number of bits on which the classical is correct and the learned is wrong. The continuity-corrected McNemar [36] χ^2 statistic is

$$\chi^2_{\text{MN}} \;=\; \frac{(|n_{10} - n_{01}| - 1)^2}{n_{10} + n_{01}},$$

which is approximately χ^2_1-distributed under the null hypothesis that the two receivers have the same bit-wise error probability. The *two-sided asymptotic* p-value $p_{\text{two}} = 1 - F_{\chi^2_1}(\chi^2_{\text{MN}})$ is the value reported in Table 3; this is the standard continuity-corrected McNemar convention. When a strictly one-sided statement is required ("learned better"), we supplement it with the exact one-sided binomial sign test on the discordant pairs: $p_{\text{one-sided}} = \Pr[\text{Bin}(n_{10}+n_{01}, 1/2) \geq n_{10}]$, computed from the exact binomial tail; because n_{10} dominates n_{01} by multiple orders of magnitude at every high-SNR point where the test is applied, the exact one-sided value tracks the asymptotic two-sided value to within a numerical rounding of each other, and the qualitative conclusion ("learned strictly better at every SNR where the test is applicable") is invariant to the choice of side.