

Erriez DS1307 I2C RTC library for Arduino  
1.0.0

Generated by Doxygen 1.8.13



# Contents

<b>1</b>	<b>DS1307 high precision I2C RTC library for Arduino</b>	<b>1</b>
<b>2</b>	<b>Class Index</b>	<b>5</b>
2.1	Class List . . . . .	5
<b>3</b>	<b>File Index</b>	<b>7</b>
3.1	File List . . . . .	7
<b>4</b>	<b>Class Documentation</b>	<b>9</b>
4.1	ErriezDS1307 Class Reference . . . . .	9
4.1.1	Detailed Description . . . . .	10
4.1.2	Member Function Documentation . . . . .	10
4.1.2.1	bcdToDec() . . . . .	10
4.1.2.2	begin() . . . . .	10
4.1.2.3	decToBcd() . . . . .	11
4.1.2.4	getEpoch() . . . . .	11
4.1.2.5	getTime() . . . . .	11
4.1.2.6	isOscillatorStopped() . . . . .	12
4.1.2.7	oscillatorEnable() . . . . .	12
4.1.2.8	read() . . . . .	13
4.1.2.9	readBuffer() . . . . .	13
4.1.2.10	setDateTime() . . . . .	13
4.1.2.11	setEpoch() . . . . .	14
4.1.2.12	setSquareWave() . . . . .	14
4.1.2.13	setTime() . . . . .	15
4.1.2.14	write() . . . . .	15
4.1.2.15	writeBuffer() . . . . .	16

<b>5</b>	<b>File Documentation</b>	<b>17</b>
5.1	src/ErriezDS1307.cpp File Reference . . . . .	17
5.1.1	Detailed Description . . . . .	17
5.2	src/ErriezDS1307.h File Reference . . . . .	18
5.2.1	Detailed Description . . . . .	19
5.2.2	Macro Definition Documentation . . . . .	20
5.2.2.1	DS1307_NUM_REGS . . . . .	20
5.2.2.2	DS1307_REG_SECONDS . . . . .	20
5.2.2.3	DS1307_SEC_CH . . . . .	20
5.2.3	Enumeration Type Documentation . . . . .	20
5.2.3.1	SquareWave . . . . .	20
	<b>Index</b>	<b>23</b>

# Chapter 1

## DS1307 high precision I2C RTC library for Arduino

This is a DS1307 I2C RTC library for Arduino.

### Library features

- `libc <time.h>` compatible
- Read/write date/time `struct tm`
- Set/get Unix epoch UTC `time_t`
- Set/get time (hours, minutes, seconds)
- Set date and time
- Control `SQW` signal (disable / 1Hz / 4096Hz / 8192Hz / 32768Hz)
- Full RTC register access

### Hardware

Any Arduino hardware with a TWI interface and `Wire.h` support.

### Pins

Pins board - DS1307	VCC	GND	SDA	SCL	SQW
Arduino UNO (ATMega328 boards)	5V	GND	A4	A5	D2 (INT0)
Arduino Mega2560	5V	GND	D20	D21	D2 (INT4)
Arduino Leonardo	5V	GND	D2	D3	D7 (INT6)
Arduino DUE (ATSAM3X8E)	3V3	GND	20	21	2
ESP8266	3V3	GND	GPIO4 (D2)	GPIO5 (D1)	GPIO0 (D3)
ESP32	3V3	GND	GPIO21	GPIO22	GPIO0

Note: Tested ESP8266 / ESP32 boards:

- **ESP8266 boards:** ESP12F / WeMos D1 & R2 / Node MCU v2 / v3
- **ESP32 boards:** WeMos LOLIN32 / LOLIN D32

Other unlisted MCU's may work, but are not tested.

## Examples

Arduino IDE | Examples | Erriez DS1307 RTC:

- [ErriezDS1307SetDateTime](#) Set date time.
- [ErriezDS1307Read](#) Read example.
- [ErriezDS1307Test](#) RTC test.

## Documentation

- [Doxygen online HTML](#)
- [Doxygen PDF](#)
- [DS1307 datasheet](#)

## Usage

### Initialization

```
{c++}
#include <Wire.h>
#include <ErriezDS1307.h>

// Create RTC object
ErriezDS1307 ds1307;

void setup()
{
    // Initialize I2C
    Wire.begin();
    Wire.setClock(100000);

    // Initialize RTC
    while (!ds1307.begin()) {
        Serial.println(F("Error: DS1307 not found"));
        delay(3000);
    }

    // Set square wave out pin
    // SquareWaveDisable, SquareWave1Hz, SquareWave4096Hz, SquareWave8192Hz, SquareWave32768Hz
    ds1307.setSquareWave(SquareWaveDisable);
}
```

### Check oscillator status at startup

```
{c++}
// Check oscillator status
if (ds1307.isOscillatorStopped()) {
    // Error: DS1307 RTC oscillator stopped. Date/time cannot be trusted.
    // Set new date/time before reading date/time.
}
```

## Set time

```
{c++}
// Write time to RTC
if (!dsl307.setTime(12, 0, 0)) {
    // Error: RTC write failed
}
```

## Get time

```
{c++}
uint8_t hour;
uint8_t minute;
uint8_t second;

// Read time from RTC
if (!rtc.getTime(&hour, &minute, &second)) {
    // Error: RTC read failed
}
```

## Set date time

```
{c++}
// Write RTC date/time: 13:45:09 31 December 2019 2=Tuesday
if (!dsl307.setDateTime(13, 45, 9, 31, 12, 2019, 2)) {
    // Error: RTC write failed
}
```

## Write date/time struct tm

```
{c++}
struct tm dt = {0};

dt.tm_hour = 12;
dt.tm_min = 34;
dt.tm_sec = 56;
dt.tm_mday = 29;
dt.tm_mon = 1; // 0=January
dt.tm_year = 2020-1900;
dt.tm_wday = 6; // 0=Sunday

if (!dsl307.write(&dt)) {
    // Error: RTC Read failed
}
```

## Read date/time struct tm

```
{c++}
struct tm dt = {0};

// Read RTC date/time
if (!dsl307.read(&dt)) {
    // Error: RTC read failed
}
```

## Read Unix Epoch UTC

```
{c++}
time_t t;

// Read Unix epoch UTC from RTC
if (!dsl307.getEpoch(&t)) {
    // Error: RTC read failed
}
```

## Square Wave Out (SQW)

```
{c++}
rtc.setSquareWave(SquareWaveDisable); // Disable
rtc.setSquareWave(SquareWave1024Hz); // 1024Hz
rtc.setSquareWave(SquareWave4096Hz); // 4096Hz
rtc.setSquareWave(SquareWave8192Hz); // 8192Hz
rtc.setSquareWave(SquareWave32768Hz); // 32768Hz
```

### Library dependencies

- `Wire.h`

### Library installation

Please refer to the [Wiki](#) page.

### Other Arduino Libraries and Sketches from Erriez

- [Erriez Libraries and Sketches](#)



## Chapter 2

# Class Index

### 2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">ErriezDS1307</a>	
DS1307 RTC class . . . . .	9



## Chapter 3

# File Index

### 3.1 File List

Here is a list of all documented files with brief descriptions:

src/ <a href="#">ErriezDS1307.cpp</a>	
DS1307 RTC library for Arduino . . . . .	17
src/ <a href="#">ErriezDS1307.h</a>	
DS1307 RTC library for Arduino . . . . .	18



## Chapter 4

# Class Documentation

### 4.1 ErriezDS1307 Class Reference

DS1307 RTC class.

```
#include <ErriezDS1307.h>
```

#### Public Member Functions

- bool [begin](#) ()  
*Initialize and detect DS1307 RTC.*
- bool [oscillatorEnable](#) (bool enable)  
*Enable or disable oscillator (Clock Halt bit in seconds register).*
- bool [isOscillatorStopped](#) ()  
*Read RTC CH (Clock Halt) from seconds register.*
- time\_t [getEpoch](#) ()  
*Read Unix UTC epoch time\_t.*
- bool [setEpoch](#) (time\_t t)  
*Write Unix epoch UTC time to RTC.*
- bool [read](#) (struct tm \*dt)  
*Read date and time from RTC.*
- bool [write](#) (const struct tm \*dt)  
*Write date and time to RTC.*
- bool [setTime](#) (uint8\_t hour, uint8\_t min, uint8\_t sec)  
*Write time to RTC.*
- bool [getTime](#) (uint8\_t \*hour, uint8\_t \*min, uint8\_t \*sec)  
*Read time from RTC.*
- bool [setDateTime](#) (uint8\_t hour, uint8\_t min, uint8\_t sec, uint8\_t mday, uint8\_t mon, uint16\_t year, uint8\_t wday)  
*Set date time.*
- bool [setSquareWave](#) ([SquareWave](#) squareWave)  
*Configure SQW (Square Wave) output pin.*
- uint8\_t [bcdToDec](#) (uint8\_t bcd)  
*BCD to decimal conversion.*
- uint8\_t [decToBcd](#) (uint8\_t dec)  
*Decimal to BCD conversion.*
- bool [readBuffer](#) (uint8\_t reg, void \*buffer, uint8\_t len)  
*Read buffer from RTC.*
- bool [writeBuffer](#) (uint8\_t reg, void \*buffer, uint8\_t len)  
*Write buffer to RTC.*

### 4.1.1 Detailed Description

DS1307 RTC class.

Definition at line 80 of file ErriezDS1307.h.

### 4.1.2 Member Function Documentation

#### 4.1.2.1 bcdToDec()

```
uint8_t ErriezDS1307::bcdToDec (
    uint8_t bcd )
```

BCD to decimal conversion.

##### Parameters

<i>bcd</i>	BCD encoded value.
------------	--------------------

##### Returns

Decimal value.

Definition at line 384 of file ErriezDS1307.cpp.

#### 4.1.2.2 begin()

```
bool ErriezDS1307::begin ( )
```

Initialize and detect DS1307 RTC.

Call this function from setup().

##### Return values

<i>true</i>	RTC detected.
<i>false</i>	RTC not detected.

Definition at line 52 of file ErriezDS1307.cpp.

#### 4.1.2.3 decToBcd()

```
uint8_t ErriezDS1307::decToBcd (
    uint8_t dec )
```

Decimal to BCD conversion.

##### Parameters

<i>dec</i>	Decimal value.
------------	----------------

##### Returns

BCD encoded value.

Definition at line 396 of file ErriezDS1307.cpp.

#### 4.1.2.4 getEpoch()

```
time_t ErriezDS1307::getEpoch ( )
```

Read Unix UTC epoch time\_t.

##### Returns

Unix epoch time\_t seconds since 1970.

Definition at line 137 of file ErriezDS1307.cpp.

#### 4.1.2.5 getTime()

```
bool ErriezDS1307::getTime (
    uint8_t * hour,
    uint8_t * min,
    uint8_t * sec )
```

Read time from RTC.

Read hour, minute and second registers from RTC.

##### Parameters

<i>hour</i>	Hours 0..23.
<i>min</i>	Minutes 0..59.
<i>sec</i>	Seconds 0..59.

**Return values**

<i>true</i>	Success.
<i>false</i>	Invalid second, minute or hour read from RTC. The time is set to zero.

Definition at line 288 of file ErriezDS1307.cpp.

**4.1.2.6 isOscillatorStopped()**

```
bool ErriezDS1307::isOscillatorStopped ( )
```

Read RTC CH (Clock Halt) from seconds register.

The application is responsible for checking the CH (Clock Halt) bit before reading date/time date. This function may be used to judge the validity of the date/time registers.

**Return values**

<i>true</i>	The date/time data is invalid when the CH bit is set. The application should enable the oscillator, or program a new date/time.
<i>false</i>	RTC oscillator is running.

Definition at line 113 of file ErriezDS1307.cpp.

**4.1.2.7 oscillatorEnable()**

```
bool ErriezDS1307::oscillatorEnable (
    bool enable )
```

Enable or disable oscillator (Clock Halt bit in seconds register).

**Parameters**

<i>enable</i>	true: Enable RTC clock. false: Stop RTC clock.
---------------	---

**Return values**

<i>true</i>	Success.
<i>false</i>	Oscillator enable failed.

Definition at line 80 of file ErriezDS1307.cpp.



#### 4.1.2.8 read()

```
bool ErriezDS1307::read (
    struct tm * dt )
```

Read date and time from RTC.

Read all RTC registers at once to prevent a time/date register change in the middle of the register read operation.

##### Parameters

<i>dt</i>	Date and time struct tm.
-----------	--------------------------

##### Return values

<i>true</i>	Success
<i>false</i>	RTC read failed.

Definition at line 195 of file ErriezDS1307.cpp.

#### 4.1.2.9 readBuffer()

```
bool ErriezDS1307::readBuffer (
    uint8_t reg,
    void * buffer,
    uint8_t len )
```

Read buffer from RTC.

##### Parameters

<i>reg</i>	RTC register number 0x00..0x07.
<i>buffer</i>	Buffer.
<i>len</i>	Buffer length. Reading is only allowed within valid RTC registers.

##### Return values

<i>true</i>	Success
<i>false</i>	I2C read failed.

Definition at line 444 of file ErriezDS1307.cpp.

#### 4.1.2.10 setDateTime()

```
bool ErriezDS1307::setDateTime (
    uint8_t hour,
```

```

uint8_t min,
uint8_t sec,
uint8_t mday,
uint8_t mon,
uint16_t year,
uint8_t wday )

```

Set date time.

#### Parameters

<i>hour</i>	Hours 0..23
<i>min</i>	Minutes 0..59
<i>sec</i>	Seconds 0..59
<i>mday</i>	Day of the month 1..31
<i>mon</i>	Month 1..12 (1=January)
<i>year</i>	Year 2000..2099
<i>wday</i>	Day of the week 0..6 (0=Sunday, .. 6=Sunday)

#### Return values

<i>true</i>	Success.
<i>false</i>	Set time failed.

Definition at line 336 of file ErriezDS1307.cpp.

#### 4.1.2.11 setEpoch()

```

bool ErriezDS1307::setEpoch (
    time_t t )

```

Write Unix epoch UTC time to RTC.

#### Parameters

<i>t</i>	time_t time
----------	-------------

#### Returns

See write returns.

Definition at line 167 of file ErriezDS1307.cpp.

#### 4.1.2.12 setSquareWave()

```

bool ErriezDS1307::setSquareWave (
    SquareWave squareWave )

```

Configure SQW (Square Wave) output pin.

This will disable or initialize the SQW clock pin.

#### Parameters

<i>squareWave</i>	SquareWave configuration: Disable: SquareWaveDisable 1Hz: SquareWave1Hz 4096Hz: SquareWave4096Hz 8192Hz: SquareWave8192Hz 32748Hz: SquareWave32768Hz
-------------------	---

#### Return values

<i>true</i>	Success
<i>false</i>	Set squareWave failed.

Definition at line 371 of file ErriezDS1307.cpp.

#### 4.1.2.13 setTime()

```
bool ErriezDS1307::setTime (
    uint8_t hour,
    uint8_t min,
    uint8_t sec )
```

Write time to RTC.

Write hour, minute and second registers to RTC.

#### Parameters

<i>hour</i>	Hours 0..23.
<i>min</i>	Minutes 0..59.
<i>sec</i>	Seconds 0..59.

#### Return values

<i>true</i>	Success.
<i>false</i>	Set time failed.

Definition at line 260 of file ErriezDS1307.cpp.

#### 4.1.2.14 write()

```
bool ErriezDS1307::write (
    const struct tm * dt )
```

Write date and time to RTC.

Write all RTC registers at once to prevent a time/date register change in the middle of the register write operation. This function enables the oscillator.

#### Parameters

<i>dt</i>	Date/time struct tm. Providing invalid date/time data may result in unpredictable behavior.
-----------	---

Definition at line 228 of file ErriezDS1307.cpp.

#### 4.1.2.15 writeBuffer()

```
bool ErriezDS1307::writeBuffer (
    uint8_t reg,
    void * buffer,
    uint8_t len )
```

Write buffer to RTC.

Please refer to the RTC datasheet.

#### Parameters

<i>reg</i>	RTC register number 0x00..0x07.
<i>buffer</i>	Buffer.
<i>len</i>	Buffer length. Writing is only allowed within valid RTC registers.

#### Return values

<i>true</i>	Success
<i>false</i>	I2C write failed.

Definition at line 416 of file ErriezDS1307.cpp.

The documentation for this class was generated from the following files:

- [src/ErriezDS1307.h](#)
- [src/ErriezDS1307.cpp](#)


## Chapter 5

# File Documentation

### 5.1 src/ErriezDS1307.cpp File Reference

DS1307 RTC library for Arduino.

```
#include <pgmspace.h>
#include <Wire.h>
#include "ErriezDS1307.h"
Include dependency graph for ErriezDS1307.cpp:
```

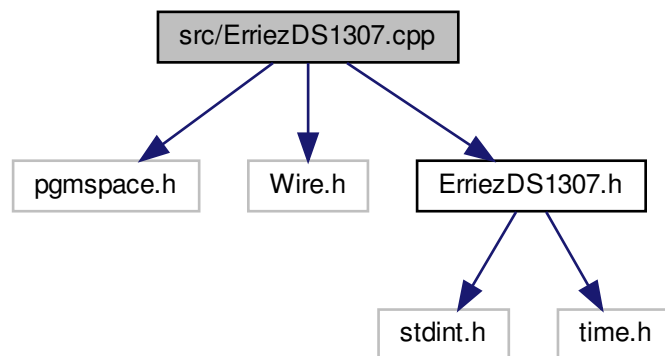

#### 5.1.1 Detailed Description

DS1307 RTC library for Arduino.

Source: <https://github.com/Erriez/ErriezDS1307> Documentation: <https://erriez.github.io/ErriezDS1307>


## 5.2 src/ErriezDS1307.h File Reference

DS1307 RTC library for Arduino.


```
#include <stdint.h>
```

```
#include <time.h>
```

Include dependency graph for ErriezDS1307.h:

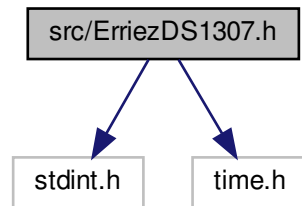

This graph shows which files directly or indirectly include this file:

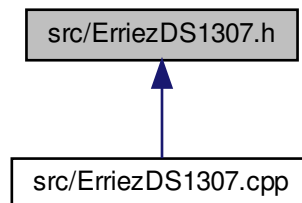

### Classes

- class [ErriezDS1307](#)  
*DS1307 RTC class.*

### Macros

- #define [DS1307\\_REG\\_SECONDS](#) 0x00  
*DS1307 registers.*
- #define [DS1307\\_REG\\_MINUTES](#) 0x01  
*Minutes register.*
- #define [DS1307\\_REG\\_HOURS](#) 0x02  
*Hours register.*

- `#define DS1307_REG_DAY_WEEK 0x03`  
*Day of the week register.*
- `#define DS1307_REG_DAY_MONTH 0x04`  
*Day of the month register.*
- `#define DS1307_REG_MONTH 0x05`  
*Month register.*
- `#define DS1307_REG_YEAR 0x06`  
*Year register.*
- `#define DS1307_REG_CONTROL 0x07`  
*Control register.*
- `#define DS1307_NUM_REGS 8`  
*DS1307 number of registers.*
- `#define DS1307_SEC_CH 7`  
*DS1307 register bit defines.*
- `#define DS1307_HOUR_12H_24H 6`  
*12 or 24 hour mode*
- `#define DS1307_HOUR_AM_PM 5`  
*AM/PM.*
- `#define DS1307_CTRL_OUT 7`  
*Enable oscillator.*
- `#define DS1307_CTRL_SQWE 4`  
*Square-Wave Enable.*
- `#define DS1307_CTRL_RS1 1`  
*Rate Select 1.*
- `#define DS1307_CTRL_RS0 0`  
*Rate Select 0.*
- `#define DS1307_ADDR (0xD0 >> 1)`  
*DS1307 I2C 7-bit address.*

## Enumerations

- `enum SquareWave {`  
`SquareWaveDisable = ((0 << DS1307_CTRL_SQWE) | (0 << DS1307_CTRL_RS1) | (0 << DS1307_CTRL_RS0)),`  
`SquareWave1Hz = ((1 << DS1307_CTRL_SQWE) | (0 << DS1307_CTRL_RS1) | (0 << DS1307_CTRL_RS0)),`  
`SquareWave4096Hz = ((1 << DS1307_CTRL_SQWE) | (0 << DS1307_CTRL_RS1) | (1 << DS1307_CTRL_RS0)),`  
`SquareWave8192Hz = ((1 << DS1307_CTRL_SQWE) | (1 << DS1307_CTRL_RS1) | (0 << DS1307_CTRL_RS0)),`  
`SquareWave32768Hz = ((1 << DS1307_CTRL_SQWE) | (1 << DS1307_CTRL_RS1) | (1 << DS1307_CTRL_RS0)) }`  
*Squarewave enum.*

### 5.2.1 Detailed Description

DS1307 RTC library for Arduino.

Source: <https://github.com/Erriez/ErriezDS1307> Documentation: <https://erriez.github.io/ErriezDS1307>

## 5.2.2 Macro Definition Documentation

### 5.2.2.1 DS1307\_NUM\_REGS

```
#define DS1307_NUM_REGS 8
```

DS1307 number of registers.

8 RTC register: 0x00..0x07

Definition at line 50 of file ErriezDS1307.h.

### 5.2.2.2 DS1307\_REG\_SECONDS

```
#define DS1307_REG_SECONDS 0x00
```

DS1307 registers.

Seconds register

Definition at line 40 of file ErriezDS1307.h.

### 5.2.2.3 DS1307\_SEC\_CH

```
#define DS1307_SEC_CH 7
```

DS1307 register bit defines.

Clock halt

Definition at line 53 of file ErriezDS1307.h.

## 5.2.3 Enumeration Type Documentation

### 5.2.3.1 SquareWave

```
enum SquareWave
```

Squarewave enum.



## Enumerator

SquareWaveDisable	SQW disable.
SquareWave1Hz	SQW 1Hz.
SquareWave4096Hz	SQW 4096Hz.
SquareWave8192Hz	SQW 8192Hz.
SquareWave32768Hz	SQW 32768Hz.

Definition at line 68 of file ErriezDS1307.h.



# Index

- bcdToDec
  - ErriezDS1307, [10](#)
- begin
  - ErriezDS1307, [10](#)
- DS1307\_NUM\_REGS
  - ErriezDS1307.h, [20](#)
- DS1307\_REG\_SECONDS
  - ErriezDS1307.h, [20](#)
- DS1307\_SEC\_CH
  - ErriezDS1307.h, [20](#)
- decToBcd
  - ErriezDS1307, [10](#)
- ErriezDS1307, [9](#)
  - bcdToDec, [10](#)
  - begin, [10](#)
  - decToBcd, [10](#)
  - getEpoch, [11](#)
  - getTime, [11](#)
  - isOscillatorStopped, [12](#)
  - oscillatorEnable, [12](#)
  - read, [12](#)
  - readBuffer, [13](#)
  - setDateTime, [13](#)
  - setEpoch, [14](#)
  - setSquareWave, [14](#)
  - setTime, [15](#)
  - write, [15](#)
  - writeBuffer, [16](#)
- ErriezDS1307.h
  - DS1307\_NUM\_REGS, [20](#)
  - DS1307\_REG\_SECONDS, [20](#)
  - DS1307\_SEC\_CH, [20](#)
  - SquareWave, [20](#)
- getEpoch
  - ErriezDS1307, [11](#)
- getTime
  - ErriezDS1307, [11](#)
- isOscillatorStopped
  - ErriezDS1307, [12](#)
- oscillatorEnable
  - ErriezDS1307, [12](#)
- read
  - ErriezDS1307, [12](#)
- readBuffer
  - ErriezDS1307, [13](#)
- setDateTime
  - ErriezDS1307, [13](#)
- setEpoch
  - ErriezDS1307, [14](#)
- setSquareWave
  - ErriezDS1307, [14](#)
- setTime
  - ErriezDS1307, [15](#)
- SquareWave
  - ErriezDS1307.h, [20](#)
- src/ErriezDS1307.cpp, [17](#)
- src/ErriezDS1307.h, [18](#)
- write
  - ErriezDS1307, [15](#)
- writeBuffer
  - ErriezDS1307, [16](#)