

SIDE-BY-SIDE 3-PERSON WORKSTATION INSTALLATION MANUAL



Thank you for choosing our workstation system. To ensure a smooth and successful installation, please read this preface and the following instructions carefully before you begin. Proper preparation is key to an efficient assembly process.

1. Package Verification

Our workstations are shipped in multiple packages labeled A, B, C, and D. Upon delivery, please verify that you have received all packages before starting assembly. Check the quantity and package types against your original order to ensure completeness. Do not proceed if any package is missing.

2. Package Configuration Guide

WORKSTATION CONFIGURATION	PACKAGES LIST	WORKSTATION CONFIGURATION	PACKAGES LIST
Single Workstation:	PKG-A x 1	Facing 2-Person Workstation:	PKG-A x 1 + PKG-B x 1
Facing 4-Person Workstation:	PKG-A x 1 + PKG-B x 1 + PKG-C x 1 + PKG-D x 1	Facing 6-Person Workstation:	PKG-A x 1 + PKG-B x 1 + PKG-C x 2 + PKG-D x 2
Side-by-Side 2-person Workstation:	PKG-A x 1 + PKG-C x 1	Side-by-Side 3-person Workstation:	PKG-A x 1 + PKG-C x 2

3. Packaging & Support

To prevent damage or loss during transit, all components are securely packed with reinforced materials. However, if you have any concerns about the received products (e.g., visible damage, missing parts, or inconsistencies), please contact our customer service first before proceeding. Our technical support team is ready to assist you promptly.

4. Installation Personnel & Pre-Assembly Planning

4.1 Recommended Installers: 1-2 persons.

4.2 Final Placement: Due to the substantial weight and size of the assembled workstation, moving it after construction is highly discouraged and may cause damage or injury. Please finalize and confirm the desired location before starting assembly to avoid future inconvenience.

5. Customer Notes

5.1 Please keep all packaging materials until assembly is complete and you have verified all parts are present and undamaged.

5.2 Follow the step-by-step instructions in the correct sequence. Do not over-tighten fasteners during intermediate steps.

5.3 Use only the tools and hardware provided.














5.4 For your safety and the product's integrity, ensure the workstation is stable and all connections are secure before use.


6. Feedback

If you are satisfied with your new desk and our service, we would be truly grateful if you could share your positive feedback. It helps us grow and continue to improve.

We wish you a pleasant and successful assembly experience!

Three Person Side by Side Assembly Steps Quantity of Accessories

 Adjustable Foot * 8	 Self-tapping Screw* 72
 Single Foot * 4	 Side Edge Banding * 4
 Single Cap * 4	 Center Support Bracket * 18
 L-shaped Foot * 2	 Square Post*4
 L-shaped Cap*2	 Table top * 3
 Cable Hole Cover*6	
 T-shaped cap * 2	 T-shaped foot * 2

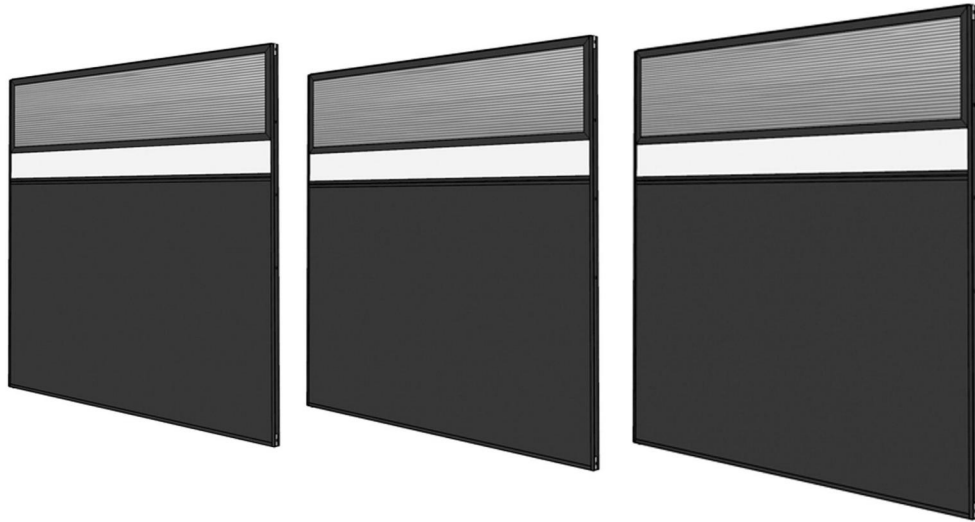


Big Screen * 3



Small Screen * 4


Step 1

Install 4 sets Single foot , 2 sets of L-shaped foot, and 2 sets T-shaped foot as shown in the picture, and assemble and adjust the feet.




Step 2

Take out the big screen and place the installed L-shaped foot and T-shaped foot on both sides of the screen, as shown in the picture. Installing this slot requires finding a partner to assist. Install one supporting screen to prevent it from collapsing

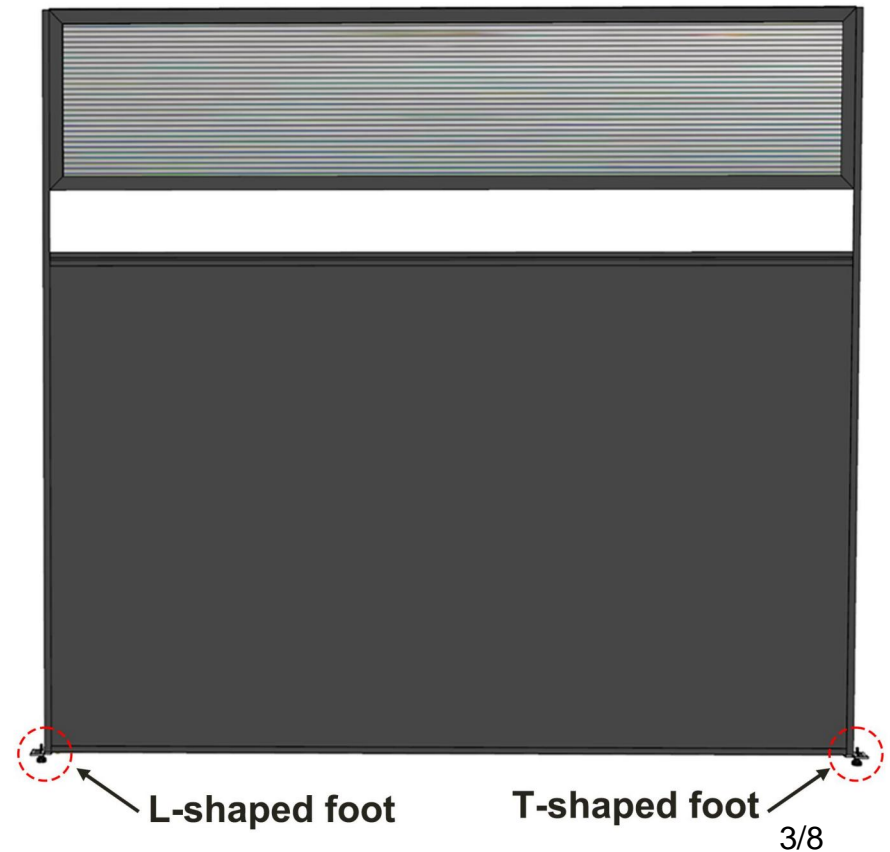


Step 3

Take out a small screen and install it with a single foot as shown in the picture. Connect it to one side of the big screen with the T-shaped foot, ensuring that the top of the big screen and small screen are parallel. If it's uneven, you can debug the foundation.

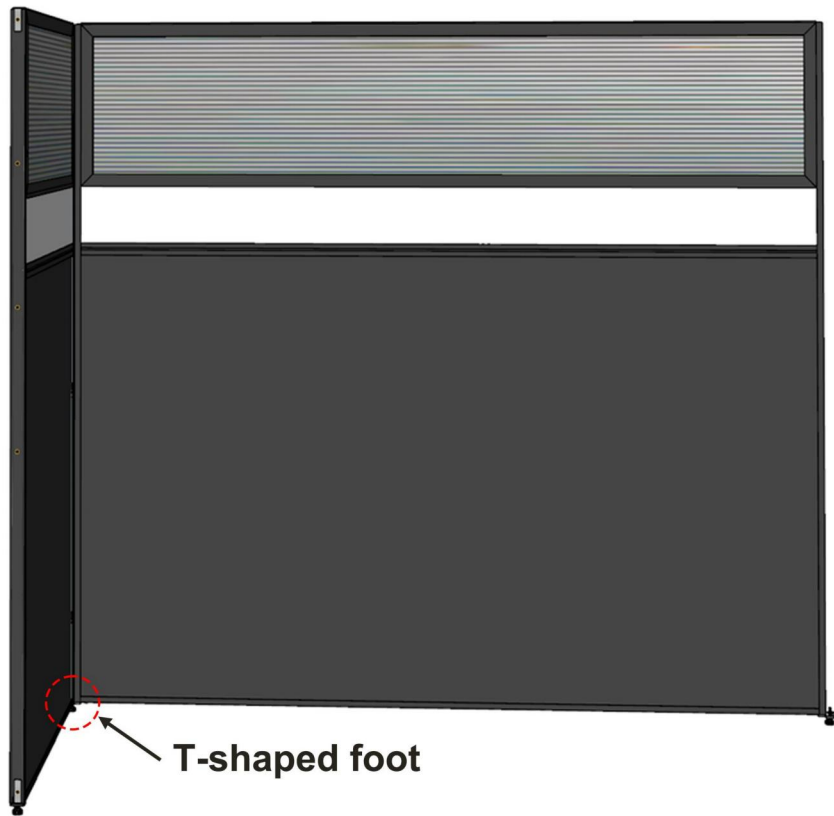


Step 4

Take another big screen and connect it to the T-shaped foot of the middle small screen as shown in the picture

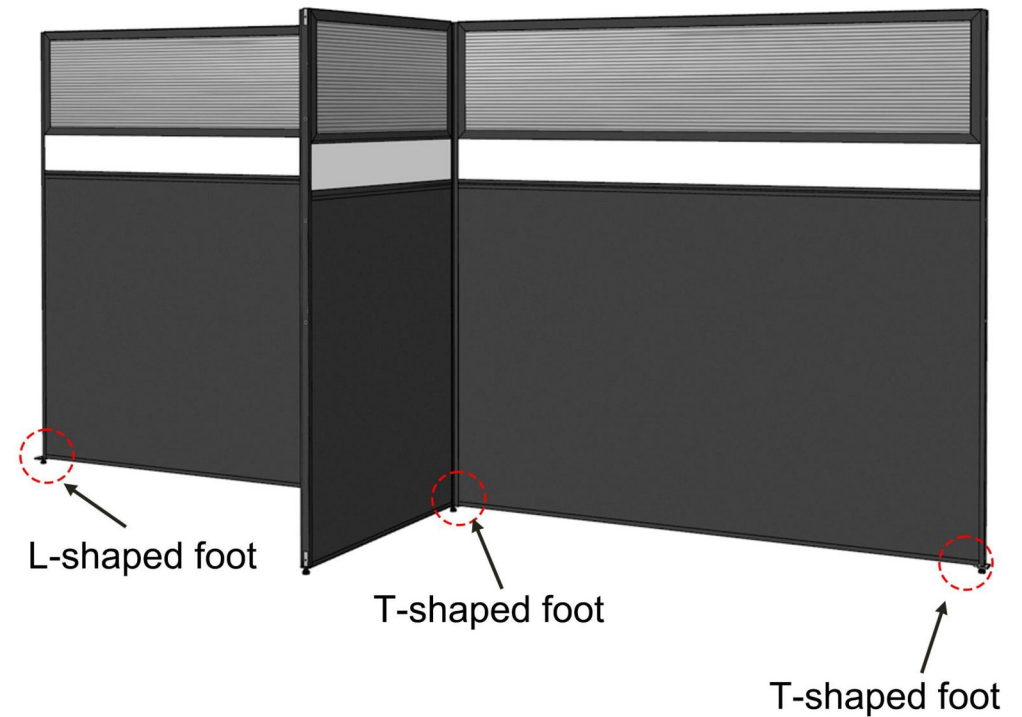


Step 5

Place the Square post pillar on the T-shaped foot of the small and big screens, ensuring that the top is flat, and then cover the T-shaped cap

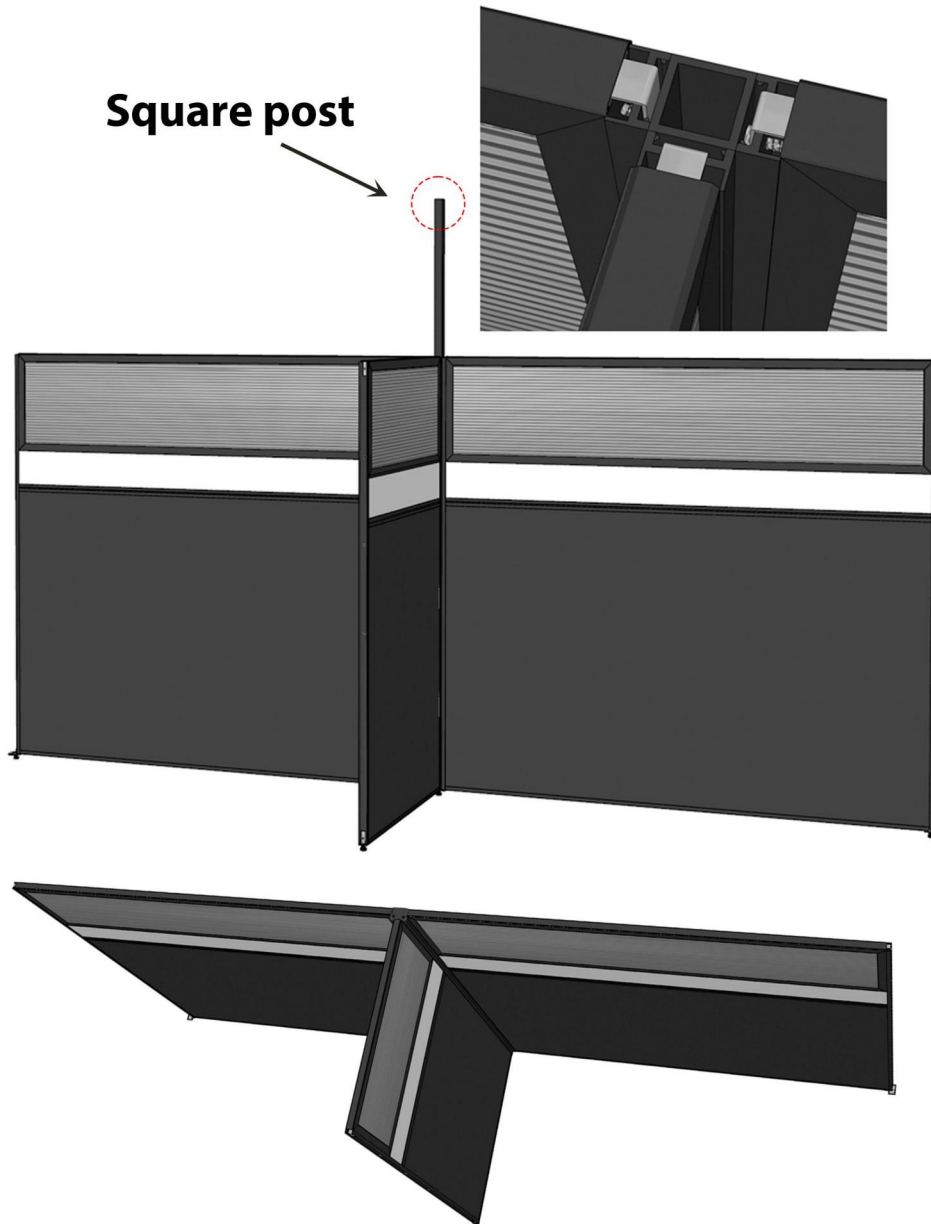


Step 6

Take a small screen and connect it to the L-shaped foot of the big screen on the left. ensuring that the top of the big screen and small screen are parallel. If it's uneven, you can debug the foundation.

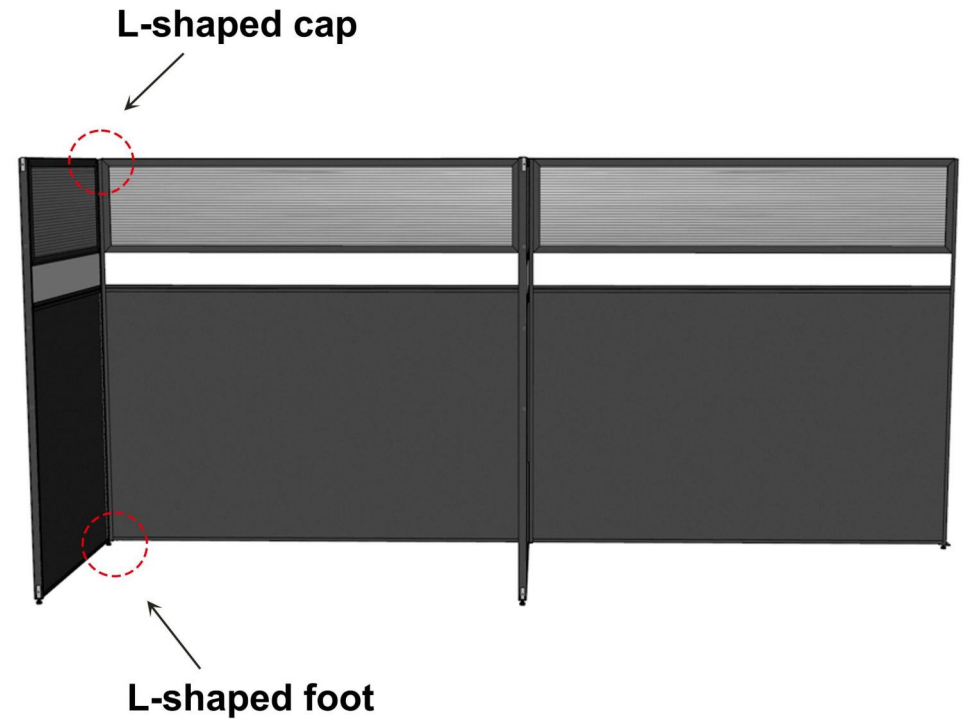


Step 7

Take the Square post pillar and L-shaped foot and install the left small screen together. The top connection should be flat to facilitate the installation of the L-shaped cap

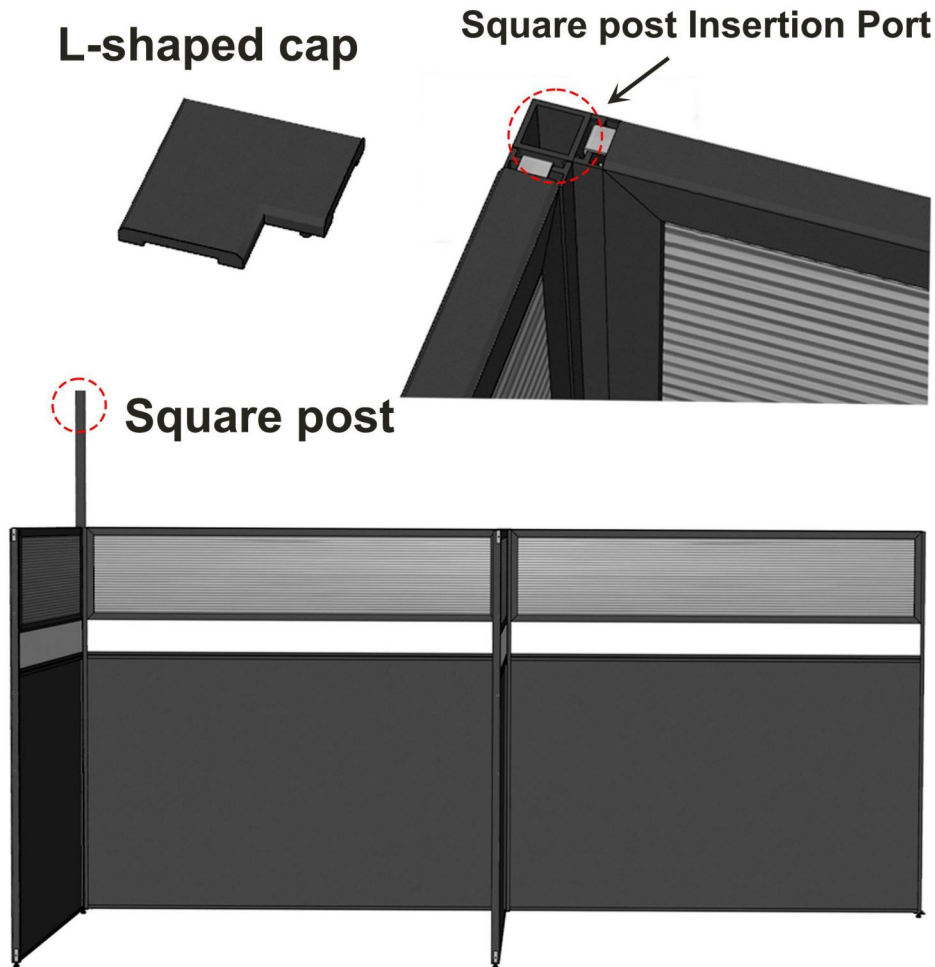


Step 8

As shown in the figure, install the small screen on the right side.

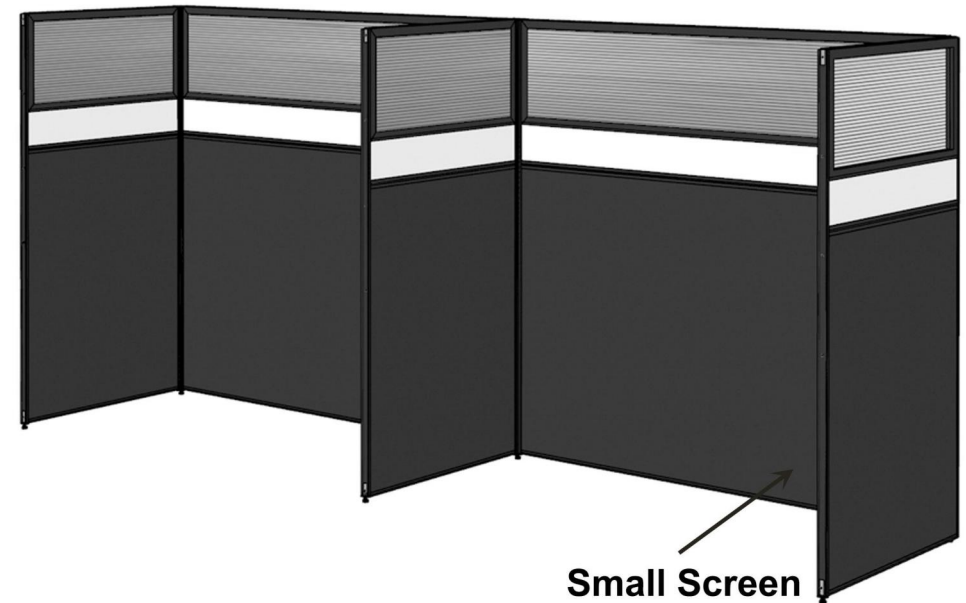


Take the third big screen and install it on the right side L-shaped foot, then clip it onto the T-shaped foot next to the third small screen.

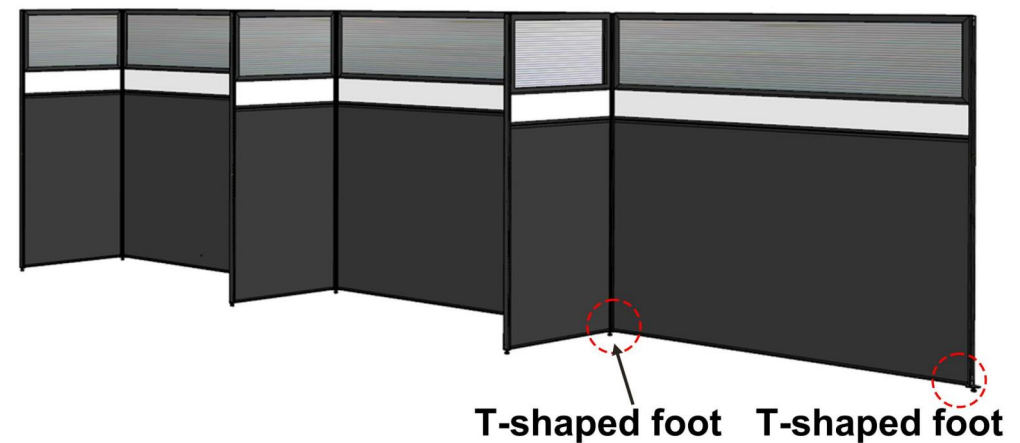


Step 9

Take out a square post and a T-shaped cap and connect them together between the screens of shown in the picture

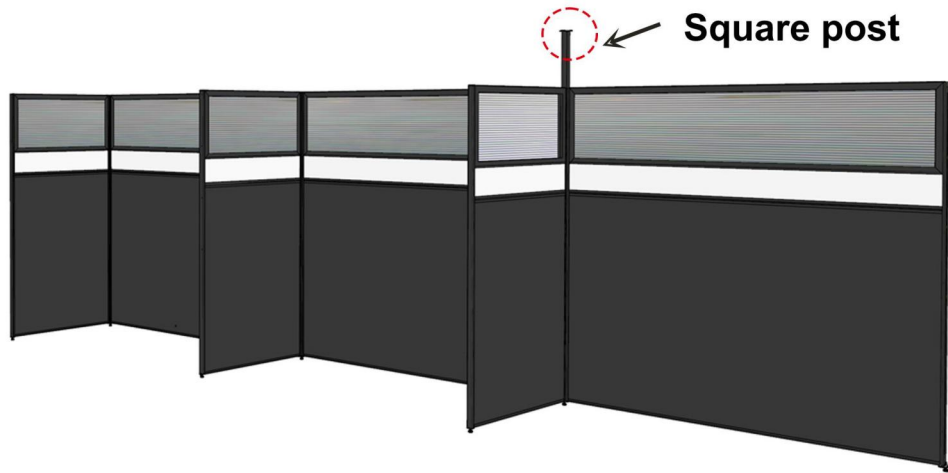

Take a small screen and attach it to the left leg of third big screen with one L-shaped foot connected. Install the Square post pillar between the big and small screens and cover it with an L-shaped cap

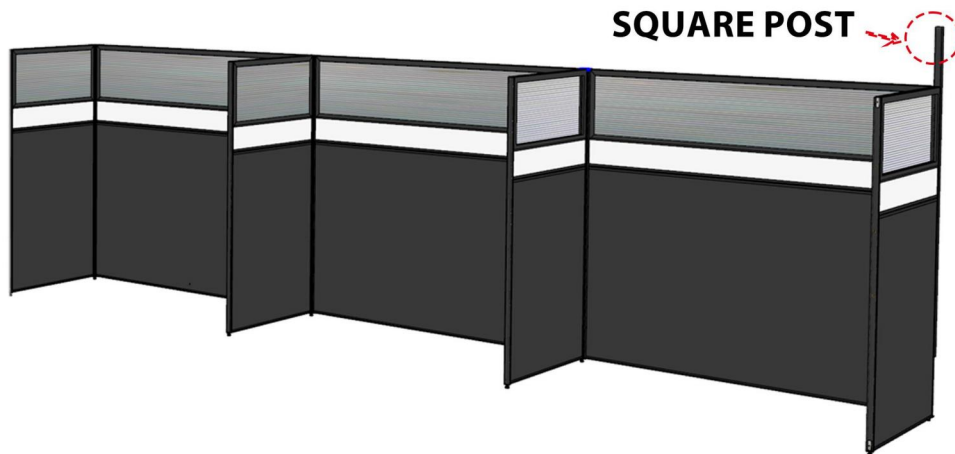

Step 10

As shown in the picture, hang 18 Center support bracket, and the support arm of the middle screen should be staggered and screwed in place to fix the Center support bracket




CENTER SUPPORT BRACKET

Adjust horizontally and place it in a straight line before fixing the desktop




Step 11

Place 3 desktop boards and cover them with six wire holes. Adjust the screen horizontally to a straight line, then fix the screws on the bottom Center support bracket and secure the desktop

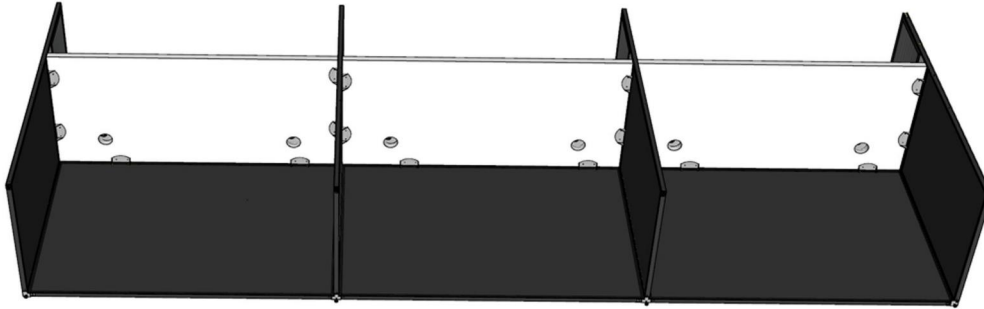

Remove the four Side edge banding . First install the side sealing strips, then attach the four single caps.

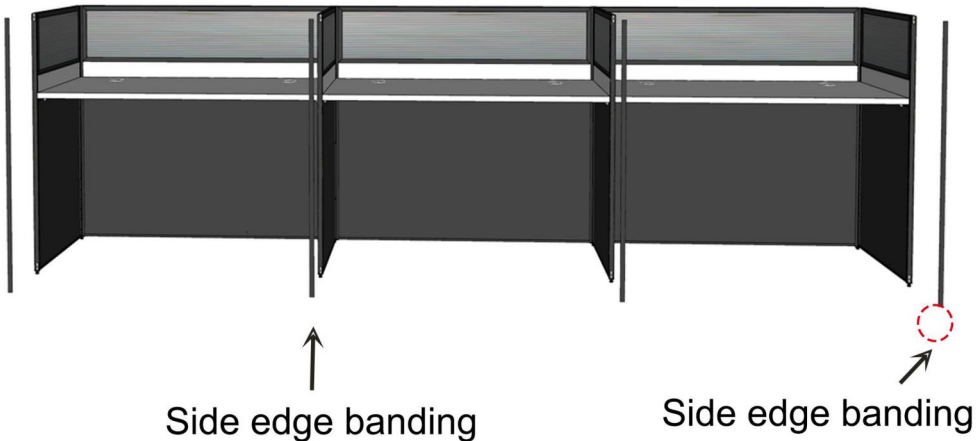

Step 12

Installation Completed

