FCC Test Report

Report No.	:	**1813C40226912601**
Applicant	:	**REMO TECH Co., Ltd.**
Address	:	**Room 220, Building 6, Qianhai Shenzhen-Hong Kong Youth Innovation and Entrepreneur Hub, Nanshan District, Shenzhen, China**
Product Name	:	**OBSBOT Meet SE**
Report Date	:	**Jan. 06, 2025**

Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information 4
1.1. Client Information 4
1.2. Description of Device (EUT) 4
1.3. Auxiliary Equipment Used During Test 4
1.4. Description of Test Modes 5
1.5. Measurement Uncertainty 5
1.6. Test Summary 5
1.7. Description of Test Facility 6
1.8. Test Equipment List 7
2. Radiated emissions (Below 1GHz) 8
2.1. EUT Operation 8
2.2. Test Setup 8
2.3. Test Data 9
APPENDIX I -- TEST SETUP PHOTOGRAPH 11
APPENDIX II -- Photo documentation 12

TEST REPORT

Applicant	:	REMO TECH Co., Ltd.
Manufacturer	:	REMO TECH Co., Ltd.
Product Name	:	OBSBOT Meet SE
Model No.	:	OWB-2408-CE, OWW-2408-CE, OWG-2408-CE
Trade Mark	:	OBSBOT
Rating(s)	:	5V⎓0.4A
Test Standard(s)	:	**FCC 47 CFR Part 15 Subpart B** **ANSI C63.4-2014**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements.
This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt: Dec. 10, 2024

Date of Test: Dec. 10, 2024 to Dec. 17, 2024

Prepared By: _____

(Yee Huang)

Approved & Authorized Signer: _____

(KingKong Jin)

1. General Information

1.1. Client Information

Applicant	:	REMO TECH Co., Ltd.
Address	:	Room 220, Building 6, Qianhai Shenzhen-Hong Kong Youth Innovation and Entrepreneur Hub, Nanshan District, Shenzhen, China
Manufacturer	:	REMO TECH Co., Ltd.
Address	:	Room 220, Building 6, Qianhai Shenzhen-Hong Kong Youth Innovation and Entrepreneur Hub, Nanshan District, Shenzhen, China
Factory	:	Shenzhen Yuantu Optoelectronic Technology Co., Ltd.
Address	:	401, Building 18, Longwangmiao Industrial Zone, East District, Baishixia C ommunity, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

1.2. Description of Device (EUT)

Product Name	:	OBSBOT Meet SE
Model No.	:	OWB-2408-CE, OWW-2408-CE, OWG-2408-CE
Trade Mark	:	OBSBOT
Test Power Supply	:	DC 5V via PC
Test Sample No.	:	1-1-1
Adapter	:	N/A
Remark: (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. (2) All samples are the same except the model number and colour, so we prepare "OWB-2408-CE" for test only.		


1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Acer Computer	acer	N19W3	2020AJ3862

1.4. Description of Test Modes

Pretest Modes	Descriptions
TM1	On mode

For Mode 1 Block Diagram of Test Setup



1.5. Measurement Uncertainty

Parameter	Uncertainty
Radiated emissions (30MHz~1000MHz)	Horizontal: 3.96dB; Vertical: 4.60dB
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.6. Test Summary

Test Items	Test Modes	Status
Radiated emissions (Below 1GHz)	Mode1	P
Note: P: Pass N: N/A, not applicable		

1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:434132
Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A
Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location
Shenzhen Anbotek Compliance Laboratory Limited.
Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

1.8. Test Equipment List

Radiated emissions (Below 1GHz)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	Pre-amplifier	Schwarzbeck	BBV-9745	9745-075	2024-01-17	2025-01-16
2	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	2022-10-16	2025-10-15
3	Software Name EZ-EMC	Farad Technology	EMEC-3A1	N/A	/	/
4	EMI Test Receiver(RE1#)	Rohde & Schwarz	ESPI3	100297	2024-02-21	2025-02-20

2. Radiated emissions (Below 1GHz)

Test Requirement:	15.109, Class B
Test Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency of emission (MHz)	Field strength @3m		Field strength @10m	
	(uV/m)	(dBuV/m)	(uV/m)	(dBuV/m)
30 – 88	100	40	30	29.5
88 – 216	150	43.5	45	33.1
216 – 960	200	46	60	35.6
Above 960	500	54	150	43.5

Test Method:	ANSI C63.4-2014
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

2.1. EUT Operation

Operating Environment:	
Test mode:	1: TM1: On mode


2.2. Test Setup

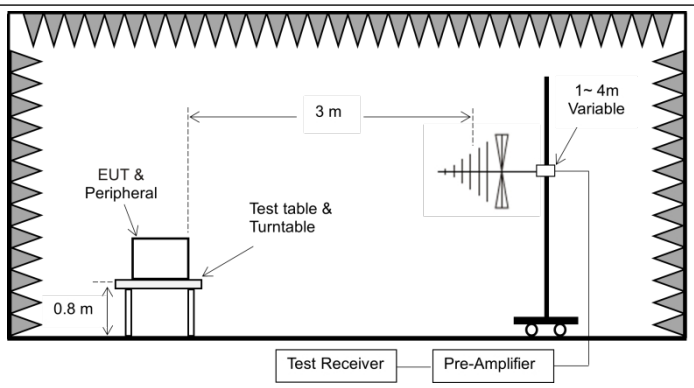

2.3. Test Data

Temperature:	22.8 °C	Humidity:	48 %	Atmospheric Pressure:	101 kPa


TM1 / Polarization: Horizontal

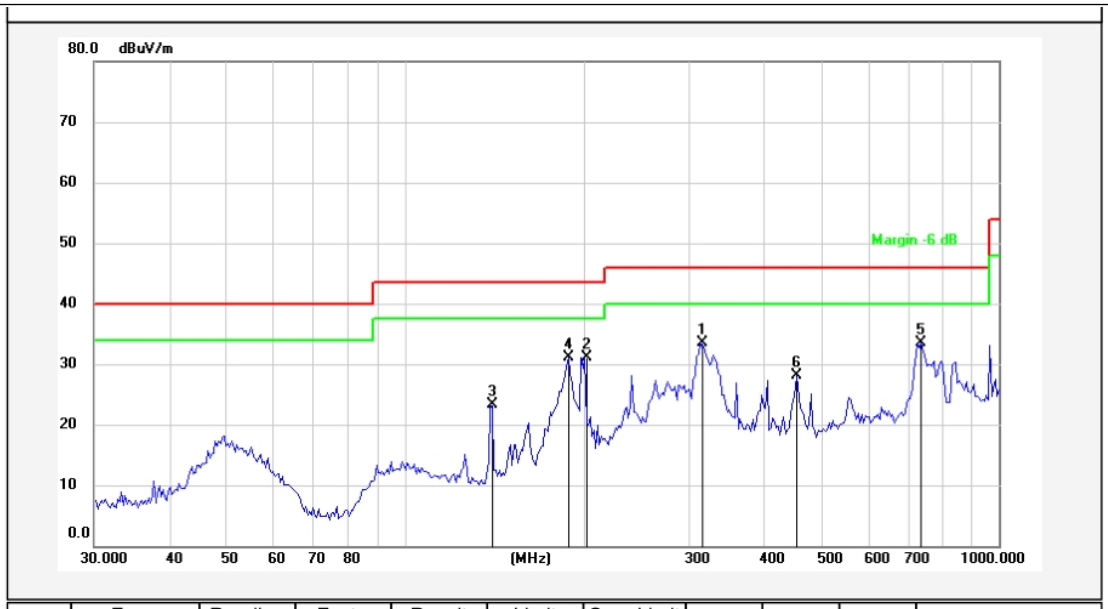

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	314.3765	50.50	-16.91	33.59	46.00	-12.41	QP			
2	200.6881	51.13	-19.97	31.16	43.50	-12.34	QP			
3	139.3613	44.27	-20.99	23.28	43.50	-20.22	QP			
4	188.4125	51.70	-20.63	31.07	43.50	-12.43	QP			
5	739.6604	44.24	-10.83	33.41	46.00	-12.59	QP			
6	455.9058	42.52	-14.42	28.10	46.00	-17.90	QP			

Temperature:	22.8 °C	Humidity:	48 %	Atmospheric Pressure:	101 kPa


TM1 / Polarization: Vertical

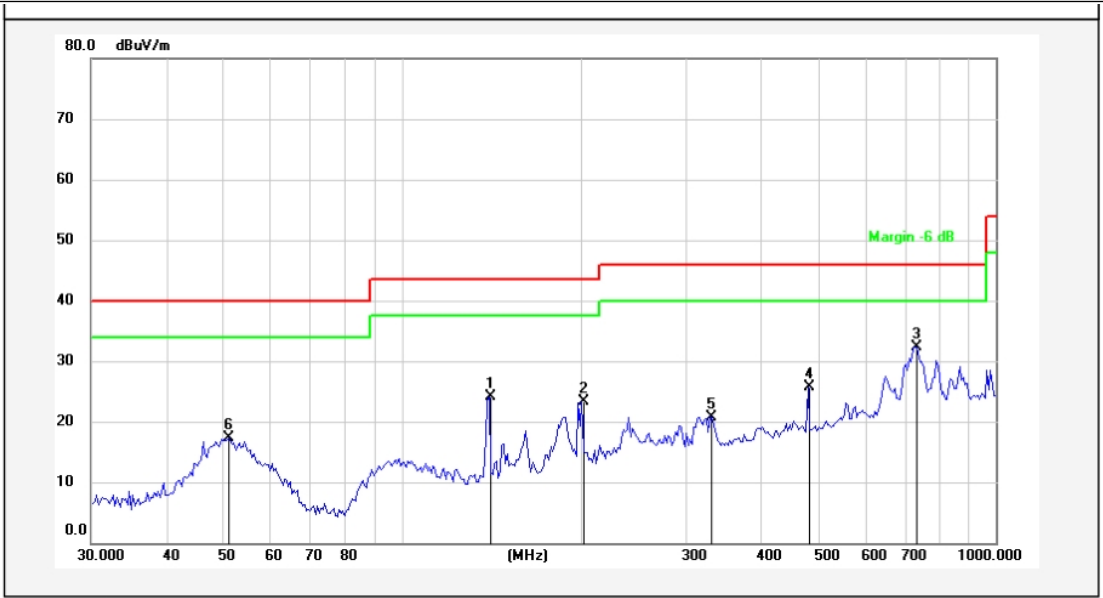


No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	140.3421	47.91	-23.82	24.09	43.50	-19.41	QP			
2	200.6881	43.28	-19.97	23.31	43.50	-20.19	QP			
3	734.4913	43.23	-10.90	32.33	46.00	-13.67	QP			
4	482.2156	39.68	-14.05	25.63	46.00	-20.37	QP			
5	330.1949	37.40	-16.60	20.80	46.00	-25.20	QP			
6	51.1209	31.89	-14.62	17.27	40.00	-22.73	QP			


APPENDIX I -- TEST SETUP PHOTOGRAPH


Radiated emissions (Below 1GHz)

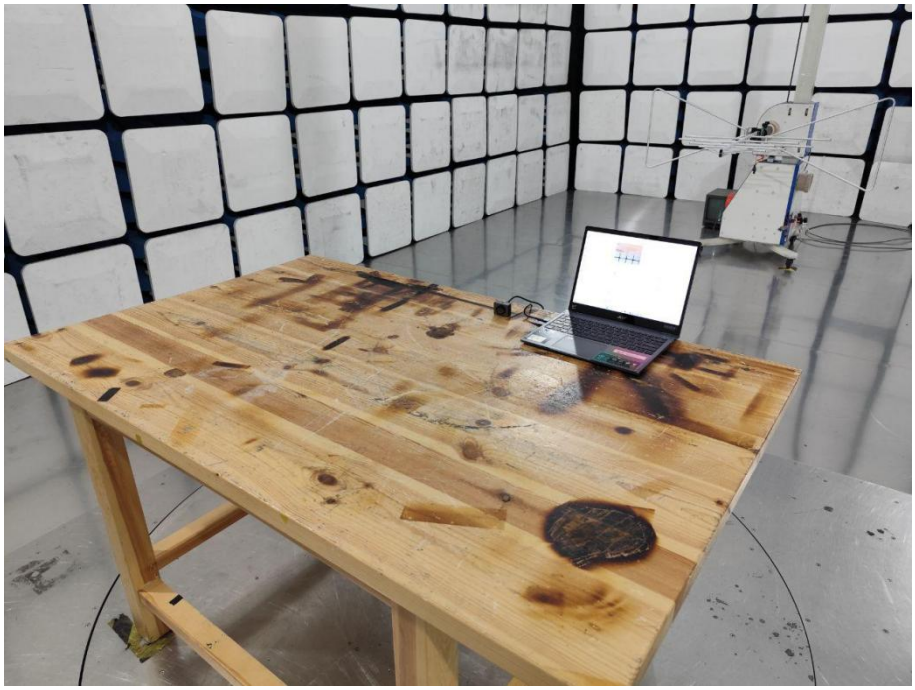



APPENDIX II -- Photo documentation

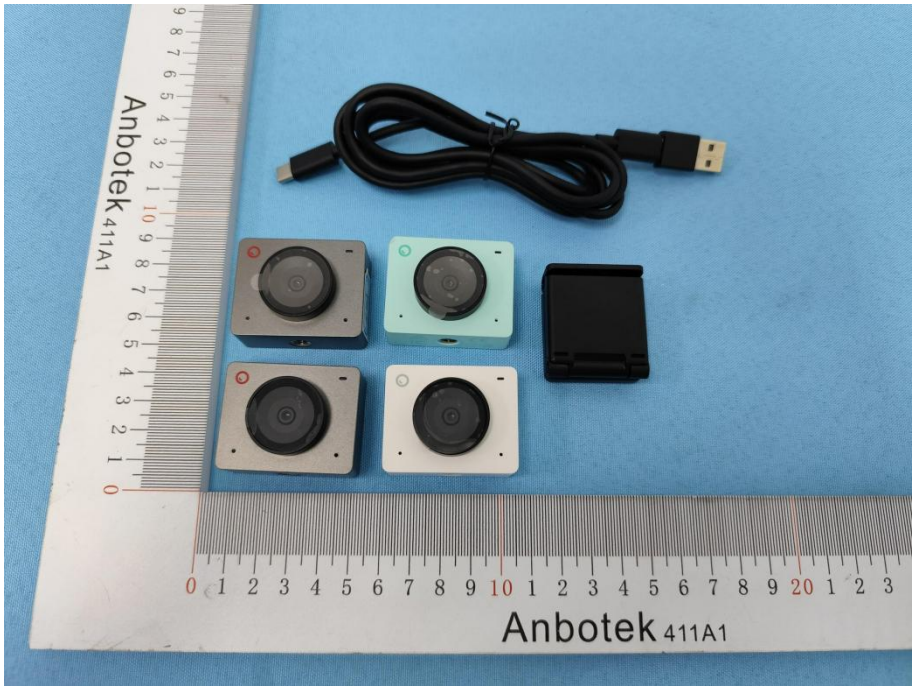


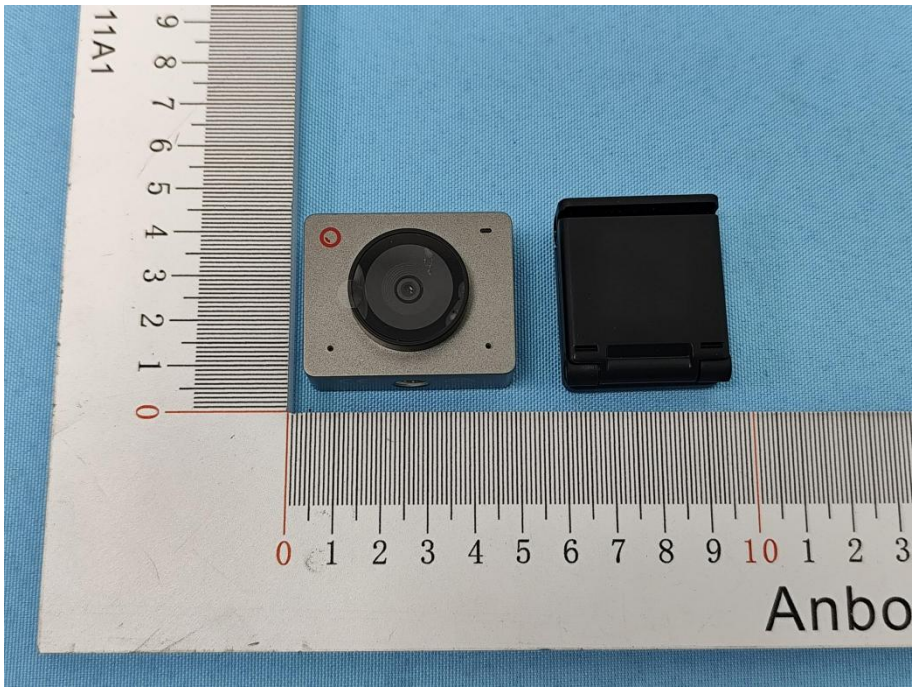

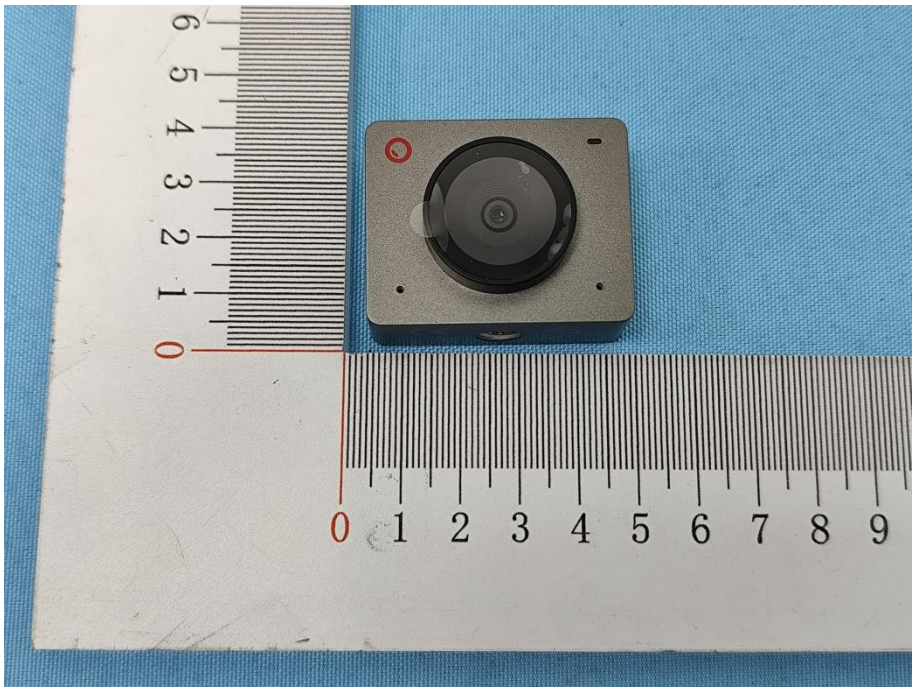

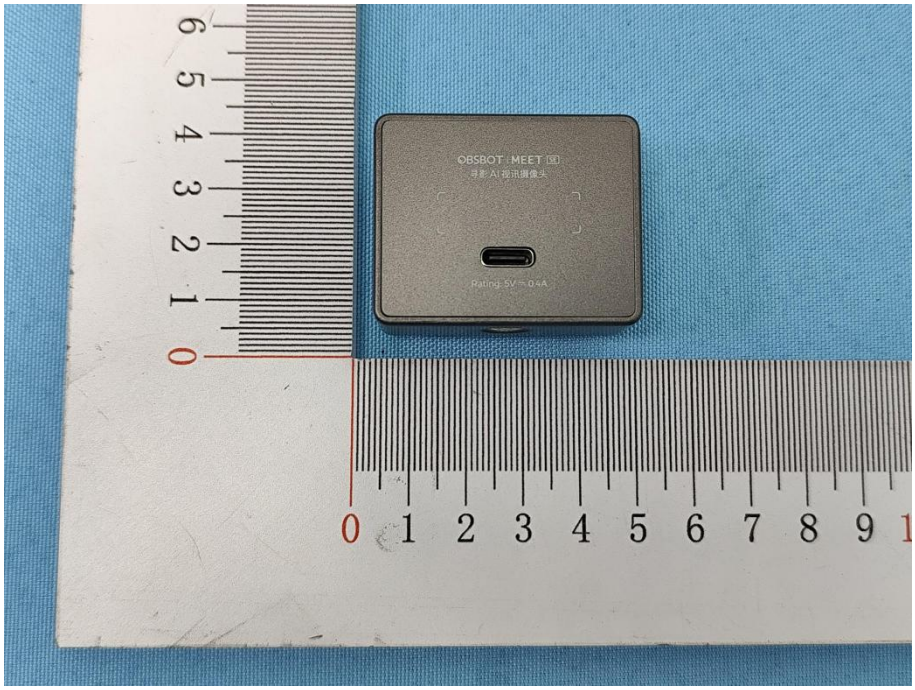
OBSBOT MEET

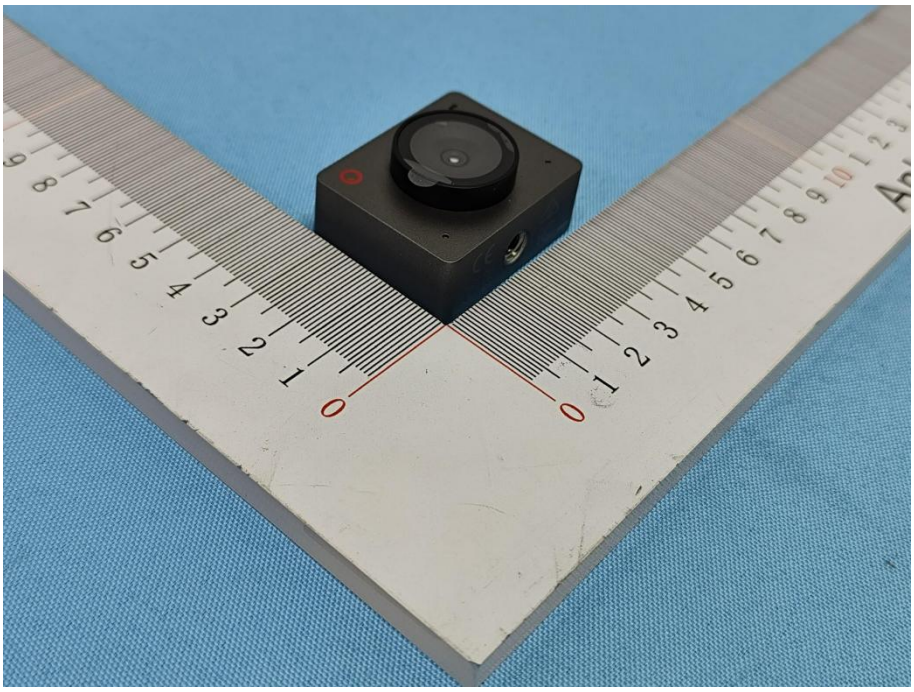

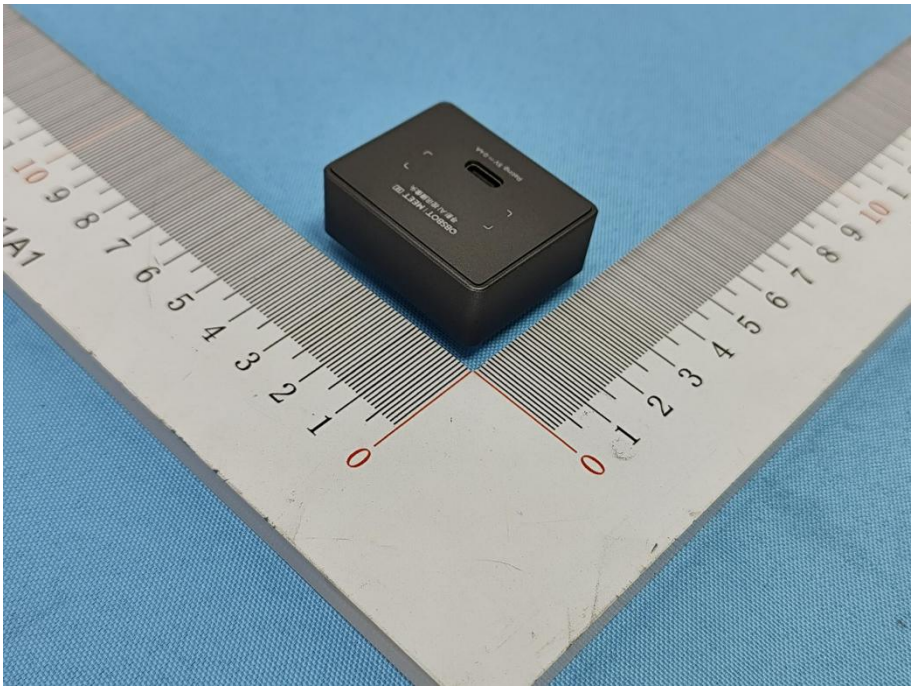

---------- End of Report ----------