

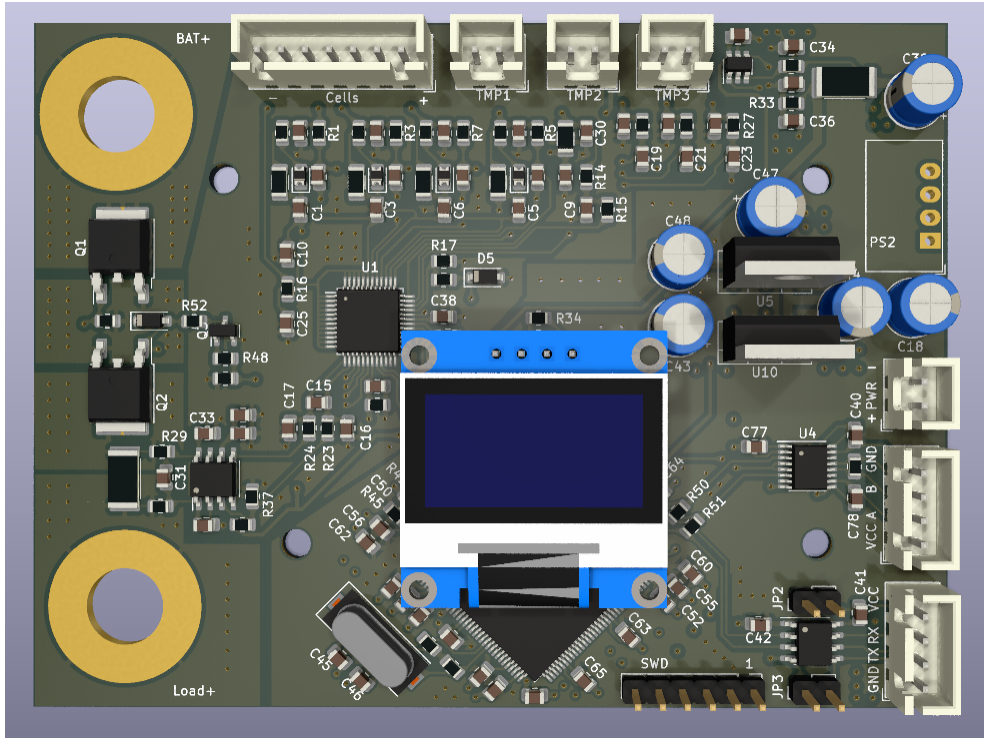


Figure 4.6: Board-level view of the Custom BMS Platform with integrated sensing, controller, communication, and auxiliary interfaces.

4.3.2 Hardware Architecture

The Custom BMS Platform can be understood as three tightly coupled hardware domains: the TLE9012DQU-based sensing and balancing stage, the current-measurement and protection interface, and the controller/communication island around the dual-core STM32H755. The board layout keeps the high-current zone, shunt, and relay path physically separated from the low-voltage controller and communication domain. This separation matters not only for safety, but also for electromagnetic compatibility and stable measurement quality. Figure 4.7 summarizes the signal and control paths between these domains.

The Infineon TLE9012DQU forms the measurement backbone of the pack. In the present 4s platform configuration, it supervises four series-connected cells with buffered RC filtering and provides cell-voltage and temperature acquisition together with passive balancing capability. The active front-end includes balancing circuitry, while unused monitor inputs are terminated according to the 12-to-4 cell adaptation of the reference design so that measurement integrity is preserved on the active channels. Temperature instrumentation is extended beyond the standard