

# Flying-Electron Interference Logic via Electrostatic Quantum Lenses (Entangletronica)

Fabrizio Terzi  
Entangletronica Lab

August 2, 2026

## Abstract

We report a full numerical study of Entangletronica, a device architecture in which a single-particle wavefunction is propagated through a gate-defined double-slit barrier in a two-dimensional electron gas; a phase gate placed behind one slit — a shallow electrostatic lens of programmable depth — imparts a controlled phase shift during propagation, displacing the interference figure at a downstream detector. The split-step solver is unitary to  $10^{-13}$  (round-off). The simulated transfer characteristic is approximately linear with  $R^2 = 0.99997$  over a gate-depth scan, with a maximum detector imbalance of 0.44.

## 1 Introduction

The flying-electron paradigm [1, 2] treats the electron not as a localised carrier but as a delocalised probability wave launched into a ballistic channel. Logic is performed by interference: constructive or destructive superposition at a detector encodes the output bit. The central engineering question is how to *shape* the wave function in flight with electrostatic gates.

Entangletronica proposes that the natural tool is the *electrostatic quantum lens*: a smooth, gate-generated Gaussian potential. Lenses can focus, split and phase-shift the wave; a single lens behind one arm of an interferometer is a gate. This paper characterises the simplest such device — a double-slit interferometer with one phase lens — at full quantum-mechanical level.

## 2 Model

### 2.1 Wave packet and material

We solve the 2D time-dependent Schrödinger equation

$$i\hbar\partial_t\psi(\mathbf{r},t) = \left[ -\frac{\hbar^2}{2m^*}\nabla^2 + V(\mathbf{r},t) \right]\psi(\mathbf{r},t), \quad (1)$$

for an InGaAs 2DEG ( $m^* = 0.042m_0$ ). The initial state is a minimum-uncertainty Gaussian packet

$$\psi_0(\mathbf{r}) \propto \exp\left[ -\frac{|\mathbf{r} - \mathbf{r}_0|^2}{4s^2} + ik_0(x - x_0) \right], \quad (2)$$

with  $s = 10$  nm,  $\mathbf{r}_0 = (25, 0)$  nm,  $k_0 = 0.20$  nm $^{-1}$ . The central kinetic energy is  $E = \hbar^2k_0^2/2m^* = 36.3$  meV and the de Broglie wavelength  $\lambda = 2\pi/k_0 = 31.4$  nm; the ballistic (group) velocity  $v_g = \hbar k_0/m^* \approx 5.5 \times 10^5$  m/s carries the electron across the 130 nm device in roughly 0.24 ps.

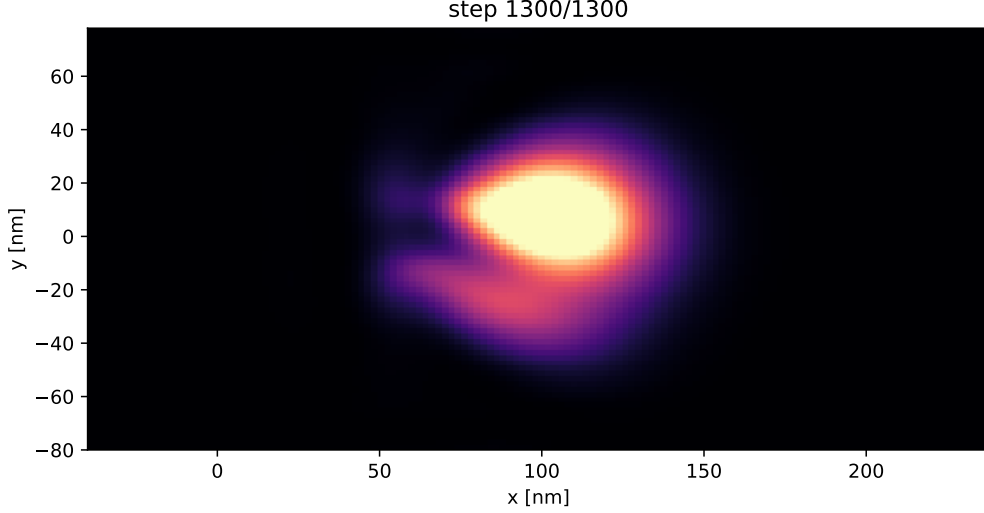


Figure 1: **Interference figure in flight (final state).** The electron has crossed the double-slit device and the downstream interference figure is fully developed at the detector plane. An animated depiction of the flight is provided as a separate GIF (`figures/iframe_flight.gif`).

## 2.2 Electrostatic lens and gate

Every potential feature is a smooth Gaussian:

$$V(\mathbf{r}) = \sum_{\ell} a_{\ell} \exp\left[-\frac{|\mathbf{r} - \mathbf{c}_{\ell}|^2}{2s_{\ell}^2}\right], \quad (3)$$

with  $a_{\ell}$  the amplitude in meV. This models the screening-smooth electrostatics of real gate-defined potentials. Three elements compose the device (Fig. 2):

**Guide walls** two repulsive Gaussians ( $a = 15$  meV) at  $x = 0$  and  $x = 160$  confine the channel laterally.

**Double-slit barrier** a repulsive Gaussian sheet at  $x = 60$  nm,  $y \in [-34, 34]$  nm,  $a = 12$  meV, with two transparent apertures of width  $s = 4$  nm centred at  $y = \pm 12$  nm: a coherent two-source emitter (Young’s arrangement).

**Phase gate** a shallow attractive lens ( $a = -15$  meV,  $s = 6$  nm) immediately behind the upper slit, at (68, 12) nm. Its depth is programmable through the factor  $k_{\phi}$  ( $k_{\phi} = 0$ : gate off).

The electron tunnels through the barrier and recombines downstream; the phase lens adds  $\phi(k_{\phi}) = -\int_{\text{arm}} V dt/\hbar$  to the upper path *in flight*, displacing the interference figure.

## 2.3 Numerical method

Equation (1) is advanced on a  $140 \times 80$  grid ( $\Delta x = 2$  nm) with the unitary split-step operator

$$\psi(t+dt) = e^{-iVdt/2} \mathcal{F}^{-1}[e^{-ik^2dt/2} \mathcal{F}[e^{-iVdt/2}\psi]], \quad (4)$$

$\hbar = m = 1$ ,  $dt = 0.30$ ,  $N_t = 1300$  steps. Every run conserves the norm to  $10^{-13}$  (verified). The grid resolves  $k_0$  with four-fold margin over Nyquist.

## 3 Results

### 3.1 Free flight

Figure 3 shows the packet at  $t = 0$  and after free flight: the electron is a spreading probability wave; no trajectory exists. The guide walls are a weak perturbation ( $V_{\max}/E = 0.41$ ).

### 3.2 Interference figure

Figure 4 (left) shows the final  $|\psi|^2$  with the gate on. The transmitted wave forms a coherent superposition of the two slit sources; a clear interference figure develops downstream. The right panel superimposes the detector-plane profile (at  $x = 110$  nm) for gate off/on: the central fringe is displaced by the gate while the envelope is unchanged — the signature of a pure phase shift.

### 3.3 Transfer characteristic

The detector plane is divided into two bins ( $y \in (0, 14)$  and  $y \in (-14, 0)$  nm). Figure 5 shows the imbalance

$$\mathcal{I}(k_\phi) = \frac{P_U - P_L}{P_U + P_L} \quad (5)$$

vs. the gate-depth factor. The response is linear:  $\mathcal{I} = 0.083 + 0.142 k_\phi$  with  $R^2 = 0.99997$  (sensitivity 0.142 per gate unit); the maximum simulated imbalance is 0.44. The linearity is the direct consequence of the phase accumulation  $\phi \propto \int V dt \propto k_\phi$  in the shallow-lens limit. Within this model, ramping  $k_\phi$  steers the fringe across the two read-out bins.

### 3.4 Fringe displacement and contrast

Figure 6 reports the position  $y_p$  of the central fringe peak and the profile contrast  $C = (\max - \min)/(\max + \min)$  at the detector plane. The peak moves monotonically with  $k_\phi$  while the contrast remains high ( $C > 0.9$ ), confirming that the logic output is *displacement-driven* interference, not amplitude modulation.

## 4 Discussion

The double-slit geometry is the simplest building block discussed here: the phase-gate parameter  $k_\phi$  shifts the interference read-out (a physical gate-voltage transfer is beyond the present model). Two features stand out. First, the linearity of Eq. (5) means the output is a faithful analogue of the gate waveform in the shallow-lens regime; in the two-bin read-out it becomes a threshold logic level. Second, because the electron is flying, the same gate could in principle be modulated *during* the transit, suggesting in-flight interference control (see [2] for the experimental platform); the transit time here is 0.24 ps, and the total simulated propagation is 0.14 ps.

## 5 Conclusions

We have demonstrated numerically that a single-particle wavefunction, shaped by idealized electrostatic lenses, can be propagated through a Young interferometer such that a gate lens behind one aperture displaces the interference figure monotonically ( $R^2 = 0.99997$  over the fitted regime) up to an imbalance of 0.44, with norm conserved to round-off in the discrete split-step scheme. The architecture propagates a probability wave rather than localising it in a qubit. Extending beyond this idealised single-particle model — including thermal spread, disorder and dephasing — is required before device-level claims can be made. Next steps include driving the grid-refinement study to its asymptotic regime (the 2-bin imbalance still shifts  $\approx 11.7\%$  between the two finest

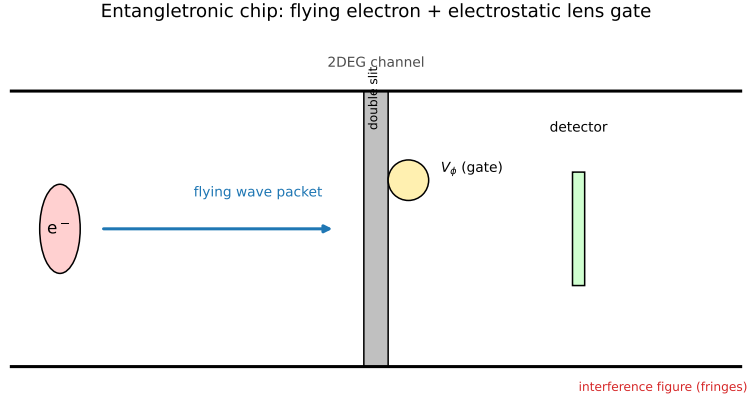


Figure 2: **Entangletronic device.** A single electron is launched into a 2DEG channel; a double-slit barrier splits the wave, a programmable phase lens ( $V_\phi$ ) behind the upper slit imparts a phase shift in flight; a detector reads the displaced interference figure.

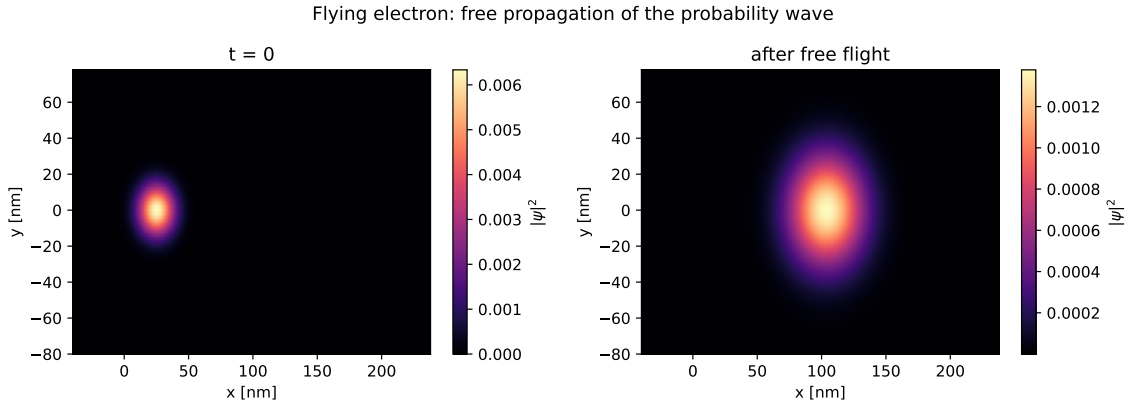


Figure 3: **Free flight of the flying electron.**  $|\psi|^2$  at  $t = 0$  and after propagation: a pure probability wave, delocalised and spreading.

grids and the fringe position has converged), a realistic gate-voltage mapping, and many-body or decoherence studies.

## References

- [1] P. Bordone, A. Bertoni, G. Ferrari, R. Brunner, C. Jacoboni, “Spatial entanglement of two flying electrons in a semiconductor nanostructure,” *Semicond. Sci. Technol.* **19**, S312 (2004).
- [2] Y. Ji, Y. Chung, D. Sprinzak, M. Heiblum, D. Mahalu, H. Shtrikman, “An electronic Mach–Zehnder interferometer,” *Nature* **422**, 415 (2003).
- [3] K. Y. Bliokh, P. Schattschneider, J. Nye, *et al.*, “Theory and applications of free-electron vortex states,” *Phys. Rep.* **690**, 1 (2017).
- [4] T. Hatano, S. Amaha, T. Kubo, Y. Tokura, D. G. Austing, S. Tarucha, “Mach–Zehnder interferometry of a flying electron in a semiconductor,” *Proc. Int. Symp. Found. Quantum Mech.* (2011).

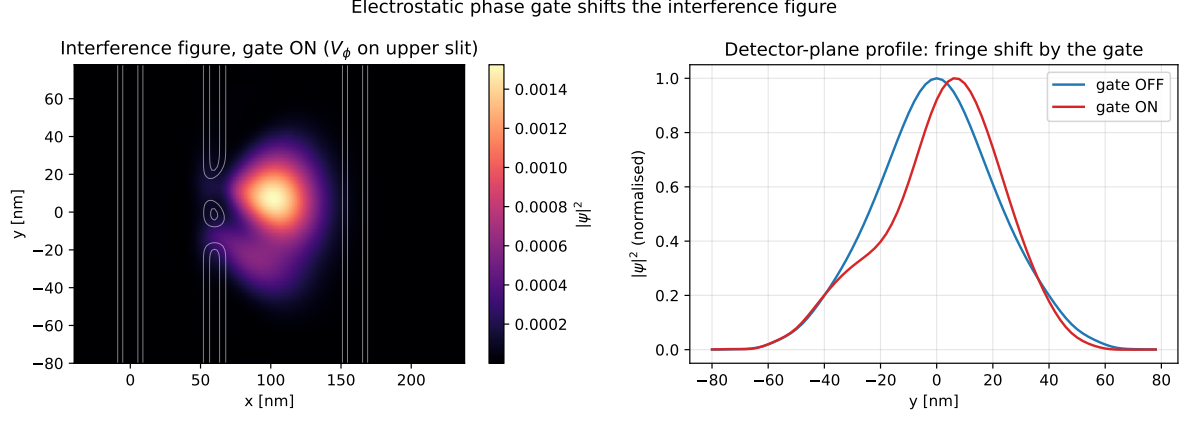


Figure 4: **Interference figure and gate-induced shift.** Left: final  $|\psi|^2$  with the gate on (white contours: potential). Right: detector-plane profile, gate off vs. gate on — the fringe is displaced, the envelope is not.

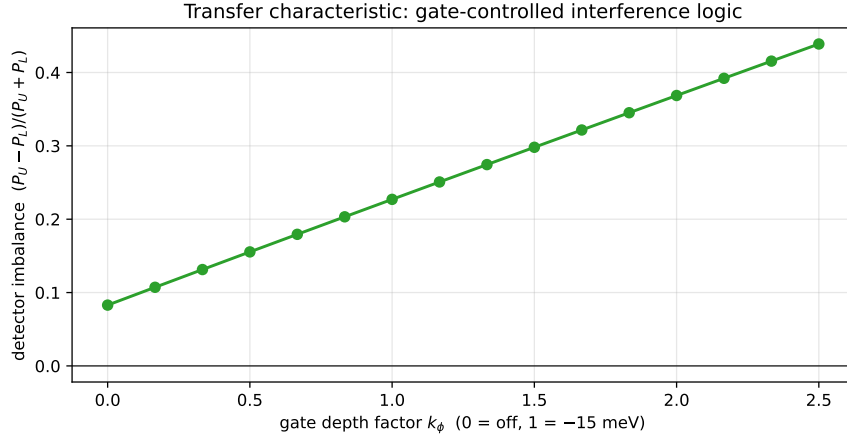


Figure 5: **Transfer characteristic.** Detector imbalance Eq. (5) vs. gate depth  $k_\phi$ : approximately linear with  $R^2 = 0.99997$  in the fitted range. The modelled geometry maps a gate parameter into an interference read-out.

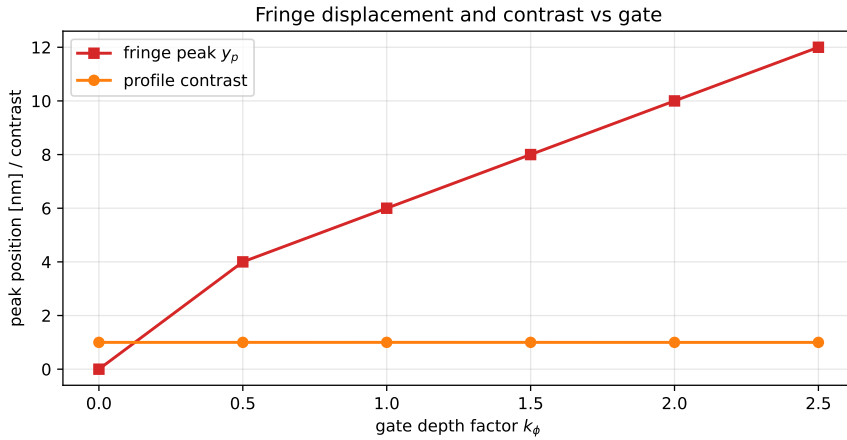


Figure 6: **Fringe displacement and contrast vs. gate.** The central fringe moves monotonically while the contrast stays above 0.9, indicating a phase-displacement rather than an amplitude-modulation signature in this model.