

EcoQube

User Guide

Ecosense

English


Introduction

At Ecosense, we are solely dedicated to developing innovative and highest performance radon gas monitoring solutions that ensure accurate and real-time reporting of indoor air safety levels for your family. Our real-time radon monitoring solution, EcoQube, integrates the latest high precision patented radon monitoring technology combined with wireless and cloud connectivity to deliver an easy to use, fast, highly accurate, compact, and affordable continuous radon monitoring solution.

In the box



EcoQube (x1)



Power cable (x1)




Power adapter (x1)

EcoQube Set Up

1. Connect the large end of power cable into the power adapter. Then plug the power adapter into an AC power supply.
2. Download and open the EcoQube app (Available in App store and Google play).
3. Register and create your account.
4. Follow instructions in the app.

EcoQube



Front View

LED Light
Shows current status of EcoQube.
Learn more on LED Light Color Guide.



Bottom View


QR Code
Scan the QR code to add new device.

Reset button
Device setting reset or Factory reset.
Learn more on LED Light Color Guide.

Air inlets
To allow air into EcoQube.

EcoQube App Overview

The EcoQube App connects with the intelligent EcoQube radon detector device. It gathers all data from the EcoQube detector device to be shared with your smartphone.

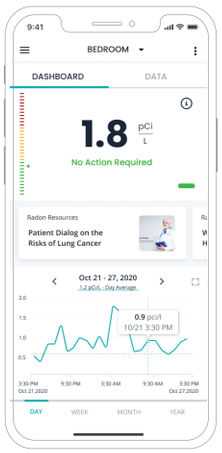


Menu

Radon level indication

Ecosense portal

Radon level historical chart

EcoQube Placement Guidelines

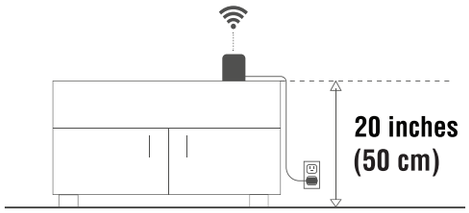

Make sure it's at the right height. Place EcoQube at least 20 inches (50cm) above the floor. Do not place EcoQube close to open windows or vents and keep it away from high heat, high humidity.
Find a spot with a good Wi-Fi signal. EcoQube uses Wi-Fi together with an internet connection to send information to your smartphone app.

Technical Specifications

Type	Pulsed Ion chamber
Radon sensitivity	30 cph(count per hour) per 1 pCi/L(37 Bq/m³)
First reliable result	Within an hour
Accuracy/Precision (95% Confidence)	< ±10% at 10 pCi/L(370 Bq/m³) after 10 hours
Data display update	10 minute interval (60 minutes moving average)
Operating temperature range	32°F~104°F (0~40°C), Relative Humidity < 80%
Measurement range	0.2 ~ 99.9 pCi/L (7~3,700 Bq/m³)
Power supply	DC 5V, 200mA (5V 1A DC Adapter)
Dimensions	2.56 X 2.56 X 3.17 in. (65 X 65 X 80.5 mm)
Weight	0.243 Lbs (110g)
Connectivity	Wi-Fi 802.11b/g/n (2.4 GHz), Bluetooth v4.2

Maintenance

Reset to device settings: Resets Wi-Fi settings, alarm settings, and unit settings to default values.
1. Press button until LED goes off.
2. Keep holding the reset button for 5 seconds until the LED turns green.
3. Release the button.


Reset to factory settings: Resets to original manufacturer settings if device becomes unresponsive.
1. Press button until LED is off.
2. Press and hold the reset button for 5 seconds until the LED turns green.
3. Keep pressing and hold the reset button for more than 20 seconds until the LED turns orange.
4. Release the button.

Powering off

To switch off the EcoQube device, please remove the power cable from the back side.

Reset existing data

To erase all data on your account, you need to unregister the EcoQube by following the below steps. Go to All Devices and swipe left on the device name to show the Unregister menu.

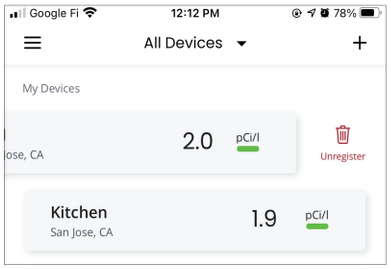

English

EcoQube LED Light Color Guide

LED Light Status	EcoQube Status
⊘ No light	No power to EcoQube.
■ ⊘ ■ Flashing orange	EcoQube is in setup mode waiting to connect to a Wi-Fi network. LED light changes to solid green once setup is complete.
■ Solid green	EcoQube is operational and connected to a Wi-Fi network. Detected radon level is within no action required range.
■ Solid orange	EcoQube is operational and connected to a Wi-Fi network. Detected radon level is within consider fixing home range.
■ Solid red	EcoQube is operational and connected to a Wi-Fi network. Detected radon level is within action required range.
■ ⊘ ■ Flashing red	EcoQube is not able to connect to a Wi-Fi network.
■ ⊘ ■ Flashing green	EcoQube is updating internal firmware.
⊘ Reset mode preparation	While pressing and holding down the reset button, if the button is released within 5 secs, the reset mode shall be canceled and the LED light shall go back to its previous status.
⊘ ↓ ■ Device setting reset preparation	While pressing and holding down the reset button for 5 to 20 secs, upon releasing the button, the EcoQube device will only perform a reset to device settings.
■ ↓ ■ Factory reset preparation	While pressing and holding down the reset button for more than 20 secs, upon releasing the button, the EcoQube device will perform a reset to factory settings.

For more details, please visit us at **https://ecosense.io/**user-guides

Customer Support

We are happy to help, please visit us at **https://ecosense.io/**support
For European customers, please contact **https://radonova.org/ecoqube**