

Barcode Scanner



Please read the user manual carefully before operation and keep it in good care

Product Features

Model	Wireless	Bluetooth	AI Voice	Transmission Distance	Storage Capacity	Battery Capacity	LED/LCD Display	CMOS Pixels
KU061	✓	x	x	0-80M	50000+	2000mAh	x	800x600
KU061PRO	✓	✓	x	0-80M(WL) 0-30M(BT)	50000+	2000mAh	x	800x600
KU062	✓	x	✓	0-80M	50000+	2000mAh	LED Light	800x600
KU062PRO	✓	✓	✓	0-80M(WL) 0-30M(BT)	50000+	2000mAh	LED Light	800x600
KU063	✓	x	✓	0-80M	50000+	2000mAh	LCD Screen	800x600
KU063PRO	✓	✓	✓	0-80M(WL) 0-30M(BT)	50000+	2000mAh	LCD Screen	800x600

Technical Parameters

Scan Barcode	1D, 2D
Scanning Barcode Type	1D: EAN13, EAN 8, UPC-A, UPC-E0, UPC-E1, Code128, Code39, Code93, Interleaved 2 of 5, Industrial 25, Matrix 2 of 5, Code11, CodeBar, MSI, RSS-14, RSS-Ltd, RSS-Exp, Standard 2 of 5, Plessey, ChinaPost 25, GS1 Composite 2D: QR Code, Data Matrix (DM), PDF417, Han Xin, Micro PDF417, Micro QRCode, MaxiCode, Aztec Code, Code16K
Operating Temperature	Celsius -0°C ~ +50°C
Storage Temperature	Celsius -40°C ~ +60°C
Operating Humidity	5%-95% (non-condensing)
Scan Mode	Manual, Auto-sensing, Continuous
Seismic Resistance	Can be passed by 1.5m free fall test
Operating Fields	POS Systems, Supermarkets, Bookstores/Libraries, Warehouses, Restaurants, Hotels, Banking, Transportation etc.

Operation for KU061,KU061PRO



-1-

Wireless Connection

Powered on the device and insert the receiver into the USB port, then it will work without pairing.

Bluetooth Connection


Powered on the scanner, open the Bluetooth search at the receiving end, find the device with the Bluetooth name "BARCODE SCANNER", click to connect, OK.

Operation for KU062,KU062PRO,KU063,KU063PRO



(Only for KU062,KU062PRO)

-2-

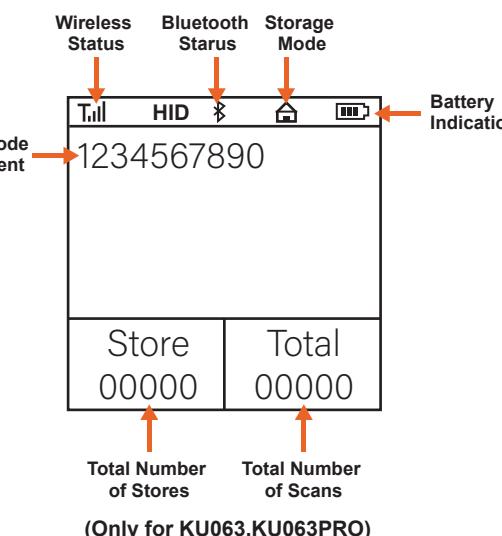

Wireless Connection

Press and hold the top button for 7 seconds, the scanner will continuously send out a pairing voice prompt, insert the receiver into the USB port of the computer, the voice prompt is paired successfully, and the screen will display the icon **Tilt** when the connection is successful.

Bluetooth Connection

Powered on the scanner, open the Bluetooth search at the receiving end, find the device with the Bluetooth name "BARCODE SCANNER", click to connect, and the x behind the Bluetooth mode will disappear after success connect. (Bluetooth mode can be set by the code below, and the corresponding name will be displayed on the screen).

Bluetooth Setting



-3-

Toggle the Configuration Code Setting On/Off



Communication Mode Setting



USB HID Mode Virtual Serial Port Mode

Common Ending Character Setting



Enter Carriage Return to Wrap Tab No Terminator

3 Scanning Mode Setting



Manual Trigger Mode Auto-sensing Scan Mode Continuous Scan Mode

Tone Setting



Turn On the Prompt Sound Turn Off the Prompt Sound Turn On Your Voice Turn Off Speech

-4-



2 Data Uploading Modes




Instructions:

- 1.Instant Upload Mode: The scan results will be uploaded to the computer in time (this mode is the default mode).
- 2.Storage Mode: The scan results are stored in the internal memory. (when the internal storage is occupied, KU061,KU061PRO Buzzer will beep for a long time to prompt,KU062, KU062PRO, KU063, KU063PRO will be voice prompts).
- 3.No Data Loss: Under this setting, when there is a signal, the scanning results will be uploaded to the computer in a timely manner; when the signal is weak or there is no signal, the scanning results will be stored in the internal memory, waiting for a signal to automatically upload the stored data to the computer.
- 4.Total Data Amount: Scanning the barcode will display the total number of stored data (for Storage Mode).
- 5.Data Upload: Scan the barcode to upload the data stored in the internal memory to the computer in turn (applicable in Storage Mode, please ensure that the wireless signal is normal when uploading data). KU061,KU061PRO Buzzer will beep 2 times for successful data upload, and 3 times for failed data upload. KU062, KU062PRO, KU063, KU063PRO will be voice prompts for successful and failed data upload).
- 6.Clear Data: Scanning the barcode will erase all the data in the internal memory.

Note: KU062, KU062PRO, KU063, KU063PRO, Double-click the orange function button at the top of the scanner to switch between Instant Upload Mode and Storage Mode.

-5-

Sleep Time Setting

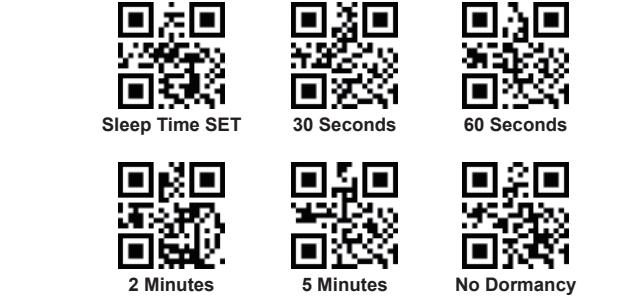


Note: Scan the sleep time SET first, and then scan the time you want to set

Language Setting



Note: KU062, KU062PRO, KU063, KU063PRO, Double-click the orange function button at the top of the scanner to switch between Instant Upload Mode and Storage Mode.

-6-

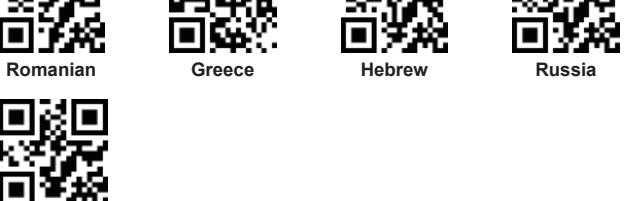

Inverted Color Code Setting



-7-

After-Sale Service

About KUIIYER:
KUIIYER is the source for hard-to-find exquisite office tools, Founded in the 2010s, we have been focusing on develop, research, design and produce over 10 years. KUIIYER is dedicated to provide our customers Innovative Fashion Simple Practical working solutions.

If you are looking for barcode scanning, time and attendance solution for your supermarket, warehouse, shopping mall, office, retail store and so on, KUIIYER hope to be the better choice and will always stand by you!

After-Sale Service:
KUIIYER Barcode Scanner has 24-month warranty. There are any product issues during the period, we hope that you will contact us as soon as possible, we will always try our best to solve your problems and provide the professional customer service.

Contact us by message,offer us your order number.
Explain your issues,Any problems will be solved by KUIIYER professional customer service team in 12 hours,Thanks for your support!

Manufacture Info:

Company: shenzhen shibo antou fuzai fanyouxiangongsi
Address: Room 512, Huafeng Xin'an Commercial Building 45 District, Xin'an Street, Bao'an District, 51810, ShenZhen ,GuangDong, China
E-mail: boansell@hotmail.com
Tel: +(86) 15571747083

EU REP CET PRODUCT SERVICE SP. Z O.O.
Address: Ul. Dluga 33 102 Zgierz 95-100 Polen
E-mail: info@cetproduct.com
Tel: +4971416432236

UK REP CT SERVICE LTD.
Address: Beacon House Stokenchurch Business Park, Istone Rd, Stokenchurch High Wycombe HP14 3FE UK
E-mail: info@cetproduct.com
Tel: +447419325266

Made in China

