



CAT IV

300 V

CAT III

500 V

CAT II

1000 V DC

Li-Ion
BATTERY



MPI-540-PV

WORK IN
IT MAINS

IP51

BLUETOOTH

WiFi

7"

touch
screen



MPI-540-PV
measurement of
PV installations



3-phase
power quality
recorder

ρ
 R_{ISO}
 Z_s
 E
 R_{CONT}

complex
measurements of
installations

Much more than a multifunctional meter

- **The largest touch screen on the market (7") – remarkable ergonomics and ease of use**
- Removable microSD memory card – easy increase of memory capacity
- Li-Ion battery – longer operation of the meter
- **MPI-540-PV | Measurement of photovoltaic installations according to EN 62446 standard**
- **MPI-540-PV | Photovoltaic installation test report with Sonel Reports PLUS software**
- **Three-phase power recorder – advanced power quality diagnostics**
 - Real time display of network parameters – immediate evaluation of the test site conditions
 - Parameters measured in accordance to class S of EN 61000-4-30 standard – high accuracy of measurements
 - Energy cost calculator – quick evaluation of potential savings
- **Measurement of all parameters related to earthing and protection against electric shock – one device instead of several**
 - Quick measurement of the fault loop impedance in networks secured with RCD without triggering (up to several seconds) – time saver
 - Auto measurements – the ability to perform automatic measurements in sequence – simplified measurements
 - Fast path from measurements to report – time saver



MPI-540-PV Solar
includes flexible coils and solar
radiation measurement set



MPI-540-PV
includes flexible coils



MPI-540-PV Start
does not include flexible coils



MPI-540
includes flexible coils



MPI-540 Start
does not include flexible coils





Features

The meter has **above-average functionality**. It combines the measuring capabilities of several devices, while ensuring equally good accuracy.

- The **MPI-540-PV** instrument can measure photovoltaic installations in accordance with the EN 62446 standard:
 - » continuity of protective and equipotential bondings,
 - » earth resistance,
 - » insulation resistance on the DC side,
 - » open circuit voltage U_{oc} ,
 - » short circuit current I_{sc} ,
 - » work currents and powers on both DC and AC side,
 - » inverter efficiency.
- **MPI-540 / MPI-540-PV** can record 50/60 Hz power quality parameters in accordance to S class of EN 61000-4-30:
 - » voltage L1, L2, L3, – average values in the range up to 500 V,
 - » L1, L2, L3 currents, – average values, current measurement in the range up to 3 kA (depending on the current probes used),
 - » frequency in the range of 40 Hz – 70 Hz,
 - » active (P), reactive (Q) and apparent (S) power,
 - » power factor (PF), $\cos\phi$,
 - » harmonics (up to 40th for voltage and current),
 - » total harmonic distortion (THD) for current and voltage.
- **MPI-540 / MPI-540-PV** can be used for all measurements for commissioning of electrical installations in accordance with applicable regulations:
 - » short circuit loop impedance (also in circuits secured with RCDs),
 - » RCD parameters,
 - » insulation resistance,
 - » earth resistance (4 measurement methods + soil resistivity measurement),
 - » continuity of protective and equipotential bondings,
 - » light intensity measurement,
 - » phase sequence test,
 - » motor rotation direction test.



Automatic installation safety test

MPI-540 / MPI-540-PV allow safety control of **residential, commercial and industrial electrical installations**. Measurements can be easily automated with:

- auto mode of residual current devices (RCD) tests,
- auto measurements – freely configurable measuring sequences,
- AutolSO-1000C adapter for automatic insulation resistance test of 3-, 4- and 5-conductor cables, without switching.



Photovoltaics under supervision

MPI-540-PV is an extremely universal meter, designed in particular for testing photovoltaic installations. The device allows a complete set of tests on the DC and AC side – in accordance with the guidelines of EN 62446 standard.

Measuring parameters related to the photovoltaic installation, the instrument will automatically convert them to the STC (Standard Test Conditions) reference conditions. Measurements of voltage, current and power on the AC and DC side of the inverter allow to verify its efficiency. **Sonel Reports PLUS** software enables creating PV installation test report with measurement results saved meter's in memory.




Three-phase power quality recorder

The device has a three-phase power quality recorder with the LIVE mode view and the possibility to register electrical network parameters such as voltage, current, power, harmonics and THD. The meter enables reading of selected parameters and their graphic presentation on the screen in real time. These parameters are measured and displayed concurrently with the recording on the memory card. In the LIVE mode, the user can see:

- voltage and current waveforms (oscilloscope),
- voltage and current timeplots,
- a phasor graph,
- display of multiple parameters in tabular form,
- spectrum graph of current and voltage harmonics.

Ease of reading

The device is equipped with a color TFT LCD touch screen with a resolution of 800x480 pixels and a diagonal of 7", which allows for convenient operation and easy reading of parameters and plotted waveforms. This screen size enables displaying more information, available at any time of use. The interface is visible in all conditions – also thanks to the appropriate size of displayed symbols. **Included stylus allows to work also with dielectric gloves.**

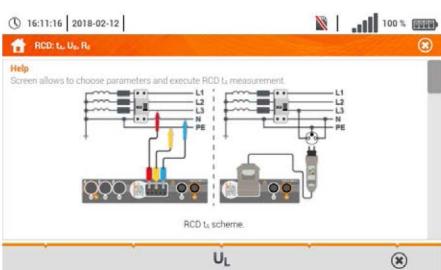

Built-in help system

The device has built-in help screens with measurement diagrams. Thanks to this you can easily and quickly check and make sure how to connect to a given system depending on the type of performed measurement.



Increased resistance to environmental conditions

The MPI-540 / MPI-540-PV meter will cope well in difficult environmental conditions. Protection against penetration of dust and water is ensured by a unique housing with a level of protection IP51. It is resistant to mechanical damage, and a special design allows you to easily protect the touch screen by shielding using the cover of the meter. In addition to the fact that it protects against damage, it also allows you to conveniently carry and use the device in different positions.



Communication and software

A very strong feature of the device is the multitude of communication interfaces and cooperation with external software. You can easily transfer measurement data to your computer via USB port, removable SD memory card, or wireless communication (Bluetooth, Wi-Fi).

In order to generate a report on measurements for electric shock protection, use **Sonel Reports PLUS** software. Saving the downloaded data to the simplest formats and printing is provided by free **Sonel Reader** software. The specialized, free **Sonel Analysis** software is used to read and analyze data from the power quality recorder.

Specifications – electrical installation parameters

Measurement functions	Measurement range	Display range	Resolution	Accuracy ±(% m.v. + digits)
Fault loop impedance				
Fault loop Z_{L-PE} , Z_{L-N} , Z_{L-L}	0.13 Ω...1999.9 Ω acc. to IEC 61557	0.000 Ω...1999.9 Ω	from 0.001 Ω	±(5% m.v. + 30 digits)
Fault loop Z_{L-PE} in RCD mode	from 0.50 Ω...1999 Ω acc. to IEC 61557	0.00 Ω...1999 Ω	from 0.01 Ω	from ±(6% m.v. + 5 digits)
Measurements of RCD parameters				
RCD tripping test and measurement of tripping time t_A measuring current $0.5 I_{Δn} \dots 1 I_{Δn} \dots 2 I_{Δn} \dots 5 I_{Δn}$				
general and short-time delay RCD	0 ms...300 ms	0 ms...300 ms	1 ms	from ±(2% m.v. + 2 digits)
selective RCD	0 ms...500 ms	0 ms...500 ms	1 ms	from ±(2% m.v. + 2 digits)
Measurement of RCD tripping current I_A measuring current $0.2 I_{Δn} \dots 2.0 I_{Δn}$				
for sinusoidal residual current (AC type)	3.3 mA...1000 mA	3.3 mA...1000 mA	from 0.1 mA	±5% $I_{Δn}$
for unidirectional residual current and unidirectional with the 6 mA DC bias (type A)	3.5 mA...700 mA	3.5 mA...700 mA	from 0.1 mA	±10% $I_{Δn}$
for direct residual current (type B)	2.0 mA...1000 mA	2.0 mA...1000 mA	from 0.1 mA	±10% $I_{Δn}$
Earth resistance				
3- and 4-pole method	from 0.50 Ω...1.99 kΩ acc. to IEC 61557-5	0.00 Ω...1.99 kΩ	from 0.01 Ω	from ±(2% m.v. + 3 digits)
3-pole + clamp method	0.00 Ω...1.99 kΩ	0.00 Ω...1.99 kΩ	from 0.01 Ω	from ±(2% m.v. + 4 digits)
2-clamp method	0.00 Ω...99.9 kΩ	0.00 Ω...99.9 kΩ	from 0.01 Ω	from ±(10% m.v. + 4 digits)
Resistance-to-earth	0.0 Ωm...99.9 kΩm	0.0 Ωm...99.9 kΩm	from 0.1 Ωm	Depending on accuracy of R_E measurement
Insulation resistance				
Measuring voltage 50 V	50 kΩ...250 MΩ acc. to IEC 61557-2	0 kΩ...250 MΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 100 V	100 kΩ...500 MΩ acc. to IEC 61557-2	0 kΩ...500 MΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 250 V	250 kΩ...999 MΩ acc. to IEC 61557-2	0 kΩ...999 MΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 500 V	500 kΩ...2.00 GΩ acc. to IEC 61557-2	0 kΩ...2.00 GΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 1000 V	1000 kΩ...9.99 GΩ acc. to IEC 61557-2	0 kΩ...9.99 GΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Resistance of protective conductors and equipotential bondings				
Measurement of resistance of protective conductors and equipotential bondings with ±200 mA current	0.12 Ω...400 Ω acc. to IEC 61557-4	0.00 Ω...400 Ω	from 0.01 Ω	±(2% m.v. + 3 digits)
Measurement of resistance with low current	0.0 Ω...1999 Ω	0.0 Ω...1999 Ω	from 0.1 Ω	±(3% m.v. + 3 digits)
Light intensity				
Measurement in luxes (lx)	0 lx...399.9 klx	0 lx...399.9 klx	from 0.001 lx	from ±(2% m.v. + 5 digits)
Measurement in feet-candles (fc)	0 fc...39.99 kfc	0 fc...39.99 kfc	from 0.001 fc	from ±(2% m.v. + 5 digits)
Phase sequence indication	in the same direction (correct), opposite direction (incorrect), U_{L-L} voltage: 95 V...500 V (45 Hz...65 Hz)			

Specifications – 3-phase power quality recorder

The device is designed to work with mains:

- » with nominal frequency 50/60 Hz
- » with nominal voltage: 64/110 V, 110/190 V, 115/200 V, 127/220 V, 220/380 V, 230/400 V, 240/415 V, 254/440 V, 290/500 V
- » DC networks

Supported systems:

- » single-phase
- » split-phase with common N
- » three-phase – WYE with and without N conductor
- » three-phase – Delta

Parameter	Measuring range	Max. resolution	Accuracy
Alternating voltage (TRMS)	0.0...500 V	0.01% U _{nom}	±0.5% U _{nom}
Alternating current (TRMS)	depending on clamp*	0.01% I _{nom}	±2% m.v. if m.v. ≥ 10% I _{nom} ±2% I _{nom} if m.v. < 10% I _{nom} (error does not account for clamp error)
Frequency	40.00...70.00 Hz	0.01 Hz	±0.05 Hz
Active, reactive, apparent and distortion power	depending on configuration (transducers, clamps)	4 significant digits	depending on configuration (transducers, clamps)
Active, reactive and apparent energy	depending on configuration (transducers, clamps)	4 significant digits	as power error
cosφ and power factor (PF)	0.00...1.00	0.01	±0.03
Harmonics			
Voltage	as for alternating voltage True RMS	as for alternating voltage True RMS	±5% m.v. if m.v. ≥ 3% U _{nom} ±0.15% U _{nom} if m.v. < 3% U _{nom}
Current	as for alternating current True RMS	as for alternating current True RMS	±5% m.v. if m.v. ≥ 10% I _{nom} ±0.5% I _{nom} if m.v. < 10% I _{nom}
THD			
Voltage	0.0...100.0%	0.1%	±5%
Current	(relative to RMS value)		
Unbalance factor	0.0...10.0%	0.1%	±0.15% (absolute error)

* F-1A, F-2A, F-3A clamp: 0...3000 A AC (10 000 A_{p-p}) • C-4A clamp: 0...1000 A AC (3600 A_{p-p}) • C-5A clamp: 0...1000 A AC/DC (3600 A_{p-p}) • C-6A clamp: 0..10 A AC (36 A_{p-p}) • C-7A clamp: 0...100 A AC (360 A_{p-p})



C-4A



C-5A



C-6A



C-7A



F-1A



F-2A



F-3A

Rated current	1000 A AC	1000 A AC 1400 A DC	10 A AC	100 A AC	3000 A AC
Frequency	30 Hz...10 kHz	DC...5 kHz	40 Hz...10 kHz	40 Hz...1 kHz	40 Hz...10 kHz
Max. diameter of measured conductor	52 mm	39 mm	20 mm	24 mm	380 mm
Minimum accuracy	≤0.5%	≤1.5%	≤1%	0.5%	1%
Battery power	–	✓	–	–	–
Lead length	2.2 m	2.2 m	2.2 m	3 m	2.5 m
Measurement category	IV 300 V	IV 300 V	IV 300 V	III 300 V	IV 600 V
Ingress protection			IP40		IP67

MPI-540-PV | Specifications – photovoltaic installation parameters

Measurement functions	Display range	Resolution	Accuracy ±(% m.v. + digits)
Open circuit voltage U_{oc}	0.0 V...1000 V	from 0.1 V	from ±(3% m.v. + 2 digits)
Short circuit current I_{sc}	0.00 A...20.00 A	0.1 A	±(3% m.v. + 0.10 A)

Other technical data

Safety and work conditions

Measuring category according to EN 61010	IV 300 V, III 500 V MPI-540-PV II 1000 V DC
--	---

Ingress protection	IP51
--------------------	------

Type of insulation according to EN 61010-1 and IEC 61557	double
--	--------

Dimensions	288 x 223 x 75 mm
------------	-------------------

Weight	ca. 2.5 kg
--------	------------

Operating temperature	0...+45°C
-----------------------	-----------

Storage temperature	-20...+60°C
---------------------	-------------

Humidity	20...90%
----------	----------

Nominal temperature	23 ± 2°C
---------------------	----------

Reference humidity	40%...60%
--------------------	-----------

Memory and communication

Memory of measurement results	unlimited
-------------------------------	-----------

Data transmission	USB 2.0
-------------------	---------

Other information

Quality standard – development, design and production	ISO 9001
---	----------

The product meets the EMC (emission for industrial environment) requirements according to standards	EN 61326-1 EN 61326-2-2
---	----------------------------



Standard accessories

	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start
 Solar radiation measurement set (IRM-1 solar radiation and temperature meter + IRM-1 mounting&measuring set + Z24 power supply + USB adapter for LoRa data transmission + M14 carrying case)	WMGBMPI540PVRM1	WMGBMPI540PV	WMGBMPI540PVNC	WMGBMPI540	WMGBMPI540NC
WMGBIRM1MPI	1				
 PVM-1 adapter	WAADAPVM1	1	1	1	
WAADAMC4					
 MC4-banana sockets adapter (set)	WAADAMC4	1	1	1	
WAADAWS03					
 WS-03 adapter with START button with UNI-Schuko plug (CAT III 300 V)	WACDAWS03	1	1	1	1
WACEGCPVOKR					
 C-PV clamp	WACEGCPVOKR	1	1	1	
WAADACPV					
 Adapter for C-PV clamp	WAADACPV	1	1	1	
WACEGF3AOKR					
 F-3A flexible clamp (Ø 120 mm)	WACEGF3AOKR	3	3		3
 Test lead 1.2 m (banana plugs) black / red / blue / yellow	WAPRZ1X2BLBBN / WAPRZ1X2REBB / WAPRZ1X2BUBB / WAPRZ1X2YEBB	1/1/1/1	1/1/1/1	1/1/1/1	1/1/1/1
 Crocodile clip 1 kV 20 A black / red / blue / yellow	WAKROBL20K01 / WAKRORE20K02 / WAKROBU20K02 / WAKROYE20K02	1/1/1/1	1/1/1/1	1/1/1/1	1/1/1/1
 Pin probe 1 kV (banana socket) red / blue / yellow	WASONREOGB1 / WASONBUOGB1 / WASONYEOGB1	1/1/1	1/1/1	1/1/1	1/1/1
 Test lead 15 m, blue (on a reel)	WAPRZ015BUBBSZ	1	1	1	1

Standard accessories

	MPI-540-PV Solar	MPI-540-PV	MPI-540-PV Start	MPI-540	MPI-540 Start
	Test lead 30 m, red (on a reel) WAPRZ030REBBSZ	1	1	1	1
	Earth contact test probe (rod), 30 cm WASONG30	2	2	2	2
	Voltage adapter with M4/M6 thread (set of 4 pcs.) WAADAM4M64	1	1	1	1
	USB cable WAPRZUSB	1	1	1	1
	4 GB microSD card WAPOZMSD4	1	1	1	1
	Mains cable with IEC C7 plug WAPRZLAD230	1	1	1	1
	Z-7 power supply WAZASZ7	1	1	1	1
	Cable for battery charging from car cigarette lighter socket (12 V) WAPRZLAD12SAM	1	1	1	1
	Li-Ion battery 11.1 V 3.4 Ah WAAKU15	1	1	1	1
	L-2 hanging straps (set) WAPOZSZEKPL	1	1	1	1
	Carrying case M-13 WAFUTM13	1	1	1	
	L-2 carrying case WAFUTL2	1	1	1	1
	Factory calibration certificate	1	1	1	1

Optional accessories



Solar radiation measurement set
only for
MPI-540-PV / MPI-540-PV Start
WMGBIRM1MPI



EVSE-01 adapter for testing vehicle charging stations
WAADAEVSE01



AutoISO-1000C adapter
WAADAAISO10C



F-1A flexible clamp (Ø 360 mm)
WACEGF1AOKR



F-2A flexible clamp (Ø 235 mm)
WACEGF2AOKR



F-3A flexible clamp (Ø 120 mm)
only for
MPI-540 Start / MPI-540-PV Start
WACEGF3AOKR



C-3 clamp (Ø 52 mm)
WACEGC3OKR



**C-4A clamp (Ø 52 mm)
1000 A AC**
WACEGC4AOKR



**C-5A clamp (Ø 39 mm)
1000 A AC/DC**
WACEGC5AOKR



**C-6A clamp (Ø 20 mm)
10 A AC**
WACEGC6AOKR



**C-7A clamp (Ø 24 mm)
100 A AC**
WACEGC7AOKR



N-1 transmitting clamp (Ø 52 mm)
WACEGN1BB



Three-phase socket adapter 16 A / 32 A
WAADAGT16C
WAADAGT32C



Three-phase socket adapter 16 A / 32 A
WAADAGT16P
WAADAGT32P



Three-phase socket adapter 63 A
WAADAGT63P



Industrial socket adapter 16 A / 32 A
WAADAGT16T
WAADAGT32T



WS-04 adapter with UNI-SCHUKO angular plug
WAADAWS04



Hard carrying case for clamps
WAWALL2



Cramp with banana socket
WAZACIMA1



Earth contact test probe 80 cm
WASONG80V2



L-3 carrying case (for 80 cm test probes)
WAFUTL3



LP-10A light meter probe with WS-06 plug
set
WAADALP10AKPL

only probe with miniDIN-4P plug
WAADALP10A

only WS-06 adapter with miniDIN-4P socket
WAADAWS06



LP-10B light meter probe with WS-06 plug
set
WAADALP10BKPL

only probe with miniDIN-4P plug
WAADALP10B

only WS-06 adapter with miniDIN-4P socket
WAADAWS06



LP-1 light meter probe with WS-06 plug
set
WAADALP1KPL

only probe with miniDIN-4P plug
WAADALP1

only WS-06 adapter with miniDIN-4P socket
WAADAWS06



Test lead for fault loop measurement (banana plugs)
5 m / 10 m / 20 m

WAPRZ005REBB
WAPRZ010REBB
WAPRZ020REBB



Test lead for earth resistance measurement
25 m / 50 m

WAPRZ025BUBBSZ
WAPRZ050YEBBSZ



Calibration certificate with accreditation