


1	BLACK HEATSHRINK SHALL COVER ANY EXPOSED CONDUCTORS.
2	BLACK TEXT ON WHITE BACKGROUND TEXT HEIGHT 5MM +/- 0.5 LABEL SHALL NOT SLIDE ALONG LENGTH OF CABLE

1	GENERIC	GENERIC	GENERIC 3-CORE UNSHIELDED CABLE 18AWG	GENERIC	GENERIC	AS NEEDED
2	Molex	0191310018	CONN SPADE TERM 14-16AWG #8 BLU	Digi-Key	WM19814-ND	3
3	TE Connectivity	5-19711773-3	CONN PLUG HSG 3POS 6.00MM	Digi-Key	A118776-ND	1
4	TE Connectivity	19711779-2	CONN FMBLADE SCK 12AWG CRMP TIN	Digi-Key	A117917C1-ND	3
5	GENERIC	GENERIC	GENERIC HEATSHRINK	GENERIC	GENERIC	AS NEEDED
6	GENERIC	GENERIC	GENERIC LABEL	GENERIC	GENERIC	1

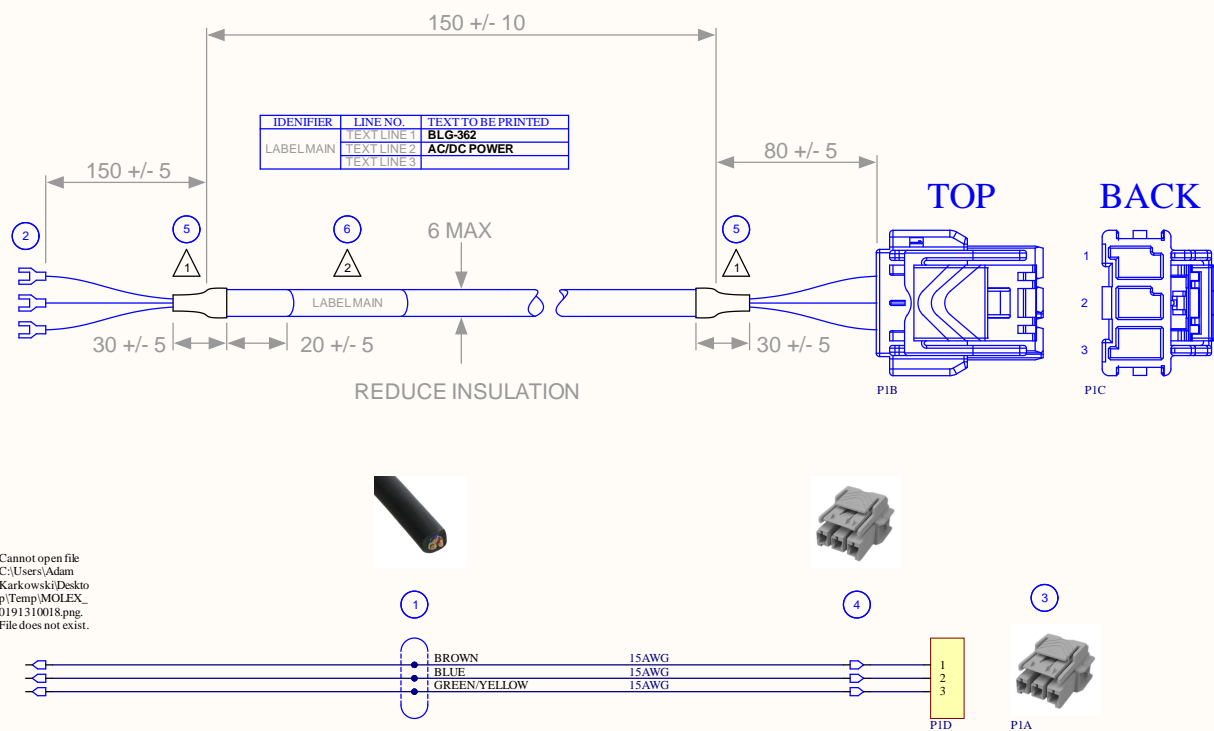

REVISION HISTORY	
R01	INITIAL DRAFT
R02	CHANGED LABEL TABLE, ADDED AWG CALLOUT TO EACH CORE

Title		
AC-DC TO POWER BOARD		
Size A3	Number BLG-362	Revision R02
Date: 8/23/2023	Sheet 1 of 1	
File: E:33_Workplace\AC-DC POWER SCH	Drawn By:	