1	TEXT HEIGHT 5 +/- 0.5 MM BLACK TEXT/WHITE BACKGROUND LABEL CHALL NOT SLIDE ALONG THE LENGTH OF CABLE
2	HEATSHRINK SHALL COVER END OF INSULATION

1	Mueller Electric Co	BU-46C-0L	GATOR CLIP COPPER INSULATED BLACK 75A	Digi-Key	314-1472-ND	1
2	Mueller Electric Co	BU-46C-2L	GATOR CLIP COPPER INSULATED RED 75A	Digi-Key	314-1473-ND	1
3	GENERIC	GENERIC	GENERIC 2-CORE UNSHIELDED CABLE 15AWG	GENERIC	GENERIC	AS NEEDED
4	GENERIC	GENERIC	GENERIC LABEL	GENERIC	GENERIC	1
5	GENERIC	GENERIC	GENERIC HEATSHRINK	GENERIC	GENERIC	AS NEEDED
6	Harwin Inc.	C90-3106F10SL-4S	CONN PLUG FMALE 2P SOLDER CUP	Digi-Key	952-1641-ND	1

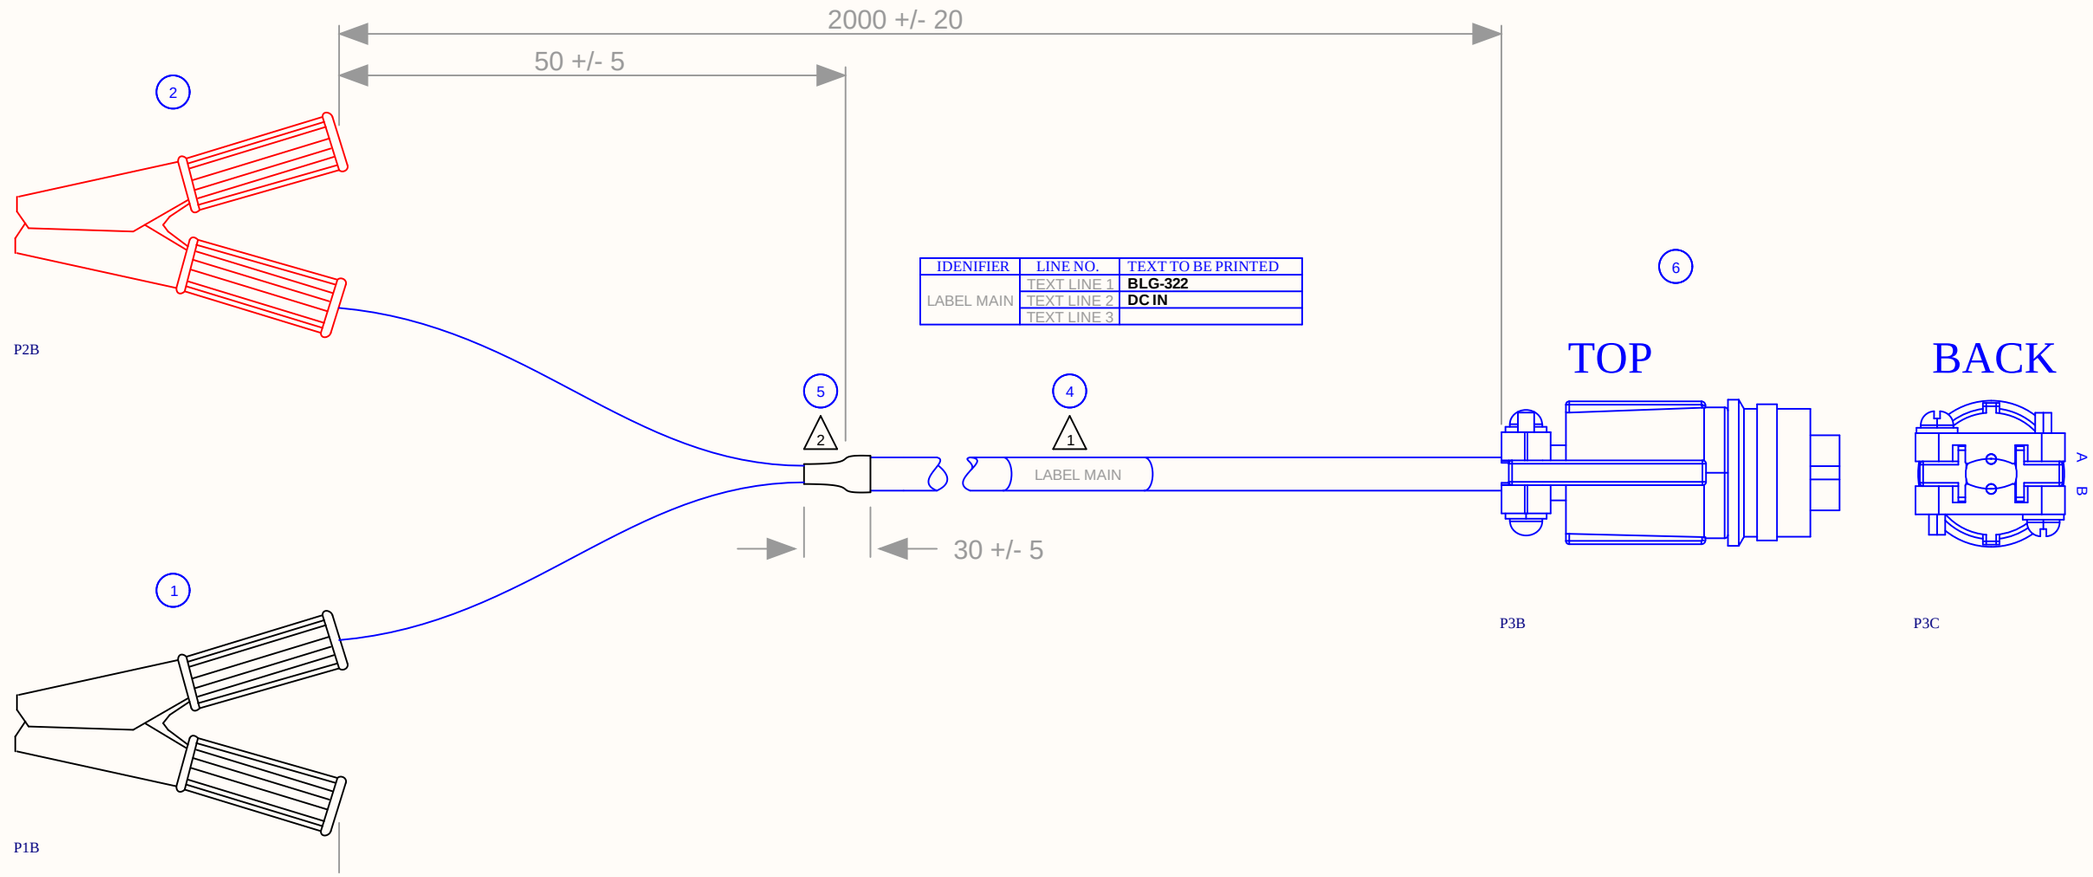

IDENIFIER	LINE NO.	TEXT TO BE PRINTED
LABEL MAIN	TEXT LINE 1	**BLG-322**
	TEXT LINE 2	**DC IN**
	TEXT LINE 3	

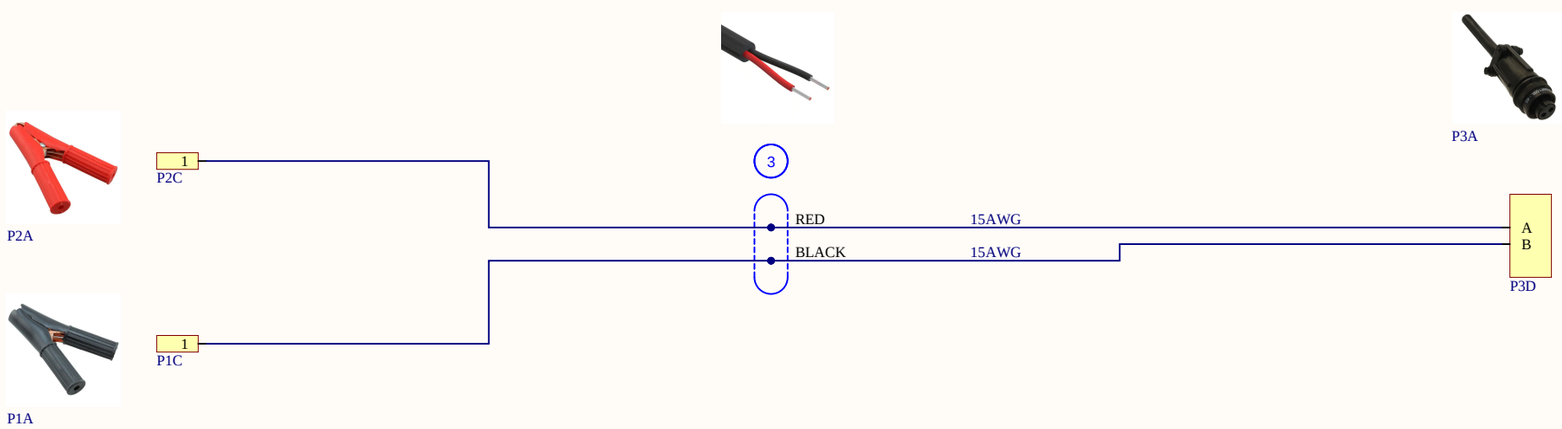

REVISION HISTORY	
R01	INITIAL DRAFT
R02	ADDED CABLE AWG, SPECIFIED LABEL TO BE FIXED IN PLACE.
R03	CHANGED LABEL TABLE, ADDED AWG CALLOUT TO ALL CORES

Title	DC IN	
Size A3	Number BLG-322	Revision R03
Date: 7/10/2023		Sheet 1 of 1
File: Z:\Windows Data\..\DC IN (BLG-322).SchDoc		Drawn By: