

- 1

TEXT HEIGHT 5+/-0.5 MM
BLACK TEXT/WHITE BACKGROUND
- 2


HEATSHRINK SHOULD COMPLETELY COVER ANY
EXPOSED BRAID/SHIELD
- 3

HEATSHRINK SHOULD COVER AS MUCH OF WIRE PAIR AS
POSSIBLE FROM UNDERNEATH (6) RIGHT UP TO (3)
- 4

TEXT HEIGHT 2 +/- 0.25 MM
BLACK TEXT/WHITE BACKGROUND
- 5

HEATSHRINK SHOULD MAKE A GOOD PURCHASE ON
BOTH CONNECTOR (3) AND HEATSHRINK (7)
PADDING MAY BE REQUIRED

ITEM NO.	MANUFACTURER	PART NUMBER	DESCRIPTION	SUPPLIER	SUPPLIER PART NO.	QTY
1	Santec Inc.	IP0106D-K	CONN RCPY HSG 12POS 2.54MM	Mouser	200-IP0106D-K	1
2	Santec Inc.	DC78L-2630-01-L	CONN SOCKET 26-28AWG CRIMP GOLD	Digi-Key	SAM0064-ND	12
3	TE Connectivity	1-1586019-2	CONN RCPY HSG 12POS 4.0MM	Digi-Key	AT11831-ND	1
4	GENERIC	GENERIC	6 TWISTED PAIR BRAIDED SHIELD 26-28AWG CABLE	GENERIC	GENERIC	AS NEEDED
5	GENERIC	GENERIC	Label 1	GENERIC	GENERIC	AS NEEDED
6	GENERIC	GENERIC	GENERIC HEATSHRINK	GENERIC	GENERIC	AS NEEDED
7	GENERIC	GENERIC	GENERIC HEATSHRINK	GENERIC	GENERIC	AS NEEDED
8	GENERIC	GENERIC	Label 51-59	GENERIC	GENERIC	AS NEEDED
9	GENERIC	GENERIC	GENERIC HEATSHRINK	GENERIC	GENERIC	AS NEEDED
10	TE Connectivity	794954-6	CONN SOCKET 22-28AWG CRIMP GOLD	Digi-Key	A30592-ND	12

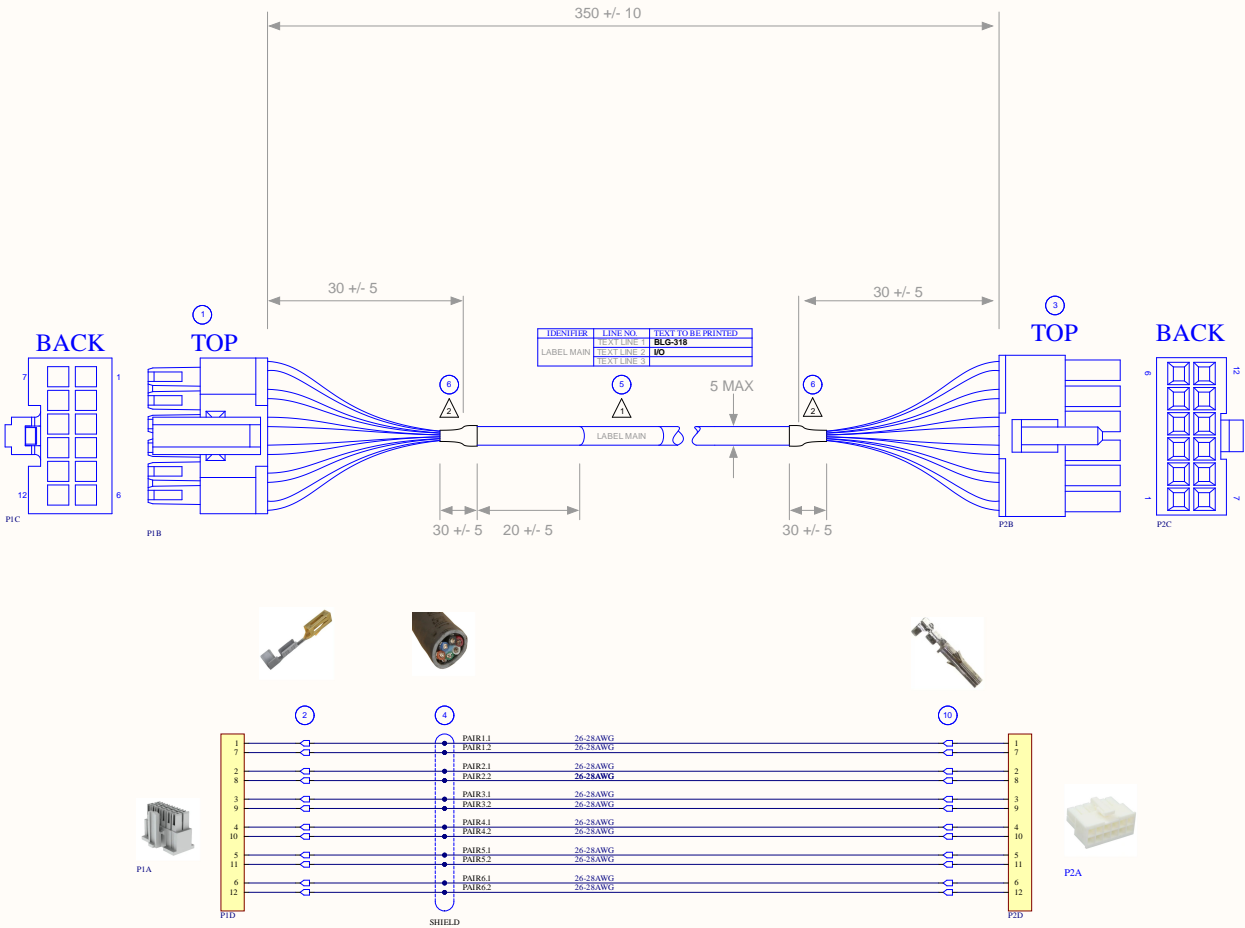

Title			
I-O			
Size	Number		Revision
A2	BLG-318		R04
Date:	8/21/2023	Sheet 1 of 1	
File:	E:\3-Workplace\ (I-O)\BLG-318\SchDwg Drawn By:		