



VISCON AUTOMATION

COMPANY / CUSTOMER	--	PI INDUSTRIES LTD.
PROJECT DESCRIPTION	--	10KL VCD SAP & LOP
TYPE OF MACHINE	--	VERTICAL CONE FILTER DRYER
JOB NUMBER	--	FND000698/2 & FND000698/3
DRAWING NUMBER -- VA-199		
QTY.	--	2 QTY
POWER SUPPLY	--	415V AC
CONTROL VOLTAGE	--	24V DC & 230V AC
NETFORM	--	105
REVISION	--	4
YEAR OF MANUFACTURING	--	2026
CREATED ON -- 02/02/2026		
EDIT DATE -- 31/03/2026		



SAP EXTERNAL GA




TOP VIEW



EXTERNAL
LHS VIEW



EXTERNAL FRONT VIEW



EXTERNAL
RHS VIEW




BOTTOM VIEW

	TECHNICAL SPECIFICATIONS ENCLOSURE	PANEL SIZE :- 2000x1600x500
1.	Enclosure-1 & 2:-	2000H X 800W X 500D (NCS20085R5)
2.	Height (H) :-	2000mm
3.	Width (W) :-	1600mm
4.	Depth (D) :-	500mm
5.	Mounting Plate Height :-	1894mm
6.	Mounting Plate Width :-	1494mm
7.	Max. Mounting Depth :-	459mm
8.	Color Code :-	RAL 7035
9.	Finish :-	Powder Coated
10.	Color :-	Light Gray

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : SAP EXTERNAL GA		= GEN
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 2
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	2 OF 105	

INTERNAL ARRANGEMENT VIEW

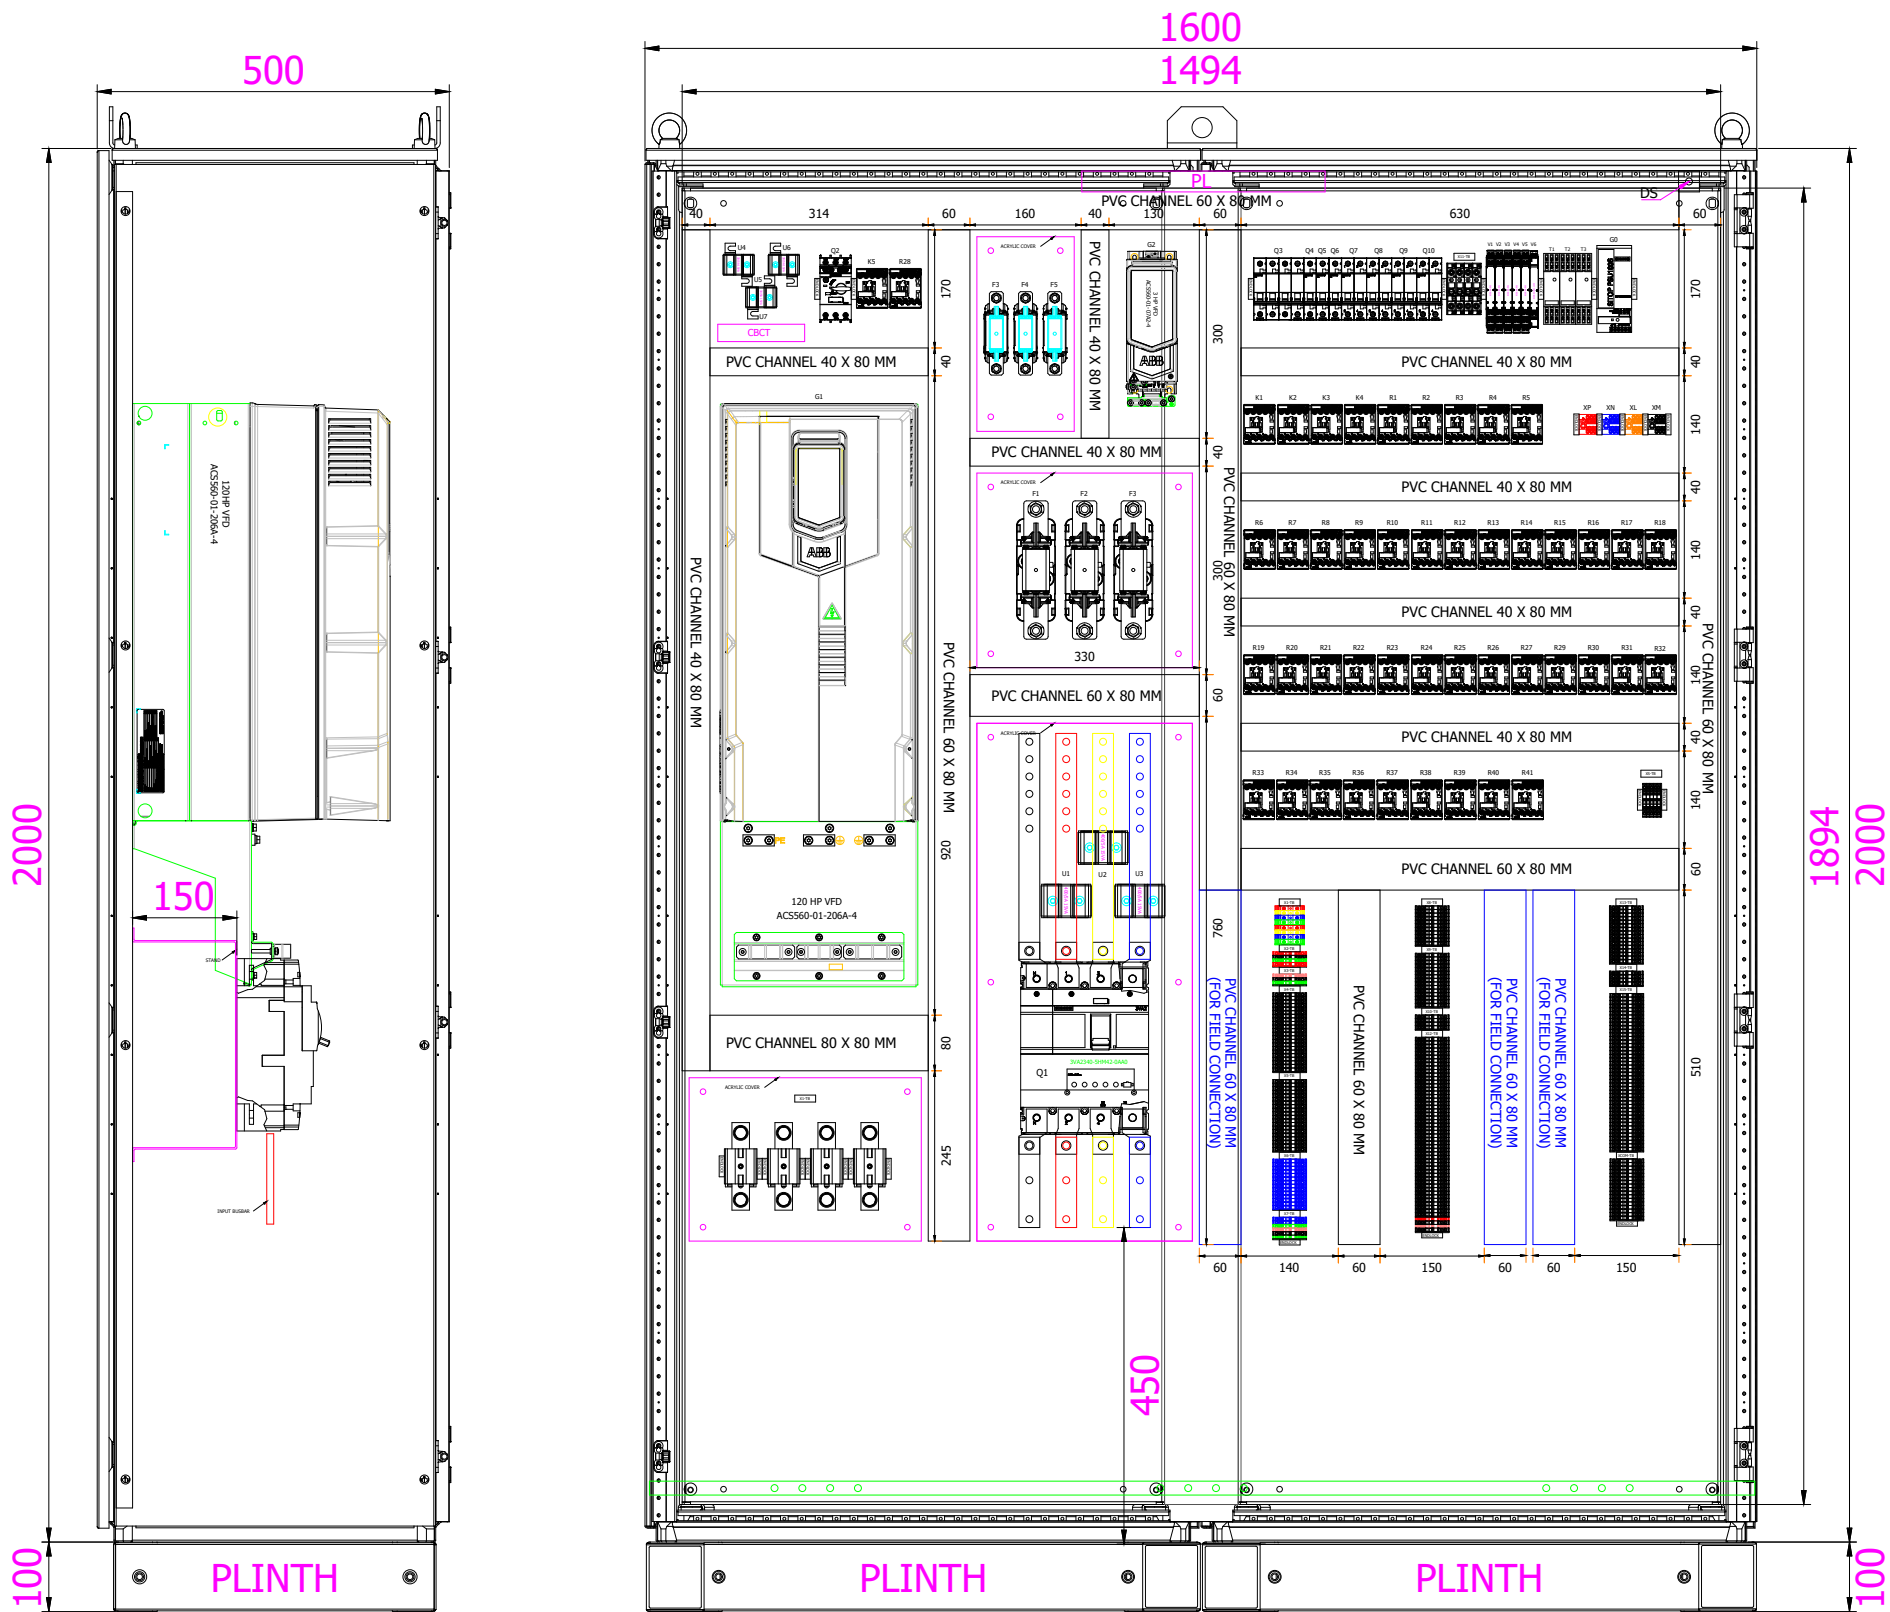


INTERNAL
LHS VIEW

INTERNAL FRONT VIEW

2										4
04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : SAP INTERNAL GA		= GEN
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 3
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	3 OF 105	

LOP EXTERNAL GA

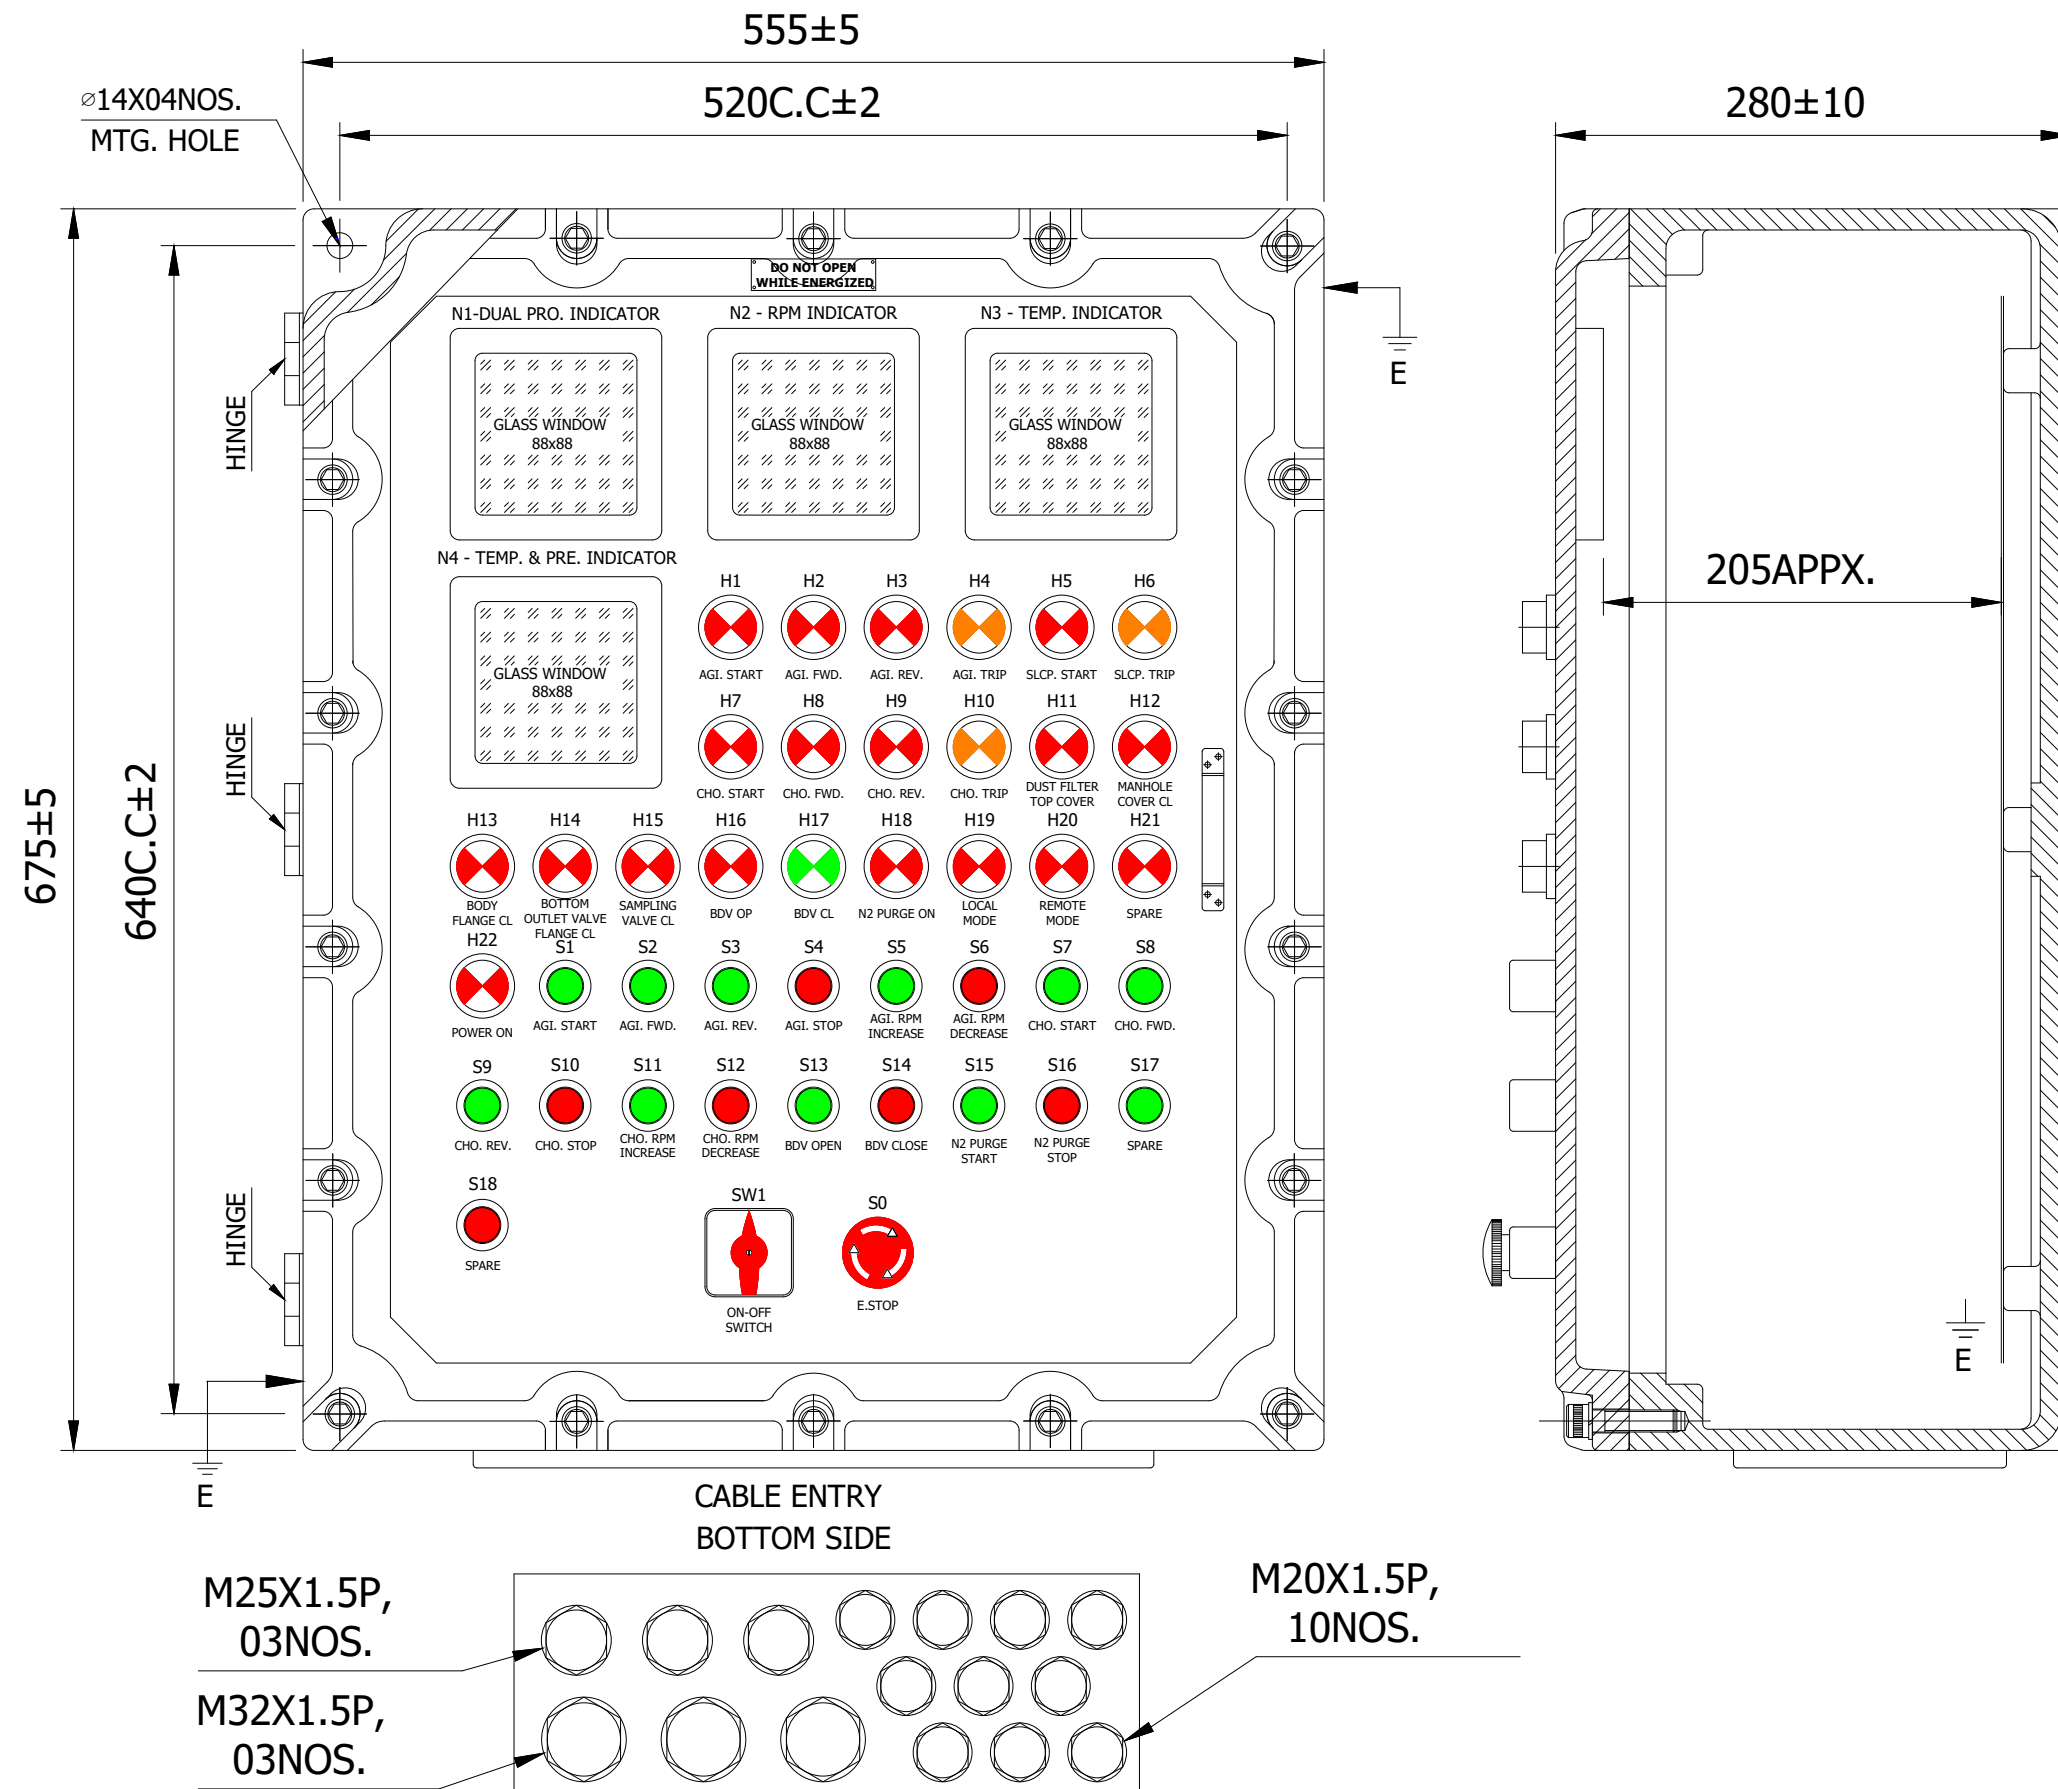

TECHNICAL DATA

ENCLOSURE TECHNICAL DATA

FLAMEPROOF PROTECTION :-
EX-d AS PER IS/IEC 60079-1:2014 SUITABLE FOR INSTALLATION
IN HAZARDOUS LOCATION OF GAS GROUP IIA & IIB, ZONE 1 & 2.

INGRESS PROTECTION :-
IP-65 AS PER IS/IEC 60529:2001 (REAFFIRMED 2014)

DUST IGNITION PROTECTION :-
(Ex 'db' IIB T6 Gb)(Ex tb/tc IIIC T85°C Db/Dc)
AS PER IS/IEC 60079-31:2013

TEMPERATURE CLASS :-
T6

ELECTRICAL RATING :-
UPTO 400Amp. at 1100V AC/DC

MATERIAL OF CONSTRUCTION :-
CAST AL ALLOY LM-6.

HARDWARE :-
STAINLESS STEEL/NICKEL PLATED STEEL

FINISH :-
DARK ADMIRALITY GREY SHADE 632 OF IS:5.


EARTHING :-
1 NO. INSIDE & 2 NOS. OUTSIDE

CABLE ENTRY :-
M32 X 1.5P - 03NOS.
M25 X 1.5P - 03NOS.
M20 X 1.5P - 10NOS.

FLP DC BRASS NI. PLATED CABLE GLAND :-
M32 X 1.5 - 02 NOS. (KCE - 5A)
M25 X 1.5 - 02 NOS. (KCE - 03)
M20 X 1.5 - 04 NOS. (KCE - 1S)
M20 X 1.5 - 03 NOS. (KCE - 01)
M20 X 1.5 - 02 NOS. (KCE - 02)

FLP BRASS NI. PLATED PLUG :-
M32 X 1.5 - 01 NOS.
M25 X 1.5 - 01 NOS.
M20 X 1.5 - 01 NOS.

LOP INTERNAL GA

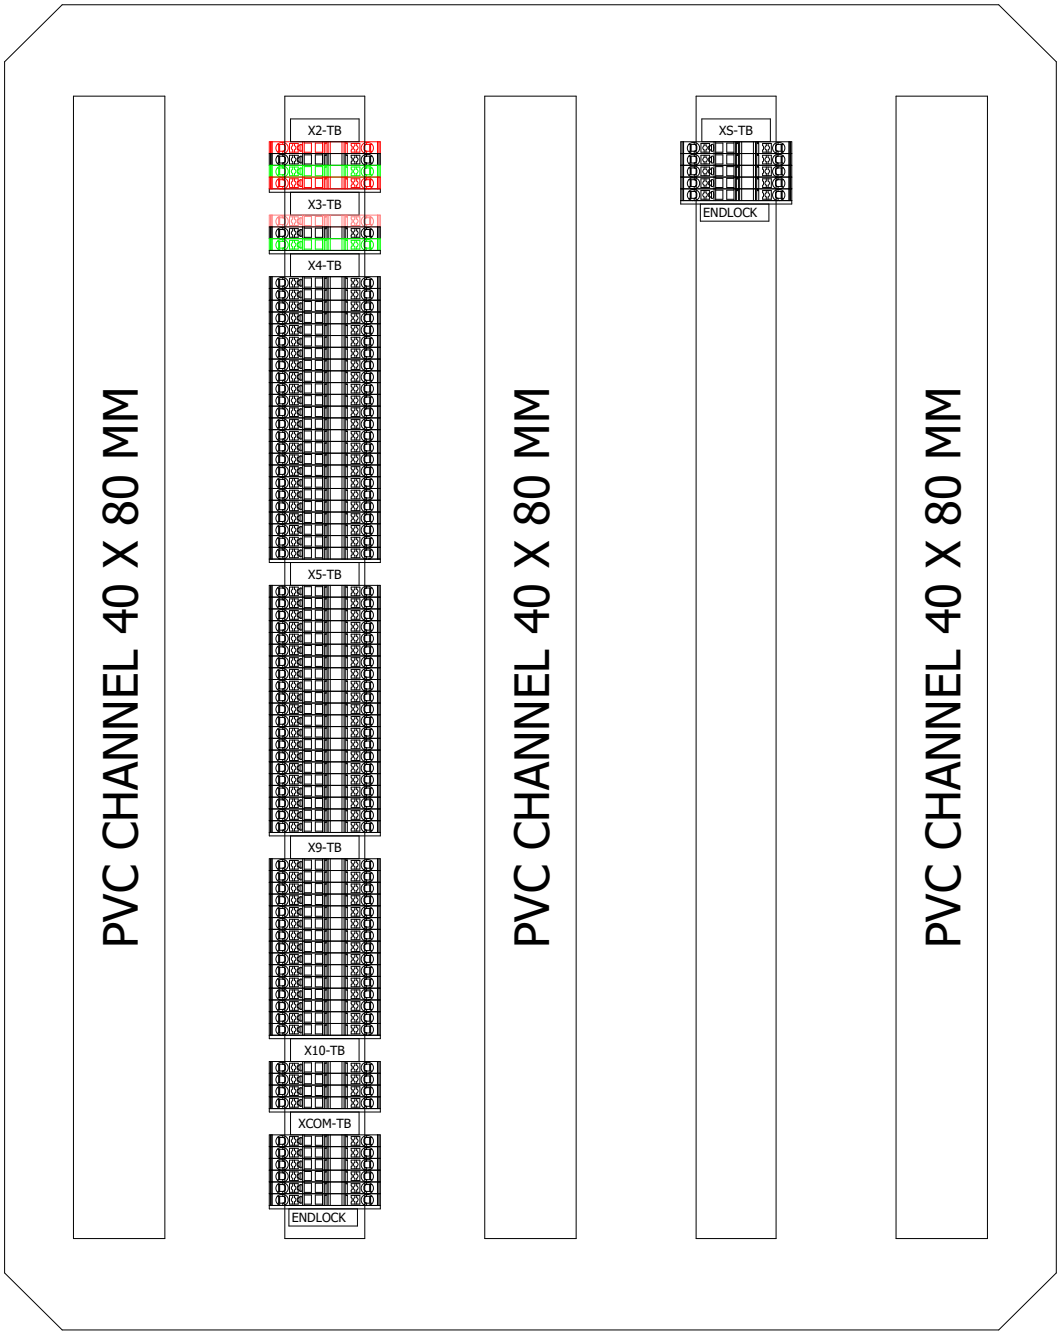

MATERIAL MOUNTING PLATE DETAILS

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : LOP INTERNAL GA	= GEN
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. : SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	5 OF 105

Structure identifier overview

Full designation	Labeling	Structure description
=GEN	Function designation	GENRAL INFORMATION
=VCD	Function designation	10KL VCD
=REPORT	Function designation	REPORTS
=SAP	Function designation	SAFE AREA CONTROL PANEL - 0326
+LOP	Location designation	FLAMEPROOF AREA LOCAL OPERATING PANEL - 0159
+CO	Location designation	CABLE OVERVIEW
+CD	Location designation	CABLE DIAGRAM
+TD	Location designation	TERMINAL DIAGRAM
+EXT	Location designation	EXTERNAL INSTALLATION
+JB	Location designation	JUNCTION BOX

Table of contents

Page	Page type	Page description	Date	Edited by
=GEN/1	Title page / cover sheet	Title page / cover sheet	31-03-2026	NAYAN PANCHAL
=GEN/2	Panel layout	SAP EXTERNAL GA	30-03-2026	NAYAN PANCHAL
=GEN/3	Panel layout	SAP INTERNAL GA	30-03-2026	NAYAN PANCHAL
=GEN/4	Panel layout	LOP EXTERNAL GA	31-03-2026	NAYAN PANCHAL
=GEN/5	Panel layout	LOP INTERNAL GA	30-03-2026	NAYAN PANCHAL
=GEN/6	Structure identifier overview	Structure identifier overview	30-03-2026	NAYAN PANCHAL
=GEN/7	Table of contents	Table of contents : =GEN/1 - =VCD/28	31-03-2026	NAYAN PANCHAL
=GEN/8	Table of contents	Table of contents : =VCD/29 - =REPORT+CD/56	31-03-2026	NAYAN PANCHAL
=GEN/9	Table of contents	Table of contents : =REPORT+CD/57 - =REPORT+TD/84	31-03-2026	NAYAN PANCHAL
=GEN/10	Table of contents	Table of contents : =REPORT+TD/85 - =REPORT+TD/105	31-03-2026	NAYAN PANCHAL
=GEN/11	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/12	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/13	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/14	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/15	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/16	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/17	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/18	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/19	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=GEN/20	Parts list	SAP & LOP - BILL OF MATERIALS	30-03-2026	NAYAN PANCHAL
=VCD/21	Schematic multi-line	MAIN SUPPLY	30-03-2026	NAYAN PANCHAL
=VCD/22	Schematic multi-line	PHASE INDICATION LAMP	30-03-2026	NAYAN PANCHAL
=VCD/23	Schematic multi-line	MFM METER AND DUAL PROCESS INDICATOR	30-03-2026	NAYAN PANCHAL
=VCD/24	Schematic multi-line	EMERGENCY	30-03-2026	NAYAN PANCHAL
=VCD/25	Schematic multi-line	PANEL LIGHT & FAN	30-03-2026	NAYAN PANCHAL
=VCD/26	Schematic multi-line	SMPS	30-03-2026	NAYAN PANCHAL
=VCD/27	Schematic multi-line	MOTOR PROTECTION DEVICE	30-03-2026	NAYAN PANCHAL
=VCD/28	Schematic multi-line	VFD-1_AGITATOR MOTOR	31-03-2026	NAYAN PANCHAL

Table of contents

Page	Page type	Page description	Date	Edited by
=VCD/29	Schematic multi-line	CONTROL WIRING	31-03-2026	NAYAN PANCHAL
=VCD/30	Schematic multi-line	VFD-2_CHOPPER MOTOR	31-03-2026	NAYAN PANCHAL
=VCD/31	Schematic multi-line	CONTROL WIRING	30-03-2026	NAYAN PANCHAL
=VCD/32	Schematic multi-line	DOL_SEAL LESS CIRCULATION PUMP	30-03-2026	NAYAN PANCHAL
=VCD/33	Schematic multi-line	INDICATOR WIRING	30-03-2026	NAYAN PANCHAL
=VCD/34	Schematic multi-line	LOP CONTROL WIRING	30-03-2026	NAYAN PANCHAL
=VCD/35	Schematic multi-line	LOP CONTROL WIRING	30-03-2026	NAYAN PANCHAL
=VCD/36	Schematic multi-line	LOP CONTROL WIRING	30-03-2026	NAYAN PANCHAL
=VCD/37	Schematic multi-line	LOP CONTROL WIRING	30-03-2026	NAYAN PANCHAL
=VCD/38	Schematic multi-line	LOP CONTROL WIRING	30-03-2026	NAYAN PANCHAL
=VCD/39	Schematic multi-line	LOP CONTROL WIRING	30-03-2026	NAYAN PANCHAL
=VCD/40	Schematic multi-line	PROXY SWITCH	30-03-2026	NAYAN PANCHAL
=VCD/41	Schematic multi-line	PROXY SWITCH	30-03-2026	NAYAN PANCHAL
=VCD/42	Schematic multi-line	PROXY SWITCH	30-03-2026	NAYAN PANCHAL
=VCD/43	Schematic multi-line	PROXY SWITCH	30-03-2026	NAYAN PANCHAL
=VCD/44	Schematic multi-line	SOV	30-03-2026	NAYAN PANCHAL
=VCD/45	Schematic multi-line	RTD SENSOR & TRANSMITTER	30-03-2026	NAYAN PANCHAL
=VCD/46	Schematic multi-line	DCS DIGITAL INPUT	30-03-2026	NAYAN PANCHAL
=VCD/47	Schematic multi-line	DCS DIGITAL INPUT	30-03-2026	NAYAN PANCHAL
=VCD/48	Schematic multi-line	DCS DIGITAL OUTPUT	31-03-2026	NAYAN PANCHAL
=VCD/49	Schematic multi-line	DCS ANALOG OUTPUT	30-03-2026	NAYAN PANCHAL
=REPORT+CO/50	Cable overview	Cable overview : =VCD+-W0 - =VCD+JB-W13	30-03-2026	NAYAN PANCHAL
=REPORT+CD/51	Cable diagram	Cable diagram =VCD+-W0	30-03-2026	NAYAN PANCHAL
=REPORT+CD/52	Cable diagram	Cable diagram =VCD+-W1	30-03-2026	NAYAN PANCHAL
=REPORT+CD/53	Cable diagram	Cable diagram =VCD+-W2	30-03-2026	NAYAN PANCHAL
=REPORT+CD/54	Cable diagram	Cable diagram =VCD+-W3	30-03-2026	NAYAN PANCHAL
=REPORT+CD/55	Cable diagram	Cable diagram =VCD+-W4	30-03-2026	NAYAN PANCHAL
=REPORT+CD/56	Cable diagram	Cable diagram =VCD+-W5	30-03-2026	NAYAN PANCHAL

Table of contents

Page	Page type	Page description	Date	Edited by
=REPORT+CD/57	Cable diagram	Cable diagram =VCD+-W6	30-03-2026	NAYAN PANCHAL
=REPORT+CD/58	Cable diagram	Cable diagram =VCD+-W6	30-03-2026	NAYAN PANCHAL
=REPORT+CD/59	Cable diagram	Cable diagram =VCD+-W7	30-03-2026	NAYAN PANCHAL
=REPORT+CD/60	Cable diagram	Cable diagram =VCD+-W8	30-03-2026	NAYAN PANCHAL
=REPORT+CD/61	Cable diagram	Cable diagram =VCD+-W8	30-03-2026	NAYAN PANCHAL
=REPORT+CD/62	Cable diagram	Cable diagram =VCD+-W9	30-03-2026	NAYAN PANCHAL
=REPORT+CD/63	Cable diagram	Cable diagram =VCD+-W10	30-03-2026	NAYAN PANCHAL
=REPORT+CD/64	Cable diagram	Cable diagram =VCD+-W11	30-03-2026	NAYAN PANCHAL
=REPORT+CD/65	Cable diagram	Cable diagram =VCD+JB-W1	30-03-2026	NAYAN PANCHAL
=REPORT+CD/66	Cable diagram	Cable diagram =VCD+JB-W2	30-03-2026	NAYAN PANCHAL
=REPORT+CD/67	Cable diagram	Cable diagram =VCD+JB-W3	30-03-2026	NAYAN PANCHAL
=REPORT+CD/68	Cable diagram	Cable diagram =VCD+JB-W4	30-03-2026	NAYAN PANCHAL
=REPORT+CD/69	Cable diagram	Cable diagram =VCD+JB-W5	30-03-2026	NAYAN PANCHAL
=REPORT+CD/70	Cable diagram	Cable diagram =VCD+JB-W6	30-03-2026	NAYAN PANCHAL
=REPORT+CD/71	Cable diagram	Cable diagram =VCD+JB-W7	30-03-2026	NAYAN PANCHAL
=REPORT+CD/72	Cable diagram	Cable diagram =VCD+JB-W8	30-03-2026	NAYAN PANCHAL
=REPORT+CD/73	Cable diagram	Cable diagram =VCD+JB-W9	30-03-2026	NAYAN PANCHAL
=REPORT+CD/74	Cable diagram	Cable diagram =VCD+JB-W10	30-03-2026	NAYAN PANCHAL
=REPORT+CD/75	Cable diagram	Cable diagram =VCD+JB-W11	30-03-2026	NAYAN PANCHAL
=REPORT+CD/76	Cable diagram	Cable diagram =VCD+JB-W12	30-03-2026	NAYAN PANCHAL
=REPORT+CD/77	Cable diagram	Cable diagram =VCD+JB-W13	30-03-2026	NAYAN PANCHAL
=REPORT+TD/78	Terminal diagram	Terminal diagram =VCD+-X1	31-03-2026	NAYAN PANCHAL
=REPORT+TD/79	Terminal diagram	Terminal diagram =VCD+-X2	31-03-2026	NAYAN PANCHAL
=REPORT+TD/80	Terminal diagram	Terminal diagram =VCD+-X3	31-03-2026	NAYAN PANCHAL
=REPORT+TD/81	Terminal diagram	Terminal diagram =VCD+-X4	31-03-2026	NAYAN PANCHAL
=REPORT+TD/82	Terminal diagram	Terminal diagram =VCD+-X5	31-03-2026	NAYAN PANCHAL
=REPORT+TD/83	Terminal diagram	Terminal diagram =VCD+-X6	31-03-2026	NAYAN PANCHAL
=REPORT+TD/84	Terminal diagram	Terminal diagram =VCD+-X7	31-03-2026	NAYAN PANCHAL

Table of contents

Page	Page type	Page description	Date	Edited by
=REPORT+TD/85	Terminal diagram	Terminal diagram =VCD+-X8	31-03-2026	NAYAN PANCHAL
=REPORT+TD/86	Terminal diagram	Terminal diagram =VCD+-X9	31-03-2026	NAYAN PANCHAL
=REPORT+TD/87	Terminal diagram	Terminal diagram =VCD+-X10	31-03-2026	NAYAN PANCHAL
=REPORT+TD/88	Terminal diagram	Terminal diagram =VCD+-X12	31-03-2026	NAYAN PANCHAL
=REPORT+TD/89	Terminal diagram	Terminal diagram =VCD+-X12	31-03-2026	NAYAN PANCHAL
=REPORT+TD/90	Terminal diagram	Terminal diagram =VCD+-X13	31-03-2026	NAYAN PANCHAL
=REPORT+TD/91	Terminal diagram	Terminal diagram =VCD+-X14	31-03-2026	NAYAN PANCHAL
=REPORT+TD/92	Terminal diagram	Terminal diagram =VCD+-X15	31-03-2026	NAYAN PANCHAL
=REPORT+TD/93	Terminal diagram	Terminal diagram =VCD+-X15	31-03-2026	NAYAN PANCHAL
=REPORT+TD/94	Terminal diagram	Terminal diagram =VCD+-XCOM	31-03-2026	NAYAN PANCHAL
=REPORT+TD/95	Terminal diagram	Terminal diagram =VCD+-XS	31-03-2026	NAYAN PANCHAL
=REPORT+TD/96	Terminal diagram	Terminal diagram =VCD+LOP-X2	31-03-2026	NAYAN PANCHAL
=REPORT+TD/97	Terminal diagram	Terminal diagram =VCD+LOP-X3	31-03-2026	NAYAN PANCHAL
=REPORT+TD/98	Terminal diagram	Terminal diagram =VCD+LOP-X4	31-03-2026	NAYAN PANCHAL
=REPORT+TD/99	Terminal diagram	Terminal diagram =VCD+LOP-X5	31-03-2026	NAYAN PANCHAL
=REPORT+TD/100	Terminal diagram	Terminal diagram =VCD+LOP-X9	31-03-2026	NAYAN PANCHAL
=REPORT+TD/101	Terminal diagram	Terminal diagram =VCD+LOP-X10	31-03-2026	NAYAN PANCHAL
=REPORT+TD/102	Terminal diagram	Terminal diagram =VCD+LOP-XCOM	31-03-2026	NAYAN PANCHAL
=REPORT+TD/103	Terminal diagram	Terminal diagram =VCD+LOP-XS	31-03-2026	NAYAN PANCHAL
=REPORT+TD/104	Terminal diagram	Terminal diagram =VCD+JB-XJ	31-03-2026	NAYAN PANCHAL
=REPORT+TD/105	Terminal diagram	Terminal diagram =VCD+JB-XJ	31-03-2026	NAYAN PANCHAL

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
1	-EL1	Floor Standing, 2000X800X500, Combianble Enclosure, 1-Door, Mild Seel, IP55	nVent Hoffman	NCS20085R5	1	/3.1
2	-EL2	Floor Standing, 2000X800X500, Combianble Enclosure, 1-Door, Mild Seel, IP55	nVent Hoffman	NCS20085R5	1	/3.3
3	-LOP	Flameproof Operating Panel	Kaysons Techno	-	1	/5.1
4	-DS	Door Limit Switch 230V AC, 1 NO + 1 NC	Siemens	3SE30200AZ1	1	=VCD/25.1
5	-F1	350A, 690 Volt AC HRC Fuse with Fuse Base	Bussman	170M3818	1	=VCD/28.0
6	-F2	350A, 690 Volt AC HRC Fuse with Fuse Base	Bussman	170M3818	1	=VCD/28.1
7	-F3	350A, 690 Volt AC HRC Fuse with Fuse Base	Bussman	170M3818	1	=VCD/28.1
8	-F4	40A, 690 Volt AC HRC Fuse with Fuse Base	Bussman	170M2696	1	=VCD/30.0
9	-F5	40A, 690 Volt AC HRC Fuse with Fuse Base	Bussman	170M2696	1	=VCD/30.1
10	-F6	40A, 690 Volt AC HRC Fuse with Fuse Base	Bussman	170M2696	1	=VCD/30.1
11	-FAN 1	Panel Fan 8" Size with Metal Blade + Air Vent	Hicool	22A230HSAC	1	=VCD/25.1
12	-FAN 2	Panel Fan 8" Size with Metal Blade + Air Vent	Hicool	22A230HSAC	1	=VCD/25.2
13	-FAN 3	Panel Fan 8" Size with Metal Blade + Air Vent	Hicool	22A230HSAC	1	=VCD/25.3
14	-FAN 4	Panel Fan 8" Size with Metal Blade + Air Vent	Hicool	22A230HSAC	1	=VCD/25.4
15	-G0	SMPS 5 Amp, Single Phase 230 VAC Input, 24 V DC Output, Din Rail Mounted, SITOP PSU	Siemens	SIE.6EP1333-2BA20	1	=VCD/26.1
16	-G1	3-phase, 380–480 V, 90kW/169A Heavy Duty VFD	ABB	ACS560-01-206A-4	1	=VCD/28.0
17	-G1	Standard Assisant Panel Display	ABB	ACS-AP-S	1	=VCD/28.8
18	-G1	Door Mounting Kit	ABB	DPMP-EXT	1	=VCD/28.8
19	-G2	3-phase, 380–480 V, 2.2 kW/5.6 A Heavy Duty VFD	ABB	ACS560-01-07A2-4	1	=VCD/30.0
20	-G2	Standard Assisant Panel Display	ABB	ACS-AP-S	1	=VCD/30.8
21	-G2	Door Mounting Kit	ABB	DPMP-EXT	1	=VCD/30.8
22	-H1	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/22.4
23	-H2	Yellow Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HD03	1	=VCD/22.4
24	-H3	Blue Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HF03	1	=VCD/22.5
25	-H4	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/21.2
26	-H5	Green Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HE03	1	=VCD/21.3
27	-H6	Amber Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HL03	1	=VCD/21.2
28	-H7	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/27.5
29	-H8	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/27.5

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
30	-H9	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/27.6
31	-H10	Amber Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HL03	1	=VCD/27.7
32	-H11	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/27.8
33	-H12	Amber Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HL03	1	=VCD/27.9
34	-H13	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/27.6
35	-H14	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/27.7
36	-H15	Red Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HC03	1	=VCD/27.7
37	-H16	Amber Compact LED indicating lamp, Voltage: 220V/240V AC	Siemens	3SB5285-6HL03	1	=VCD/27.8
38	-K1	Auxiliary switch, on the front, 2 NO + 2 NC	Siemens	3RH2911-1NE22	1	=VCD/29.5
39	-K1	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/29.5
40	-K2	Auxiliary switch, on the front, 2 NO + 2 NC	Siemens	3RH2911-1NE22	1	=VCD/29.7
41	-K2	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/29.7
42	-K3	Auxiliary switch, on the front, 2 NO + 2 NC	Siemens	3RH2911-1NE22	1	=VCD/31.5
43	-K3	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/31.5
44	-K4	Auxiliary switch, on the front, 2 NO + 2 NC	Siemens	3RH2911-1NE22	1	=VCD/31.7
45	-K4	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/31.7
46	-K5	Auxiliary switch, on the front, 2 NO + 2 NC	Siemens	3RH2911-1NE22	1	=VCD/32.4
47	-K5	AC3: 7A 3P Power Contactor, Coil: 230V AC, Aux. Contact: 1NO, Size: S00, Type: 3RT	Siemens	3RT2015-1AP018K	1	=VCD/32.4
48	-N1	MFM Meter, Acc. CL: 0.5s, Aux. Supply: 80-300V AC/DC	Secure	Elite 444	1	=VCD/23.1
49	-N2	Intelligent Motor Protection Device	Softhard	I.MWM	1	=VCD/27.2
50	-PL	Led Tubelight, 1 Feet Lnog, Aux Supply : 230V AC, 5 WATT	Philips	ASTRALINE	1	=VCD/25.5
51	-Q1	Spreader Links - Broadened (with phase barriers) (one set = 4 links+ 3 phase barriers) for	Siemens	3VA9484-0QC50	2	=VCD/21.3
52	-Q1	Extended Door Mounted Rotary Operator (including 8UC handle) for 3VA13/14 400A/630A	Siemens	3VA9467-0FK51	1	=VCD/21.3
53	-Q1	Auxiliary Switch (AUX) (1C/O)	Siemens	3VA9988-0AA12	2	=VCD/21.3
54	-Q1	Trip Alarm Switch (TAS) (1C/O)	Siemens	3VA9988-0AB12	2	=VCD/21.2
55	-Q1	400A 4P 55kA MCCB, Release: Microprocessor Trip Unit, ETU330 LIG, Type: 3VA23	Siemens	3VA2340-5HM42-0AA0	1	=VCD/21.6
56	-Q2	0.8A 100kA (400V AC), Acc. Cl: 10 MPCB, Release: TM Release, Size: S00, Range:	Siemens	3RV2011-0HA10	1	=VCD/32.1
57	-Q3	2A 4P 10kA C-Curve MCB	Siemens	5SL44027RC	1	=VCD/27.2
58	-Q4	2A 1P 10kA C-Curve MCB	Siemens	5SL41027RC	1	=VCD/22.4

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
59	-Q5	2A 1P 10kA C-Curve MCB	Siemens	5SL41027RC	1	=VCD/22.4
60	-Q6	2A 1P 10kA C-Curve MCB	Siemens	5SL41027RC	1	=VCD/22.5
61	-Q7	6A 2P 10kA C-Curve MCB	Siemens	5SL42067RC	1	=VCD/23.1
62	-Q8	6A 2P 10kA C-Curve MCB	Siemens	5SL42067RC	1	=VCD/24.1
63	-Q9	6A 2P 10kA C-Curve MCB	Siemens	5SL42067RC	1	=VCD/25.1
64	-Q10	6A 2P 10kA C-Curve MCB	Siemens	5SL42067RC	1	=VCD/26.1
65	-R1	Auxiliary switch, on the front, 4 NO	Siemens	3RH2911-1XA40-0MA0	1	=VCD/40.1
66	-R1	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/40.1
67	-R2	Auxiliary switch, on the front, 4 NO	Siemens	3RH2911-1XA40-0MA0	1	=VCD/40.2
68	-R2	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/40.2
69	-R3	Auxiliary switch, on the front, 4 NO	Siemens	3RH2911-1XA40-0MA0	1	=VCD/41.1
70	-R3	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/41.1
71	-R4	Auxiliary switch, on the front, 4 NO	Siemens	3RH2911-1XA40-0MA0	1	=VCD/41.2
72	-R4	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/41.2
73	-R5	Auxiliary switch, on the front, 4 NO	Siemens	3RH2911-1XA40-0MA0	1	=VCD/42.1
74	-R5	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/42.1
75	-R6	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/42.2
76	-R7	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/43.1
77	-R8	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/34.3
78	-R9	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/34.4
79	-R10	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/34.5
80	-R11	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/34.6
81	-R12	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/35.0
82	-R13	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 2NO + 2NC, Size: S00, Type: 3RH2	Siemens	3RH2122-1AP00	1	=VCD/35.1
83	-R14	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 2NO + 2NC, Size: S00, Type: 3RH2	Siemens	3RH2122-1AP00	1	=VCD/35.2
84	-R15	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/35.3
85	-R16	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/35.8
86	-R17	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/36.4
87	-R18	Auxiliary switch, on the front, 4 NO	Siemens	3RH2911-1XA40-0MA0	1	=VCD/29.3

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
88	-R18	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/29.3
89	-R19	Auxiliary switch, on the front, 4 NO	Siemens	3RH2911-1XA40-0MA0	1	=VCD/31.4
90	-R19	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/31.3
91	-R20	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/44.4
92	-R21	Auxiliary switch, on the front, 2 NO + 2 NC	Siemens	3RH2911-1NE22	1	=VCD/28.8
93	-R21	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/28.8
94	-R22	Auxiliary switch, on the front, 2 NC	Siemens	3RH2911-1MA02	1	=VCD/30.8
95	-R22	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/30.8
96	-R23	Auxiliary switch, on the front, 4 NC	Siemens	3RH2911-1XA04-0MA0	1	=VCD/44.6
97	-R23	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/44.6
98	-R24	Auxiliary switch, on the front, 4 NC	Siemens	3RH2911-1XA04-0MA0	1	=VCD/44.7
99	-R24	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/44.7
100	-R25	Auxiliary switch, on the front, 4 NC	Siemens	3RH2911-1XA04-0MA0	1	=VCD/44.8
101	-R25	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/44.8
102	-R26	Auxiliary switch, on the front, 4 NC	Siemens	3RH2911-1XA04-0MA0	1	=VCD/44.8
103	-R26	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/44.8
104	-R27	Auxiliary switch, on the front, 2 NO + 2 NC	Siemens	3RH2911-1NE22	1	=VCD/27.4
105	-R27	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/27.4
106	-R28	Auxiliary switch, on the front, 2 NC	Siemens	3RH2911-1MA02	1	=VCD/32.6
107	-R28	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/32.6
108	-R29	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.1
109	-R30	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.2
110	-R31	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.3
111	-R32	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.4
112	-R33	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.5
113	-R34	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.6
114	-R35	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.8
115	-R36	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/48.9
116	-R37	10A Auxiliary Contactor, Coil: 24V DC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1BB408K	1	=VCD/44.9

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
117	-R38	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/34.8
118	-R39	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/34.9
119	-R40	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/35.6
120	-R41	10A Auxiliary Contactor, Coil: 230V AC, Aux Contact: 4NO, Size: S00, Type: 3RH2	Siemens	3RH2140-1AP008K	1	=VCD/35.6
121	-S0	Red Mushroom push to trip, turn to release actuator(40 mm ø) for Emergency Stop	Siemens	3SB5000-0UC01	1	=VCD/24.1
122	-SW1	Contact block, 1 NC, screw terminal, front plate mounting	Siemens	3SB5400-0C	1	=VCD/44.6
123	-SW1	Key switch, 22 mm, round, plastic, 2 positions O-I, maintained	Siemens	3SB5000-4AB01	1	=VCD/44.6
124	-T1	Timing relay, electronic OFF delay 1 change-over contact	Siemens	3RP1533-1AP308K	1	=VCD/34.6
125	-T2	Timing relay, electronic OFF delay 1 change-over contact	Siemens	3RP1533-1AP308K	1	=VCD/35.4
126	-T3	Timing relay, Multifunction 1 change-over contact, 8 functions 15 time ranges	Siemens	3RP1505-1AW308K	1	=VCD/36.2
127	-U1	400/5A 15VA Acc. Cl: 0.5 Tape Wound Ring Type Current Transformer	TRIO	NA	1	=VCD/22.1
128	-U2	400/5A 15VA Acc. Cl: 0.5 Tape Wound Ring Type Current Transformer	TRIO	NA	1	=VCD/22.2
129	-U3	400/5A 15VA Acc. Cl: 0.5 Tape Wound Ring Type Current Transformer	TRIO	NA	1	=VCD/22.3
130	-V1	2-channel isolated barrier	Pepperl+Fuchs	KCD2-SR-EX2	1	=VCD/40.3
131	-V2	2-channel isolated barrier	Pepperl+Fuchs	KCD2-SR-EX2	1	=VCD/41.3
132	-V3	2-channel isolated barrier	Pepperl+Fuchs	KCD2-SR-EX2	1	=VCD/42.3
133	-V4	2-channel isolated barrier	Pepperl+Fuchs	KCD2-SR-EX2	1	=VCD/43.3
134	-V5	2-channel isolated barrier	Pepperl+Fuchs	KCD2-SR-EX2	1	=VCD/43.6
135	-V6	Solenoid Driver	Pepperl+Fuchs	KCD0-SD-EX1.1245	1	=VCD/44.1
136	-X1	Power - Bus-Bar Terminal	Elmex	DPBB120_RD	1	=VCD/28.0
137	-X1	Power - Bus-Bar Terminal	Elmex	DPBB120_YE	1	=VCD/28.1
138	-X1	Power - Bus-Bar Terminal	Elmex	DPBB120_BU	1	=VCD/28.1
139	-X1	Power - Bus-Bar Terminal	Elmex	DPBB120_GNYYE	1	=VCD/28.1
140	-X1	4 Sq.mm Feed Through Terminal	Elmex	KUT 4_RD	1	=VCD/30.0
141	-X1	4 Sq.mm Feed Through Terminal	Elmex	KUT 4_YE	1	=VCD/30.1
142	-X1	4 Sq.mm Feed Through Terminal	Elmex	KUT 4_BU	1	=VCD/30.1
143	-X1	4 Sq.mm Feed Through Terminal	Elmex	KUT 4_GNYYE	1	=VCD/30.1
144	-X1	2.5 Sq.mm Feed Through Terminal	Elmex	KUT 2.5_RD	1	=VCD/32.1
145	-X1	2.5 Sq.mm Feed Through Terminal	Elmex	KUT 2.5_YE	1	=VCD/32.1

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
146	-X1	2.5 Sq.mm Feed Through Terminal	Elmex	KUT 2.5_BU	1	=VCD/32.1
147	-X1	2.5 Sq.mm Feed Through Terminal	Elmex	KUT 2.5_GNYE	1	=VCD/32.2
148	-X2	Feed-through terminal block - PT 2,5 RD	Phoenix Contact	3209512	2	=VCD/24.4
149	-X2	Feed-through terminal block - PT 2,5 BK	Phoenix Contact	3212330	1	=VCD/24.5
150	-X2	Ground modular terminal block - PT 2,5-PE	Phoenix Contact	3209536	1	=VCD/24.5
151	-X3	Feed-through terminal block - PT 2,5 BN	Phoenix Contact	1176299	1	=VCD/24.7
152	-X3	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	1	=VCD/24.8
153	-X3	Ground modular terminal block - PT 2,5-PE	Phoenix Contact	3209536	1	=VCD/24.8
154	-X4	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	22	=VCD/34.1...=VCD/34.9
155	-X5	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	20	=VCD/37.1...=VCD/37.8
156	-X6	Feed-through terminal block - PT 2,5 BU	Phoenix Contact	3209523	14	=VCD/40.3
157	-X7	Feed-through terminal block - PT 2,5 BU	Phoenix Contact	3209523	2	=VCD/44.1
158	-X7	Ground modular terminal block - PT 2,5-PE	Phoenix Contact	3209536	2	=VCD/44.2
159	-X7	Feed-through terminal block - PT 2,5 BN	Phoenix Contact	1176299	1	=VCD/44.3
160	-X7	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	1	=VCD/44.5
161	-X8	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	11	=VCD/45.1...=VCD/45.6
162	-X9	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	15	=VCD/33.1
163	-X10	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	4	=VCD/23.5
164	-X11	Drop link type terminals for CT Shorting-RD	Elmex	KUTSD6NV_RD	1	=VCD/22.1
165	-X11	Drop link type terminals for CT Shorting-YE	Elmex	KUTSD6NV_YE	1	=VCD/22.2
166	-X11	Drop link type terminals for CT Shorting-BU	Elmex	KUTSD6NV_BU	1	=VCD/22.3
167	-X11	Drop link type terminals for CT Shorting-PE	Elmex	KUTSD6NV_GNYE	1	=VCD/22.1
168	-X12	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	51	=VCD/29.5
169	-X12	Feed-through terminal block - PT 2,5 BN	Phoenix Contact	1176299	1	=VCD/47.6
170	-X12	Feed-through terminal block - PT 2,5 RD	Phoenix Contact	3209512	1	=VCD/47.7
171	-X12	Feed-through terminal block - PT 2,5 BK	Phoenix Contact	3212330	1	=VCD/47.7
172	-X13	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	16	=VCD/48.0...=VCD/48.9
173	-X14	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	4	=VCD/49.0...=VCD/49.2
174	-X15	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	44	=VCD/28.2

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
175	-XCOM	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	17	=VCD/23.3
176	-XL	Distribution block nom. voltage: 450 V, nominal current: 24 A BN	Phoenix	PTFIX 6/6X2,5 BN	1	=VCD/26.3
177	-XM	Distribution block nom. voltage: 450 V, nominal current: 24 A GY	Phoenix	PTFIX 6/6X2,5 GY	1	=VCD/26.5
178	-XN	Distribution block nom. voltage: 450 V, nominal current: 24 A BK	Phoenix	PTFIX 6/6X2,5 BK	1	=VCD/24.2
179	-XP	Distribution block nom. voltage: 450 V, nominal current: 24 A RD	Phoenix	PTFIX 6/6X2,5 RD	1	=VCD/24.1
180	-XS	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	5	=VCD/49.3
181	-H1	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.1
182	-H2	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.1
183	-H3	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.2
184	-H4	22.5mm LED Indicator Lamp Amber Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.3
185	-H5	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.4
186	-H6	22.5mm LED Indicator Lamp Amber Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.5
187	-H7	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.6
188	-H8	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.7
189	-H9	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.8
190	-H10	22.5mm LED Indicator Lamp Amber Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/37.8
191	-H11	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.1
192	-H12	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.1
193	-H13	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.2
194	-H14	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.3
195	-H15	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.4
196	-H16	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.5
197	-H17	22.5mm LED Indicator Lamp Green Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.6
198	-H18	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.7
199	-H19	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.8
200	-H20	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/38.8
201	-H21	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/39.1
202	-H22	22.5 mm LED Indicator Lamp Red Color 240V AC	Vaishno-Hotline	2XVLDIL-BN (240V AC)	1	=VCD/39.1
203	-N1	Dual Process Indicator, 96 X 96 Size, 230V AC Aux. Supply, Model : DPI 122	Multispan	DPI 122	1	=VCD/23.5

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
204	-N2	Dual Channel Indicator	Masibus	LC5296-DC-CCU211	1	=VCD/33.0
205	-N3	Dual Channel Indicator	Masibus	LC5296-DC-99U211	1	=VCD/33.3
206	-N4	Dual Channel Indicator	Masibus	LC5296-DC-9CU211	1	=VCD/33.7
207	-S0	Single contact block, NC type	Vaishno-Hotline	ES-3	2	=VCD/34.1
208	-S0	Emergency Stop,Switching OFF Head Trigger and Latching Turn Release	Vaishno-Hotline	2XVAPR	1	=VCD/34.1
209	-S1	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/34.3
210	-S1	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/34.3
211	-S2	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/34.4
212	-S2	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/34.4
213	-S3	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/34.5
214	-S3	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/34.5
215	-S4	Single contact block, NC type	Vaishno-Hotline	ES-3	1	=VCD/34.6
216	-S4	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/34.7
217	-S4	Red Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/34.6
218	-S5	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/34.8
219	-S5	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/34.8
220	-S6	Single contact block, NC type	Vaishno-Hotline	ES-3	1	=VCD/34.9
221	-S6	Red Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/34.9
222	-S7	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/35.0
223	-S7	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.0
224	-S8	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/35.1
225	-S8	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.1
226	-S9	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/35.2
227	-S9	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.2
228	-S10	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/35.4
229	-S10	Single contact block, NC type	Vaishno-Hotline	ES-3	1	=VCD/35.3
230	-S10	Red Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.3
231	-S11	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/35.6
232	-S11	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.6

SAP & LOP - BILL OF MATERIAL


SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
233	-S12	Single contact block, NC type	Vaishno-Hotline	ES-3	1	=VCD/35.6
234	-S12	Red Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.6
235	-S13	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/35.8
236	-S13	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.8
237	-S14	Single contact block, NC type	Vaishno-Hotline	ES-3	1	=VCD/35.9
238	-S14	Red Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/35.9
239	-S15	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/36.2
240	-S15	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/36.2
241	-S16	Single contact block, NC type	Vaishno-Hotline	ES-3	1	=VCD/36.4
242	-S16	Red Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/36.4
243	-S17	Single contact block, NO type	Vaishno-Hotline	ES-2	1	=VCD/36.5
244	-S17	Green Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/36.5
245	-S18	Single contact block, NC type	Vaishno-Hotline	ES-3	1	=VCD/36.6
246	-S18	Red Pushbutton-Flameproof Spring Type	Vaishno-Hotline	-	1	=VCD/36.6
247	-SW1	Power ON-OFF selector switch, 6 A 4 pole on-off	Salzer	-	1	=VCD/24.4
248	-X2	Feed-through terminal block - PT 2,5 RD	Phoenix Contact	3209512	2	=VCD/24.4
249	-X2	Feed-through terminal block - PT 2,5 BK	Phoenix Contact	3212330	1	=VCD/24.5
250	-X2	Ground modular terminal block - PT 2,5-PE	Phoenix Contact	3209536	1	=VCD/24.5
251	-X3	Feed-through terminal block - PT 2,5 BN	Phoenix Contact	1176299	1	=VCD/24.7
252	-X3	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	1	=VCD/24.8
253	-X3	Ground modular terminal block - PT 2,5-PE	Phoenix Contact	3209536	1	=VCD/24.8
254	-X4	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	24	=VCD/34.1...=VCD/34.9
255	-X5	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	21	=VCD/37.1...=VCD/37.8
256	-X9	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	15	=VCD/33.1
257	-X10	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	4	=VCD/23.5
258	-XCOM	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	6	=VCD/33.2
259	-XS	Feed-through terminal block - PT 2,5	Phoenix Contact	3209510	5	=VCD/49.3
260	-P1	Inductive sensor	Pepperl+Fuchs	P+F.NCB4-12GM40-N0-V1	1	=VCD/40.3
261	-P2	Inductive sensor	Pepperl+Fuchs	P+F.NCB4-12GM40-N0-V1	1	=VCD/40.4

SAP & LOP - BILL OF MATERIAL

SR. NO.	DEVICE TAG	DESCRIPTION	MANUFACTURER	TYPE NUMBER	QUANTITY	PAGE REFERENCE
262	-P3	Inductive sensor	Pepperl+Fuchs	P+F.NCB4-12GM40-N0-V1	1	=VCD/41.3
263	-P4	Inductive sensor	Pepperl+Fuchs	P+F.NCB4-12GM40-N0-V1	1	=VCD/41.4
264	-P5	Inductive sensor	Pepperl+Fuchs	P+F.NCB4-12GM40-N0-V1	1	=VCD/42.3
265	-P6	Inductive sensor	Pepperl+Fuchs	P+F.NCB4-12GM40-N0-V1	1	=VCD/42.4
266	-P7	Inductive sensor	Pepperl+Fuchs	P+F.NCB4-12GM40-N0-V1	1	=VCD/43.3




23

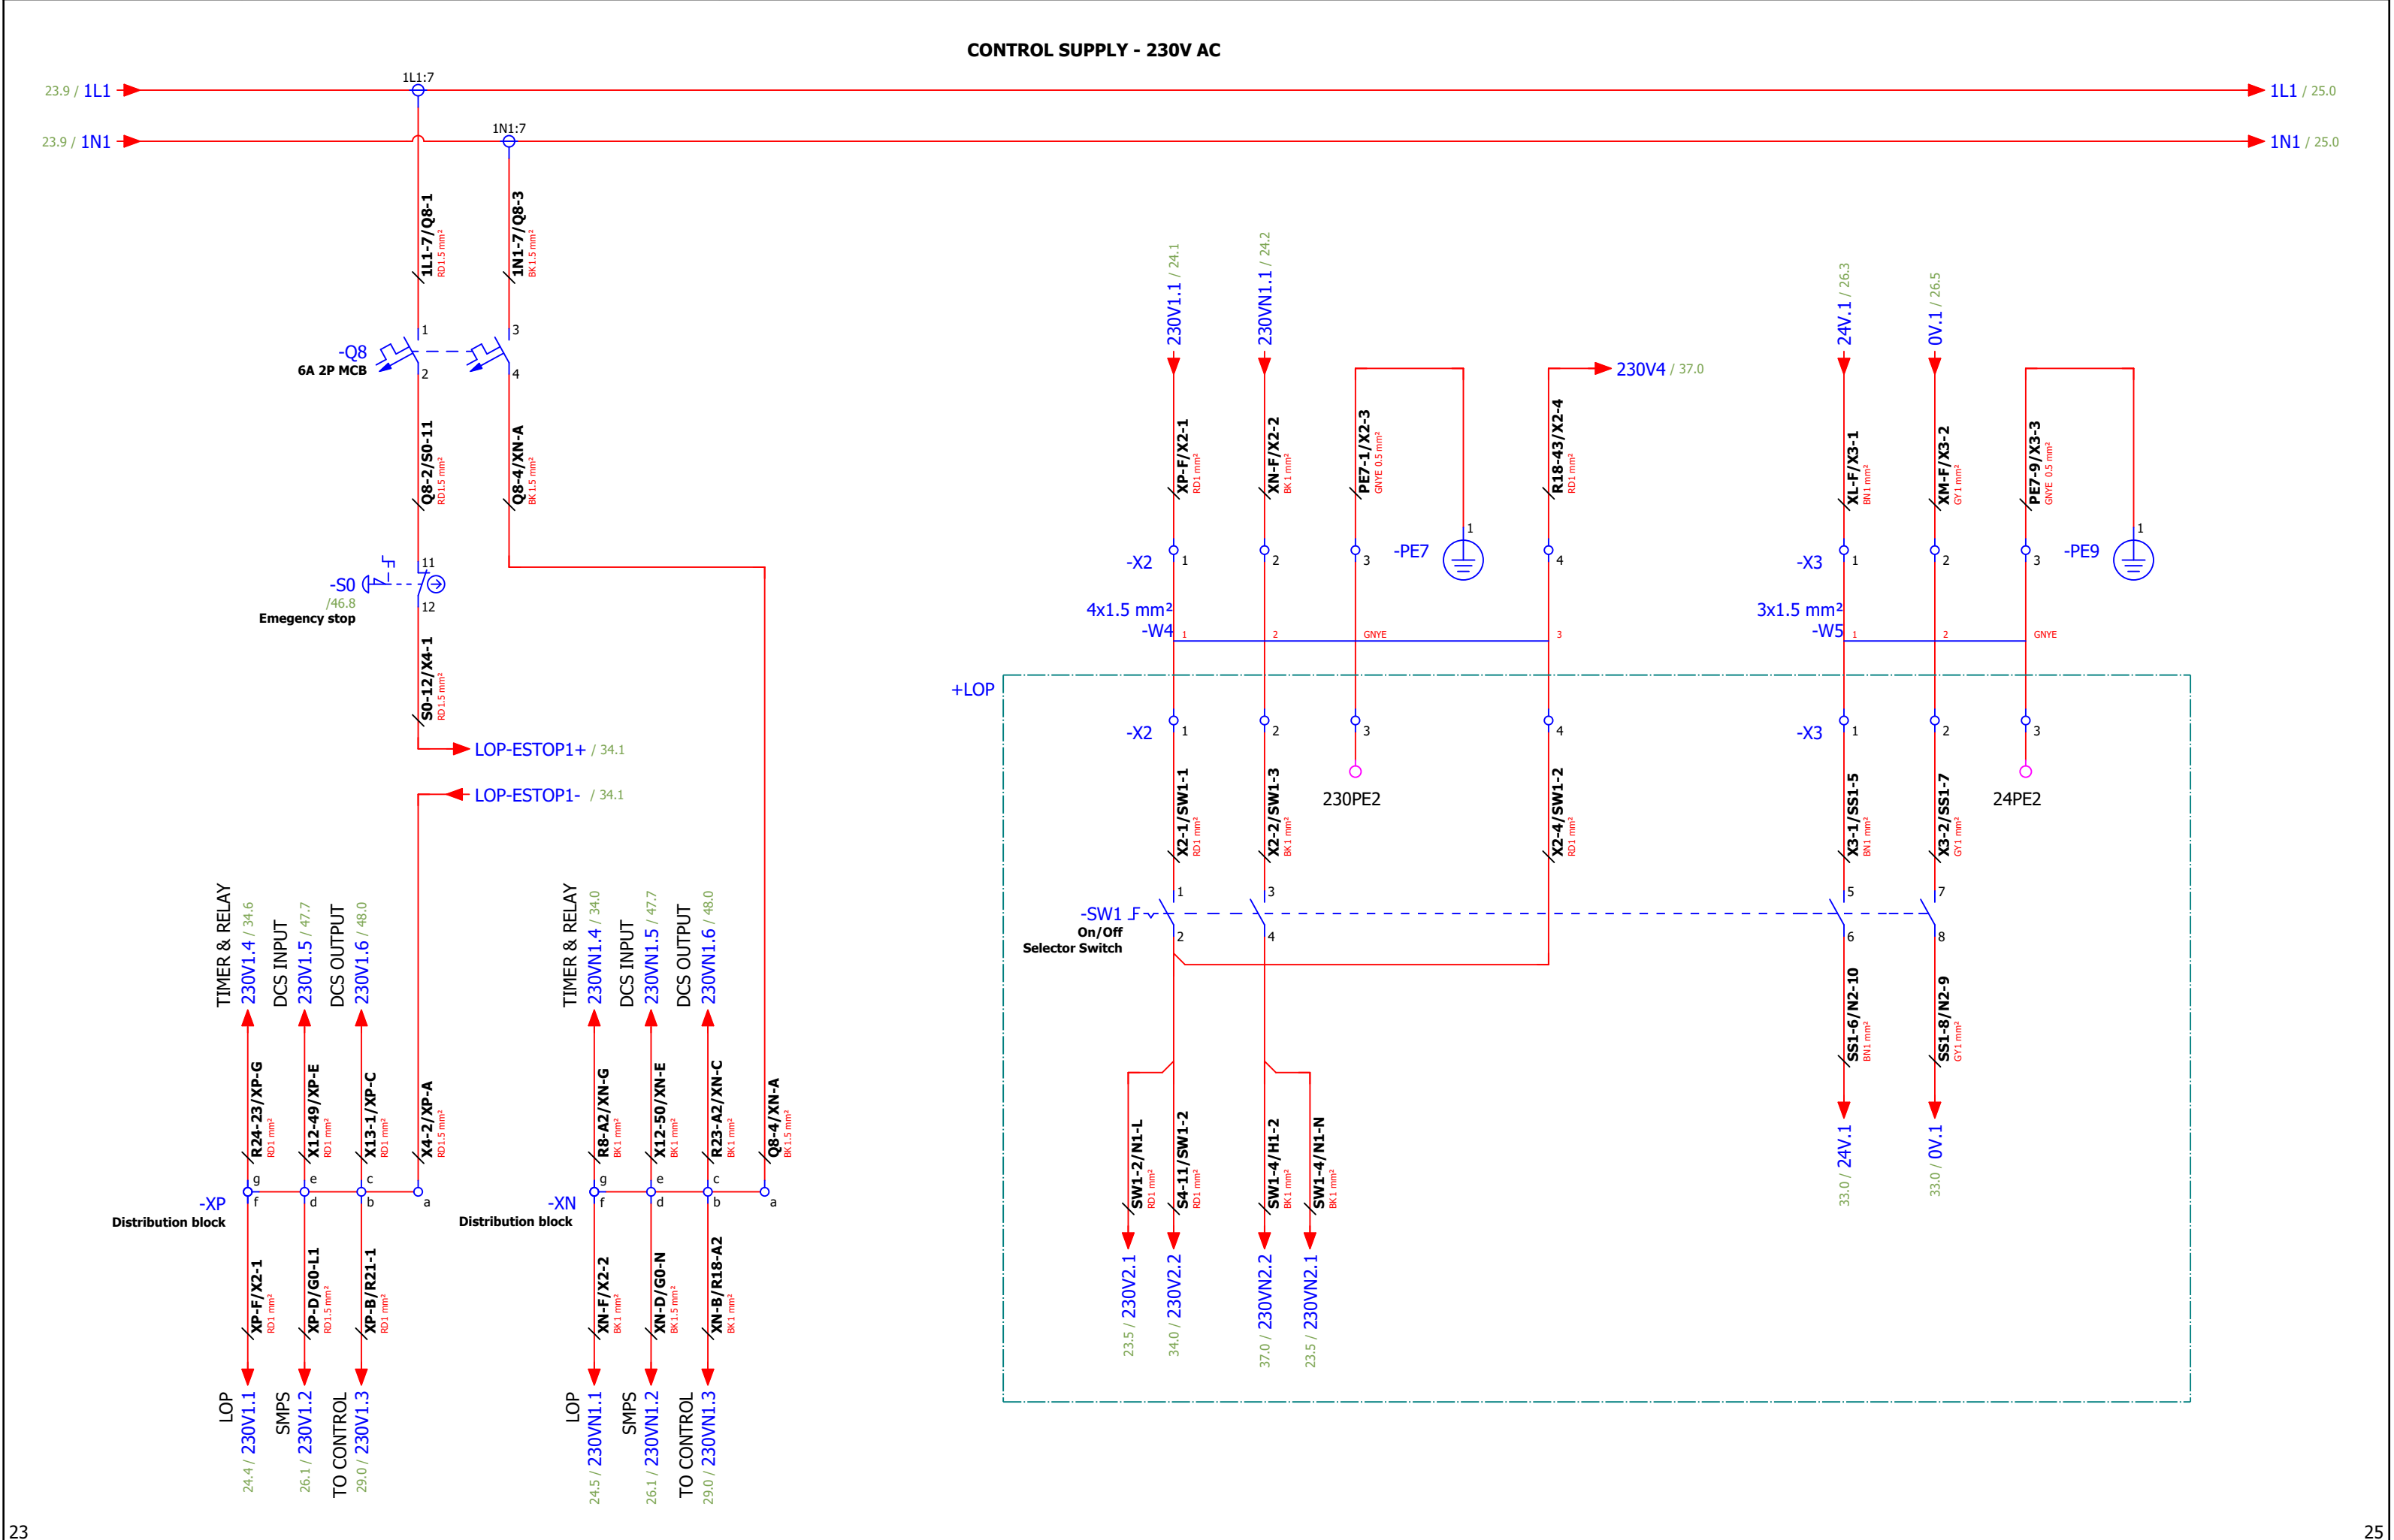


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : EMERGENCY		= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION	 VIS-CON AUTOMATION	VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 24
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	24 OF 105	

CONTROL VOLTAGE SUPPLY -24V DC


24V DC SUPPLY JUNCTION

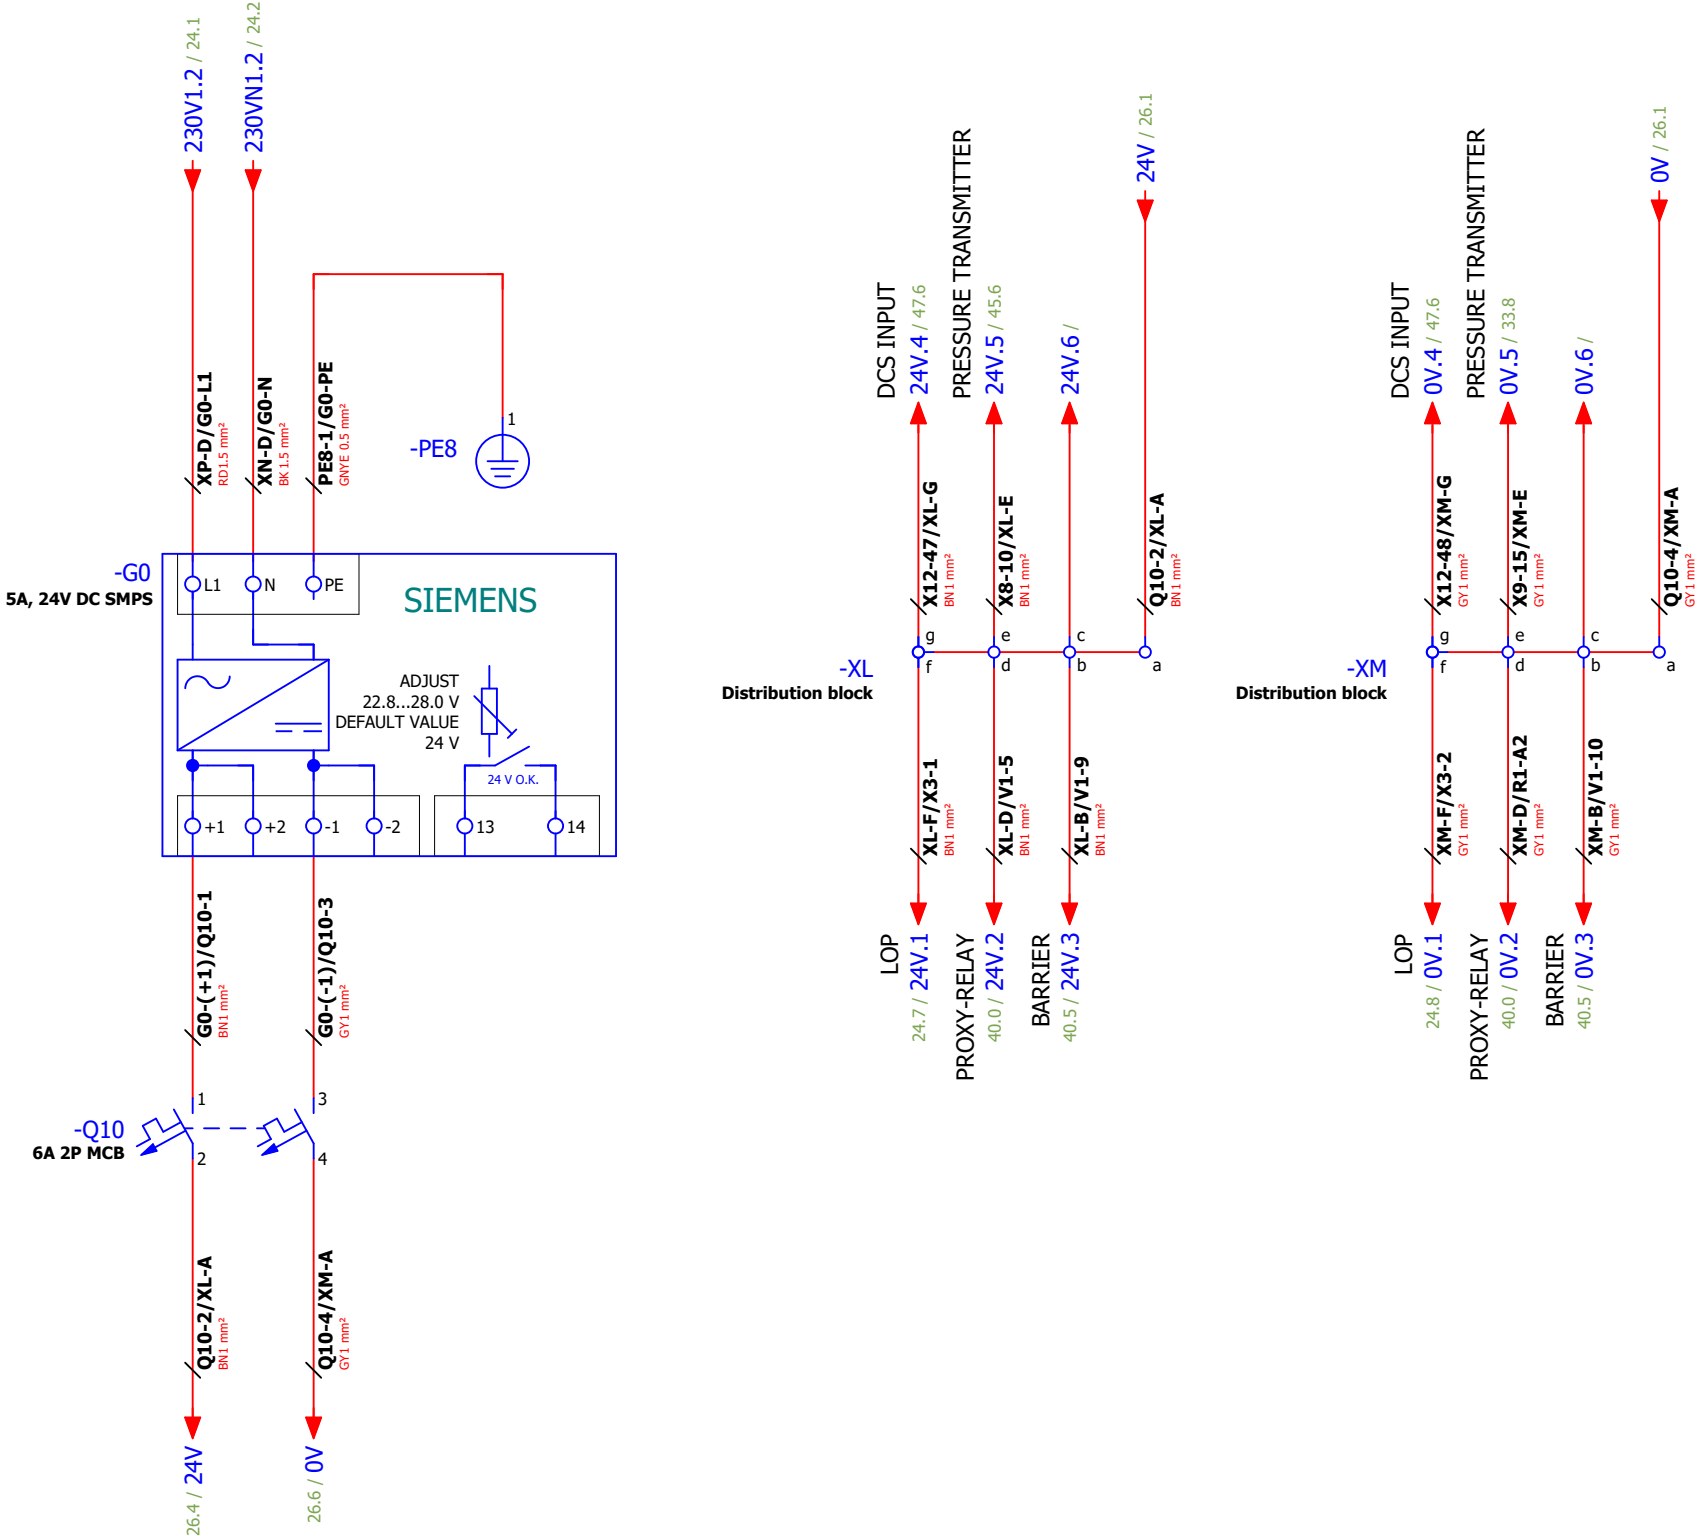



04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : SMPS	= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			26 OF 105

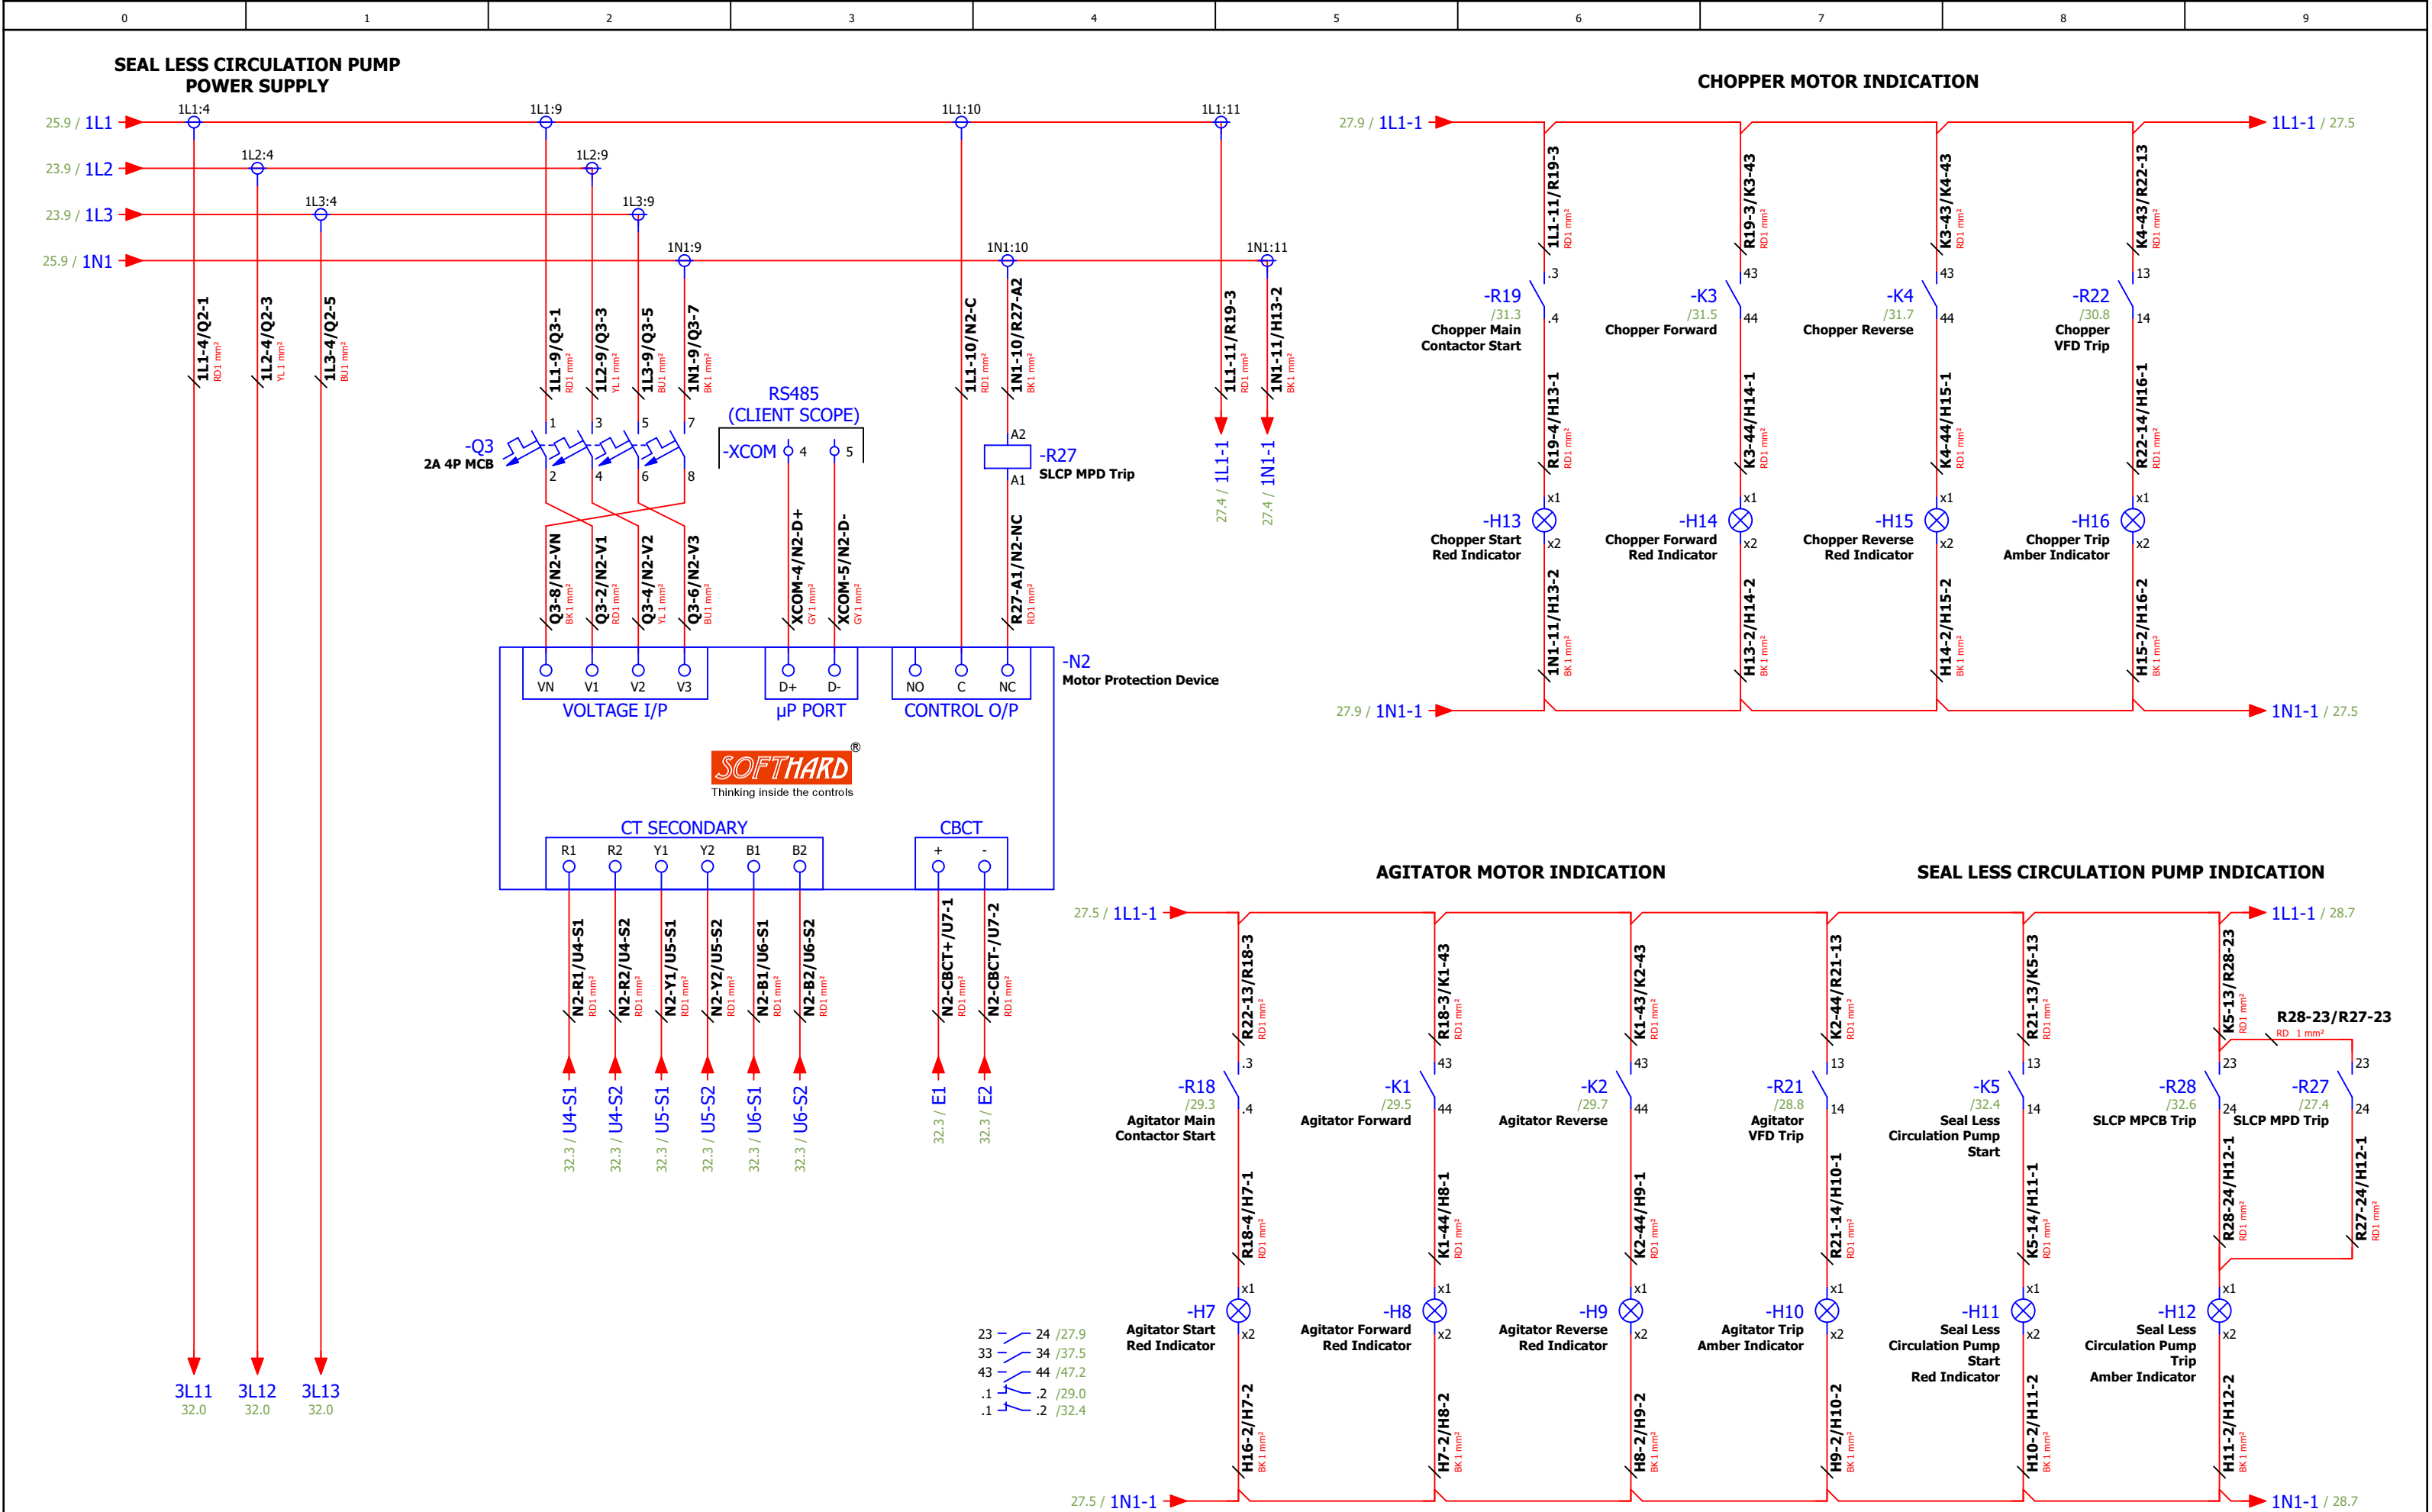


26											28										
04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : MOTOR PROTECTION DEVICE			= VCD										
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)			PANEL TAG No. :	Page : 27									
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD					DRAWING No. :	SHEET									
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199					VA-199	27 OF 105									

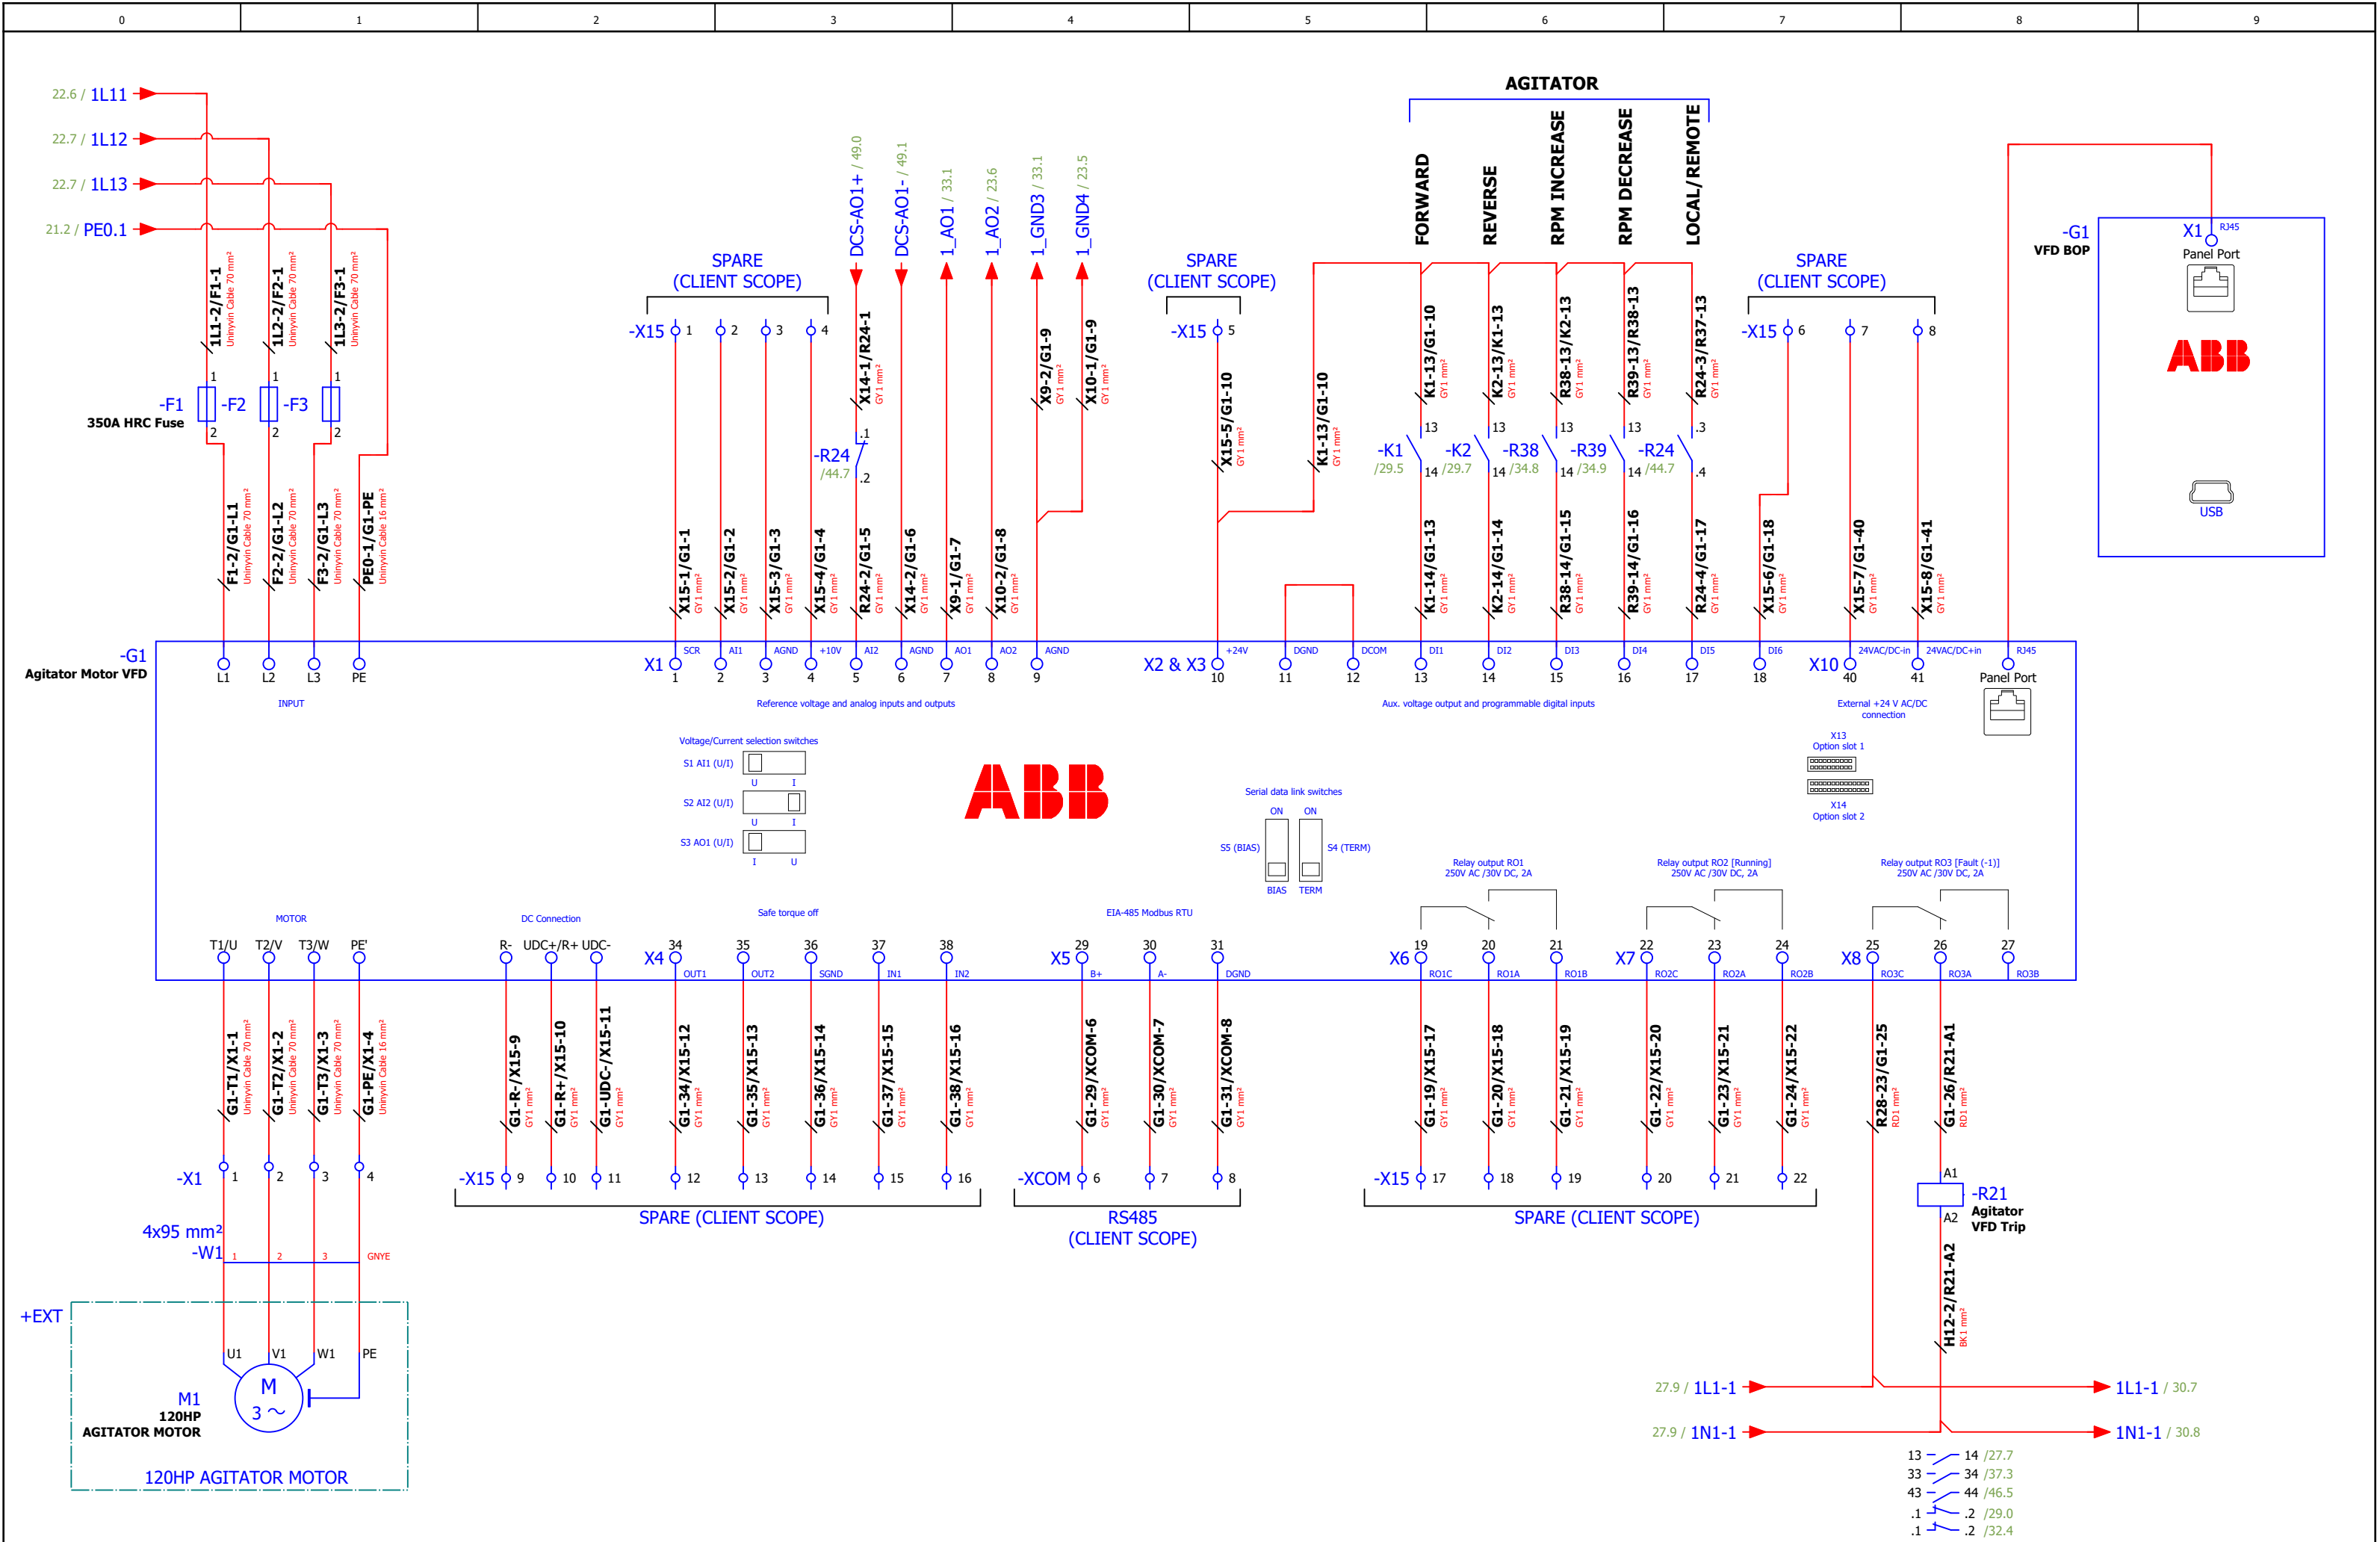


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	 VIS-CON AUTOMATION	PANEL QUANTITY :- 2		TITLE : VFD-1_AGITATOR MOTOR	= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 28	
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	28 OF 105		

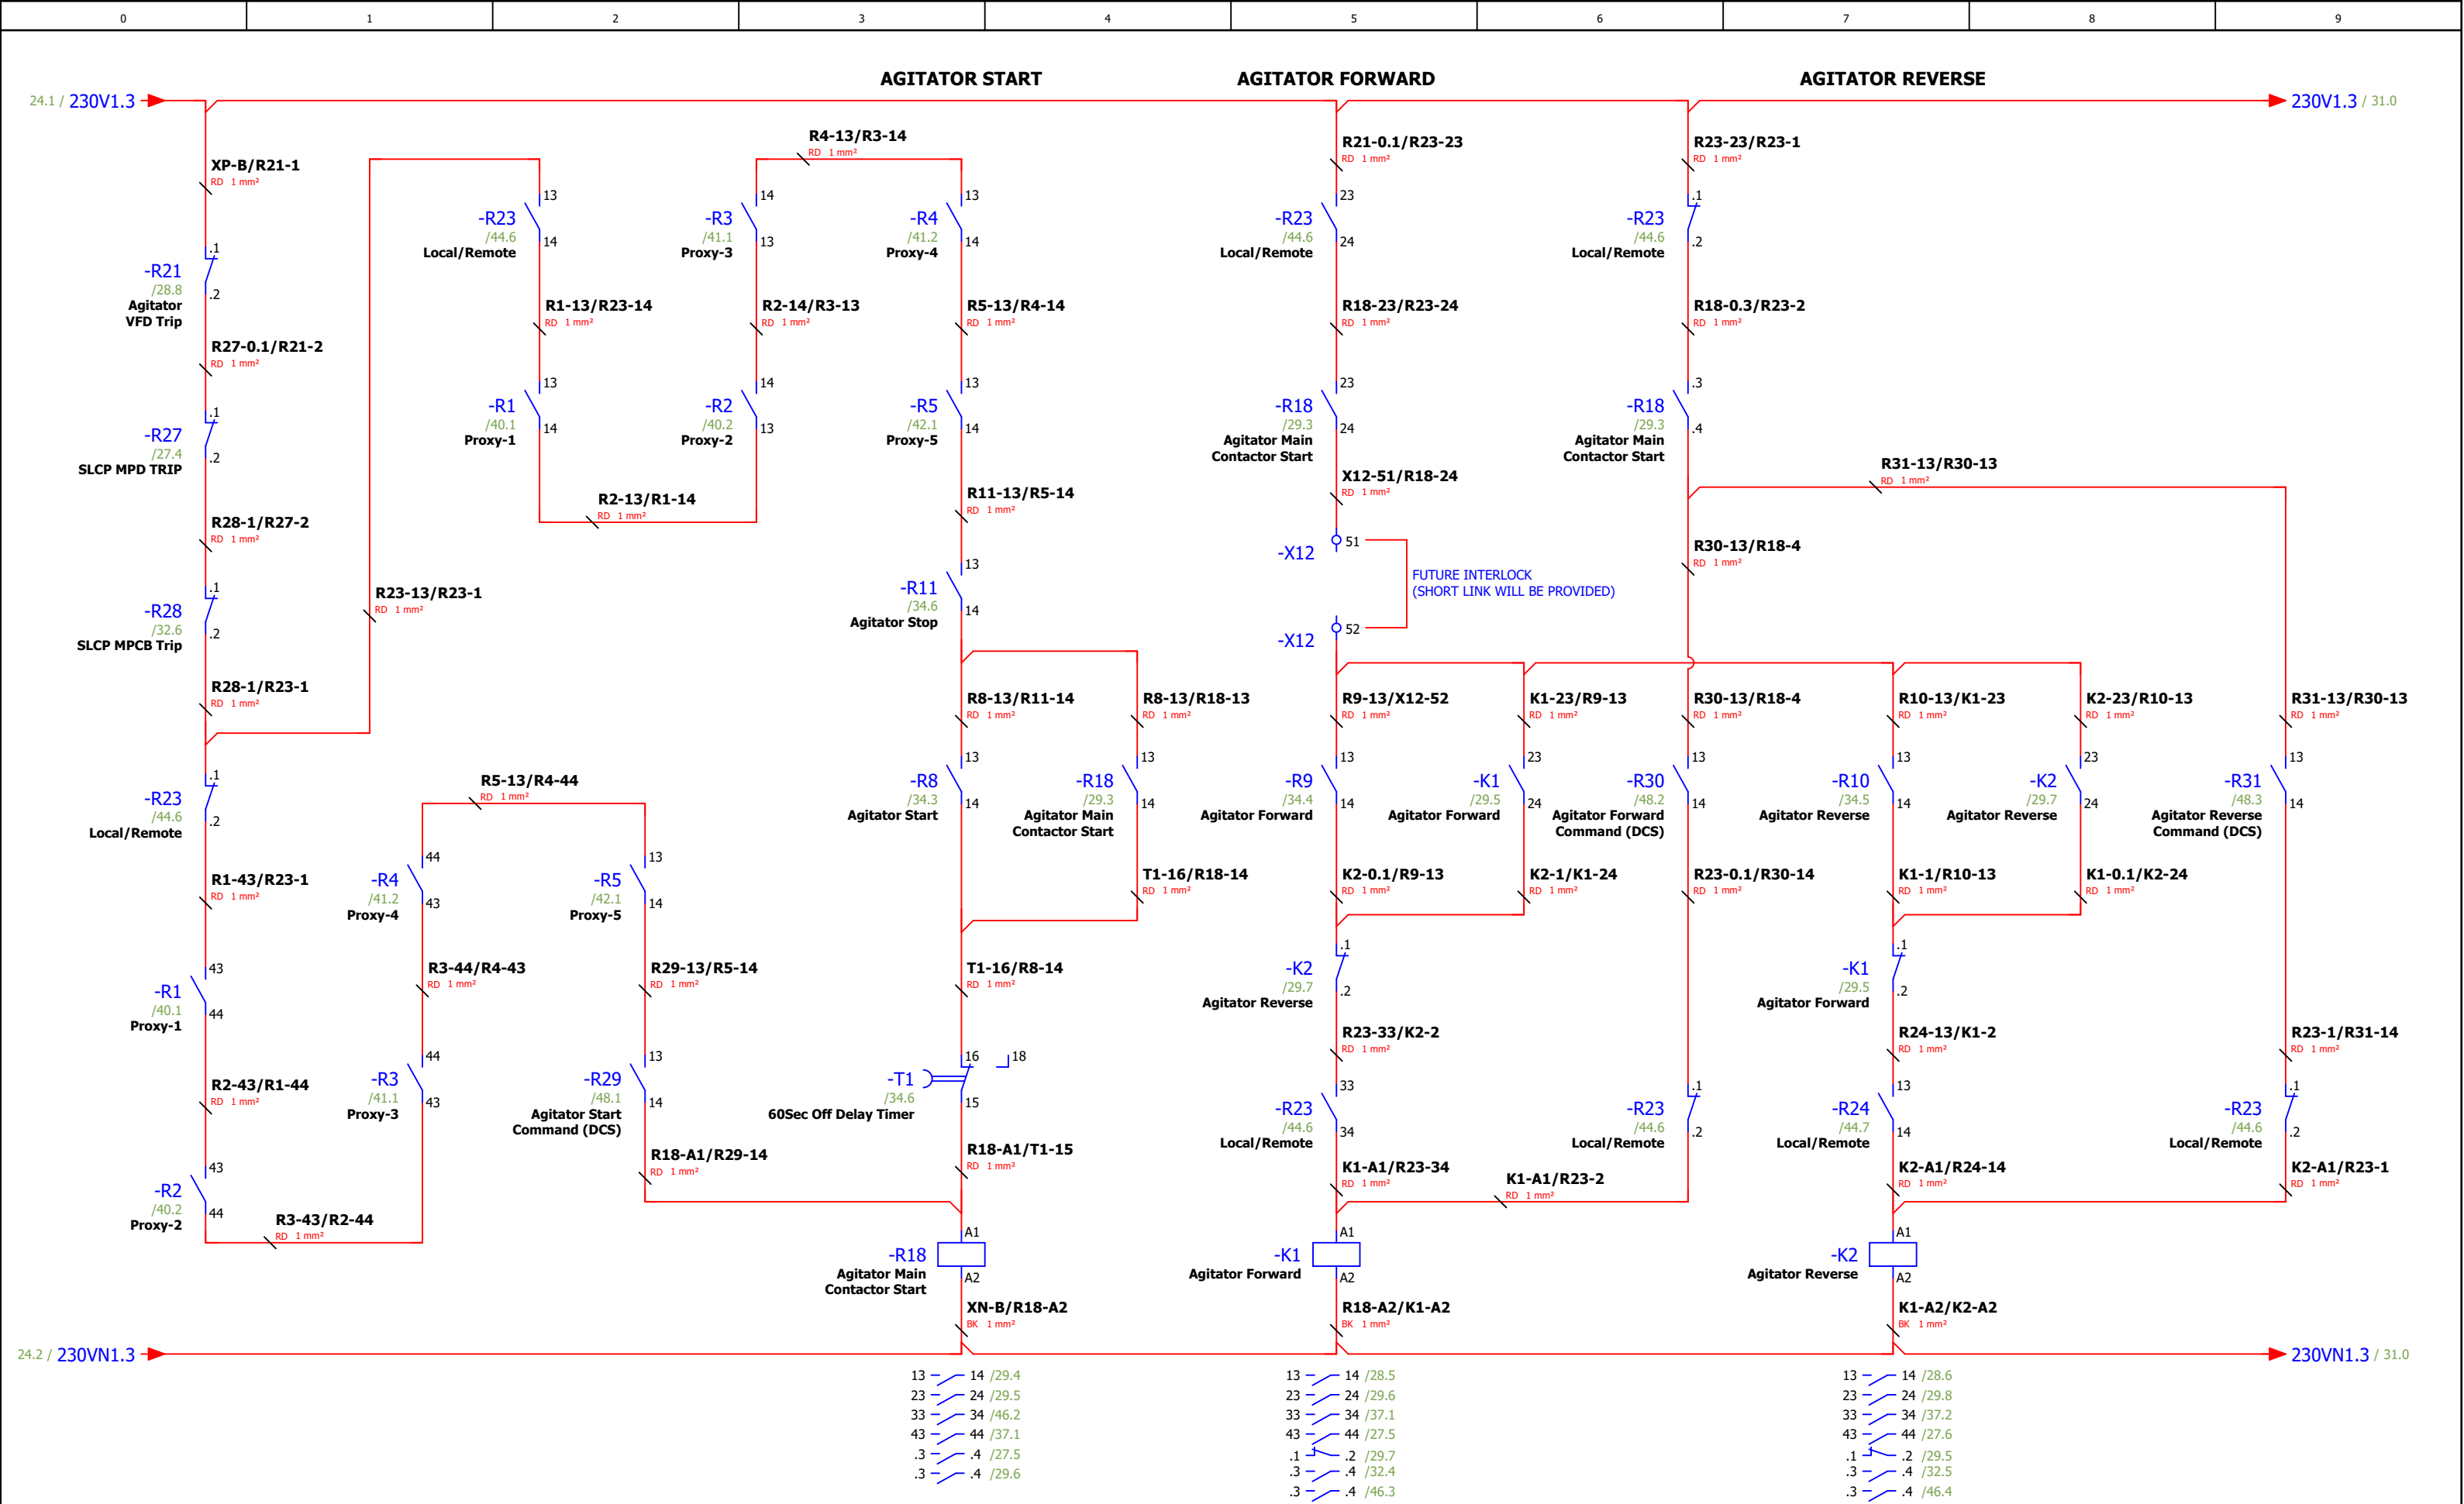


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : CONTROL WIRING	= VCD	
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 29
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	29 OF 105	

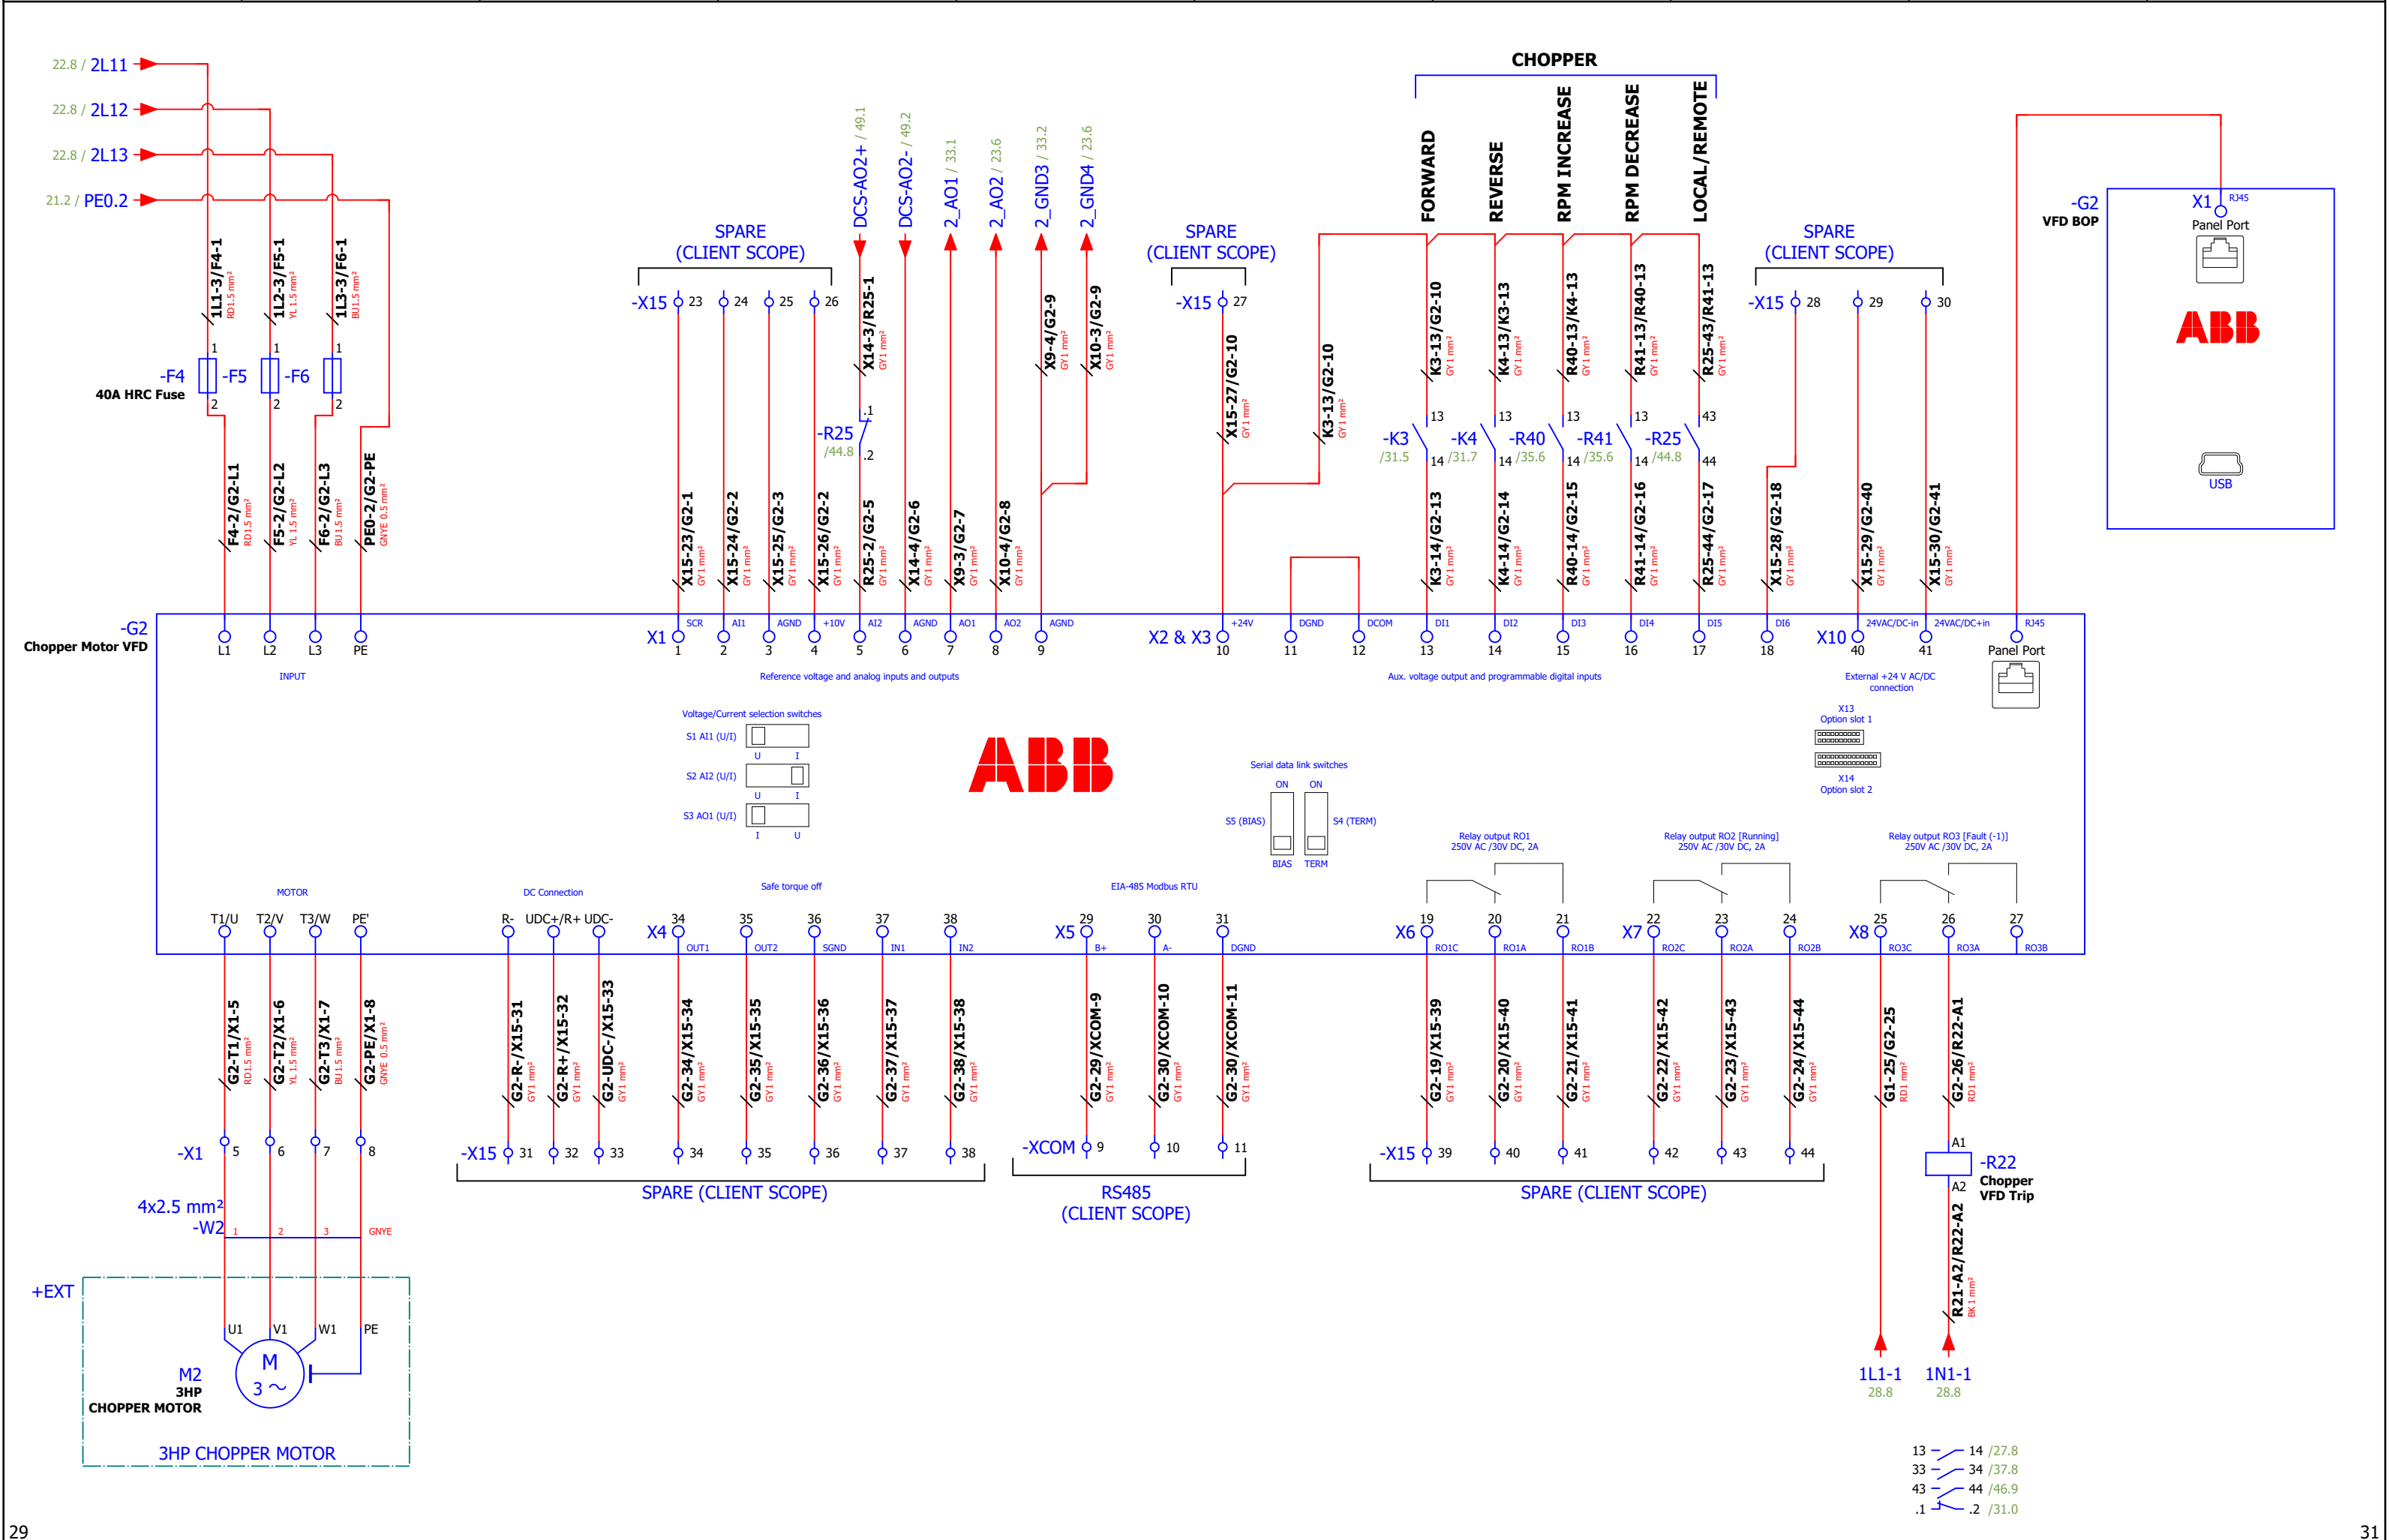


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : VFD-2_CHOPPER MOTOR		= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION	 VIS-CON AUTOMATION	VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 30
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :	SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			VA-199	30 OF 105

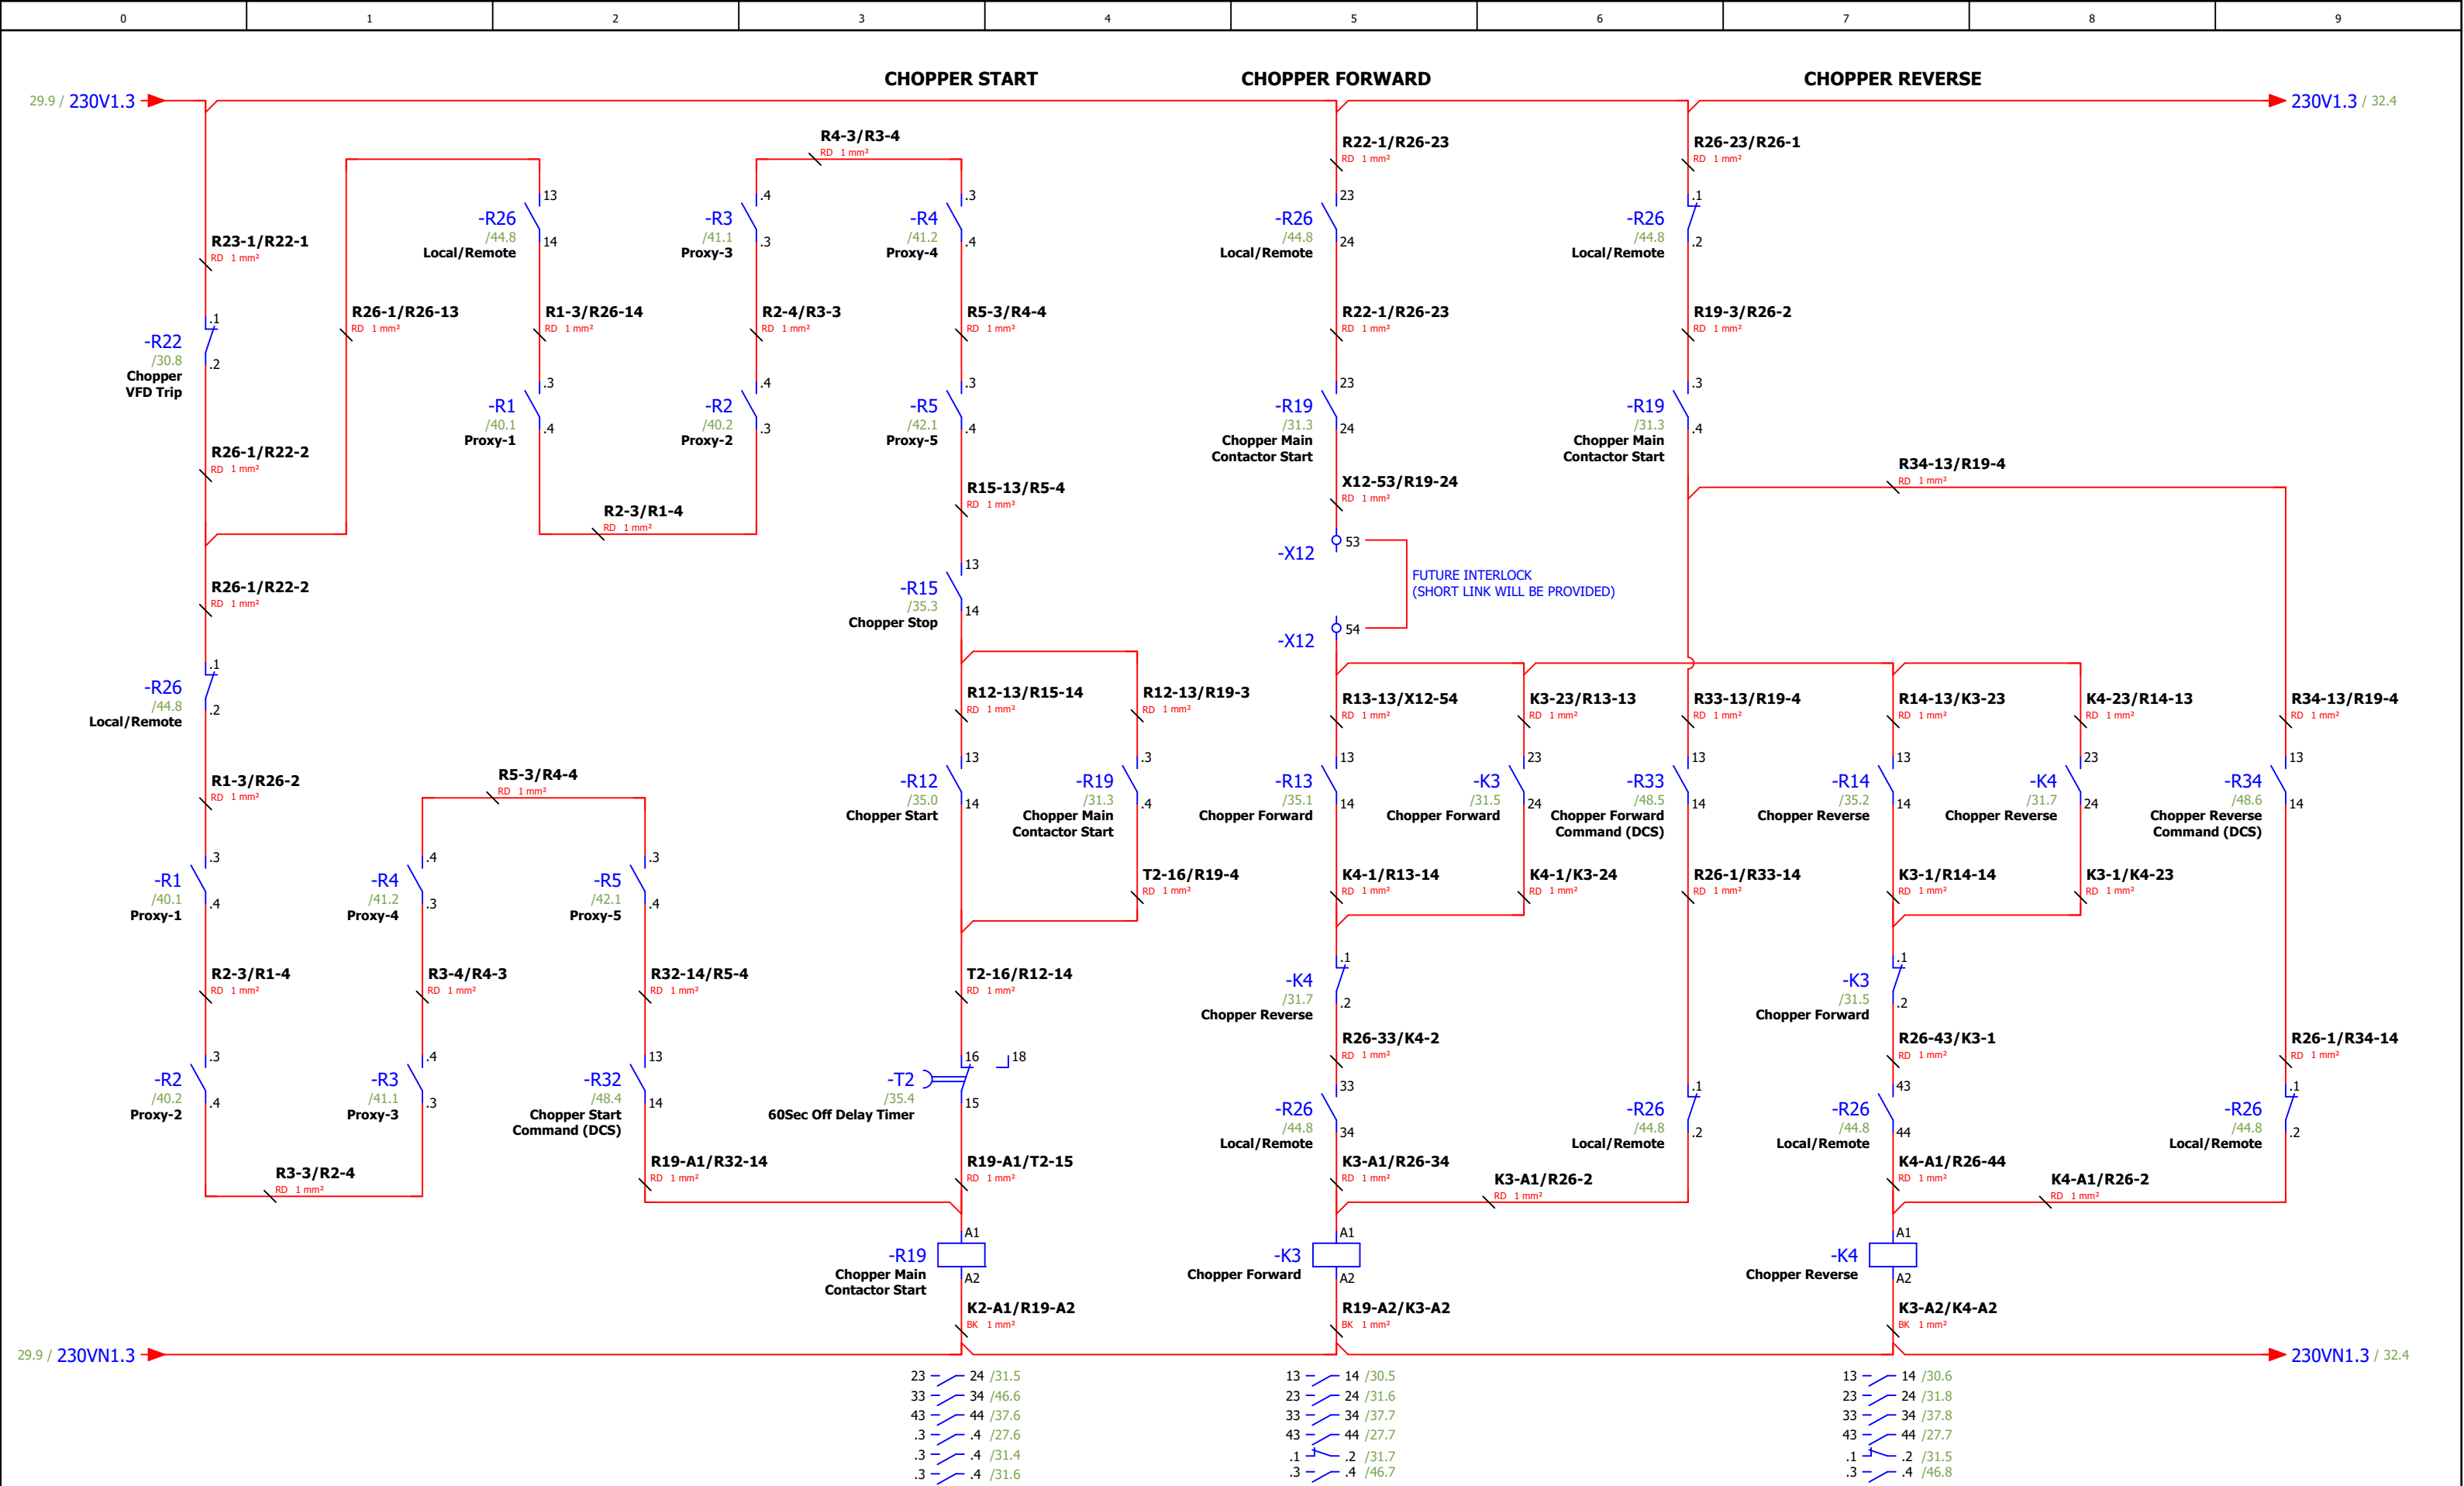


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : CONTROL WIRING		= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 31
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	31 OF 105	

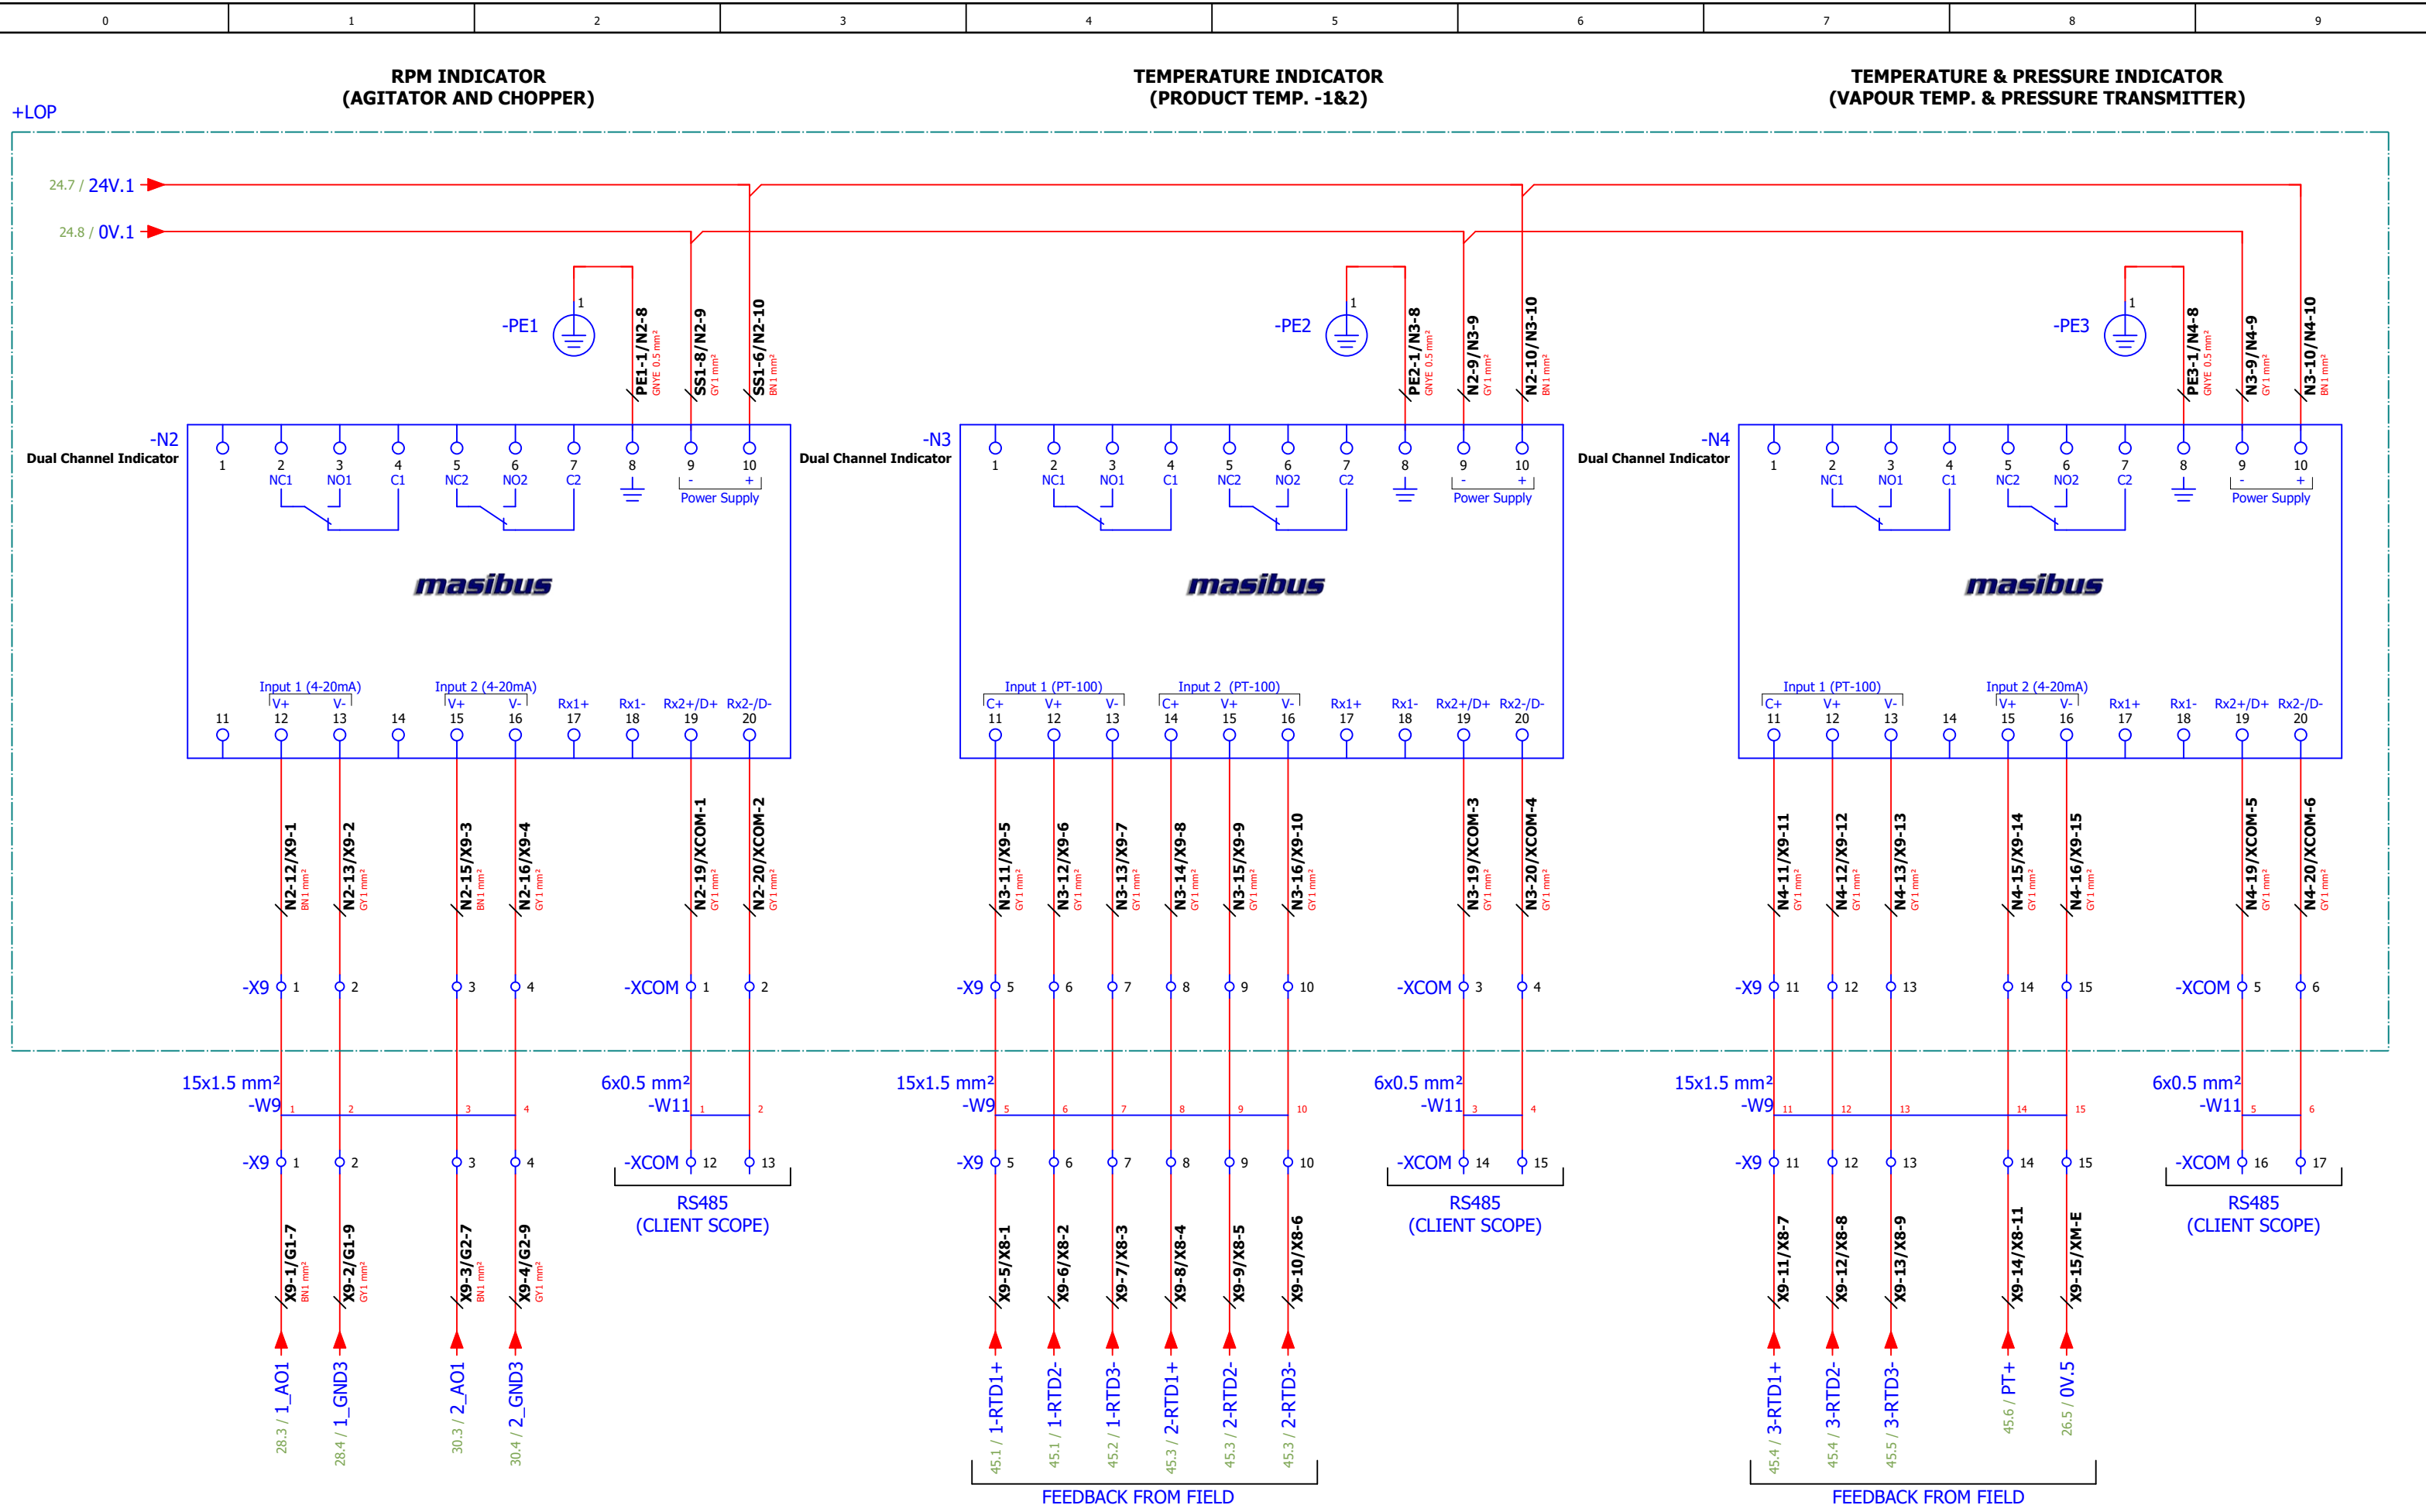


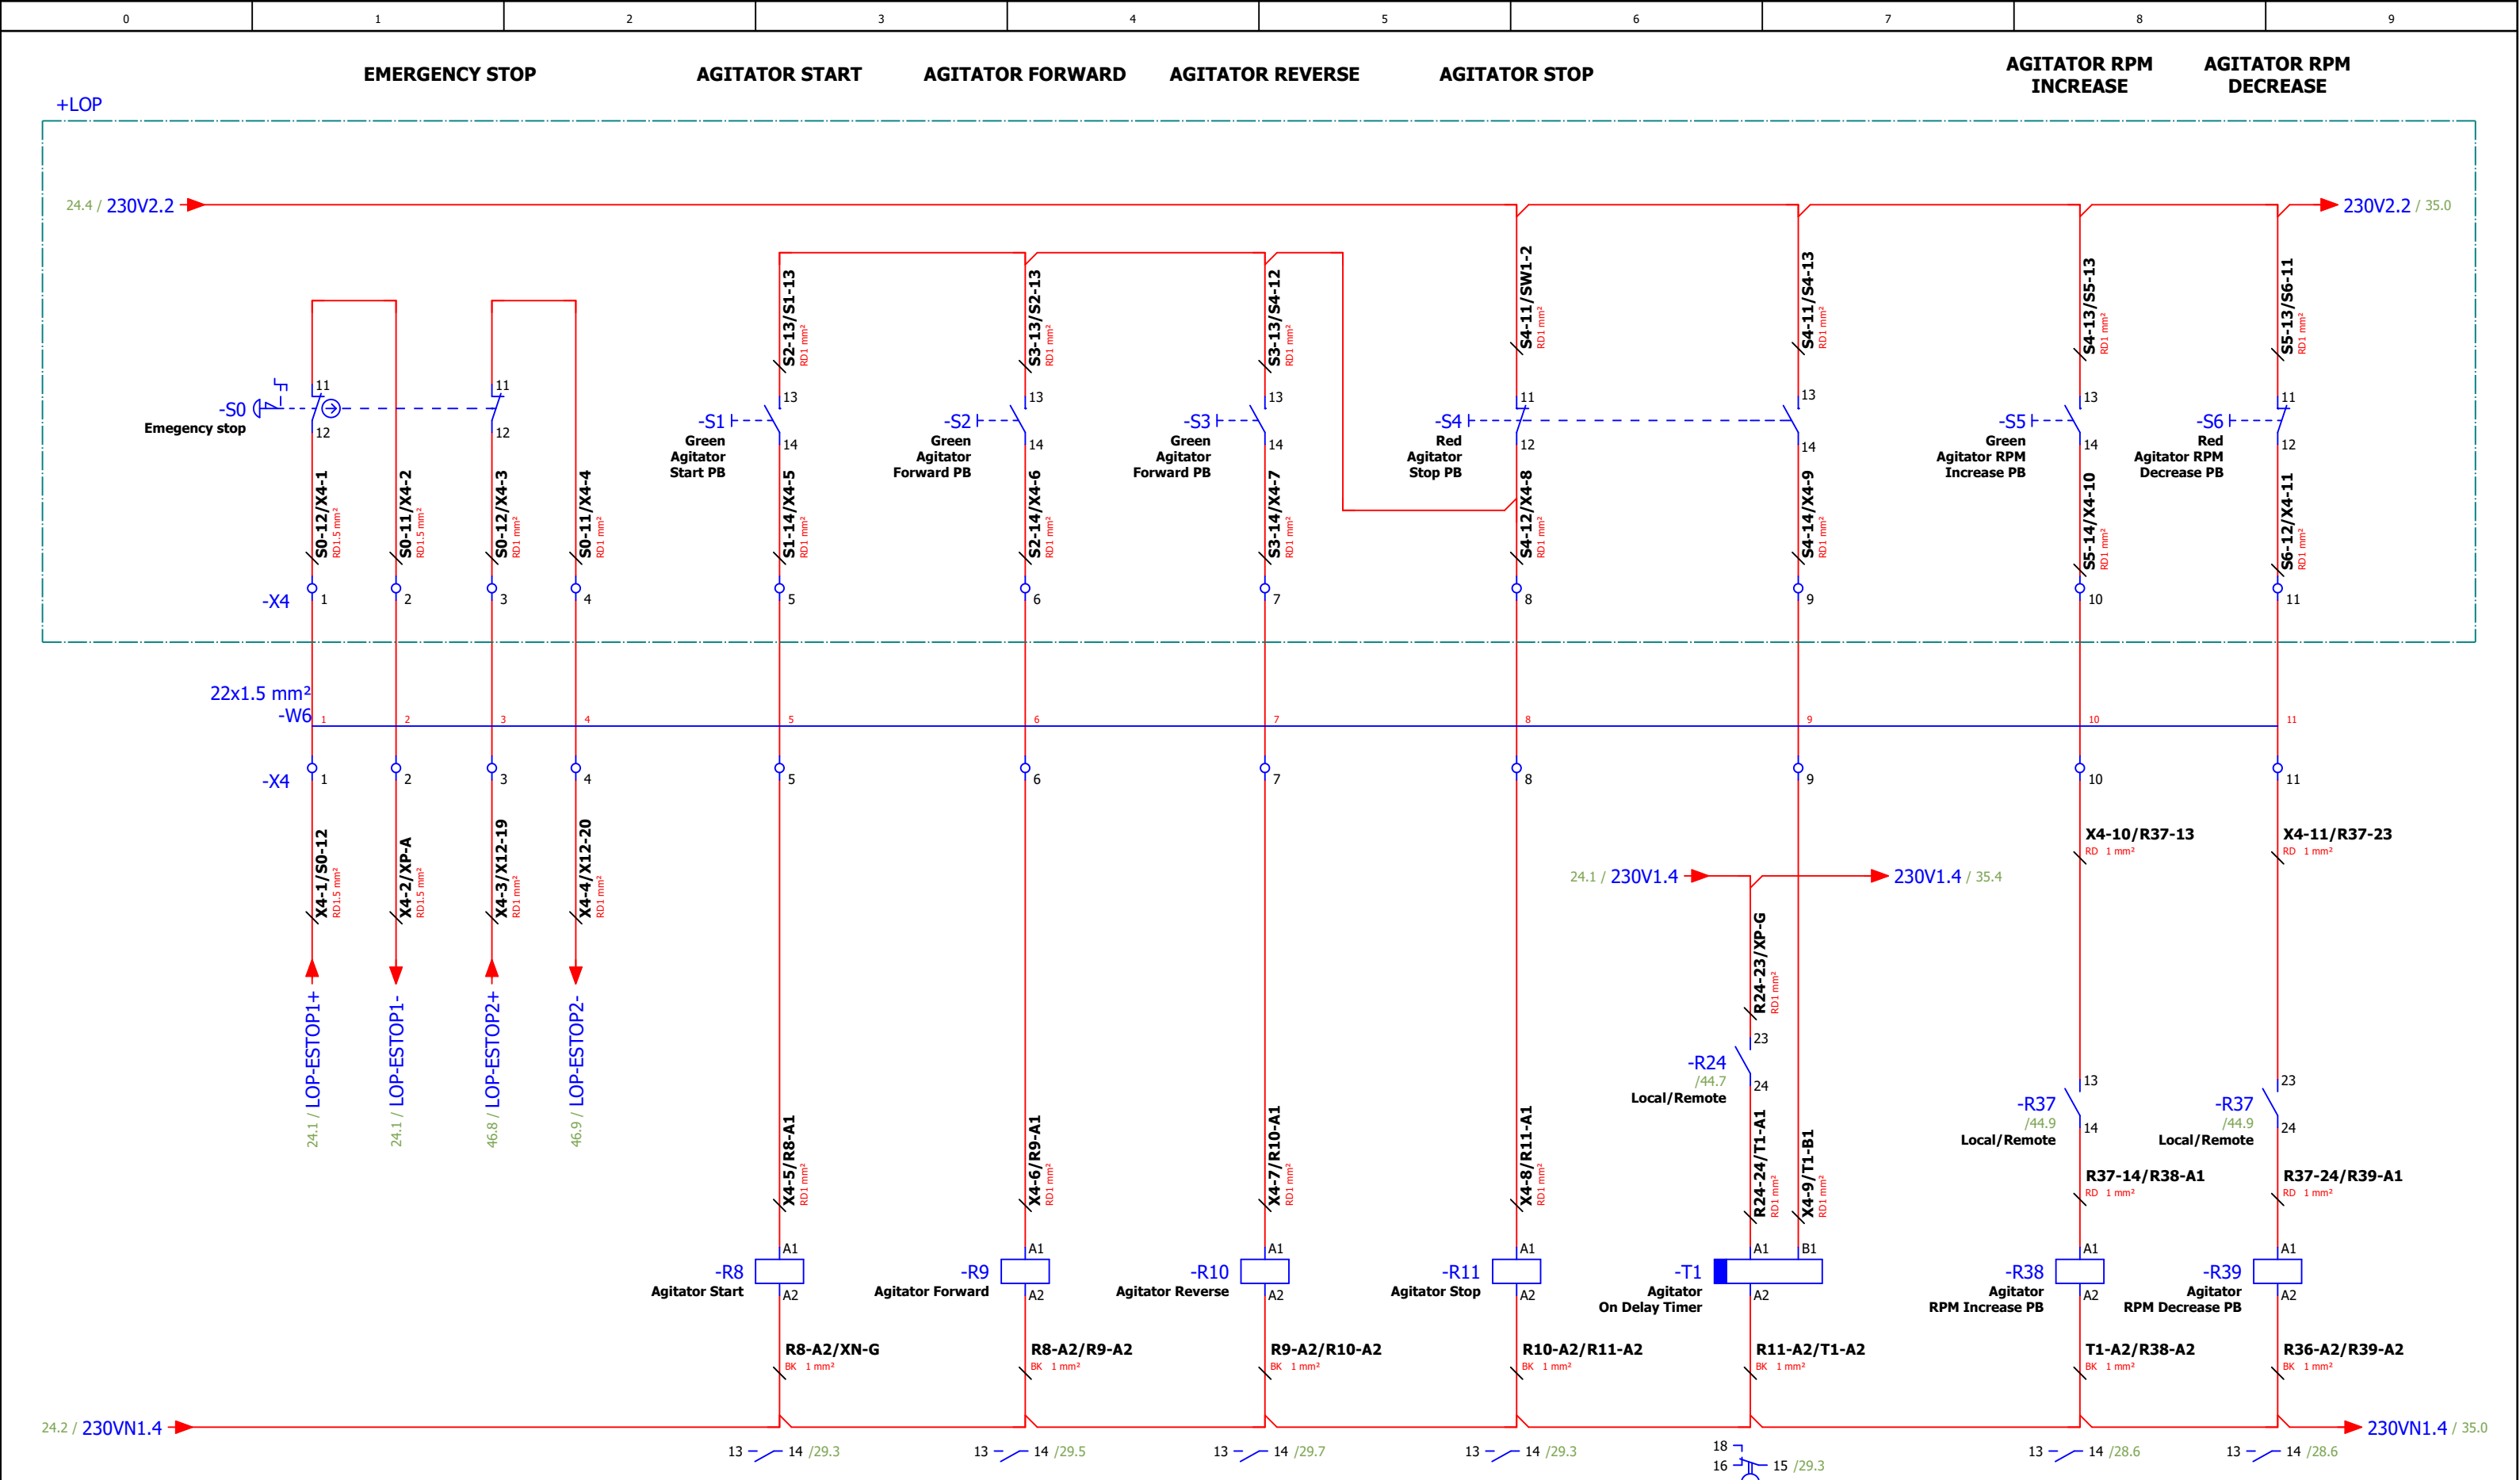


33											35										
04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : LOP CONTROL WIRING			= VCD										
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)			PANEL TAG No. :	Page : 34									
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD					DRAWING No. :	SHEET									
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199					VA-199	34 OF 105									

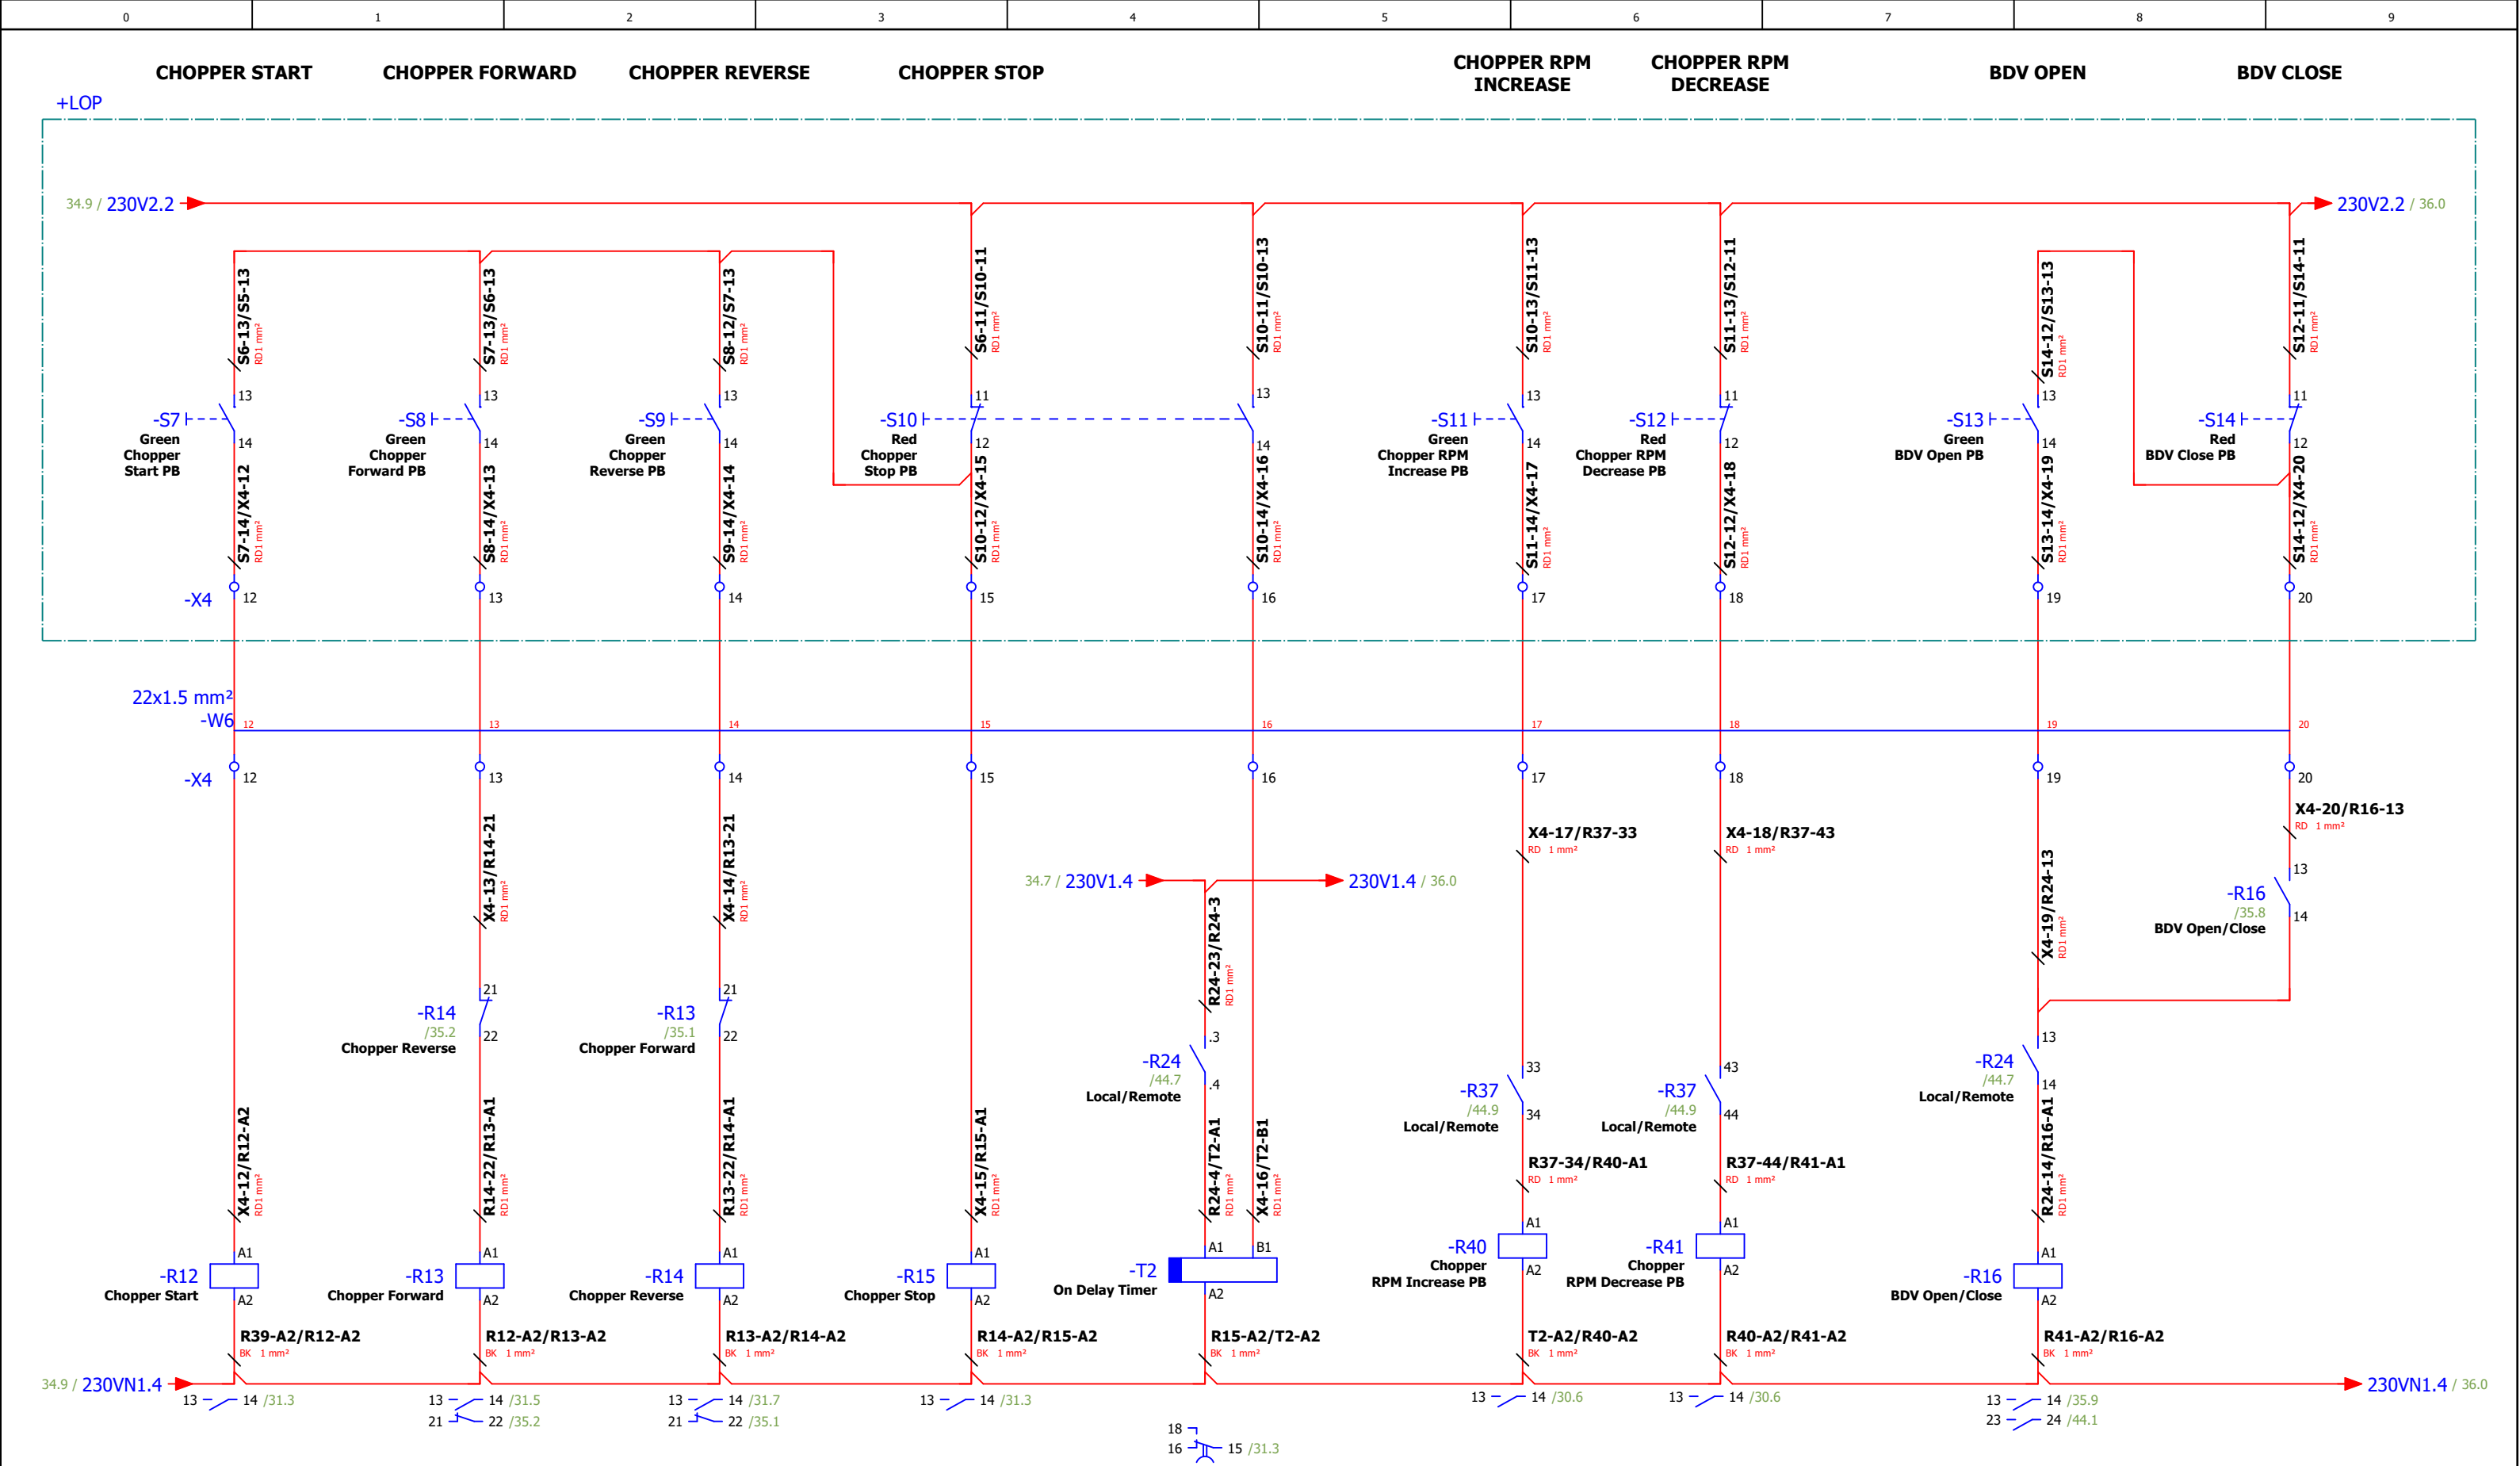

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : LOP CONTROL WIRING	= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : DRAWING No. : VA-199
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			35 OF 105

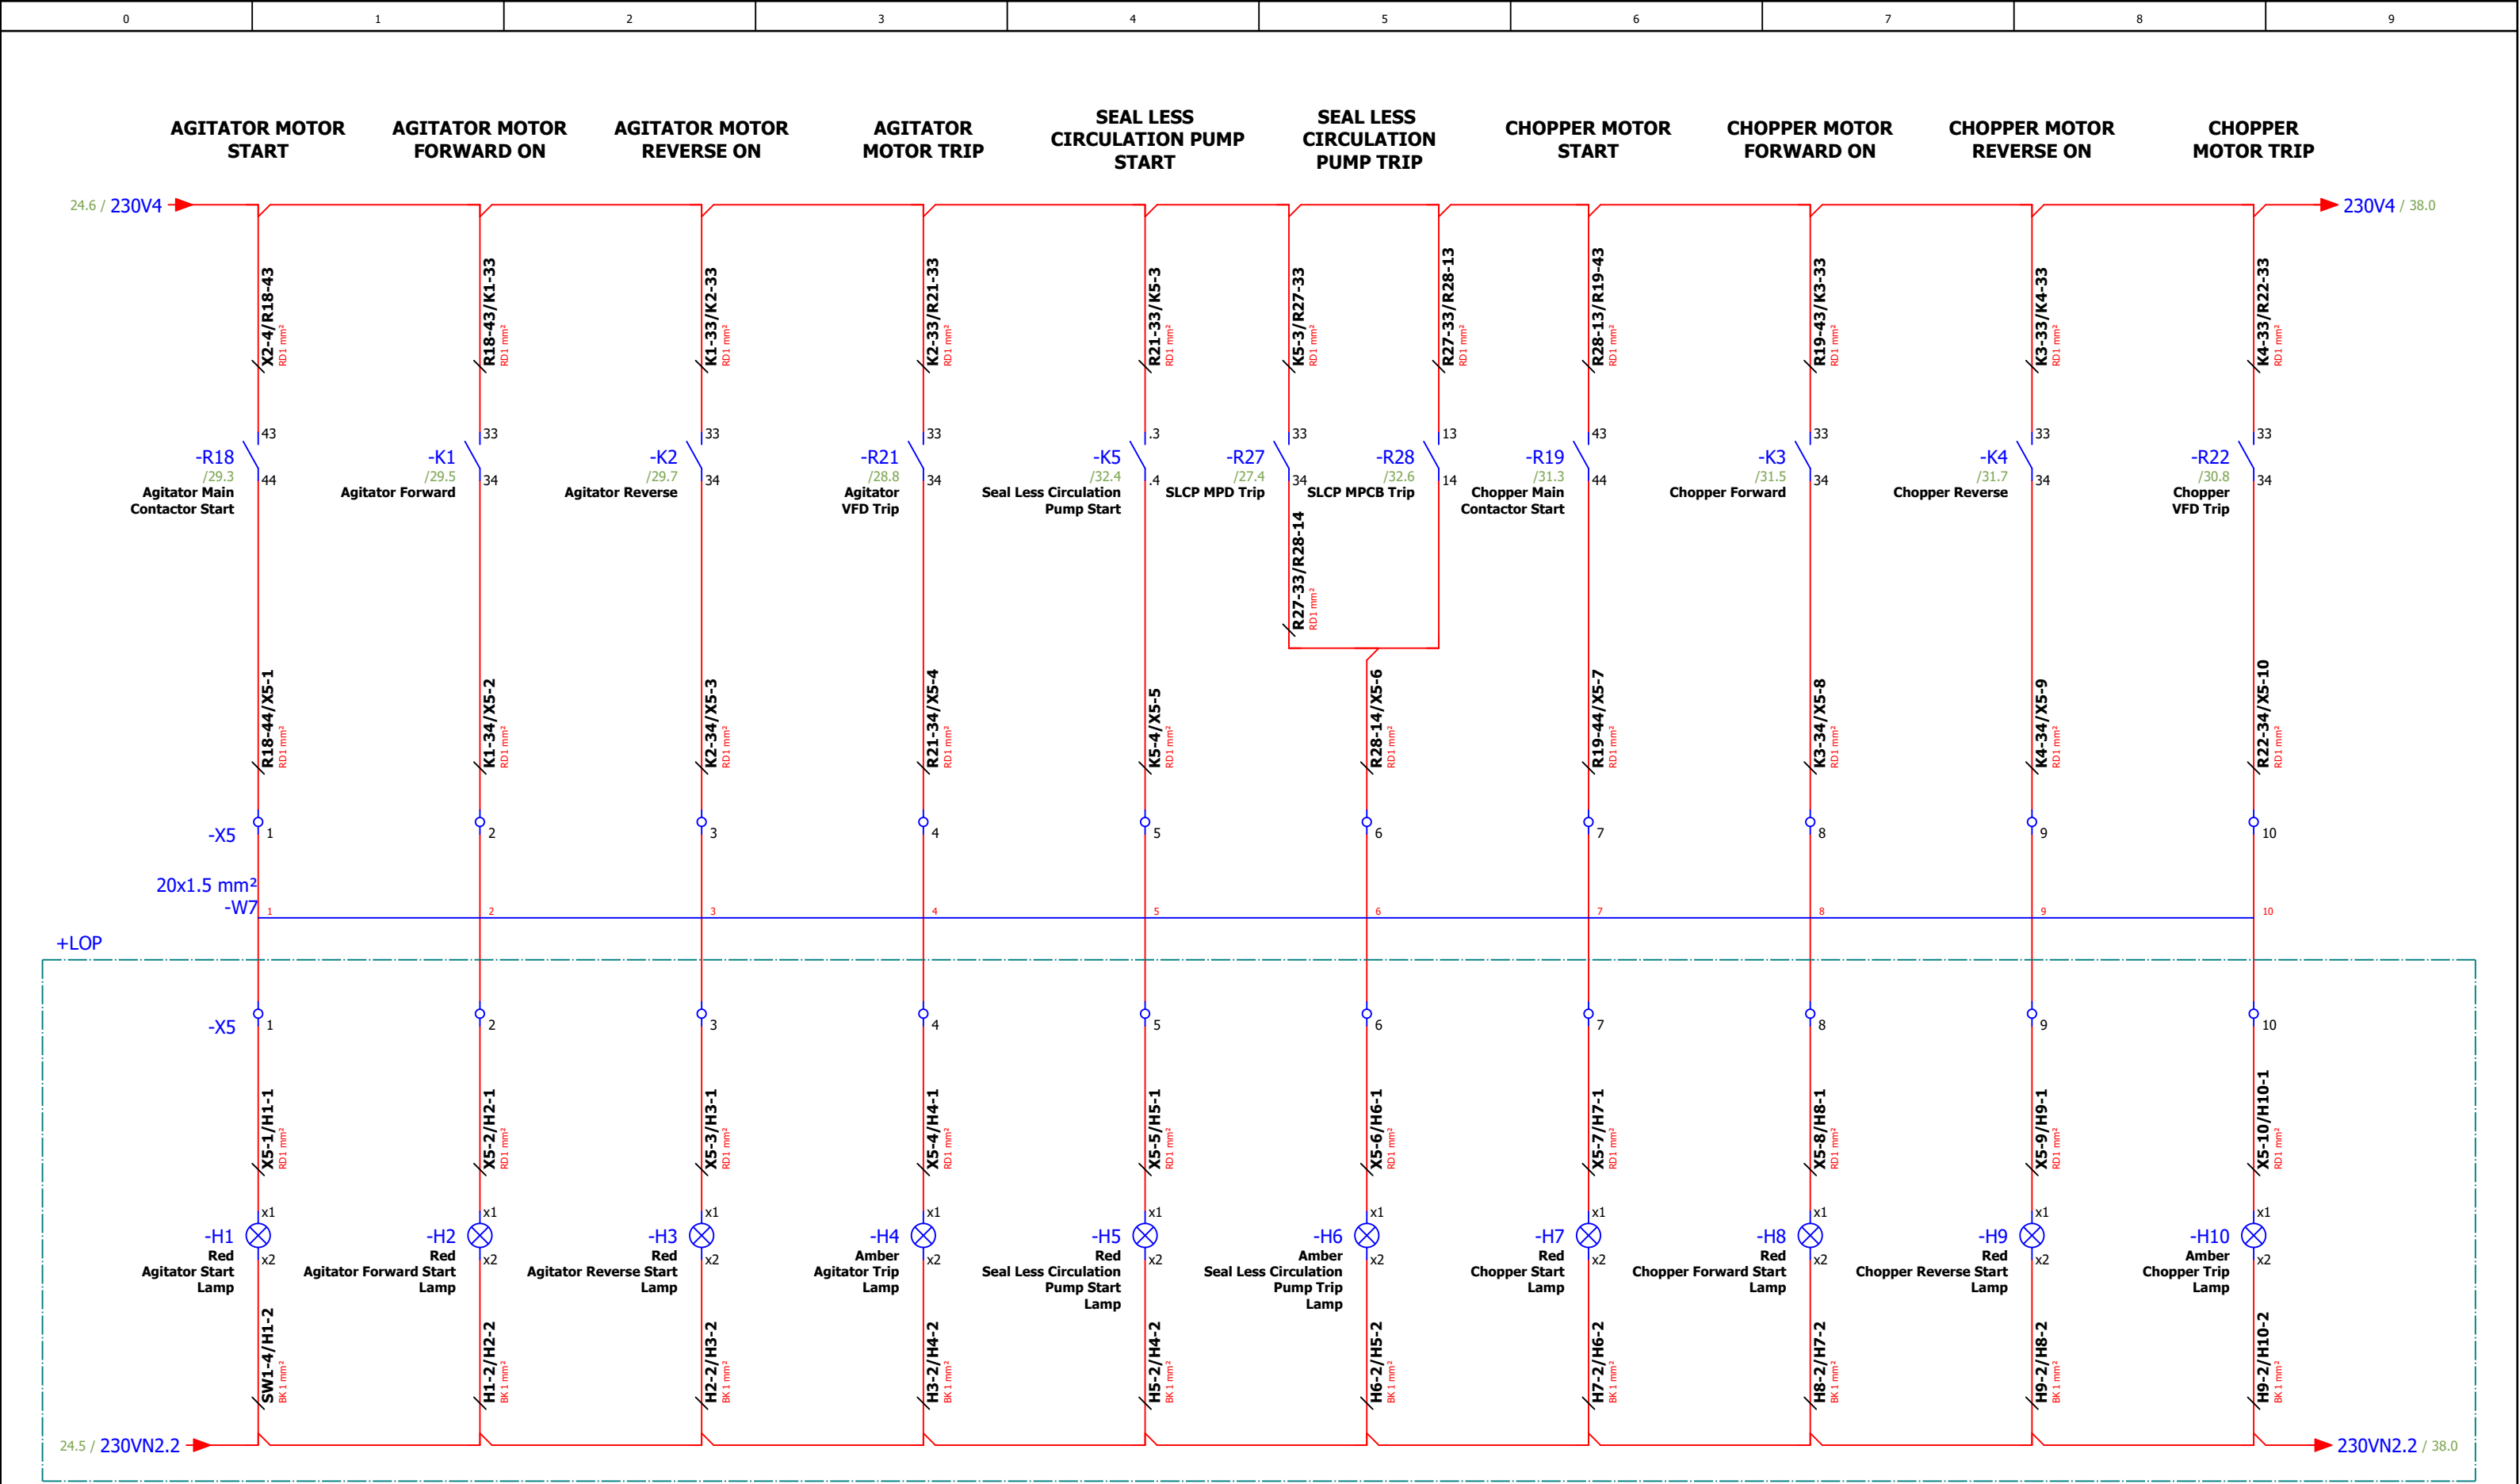


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : LOP CONTROL WIRING	= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	Page : 37
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		PANEL TAG No. :	SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	37 OF 105

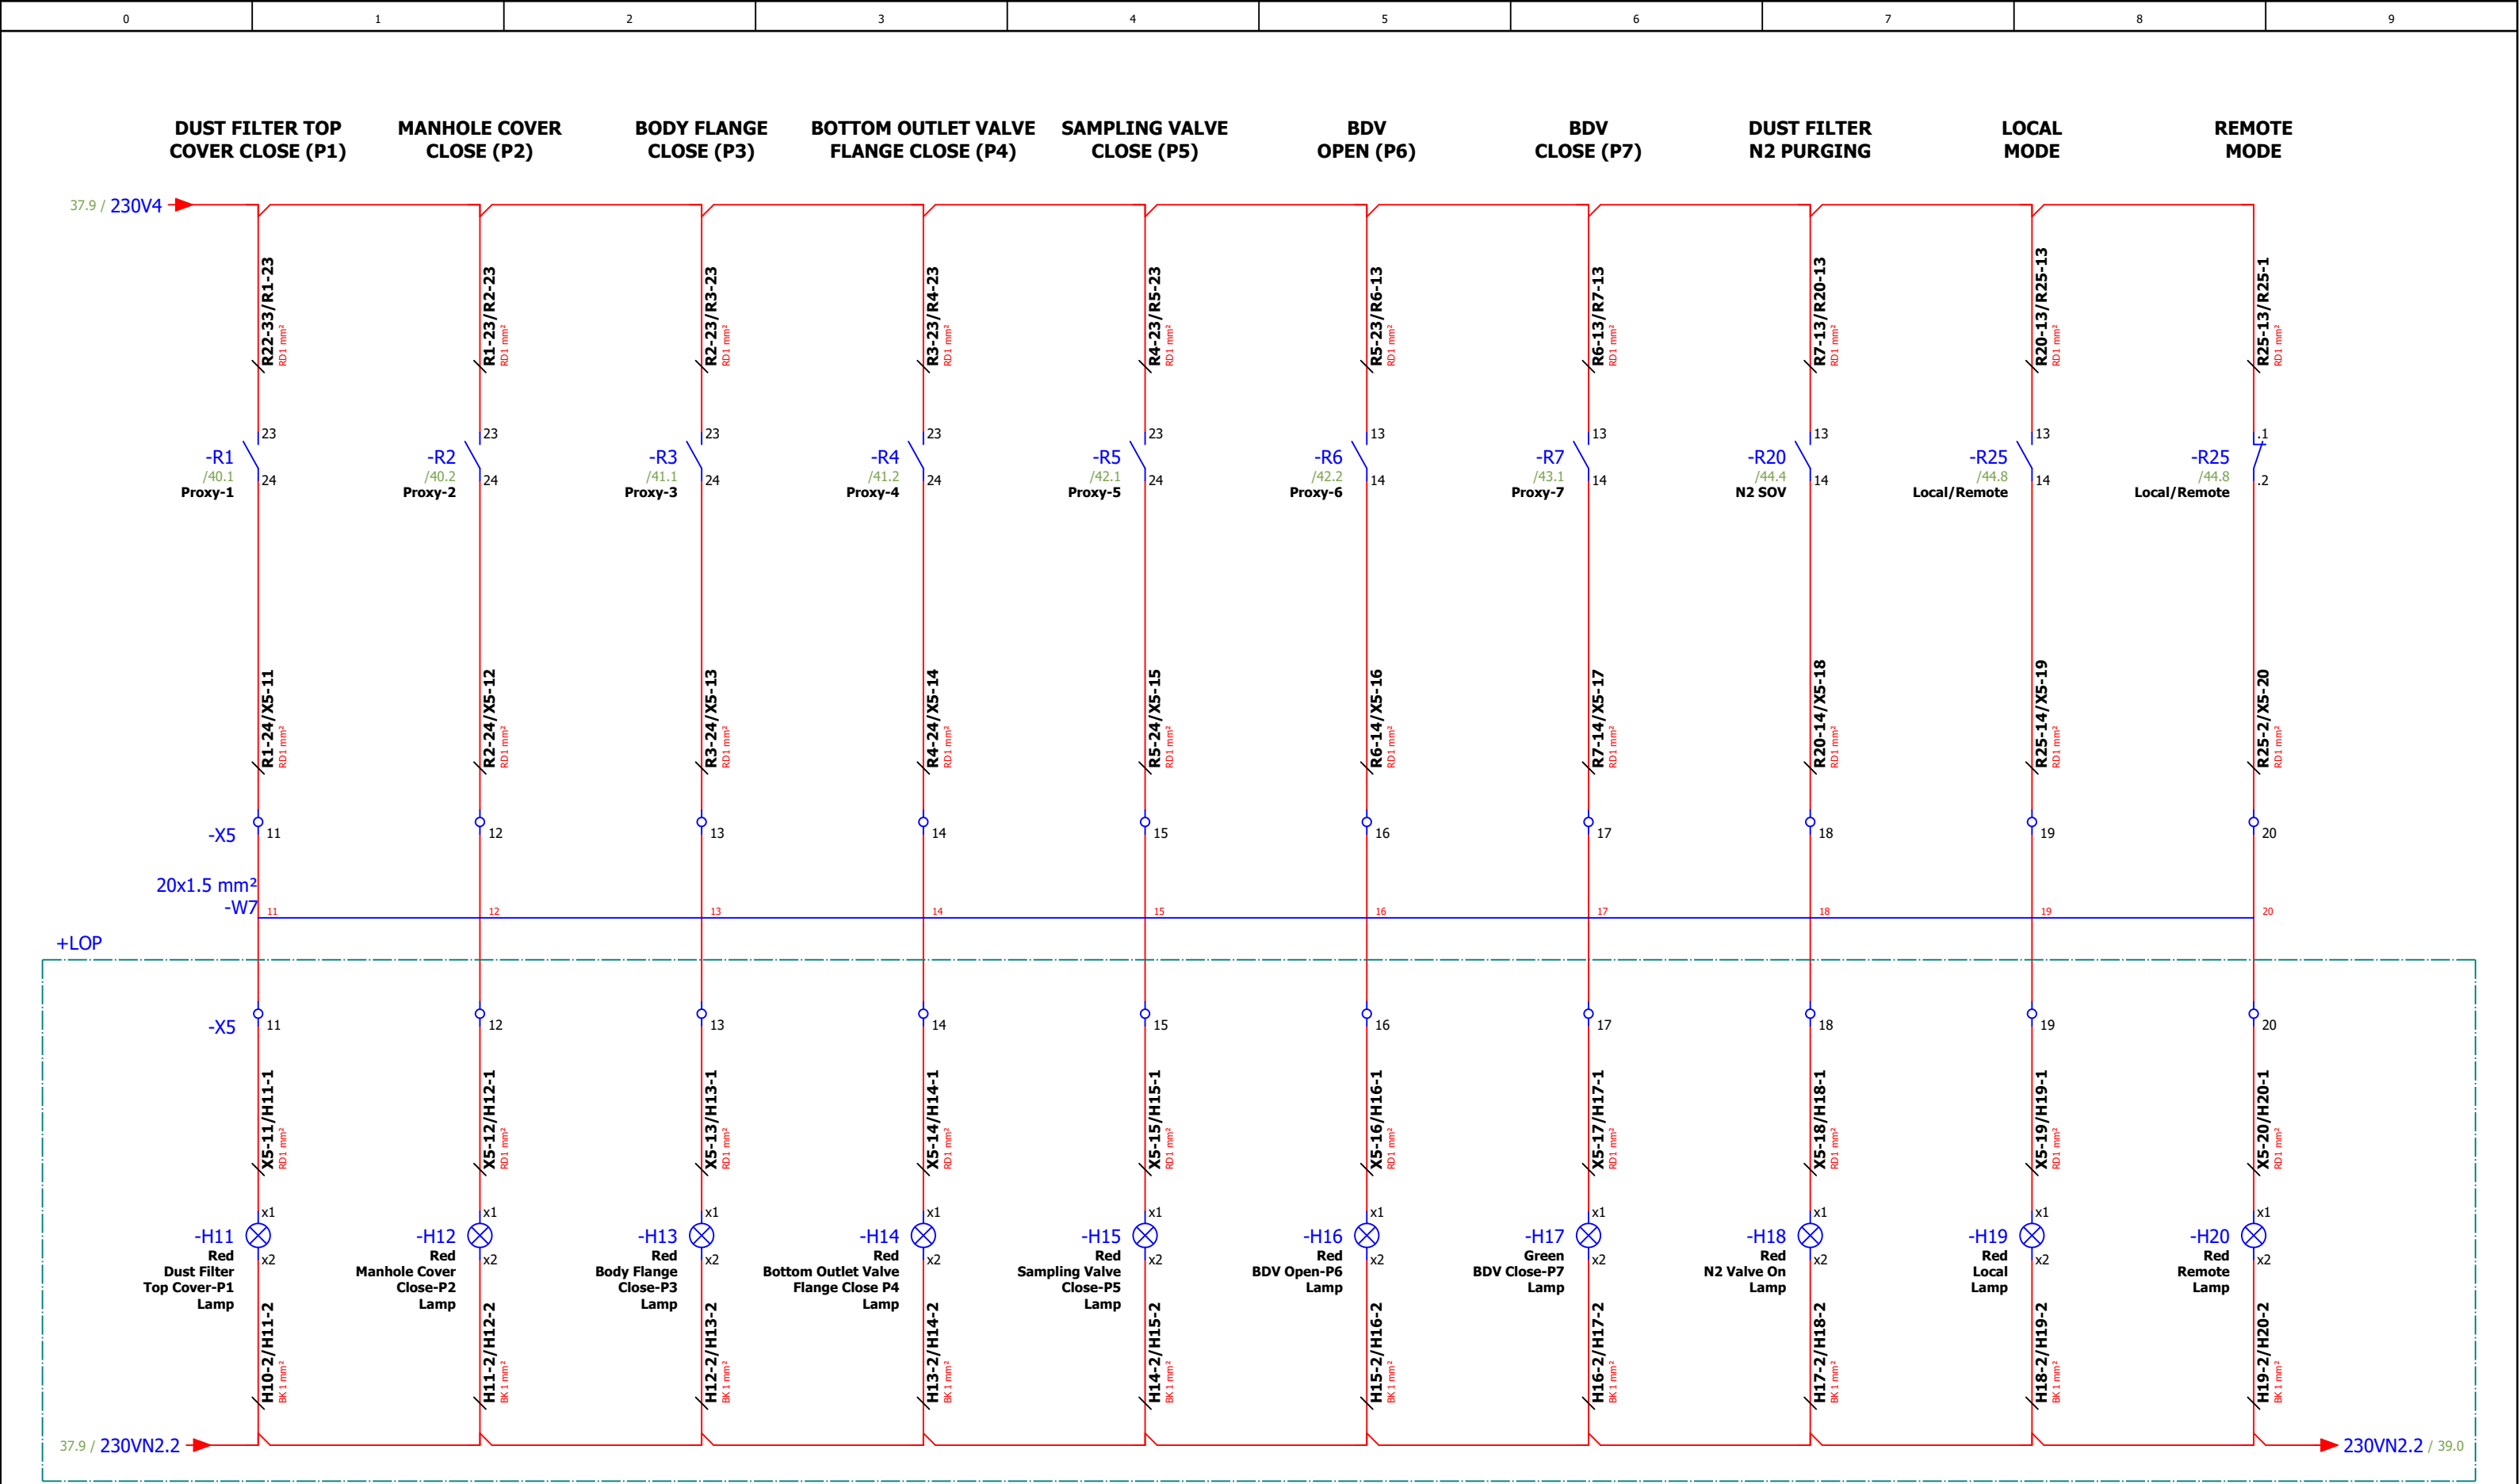



04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : LOP CONTROL WIRING	= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : DRAWING No. : VA-199
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			Page : 38 SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			38 OF 105


SPARE


POWER SUPPLY ON

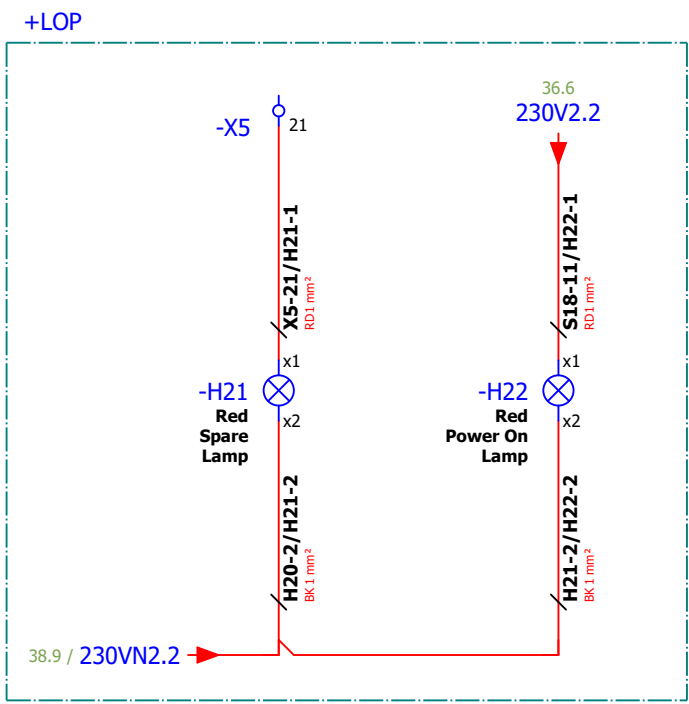


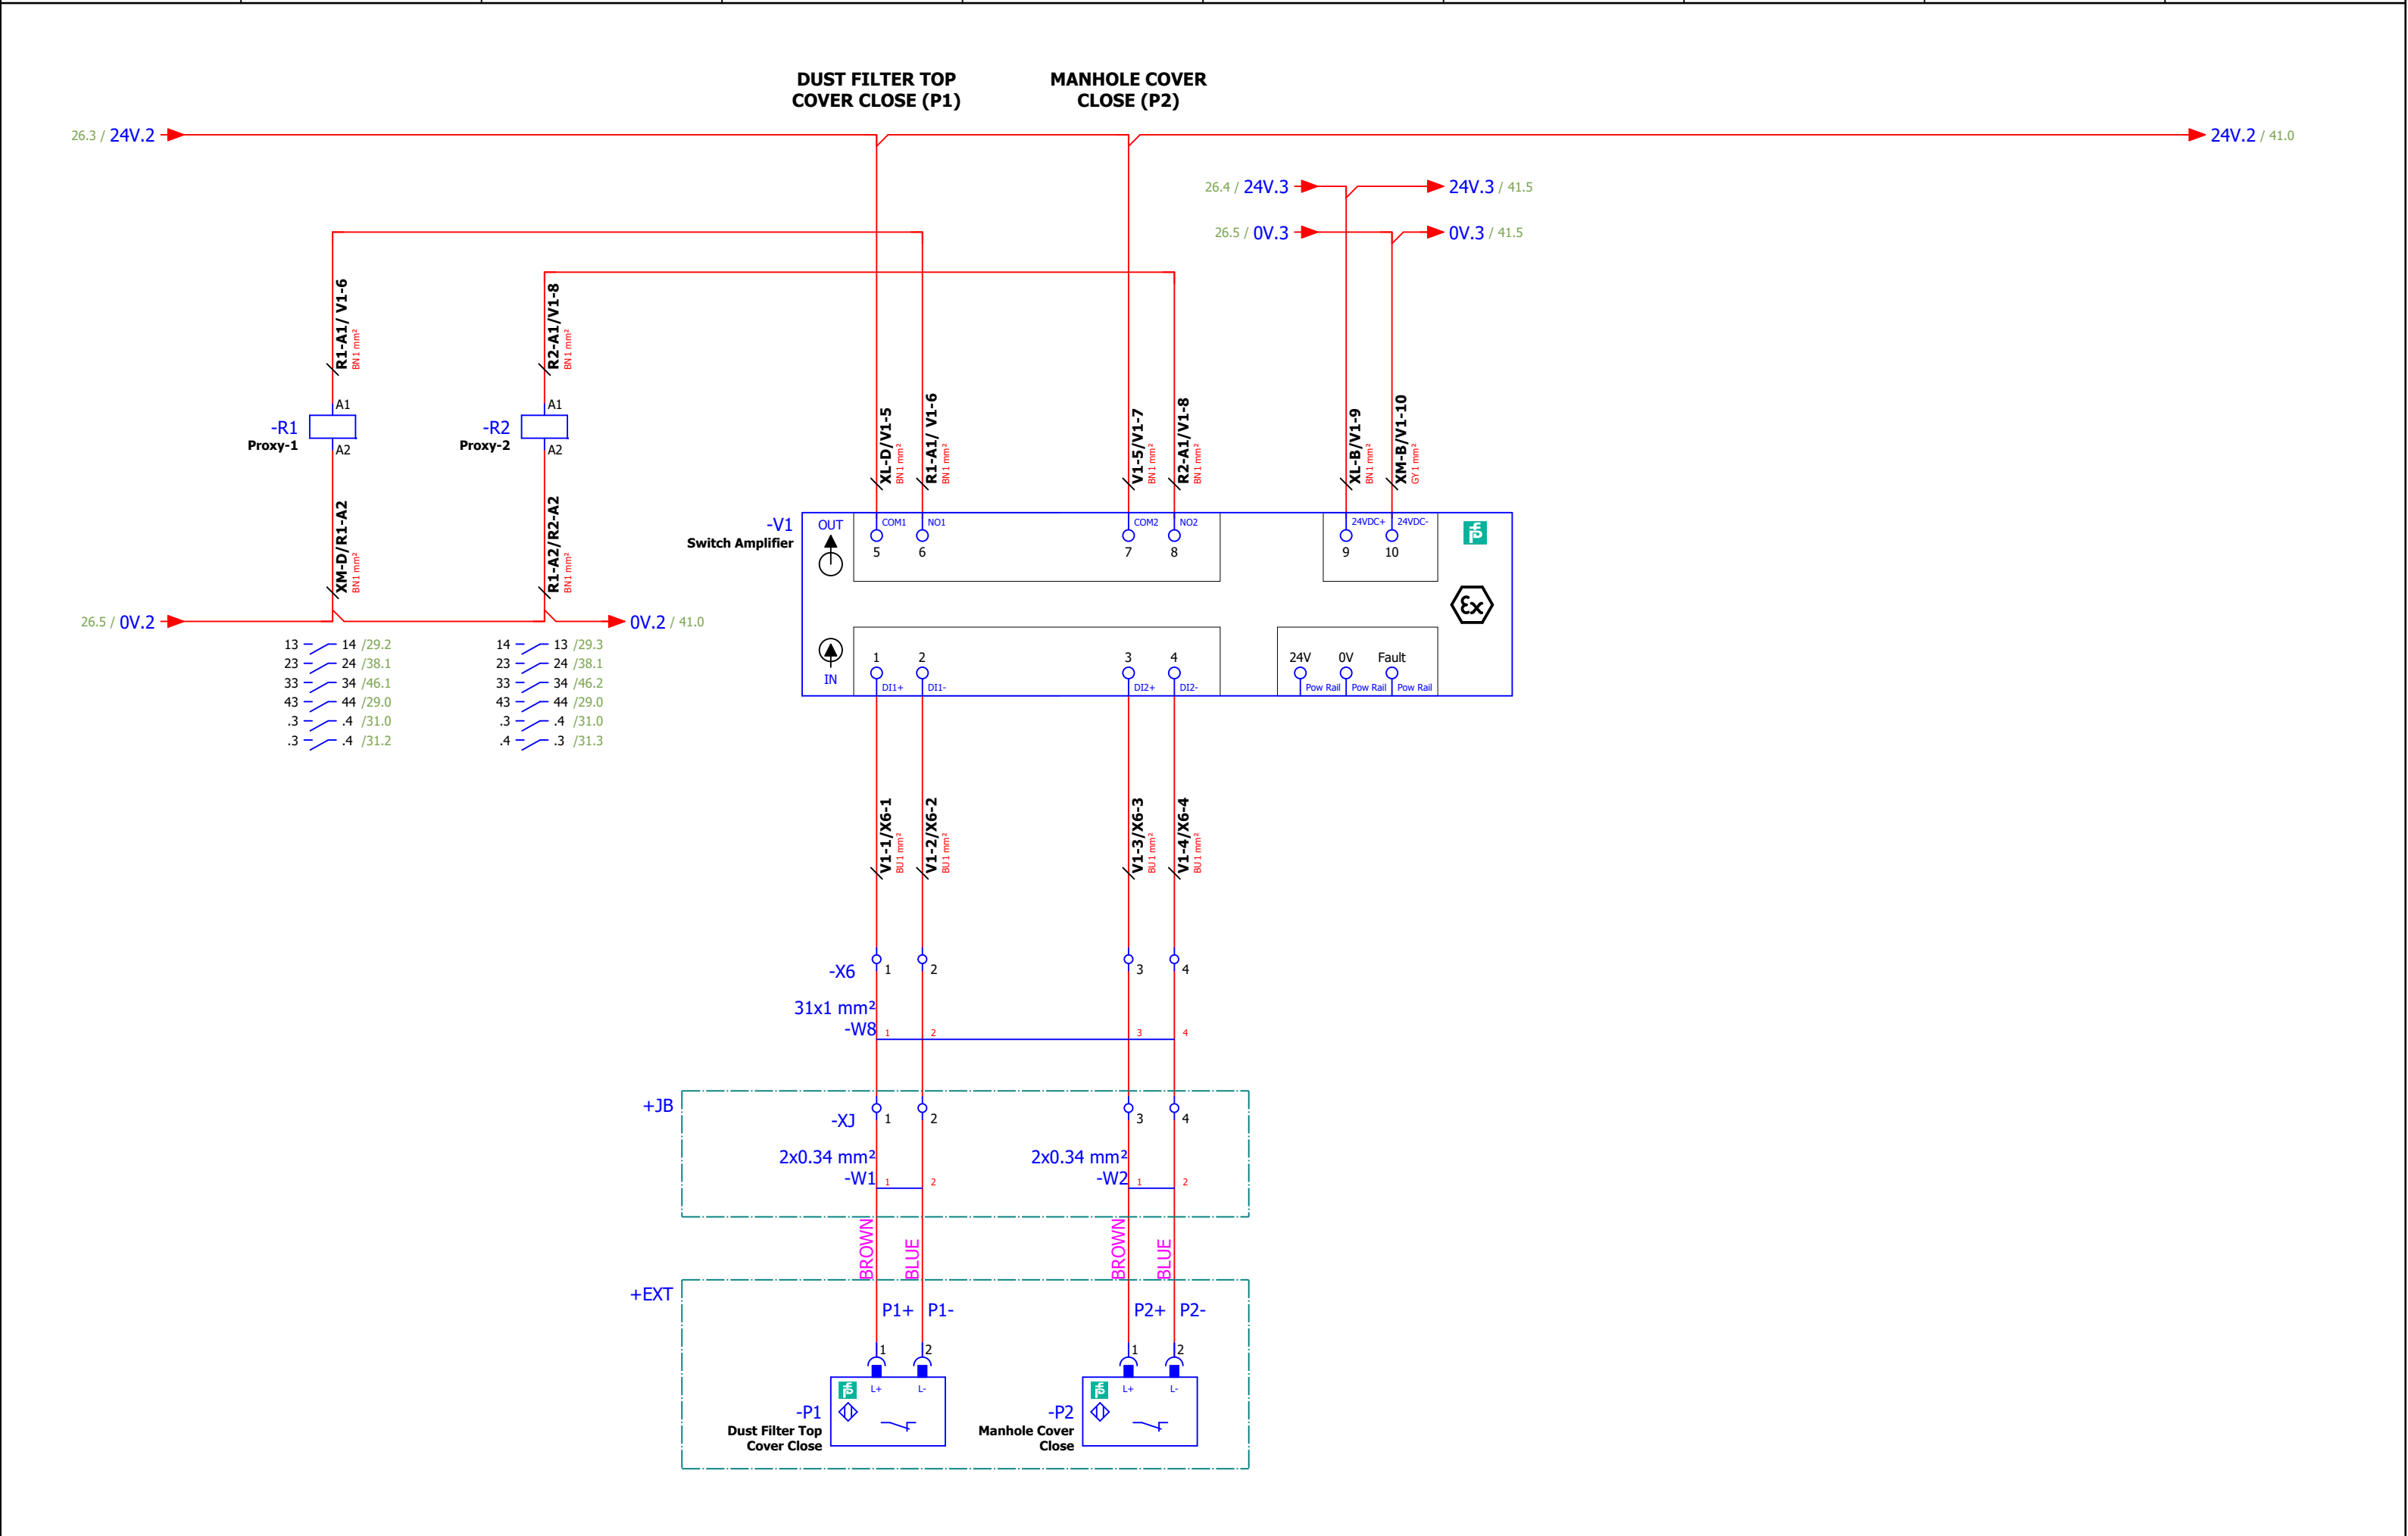

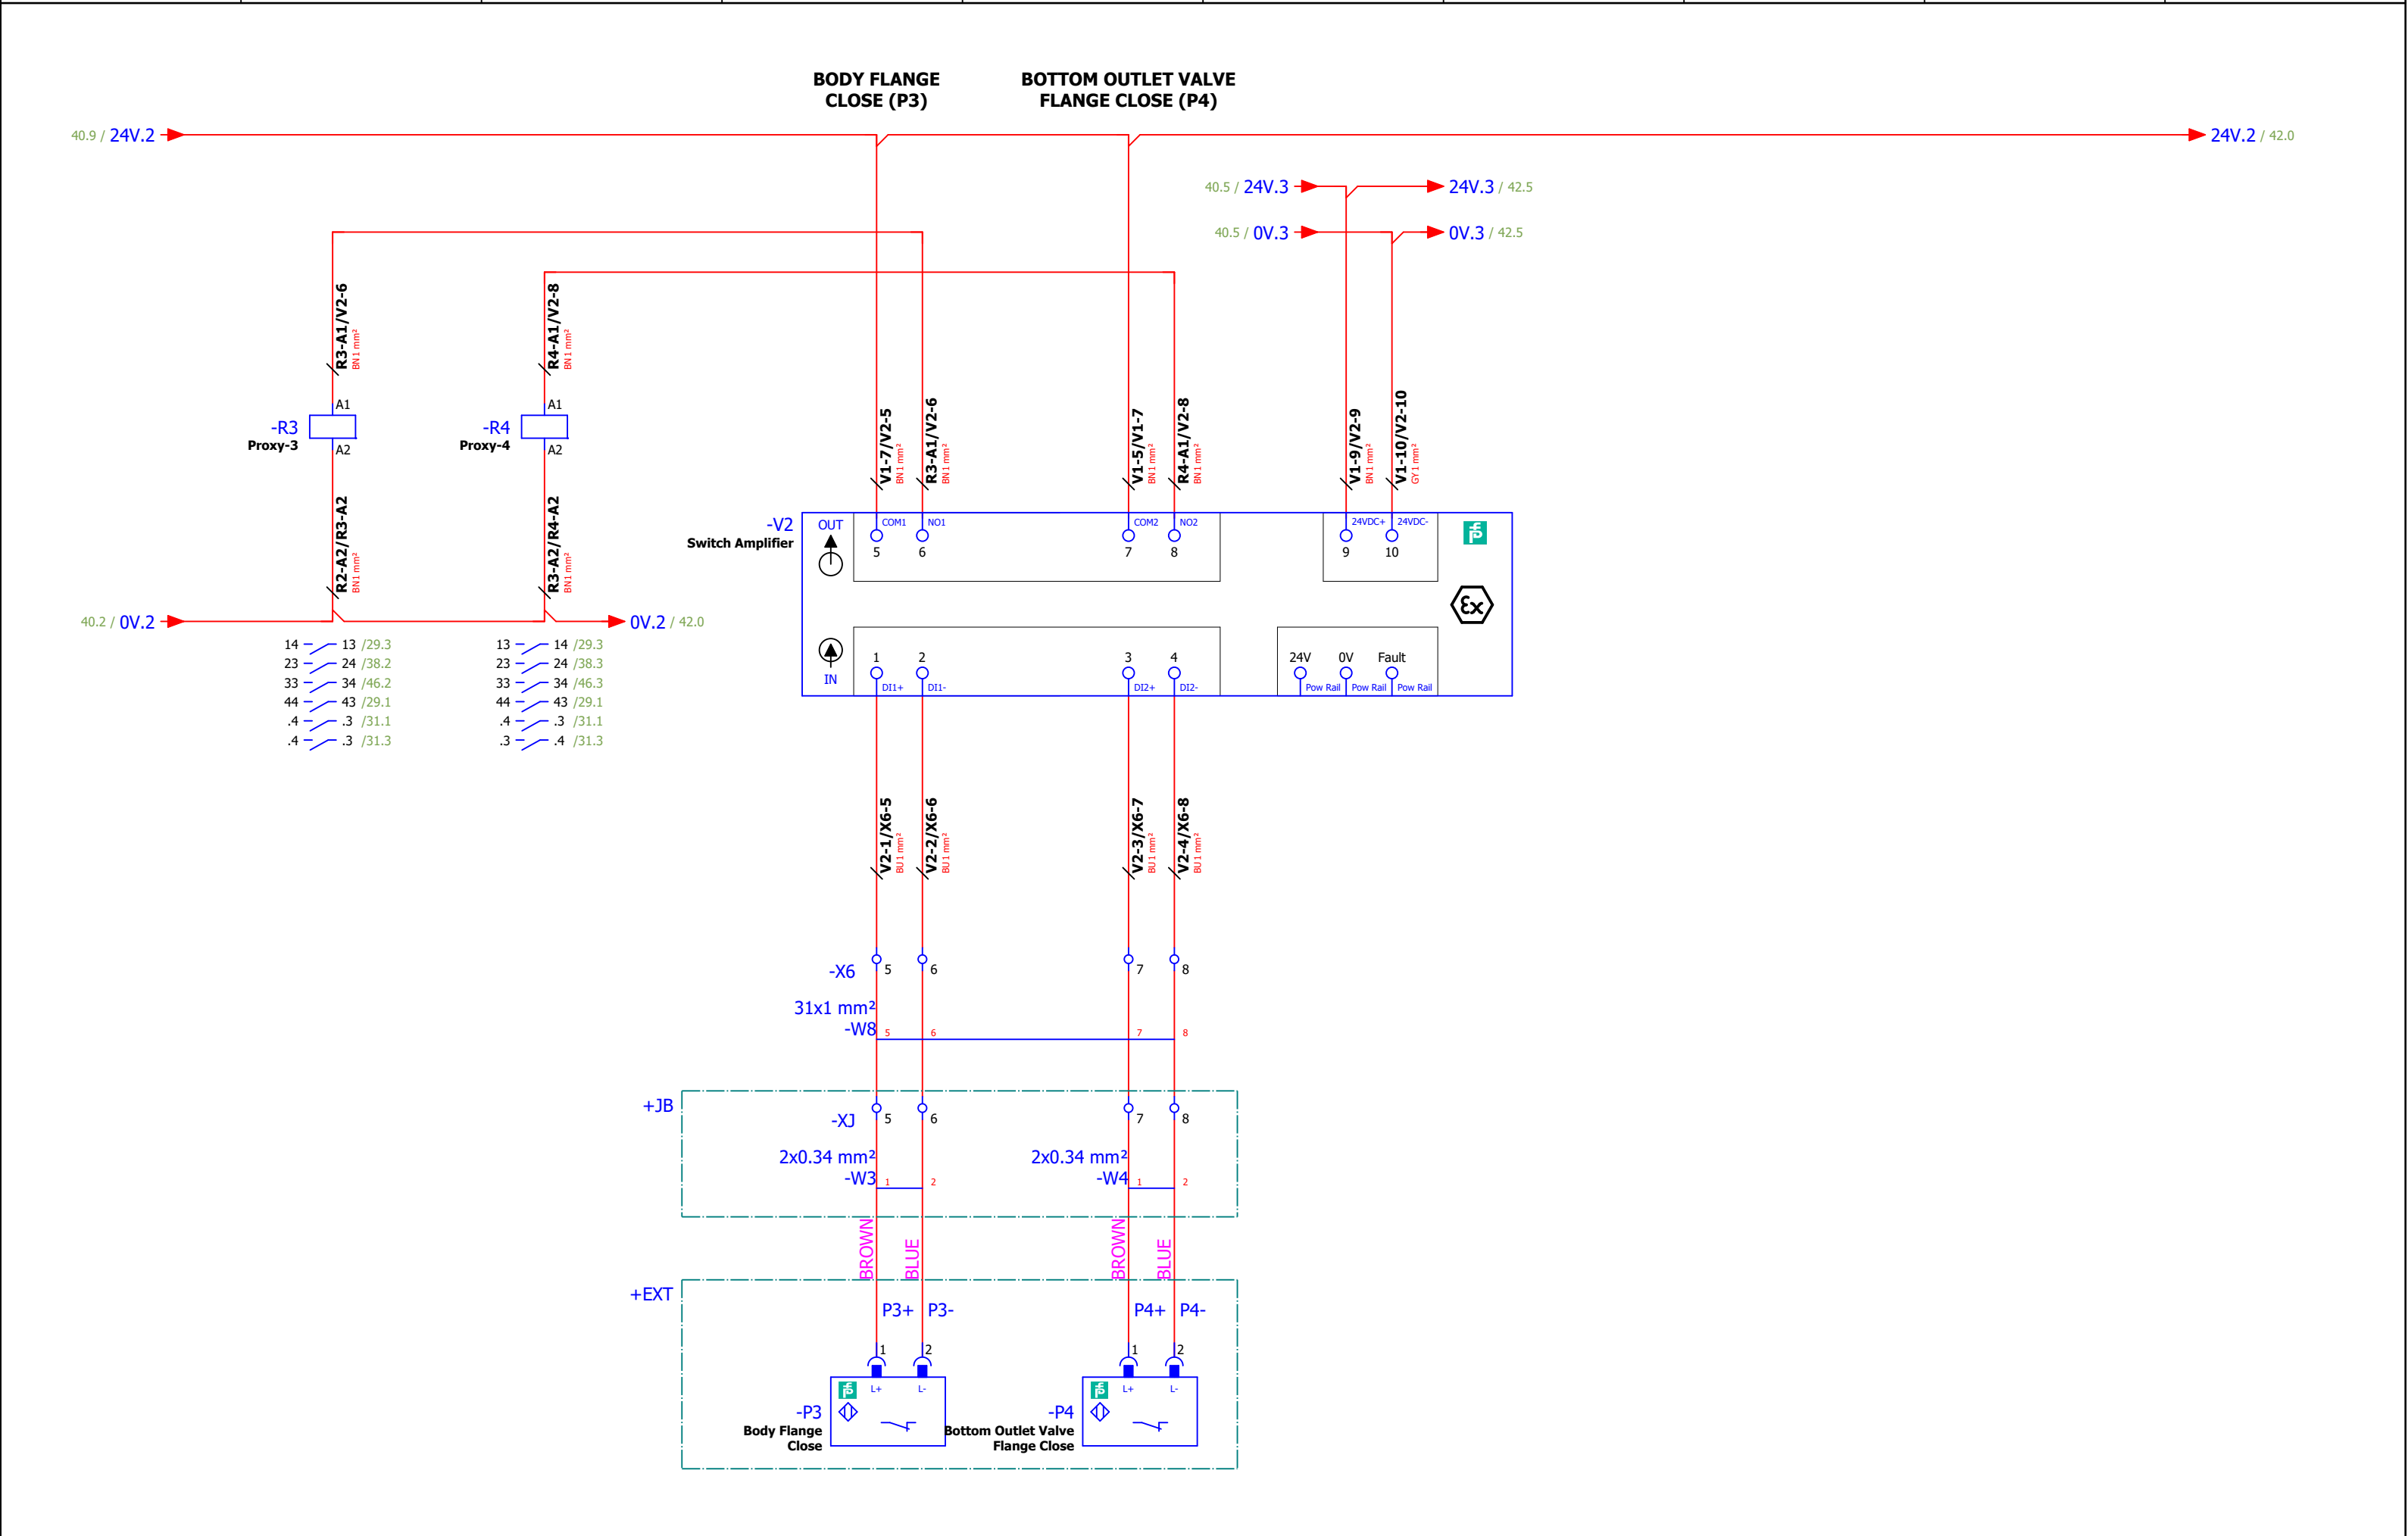


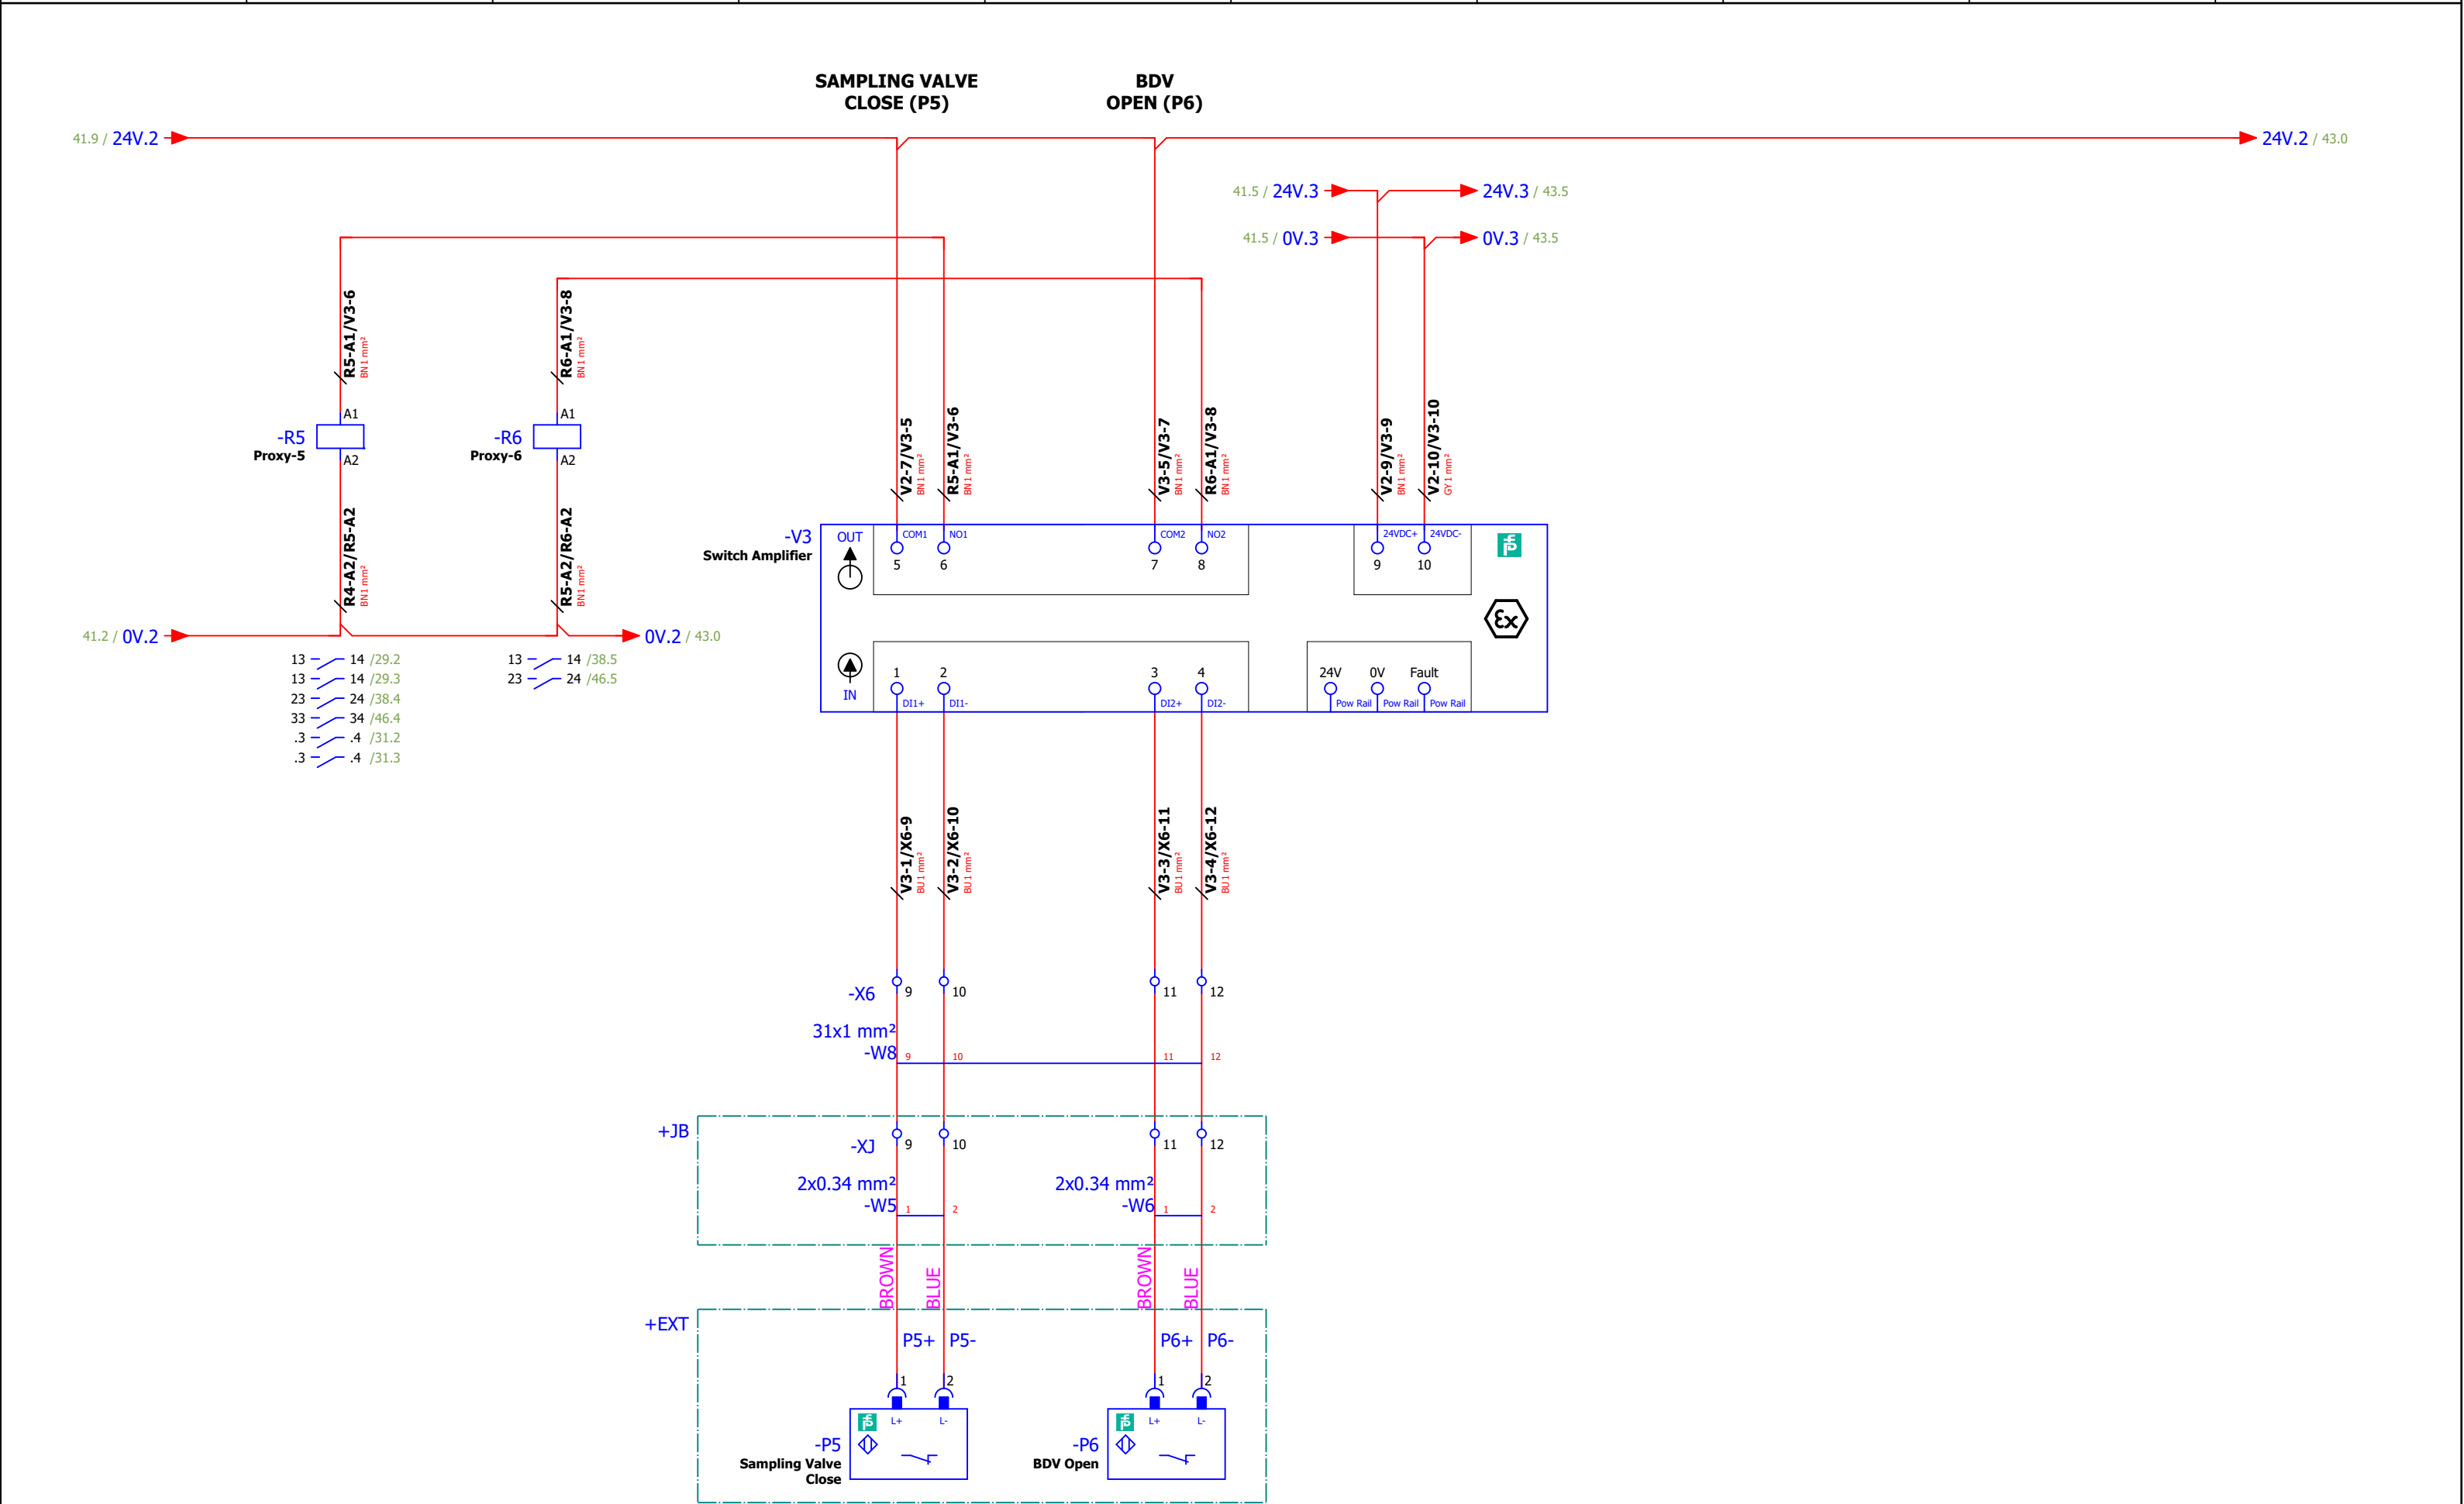


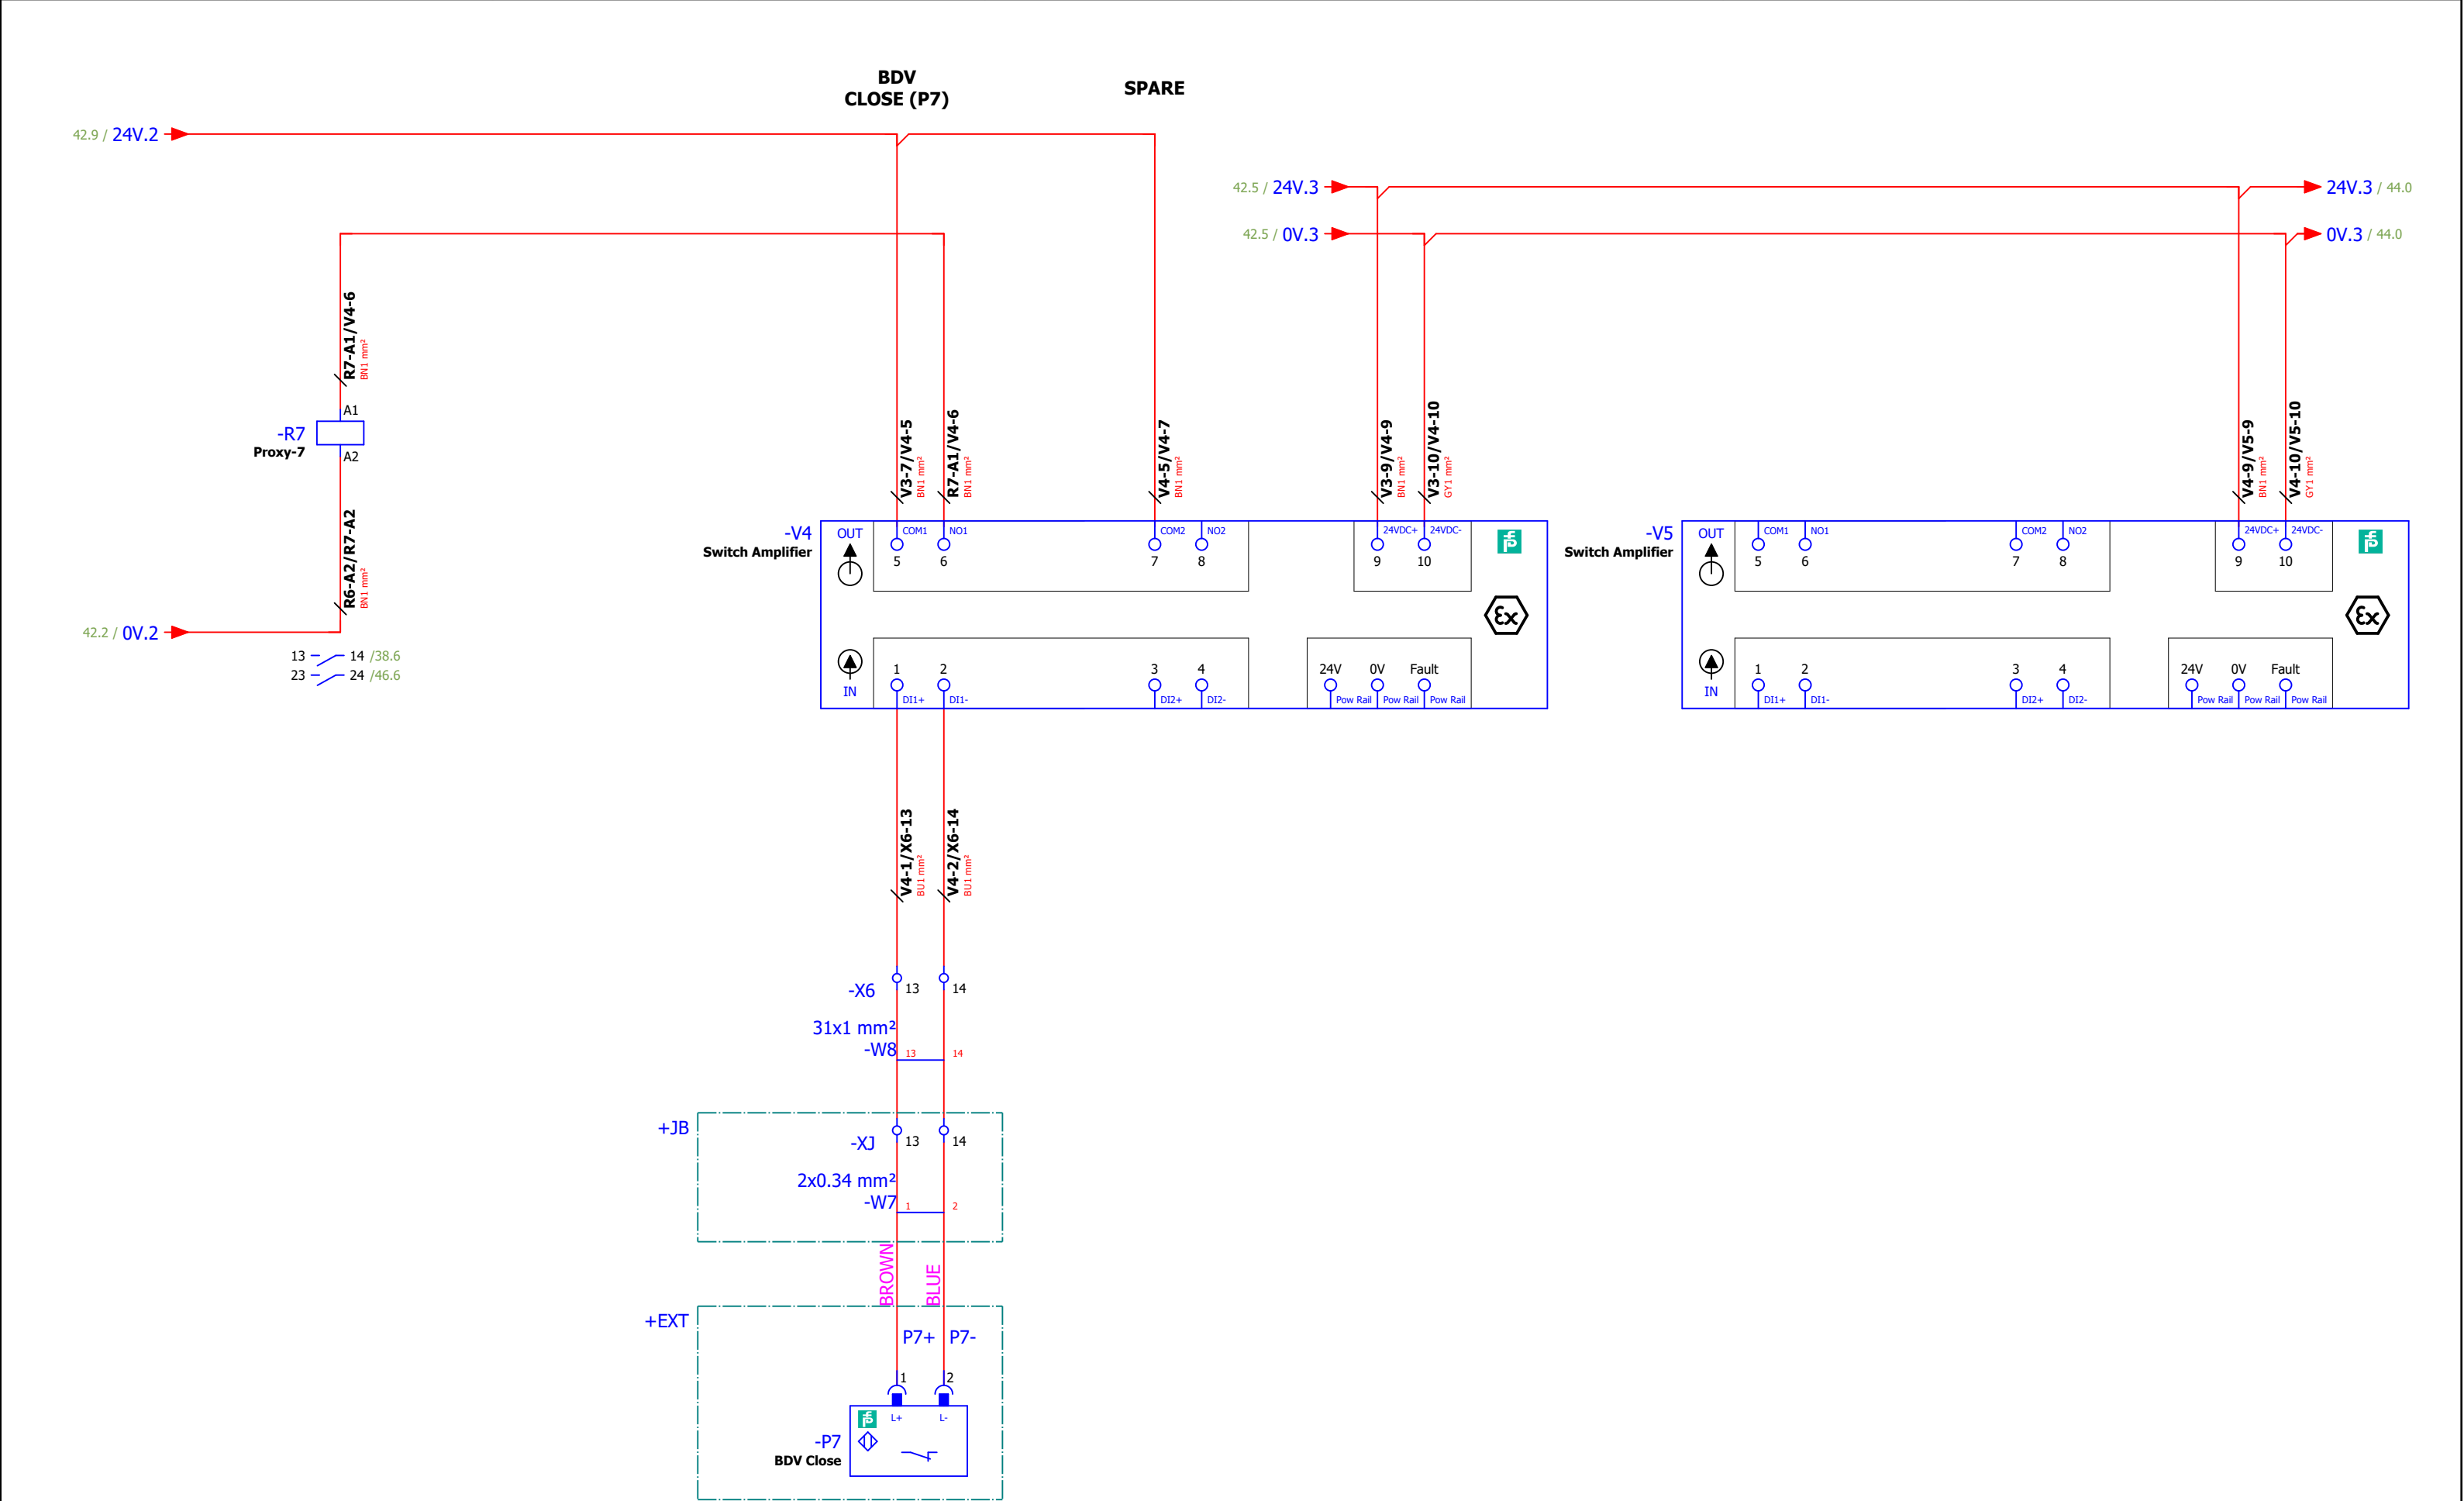

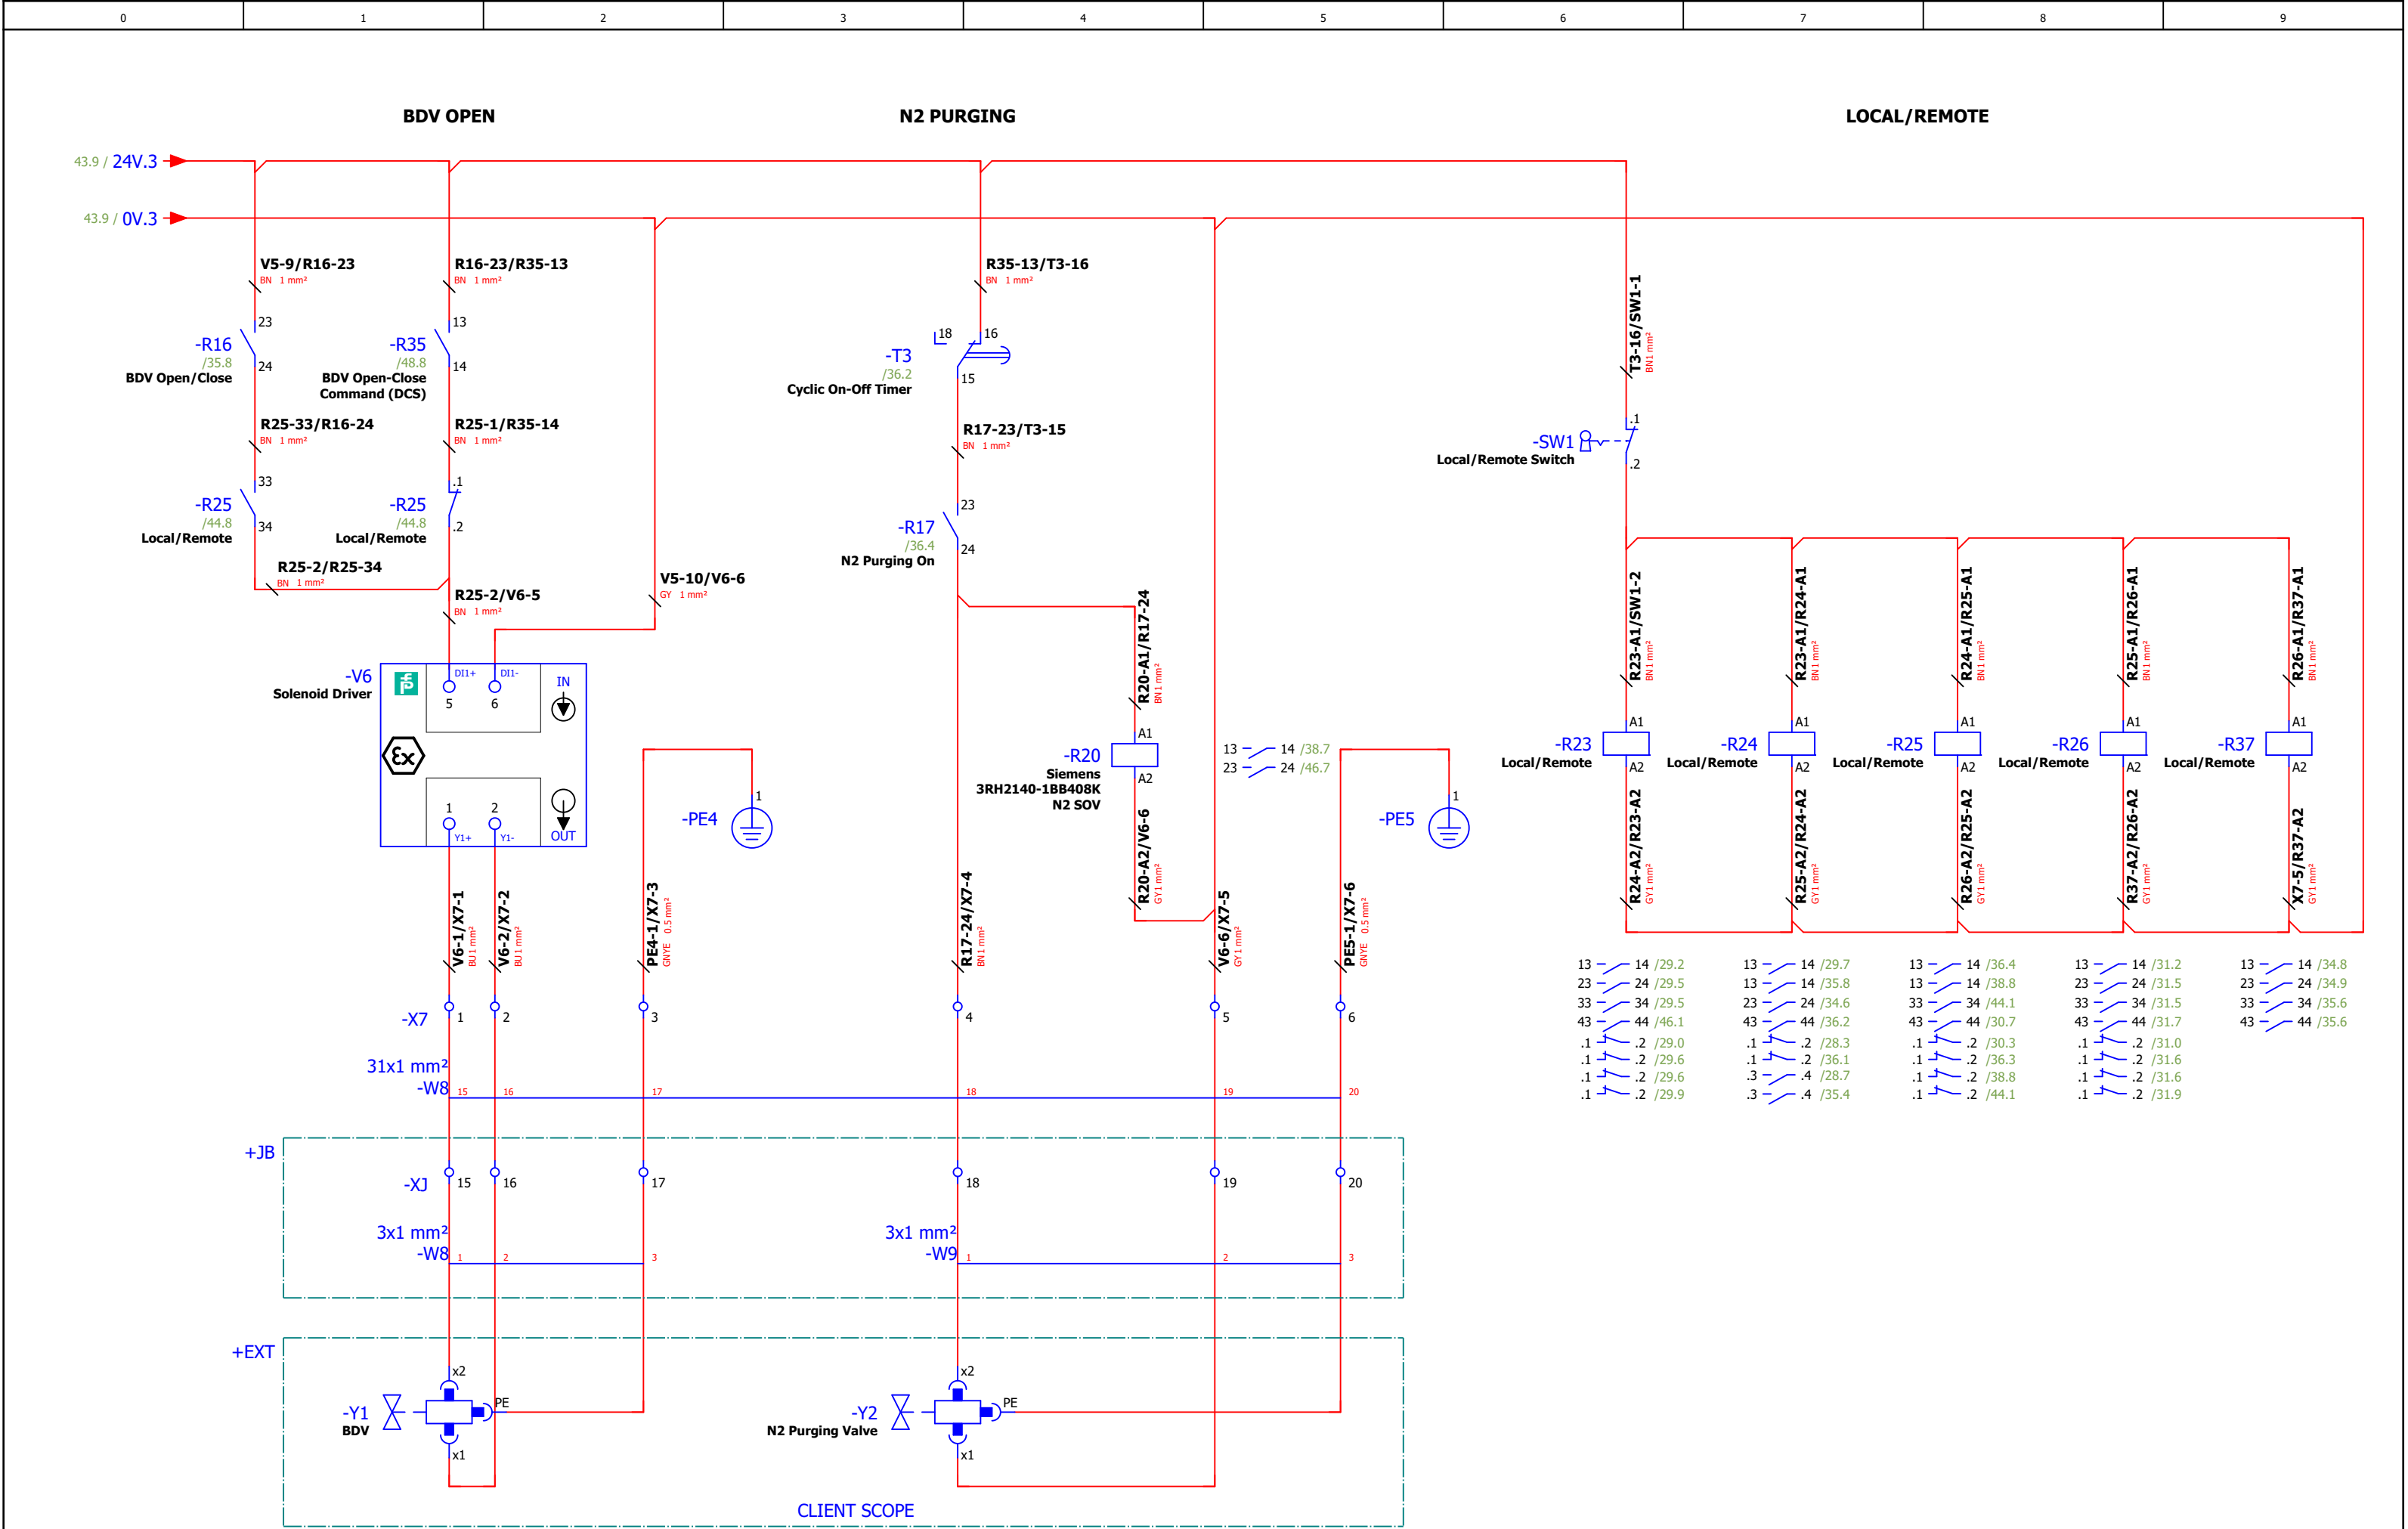


43										45									
04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : SOV		= VCD									
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 44									
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :	SHEET									
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			VA-199	44 OF 105									

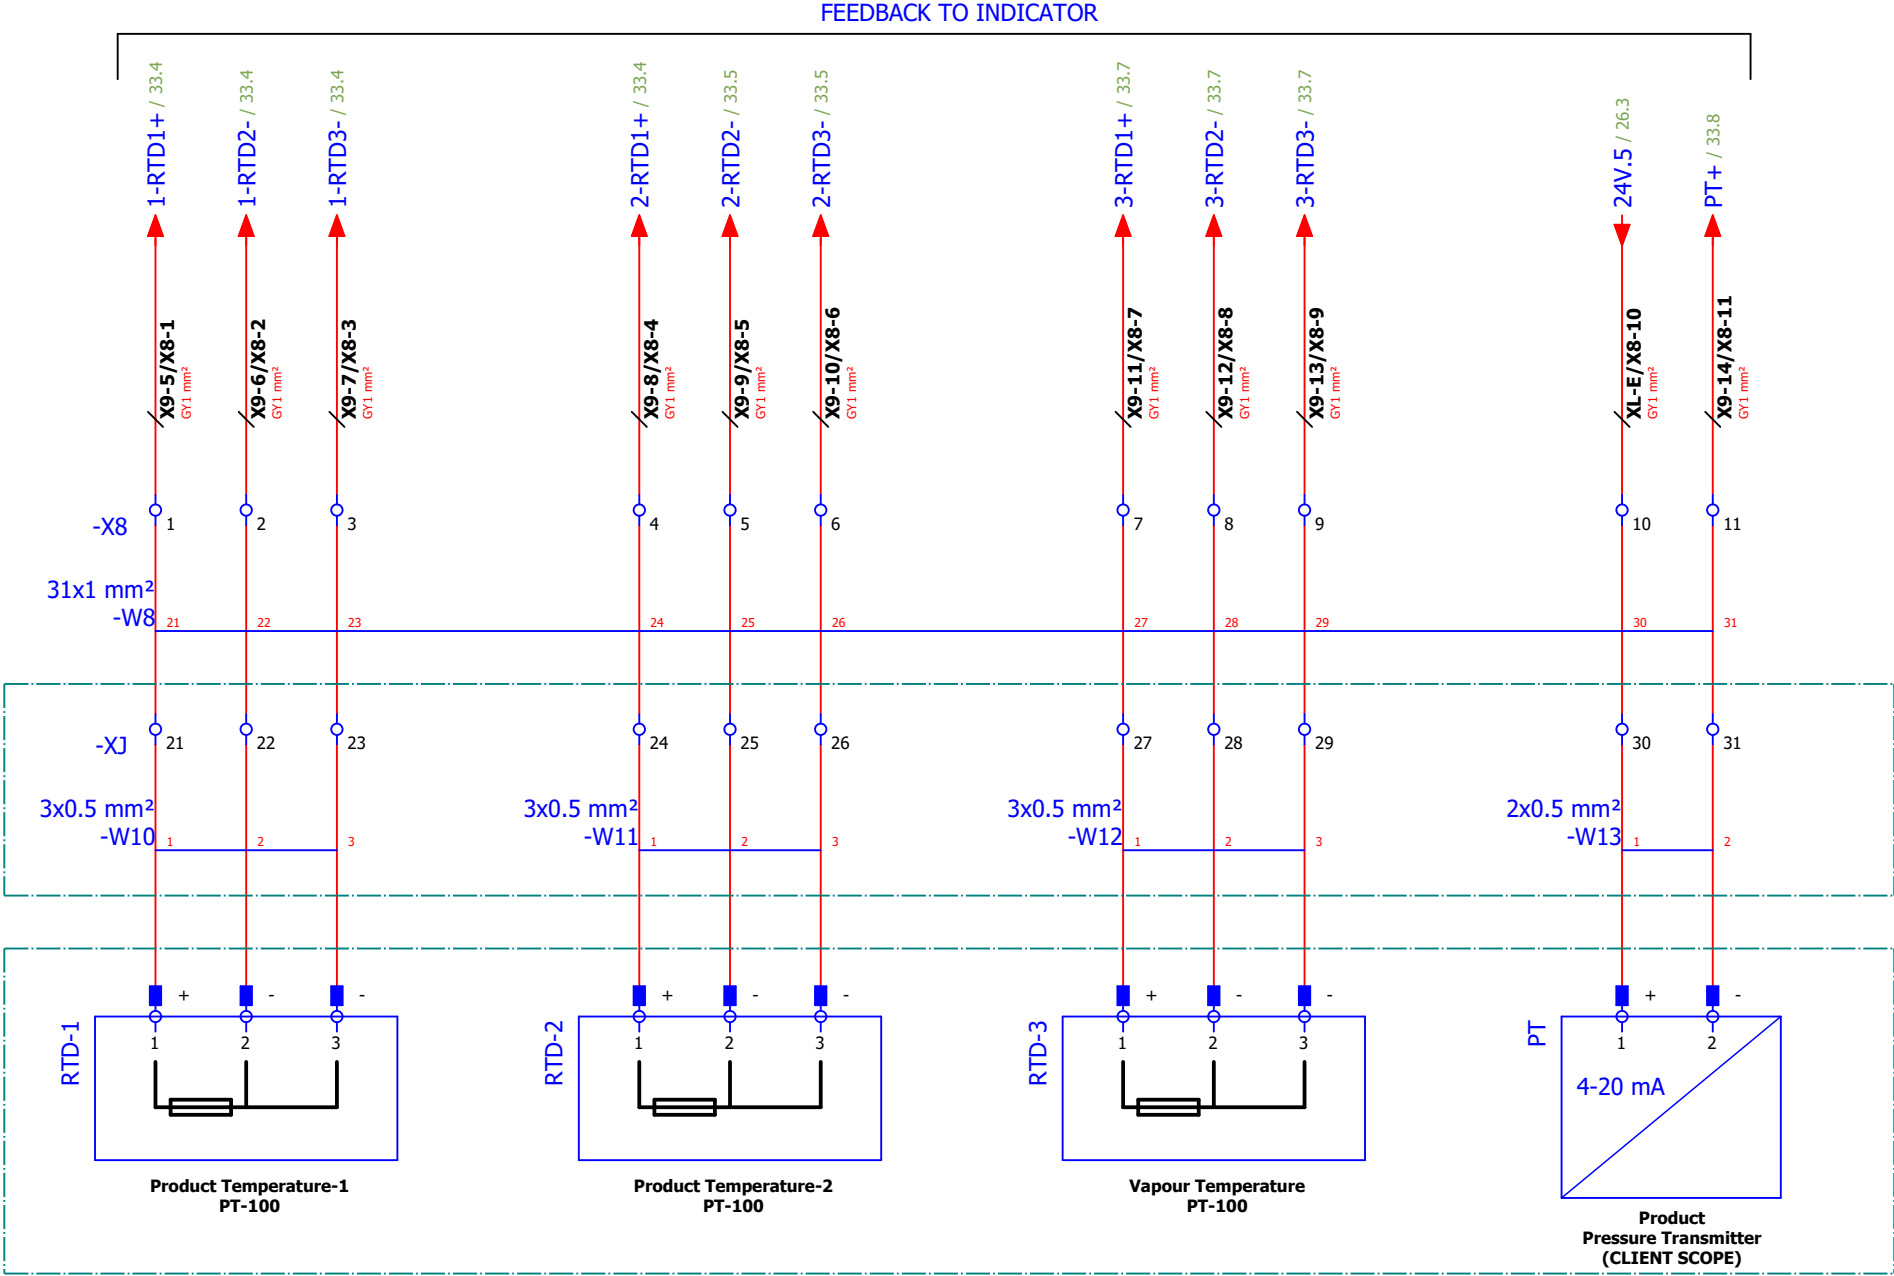

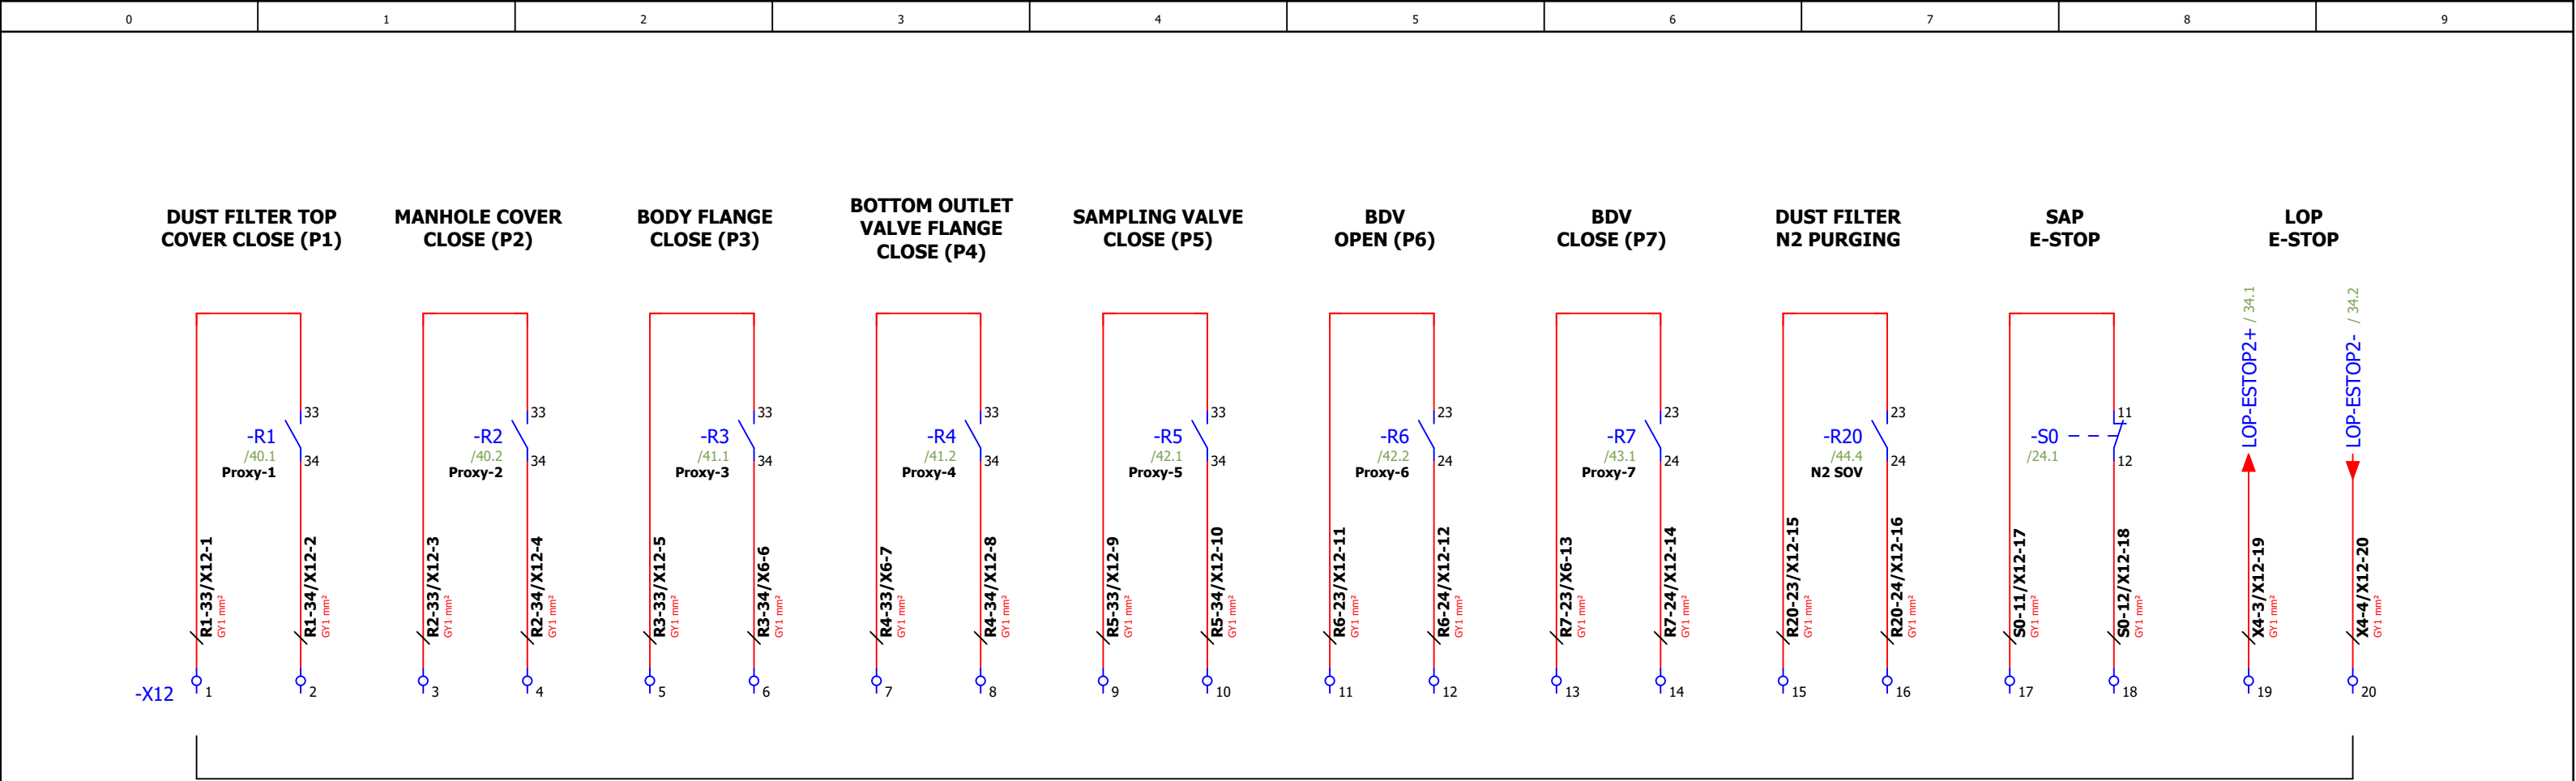


TO CLIENT'S DCS DIGITAL INPUT

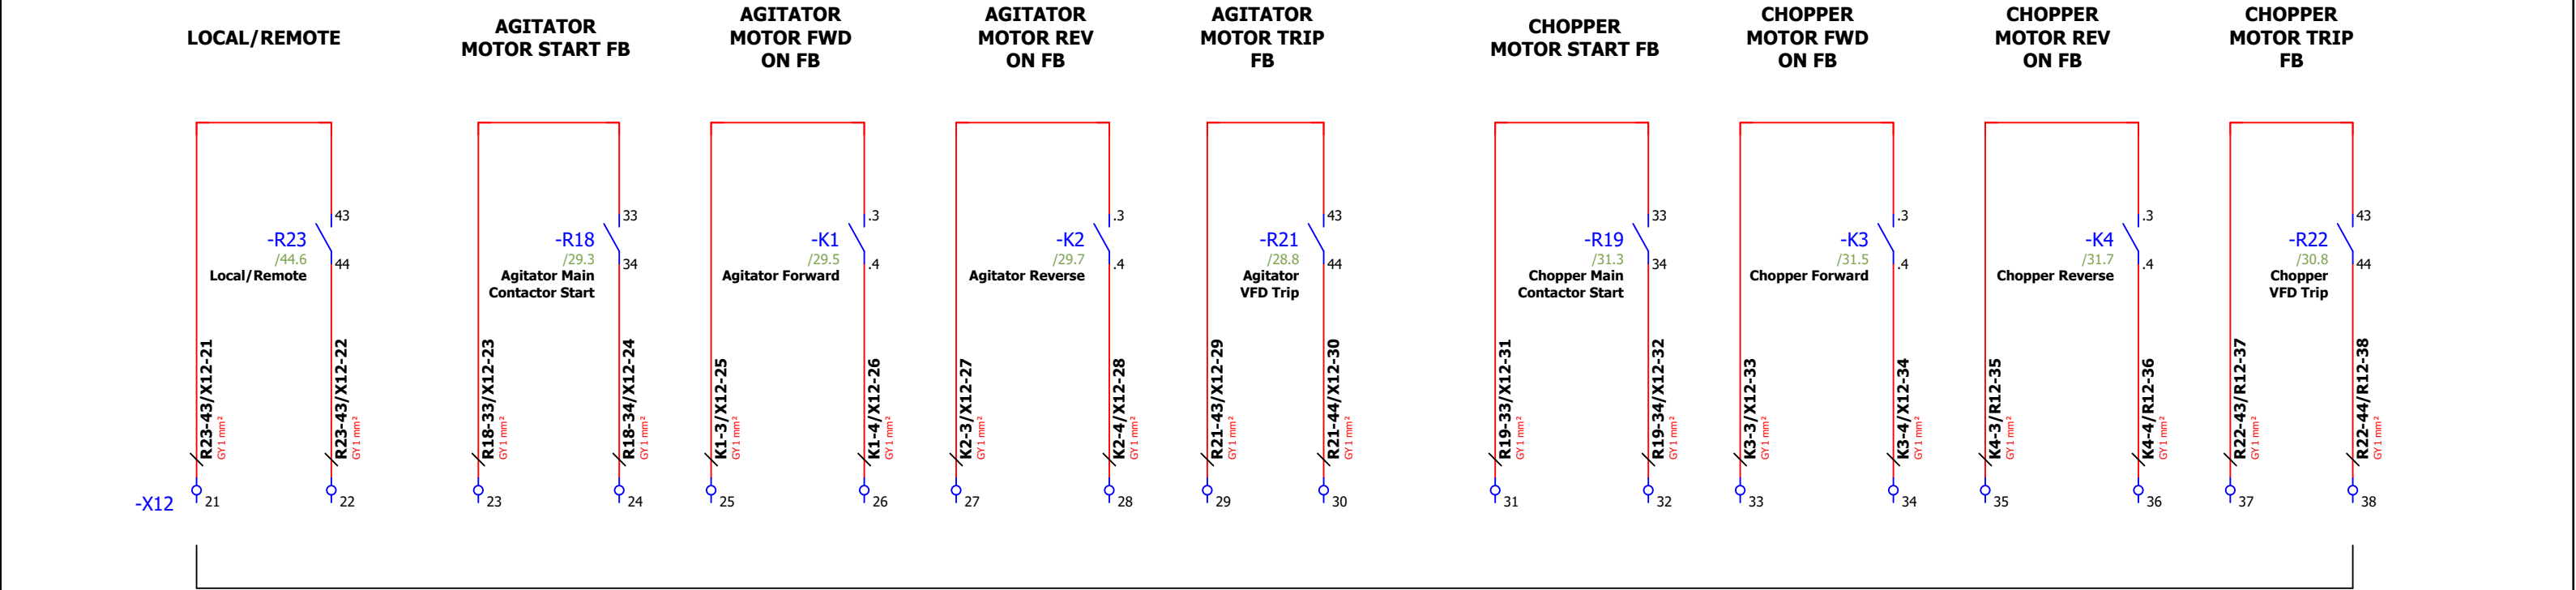

TO CLIENT'S DCS DIGITAL INPUT


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : DCS DIGITAL INPUT	= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 46
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. : SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	46 OF 105

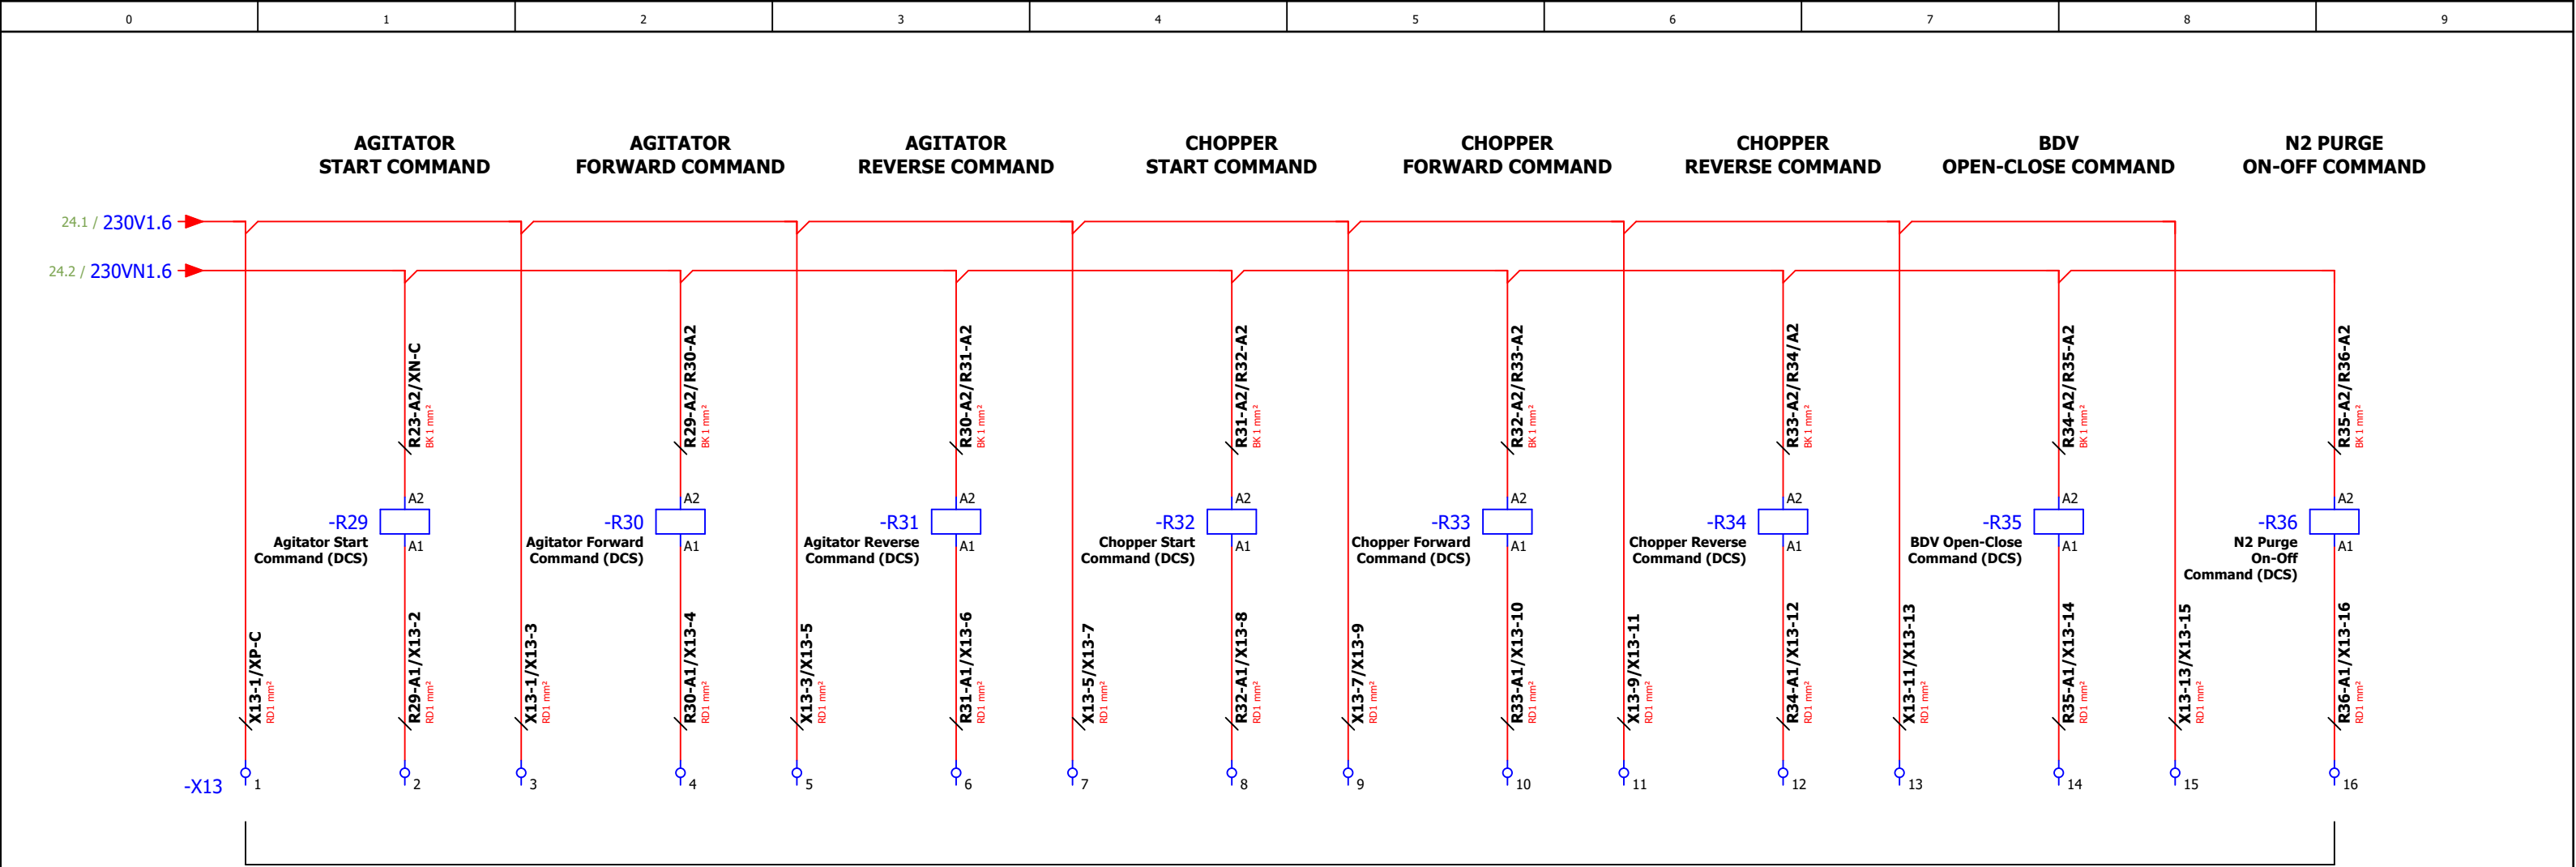

TO CLIENT'S DCS DIGITAL OUTPUT

13 - 14 /29.2 13 - 14 /29.6 13 - 14 /29.9 13 - 14 /31.2 13 - 14 /31.6 13 - 14 /31.9 13 - 14 /44.1 13 - 14 /36.1


04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : DCS DIGITAL OUTPUT	= VCD
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 48
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. : SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	48 OF 105

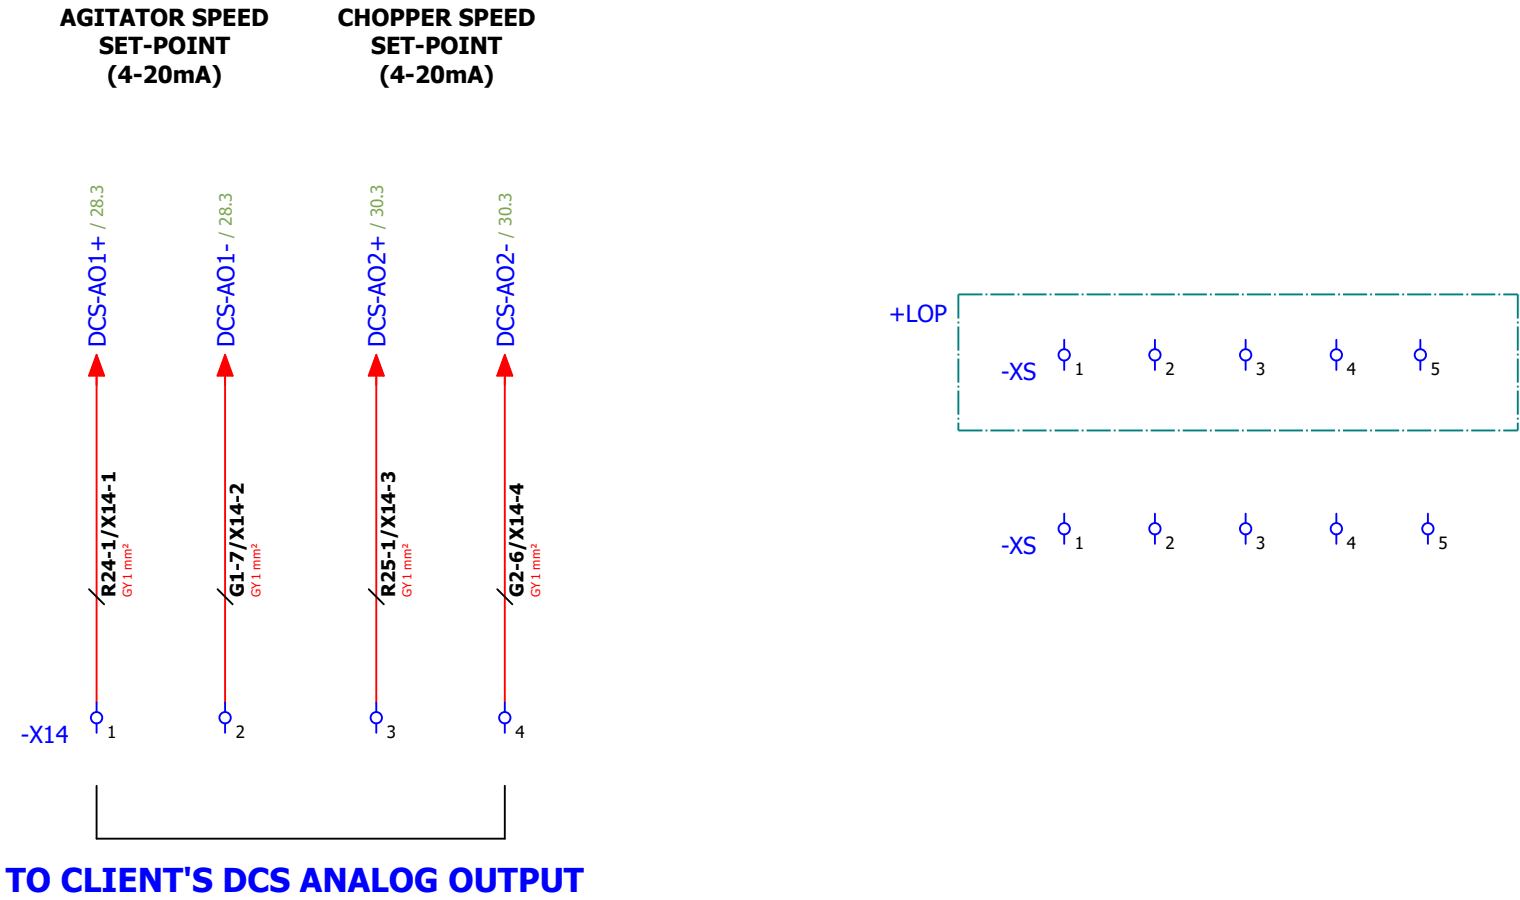


Cable overview

Cable name	Source (from)	Target (to)	all conductors	Conductors used	Cross-section [mm]	Function text	Graphical page of cable diagram
=VCD-W0	=VCD-Q1	=VCD-PE0	5	5	240	MAIN SUPPLY 415V AC	=REPORT+CD/51
=VCD-W1	=VCD-X1	=VCD+EXT-M1	4	4	95	AGITATOR MOTOR 120HP	=REPORT+CD/52
=VCD-W2	=VCD-X1	=VCD+EXT-M2	4	4	2.5	CHOPPER MOTOR 3HP	=REPORT+CD/53
=VCD-W3	=VCD-X1	=VCD+EXT-M3	4	4	1.5	SEAL LESS CIRCULATION PUMP 0.16HP	=REPORT+CD/54
=VCD-W4	=VCD-X2	=VCD+LOP-X2	4	4	1.5	CONTROL SUPPLY 230V AC	=REPORT+CD/55
=VCD-W5	=VCD-X3	=VCD+LOP-X3	3	3	1.5	CONTROL SUPPLY 24V DC	=REPORT+CD/56
=VCD-W6	=VCD-X4	=VCD+LOP-X4	22	22	1.5	PUSHBUTTON CONNECTION	=REPORT+CD/57
=VCD-W7	=VCD-X5	=VCD+LOP-X5	20	20	1.5	INDICATION CONNECTION	=REPORT+CD/58
=VCD-W8	=VCD-X6;=VCD-X7	=VCD+JB-XJ	31	31	1	SENSOR & SOV CONNECTION	=REPORT+CD/59
=VCD-W9	=VCD-X9	=VCD+LOP-X9	15	15	1.5	INDICATOR	=REPORT+CD/61
=VCD-W10	=VCD-X10	=VCD+LOP-X10	4	4	1.5	DUAL PROCESS INDICATOR	=REPORT+CD/62
=VCD-W11	=VCD-XCOM	=VCD+LOP-XCOM	6	6	0.5	RS485 COMMUNICATION	=REPORT+CD/63
=VCD+JB-W1	=VCD+JB-XJ	=VCD+EXT-P1	2	2	0.34	PROXY-1 (DUST FILTER TOP COVER CLOSE)	=REPORT+CD/64
=VCD+JB-W2	=VCD+JB-XJ	=VCD+EXT-P2	2	2	0.34	PROXY-2 (MANOLE COVER CLOSE)	=REPORT+CD/65
=VCD+JB-W3	=VCD+JB-XJ	=VCD+EXT-P3	2	2	0.34	PROXY-3 (BODY FLANGE CLOSE)	=REPORT+CD/66
=VCD+JB-W4	=VCD+JB-XJ	=VCD+EXT-P4	2	2	0.34	PROXY -4 (BOTTOM OUTLET VALVE FLANGE CLOSE)	=REPORT+CD/67
=VCD+JB-W5	=VCD+JB-XJ	=VCD+EXT-P5	2	2	0.34	PROXY-5 (SAMPLING VALVE CLOSE)	=REPORT+CD/68
=VCD+JB-W6	=VCD+JB-XJ	=VCD+EXT-P6	2	2	0.34	PROXY-6 (BDV OPEN)	=REPORT+CD/69
=VCD+JB-W7	=VCD+JB-XJ	=VCD+EXT-P7	2	2	0.34	PROXY-7 (BDV CLOSE)	=REPORT+CD/70
=VCD+JB-W8	=VCD+JB-XJ	=VCD+EXT-Y1	3	3	1	SOV-1 (BDV)	=REPORT+CD/71
=VCD+JB-W9	=VCD+JB-XJ	=VCD+EXT-Y2	3	3	1	SOV-2 (N2 PURGING VALVE)	=REPORT+CD/72
=VCD+JB-W10	=VCD+EXT-RTD-1	=VCD+JB-XJ	3	3	0.5	RTD SENSOR-1 (PRODUCT TEMPERATURE-1)	=REPORT+CD/73
=VCD+JB-W11	=VCD+EXT-RTD-2	=VCD+JB-XJ	3	3	0.5	RTD SENSOR-2 (PRODUCT TEMPERATURE-2)	=REPORT+CD/74
=VCD+JB-W12	=VCD+EXT-RTD-3	=VCD+JB-XJ	3	3	0.5	RTD SENSOR-3 (VAPOUR TEMPERATURE)	=REPORT+CD/75
=VCD+JB-W13	=VCD+EXT-PT	=VCD+JB-XJ	2	2	0.5	PRODUCT PRESSURE TRANSMITTER	=REPORT+CD/76

Cable diagram

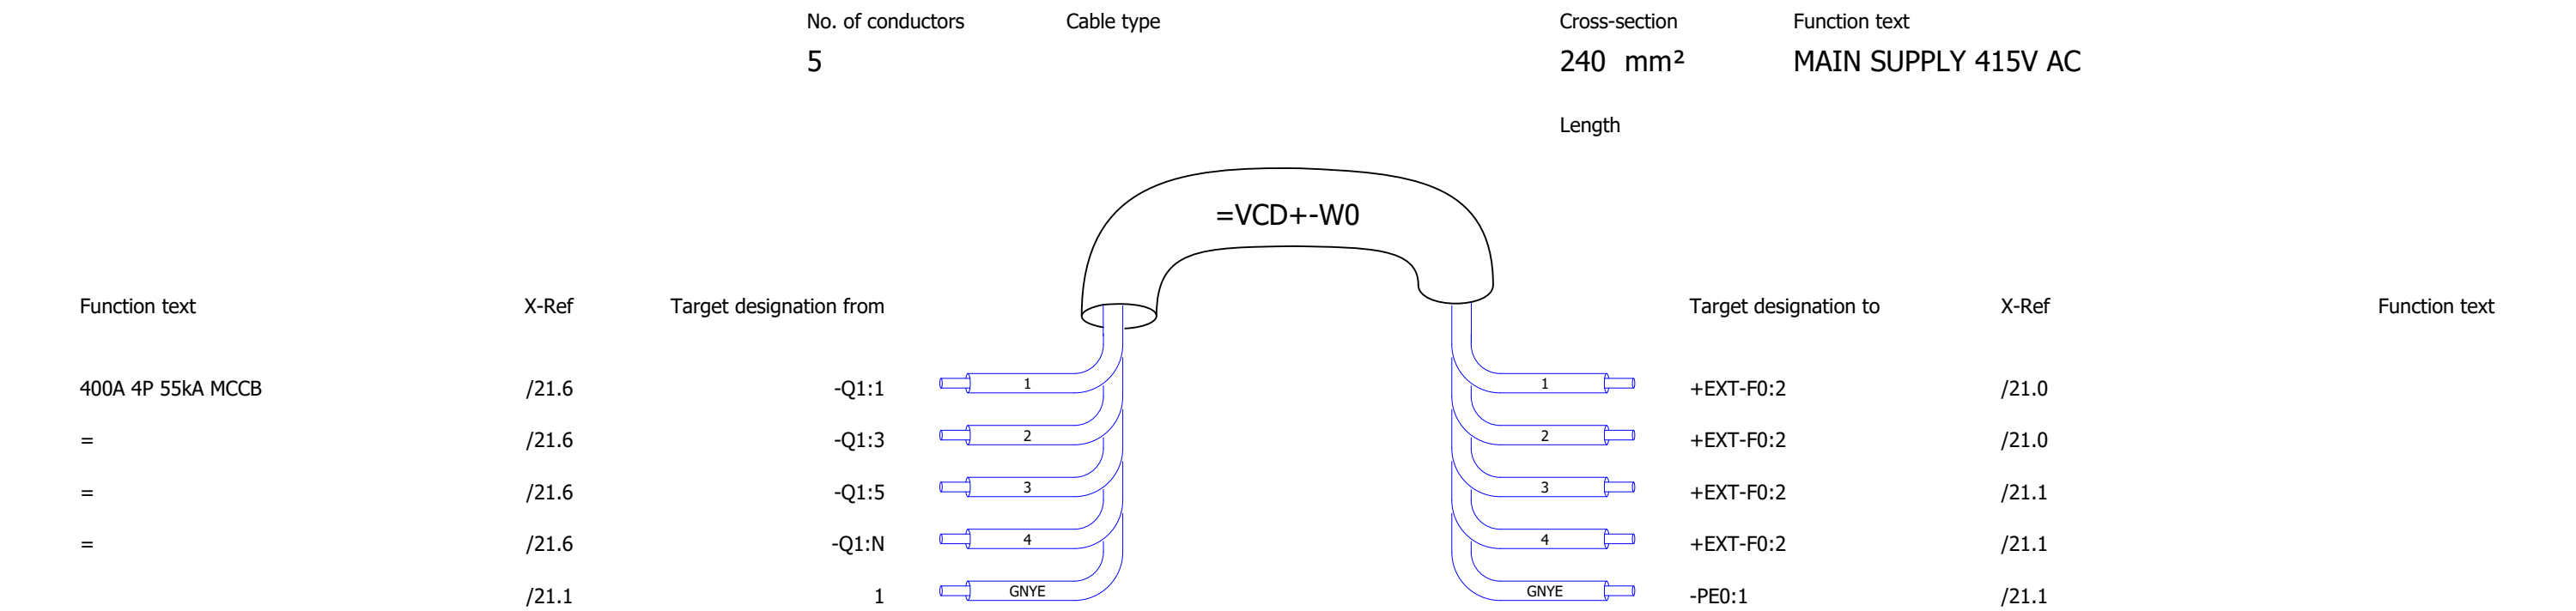


Cable diagram

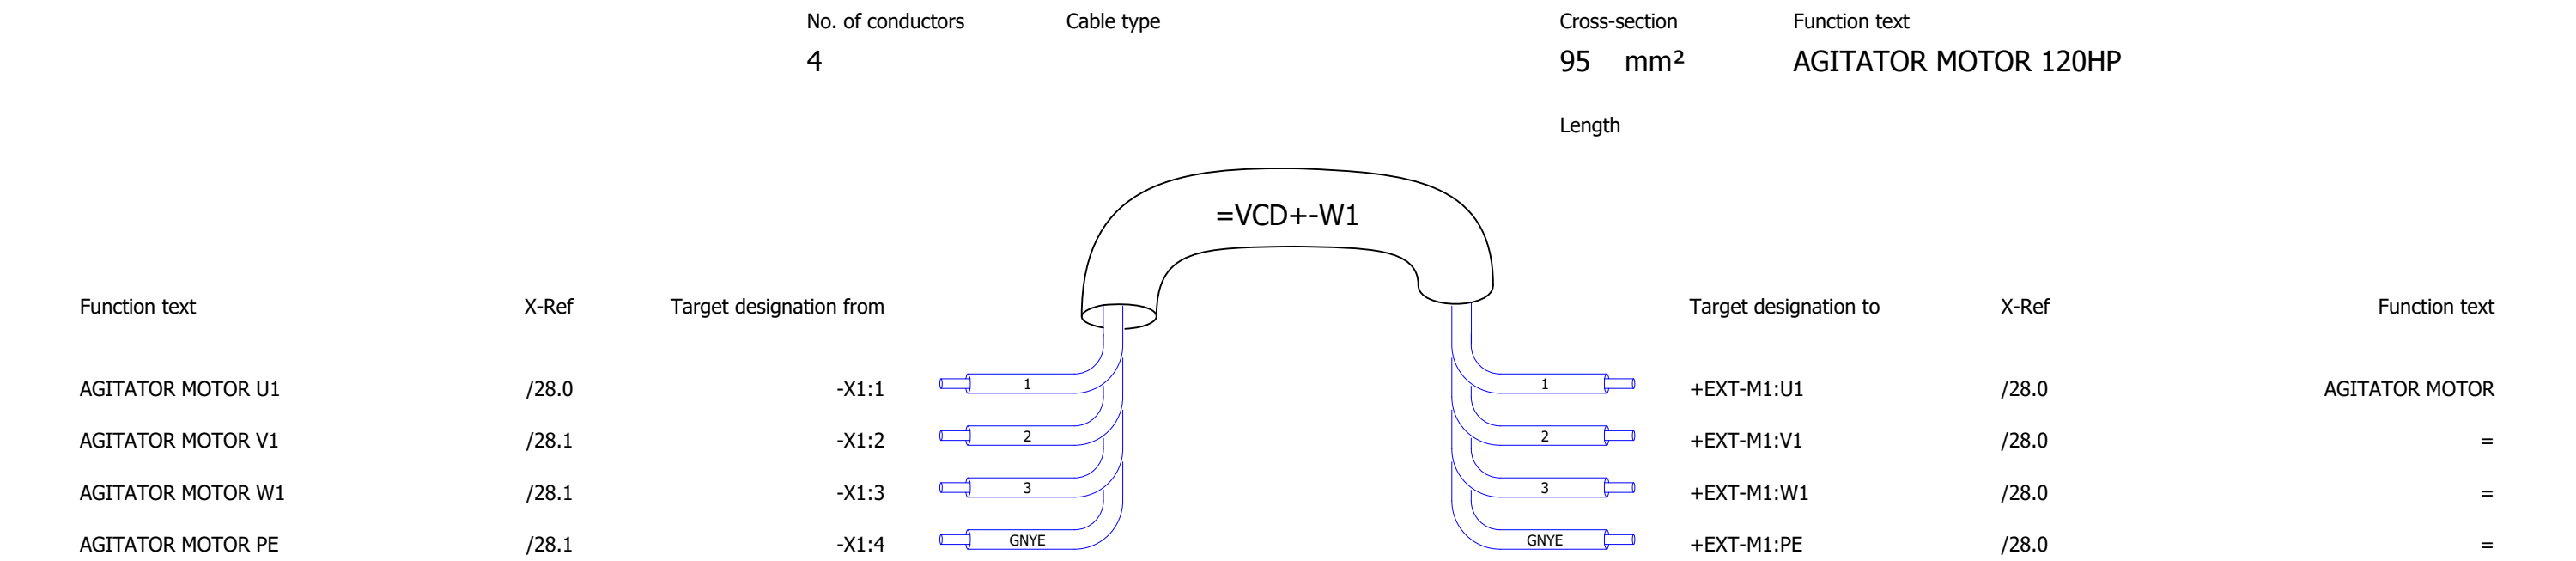


Cable diagram

		No. of conductors	Cable type		Cross-section	Function text	
		4			2.5 mm²	CHOPPER MOTOR 3HP	
				Length			
Function text	X-Ref	Target designation from		Target designation to		X-Ref	Function text
CHOPPER MOTOR U2	/30.0	-X1:5	1	+EXT-M2:U1	1	/30.0	CHOPPER MOTOR
CHOPPER MOTOR V2	/30.1	-X1:6	2	+EXT-M2:V1	2	/30.0	=
CHOPPER MOTOR W2	/30.1	-X1:7	3	+EXT-M2:W1	3	/30.0	=
CHOPPER MOTOR PE	/30.1	-X1:8	GNYE	+EXT-M2:PE	GNYE	/30.0	=


Cable diagram

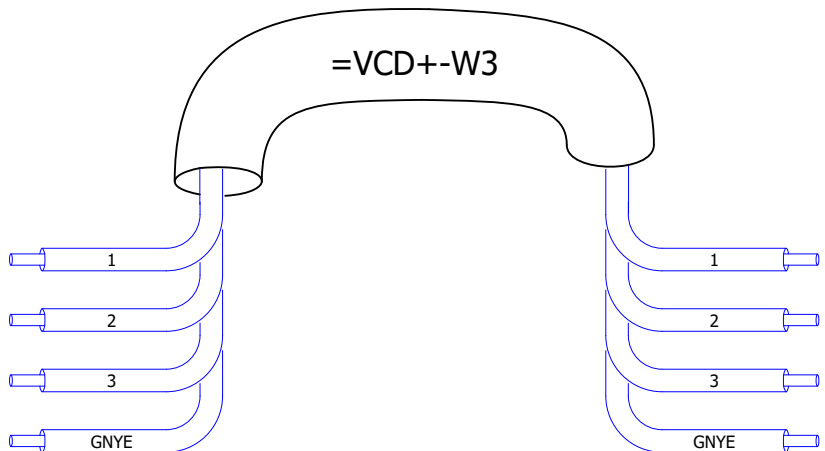		No. of conductors	Cable type	Cross-section	Function text		
		4		1.5 mm²	SEAL LESS CIRCULATION PUMP 0.16HP		
		Length					
							
Function text	X-Ref	Target designation from			Target designation to	X-Ref	Function text
SEAL LESS CIRCULATION PUMP U3	/32.1	-X1:9	1		+EXT-M3:U1	/32.1	SEAL LESS CIRCULATION PUMP
SEAL LESS CIRCULATION PUMP V3	/32.1	-X1:10	2		+EXT-M3:V1	/32.1	=
SEAL LESS CIRCULATION PUMP W3	/32.1	-X1:11	3		+EXT-M3:W1	/32.1	=
SEAL LESS CIRCULATION PUMP PE	/32.2	-X1:12	GNYE		+EXT-M3:PE	/32.1	=


Cable diagram

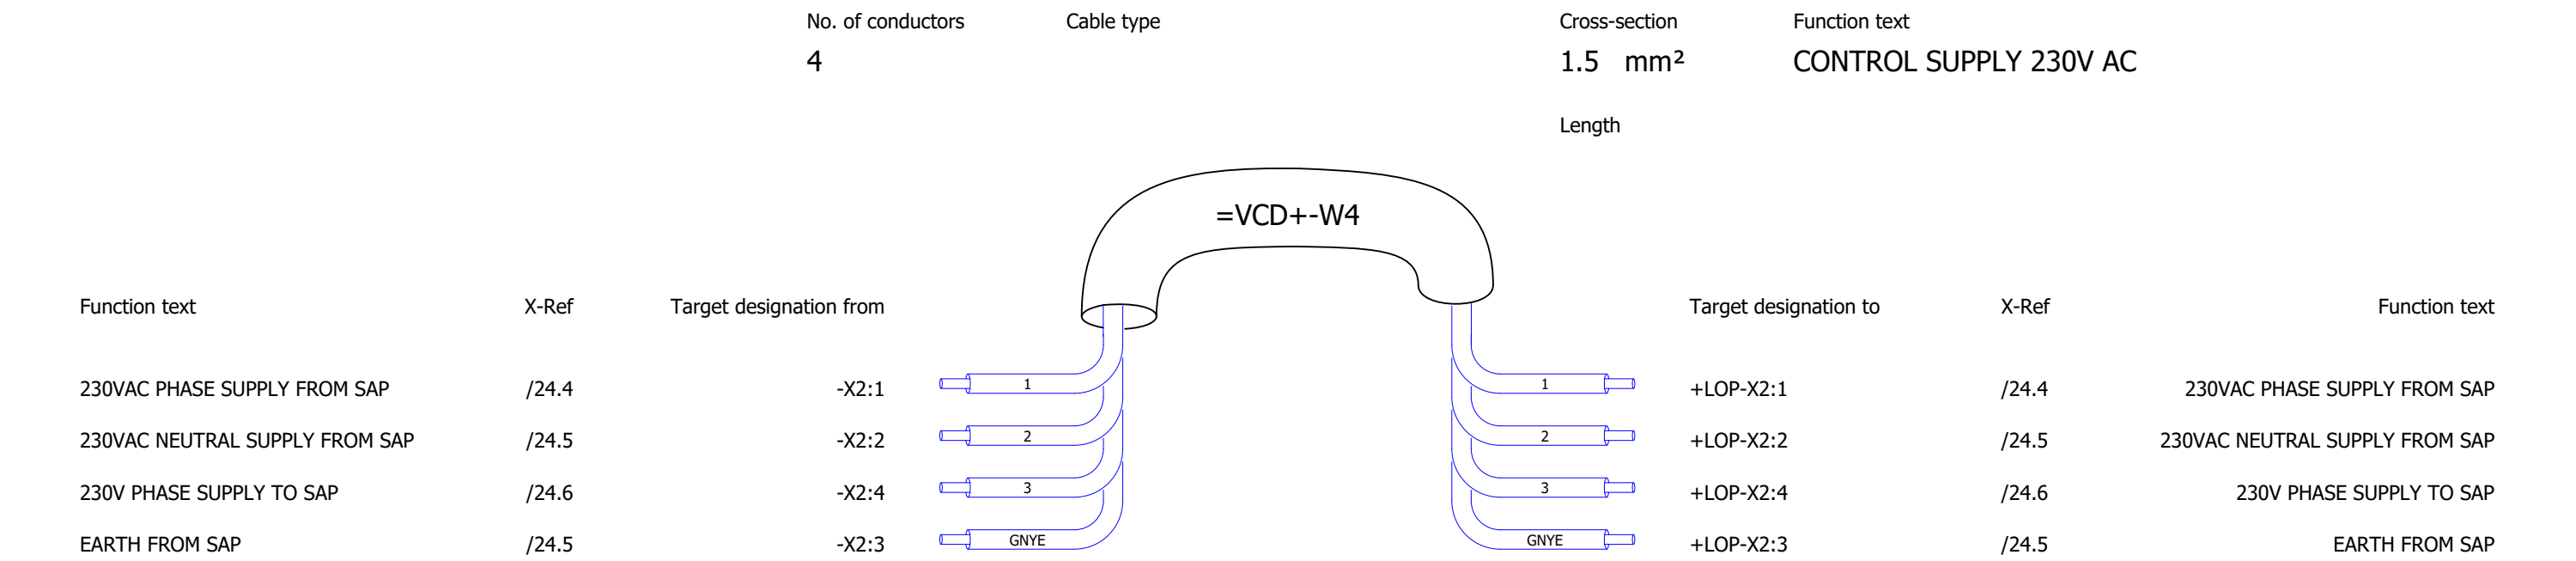


Cable diagram

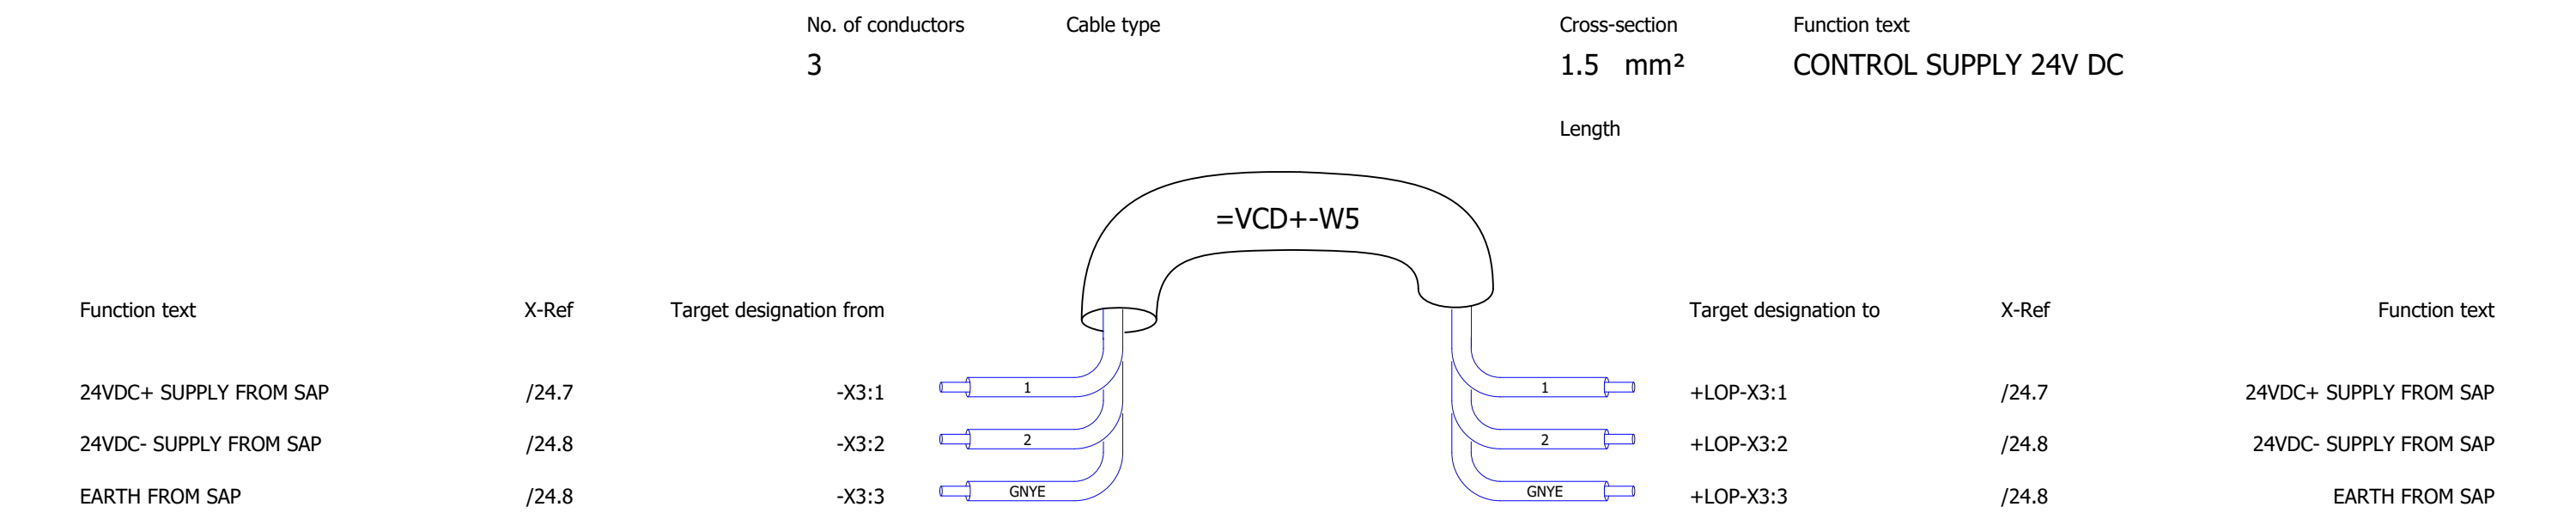

Cable diagram

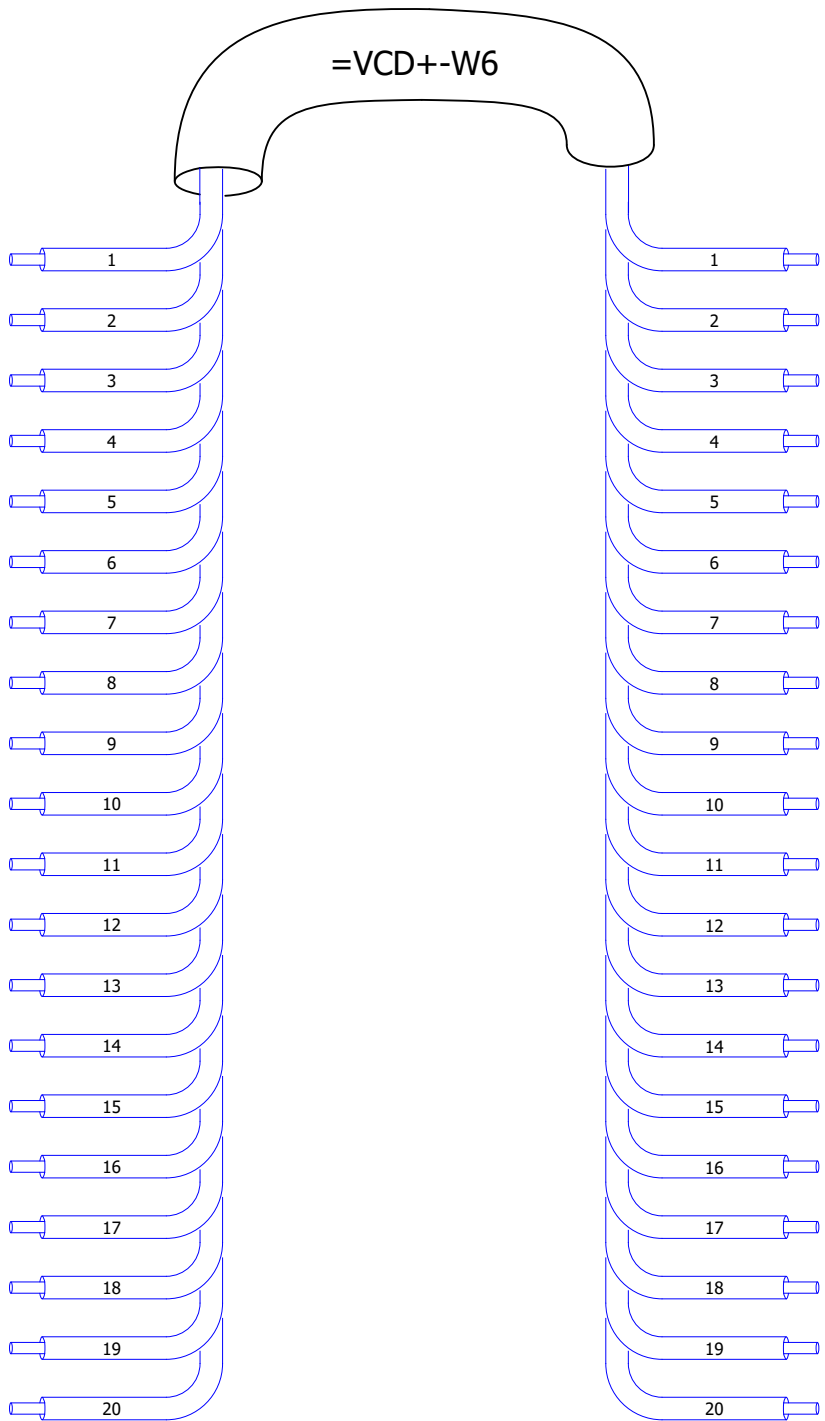		No. of conductors	Cable type		Cross-section	Function text		
		22			1.5 mm²	PUSHBUTTON CONNECTION		
				Length				
Function text	X-Ref	Target designation from			Target designation to	X-Ref	Function text	
EMGERGENCY COMMON (SAP)	/34.1	-X4:1	1		+LOP-X4:1	/34.1	EMGERGENCY COMMON (SAP)	
EMGERGENCY NC (SAP)	/34.1	-X4:2	2		+LOP-X4:2	/34.1	EMGERGENCY NC (SAP)	
EMGERGENCY COMMON (DCS)	/34.1	-X4:3	3		+LOP-X4:3	/34.1	EMGERGENCY COMMON (DCS)	
EMGERGENCY NC (DCS)	/34.2	-X4:4	4		+LOP-X4:4	/34.2	EMGERGENCY NC (DCS)	
AGITATOR START PB S1	/34.3	-X4:5	5		+LOP-X4:5	/34.3	AGITATOR START PB S1	
AGITATOR FORWARD PB S2	/34.4	-X4:6	6		+LOP-X4:6	/34.4	AGITATOR FORWARD PB S2	
AGITATOR REVERSE PB S3	/34.5	-X4:7	7		+LOP-X4:7	/34.5	AGITATOR REVERSE PB S3	
AGITATOR STOP PB S4	/34.6	-X4:8	8		+LOP-X4:8	/34.6	AGITATOR STOP PB S4	
AGITATOR STOP PB S4 FOR TIMER	/34.7	-X4:9	9		+LOP-X4:9	/34.7	AGITATOR STOP PB S4 FOR TIMER	
AGITATOR RPM INCREASRE PB S5	/34.8	-X4:10	10		+LOP-X4:10	/34.8	AGITATOR RPM INCREASRE PB S5	
AGITATOR RPM DECREASRE PB S6	/34.9	-X4:11	11		+LOP-X4:11	/34.9	AGITATOR RPM DECREASRE PB S6	
CHOPPER START PB S7	/35.0	-X4:12	12		+LOP-X4:12	/35.0	CHOPPER START PB S7	
CHOPPER FORWARD PB S8	/35.1	-X4:13	13		+LOP-X4:13	/35.1	CHOPPER FORWARD PB S8	
CHOPPER REVERSE PB S9	/35.2	-X4:14	14		+LOP-X4:14	/35.2	CHOPPER REVERSE PB S9	
CHOPPER STOP PB S10	/35.3	-X4:15	15		+LOP-X4:15	/35.3	CHOPPER STOP PB S10	
CHOPPER STOP PB S10 FOR TIMER	/35.4	-X4:16	16		+LOP-X4:16	/35.4	CHOPPER STOP PB S10 FOR TIMER	
CHOPPER RPM INCREASRE PB S11	/35.6	-X4:17	17		+LOP-X4:17	/35.6	CHOPPER RPM INCREASRE PB S11	
CHOPPER RPM DECREASRE PB S12	/35.6	-X4:18	18		+LOP-X4:18	/35.6	CHOPPER RPM DECREASRE PB S12	
BDV OPEN PB S13	/35.8	-X4:19	19		+LOP-X4:19	/35.8	BDV OPEN PB S13	
BDV CLOSE PB S14	/35.9	-X4:20	20		+LOP-X4:20	/35.9	BDV CLOSE PB S14	


Cable diagram

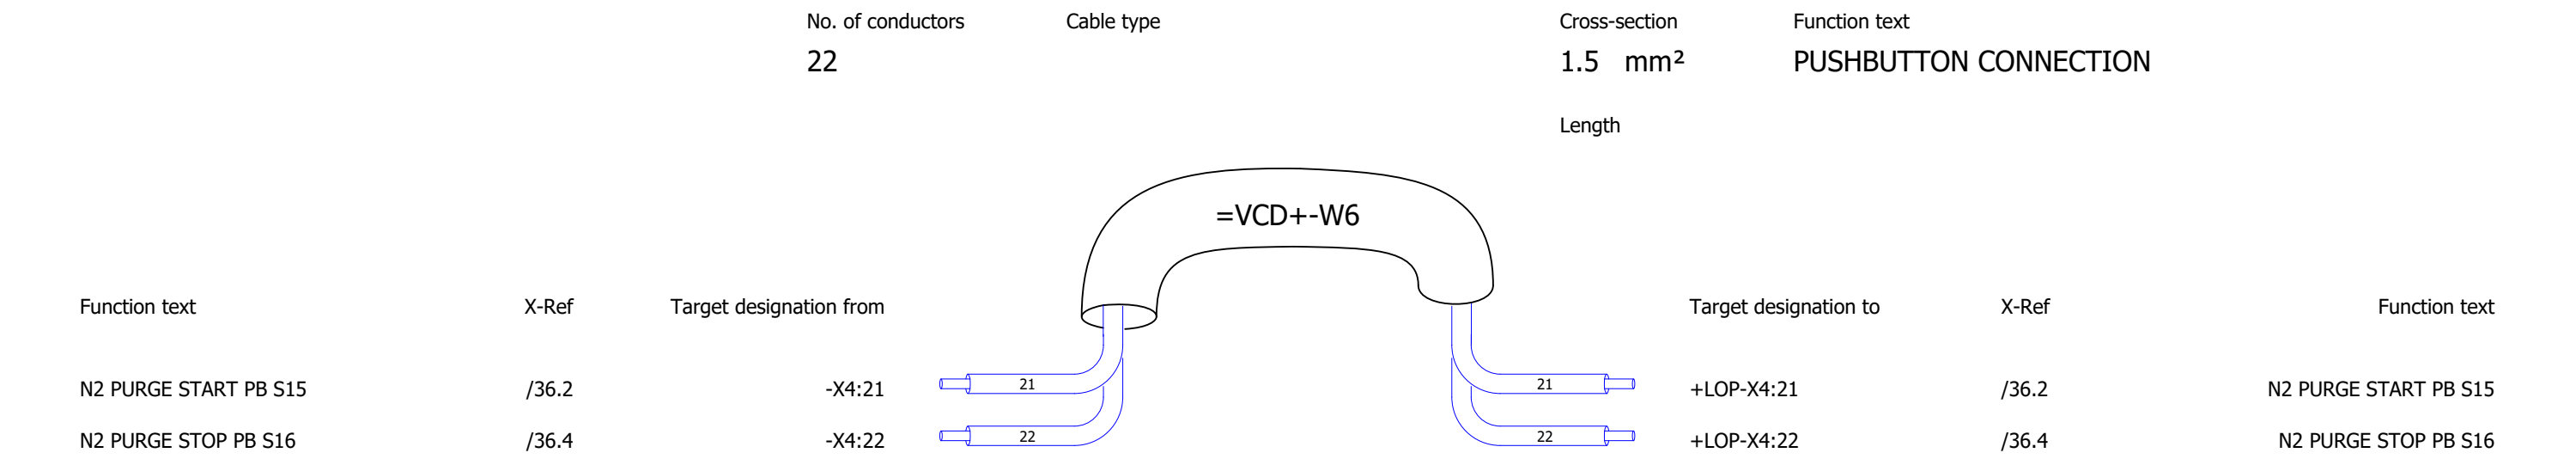


Cable diagram

		No. of conductors	Cable type		Cross-section	Function text		
		20			1.5 mm²	INDICATION CONNECTION		
				Length				

Cable diagram

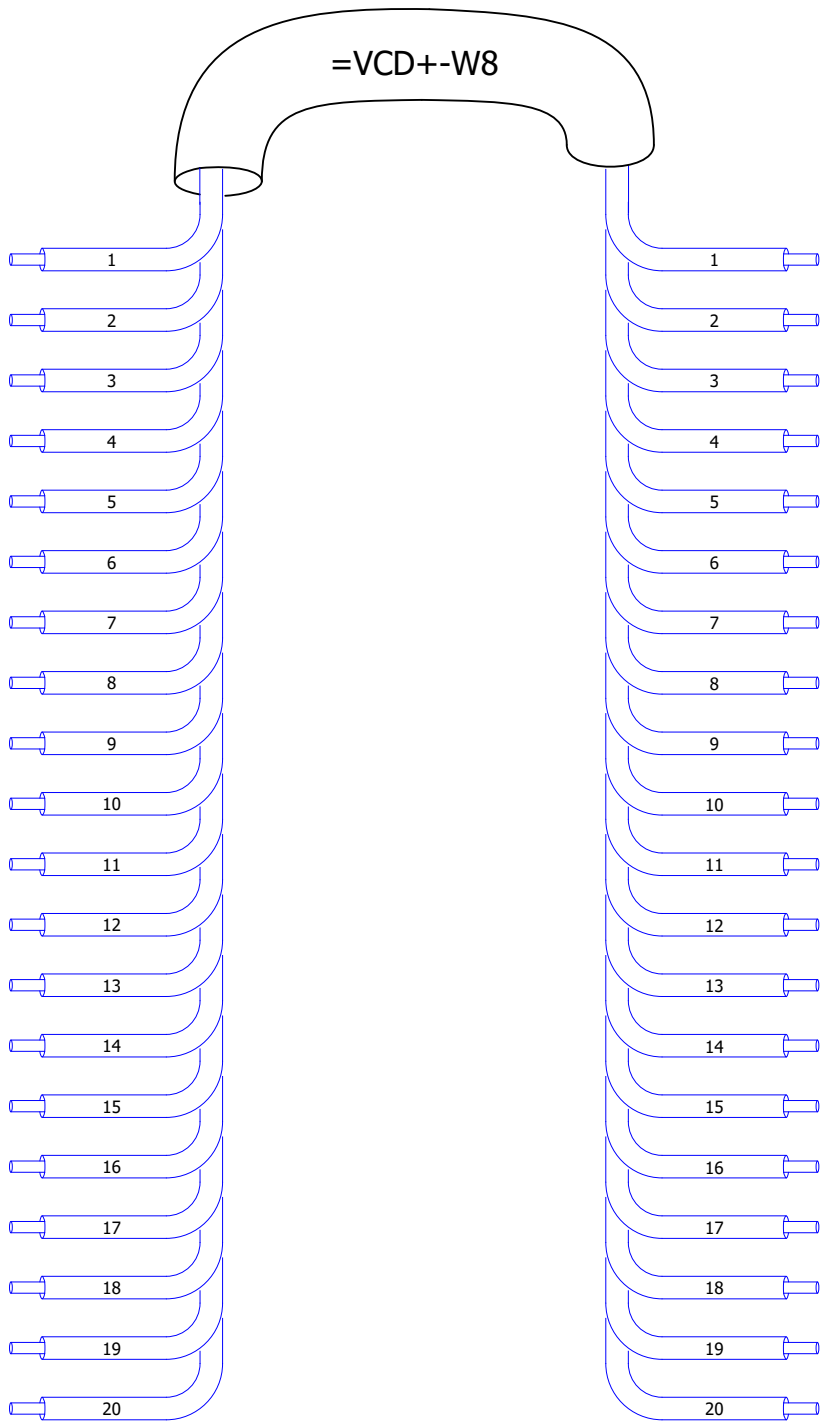		No. of conductors	Cable type		Cross-section	Function text		
		31			1 mm ²	SENSOR & SOV CONNECTION		
				Length				
Function text	X-Ref	Target designation from			Target designation to	X-Ref	Function text	
PROXY P1+	/40.3	-X6:1	1		+JB-XJ:1	/40.3	PROXY P1+ (JB)	
PROXY P1-	/40.3	-X6:2	2		+JB-XJ:2	/40.3	PROXY P1- (JB)	
PROXY P2+	/40.4	-X6:3	3		+JB-XJ:3	/40.4	PROXY P2+ (JB)	
PROXY P2-	/40.4	-X6:4	4		+JB-XJ:4	/40.4	PROXY P2- (JB)	
PROXY P3+	/41.3	-X6:5	5		+JB-XJ:5	/41.3	PROXY P3+ (JB)	
PROXY P3-	/41.3	-X6:6	6		+JB-XJ:6	/41.3	PROXY P3- (JB)	
PROXY P4+	/41.4	-X6:7	7		+JB-XJ:7	/41.4	PROXY P4+ (JB)	
PROXY P4-	/41.4	-X6:8	8		+JB-XJ:8	/41.4	PROXY P4- (JB)	
PROXY P5+	/42.3	-X6:9	9		+JB-XJ:9	/42.3	PROXY P5+ (JB)	
PROXY P5-	/42.3	-X6:10	10		+JB-XJ:10	/42.3	PROXY P5- (JB)	
PROXY P6+	/42.4	-X6:11	11		+JB-XJ:11	/42.4	PROXY P6+ (JB)	
PROXY P6-	/42.4	-X6:12	12		+JB-XJ:12	/42.4	PROXY P6- (JB)	
PROXY P7+	/43.3	-X6:13	13		+JB-XJ:13	/43.3	PROXY P7+ (JB)	
PROXY P7-	/43.3	-X6:14	14		+JB-XJ:14	/43.3	PROXY P7- (JB)	
SOV Y1+	/44.1	-X7:1	15		+JB-XJ:15	/44.1	SOV Y1+ (JB)	
SOV Y1-	/44.2	-X7:2	16		+JB-XJ:16	/44.2	SOV Y1- (JB)	
SOV Y1 EARTH	/44.2	-X7:3	17		+JB-XJ:17	/44.2	SOV Y1 EARTH (JB)	
SOV Y2 24V	/44.3	-X7:4	18		+JB-XJ:18	/44.3	SOV Y2 24V (JB)	
SOV Y2 0V	/44.5	-X7:5	19		+JB-XJ:19	/44.5	SOV Y2 0V (JB)	
SOV Y2 EARTH	/44.5	-X7:6	20		+JB-XJ:20	/44.5	SOV Y2 EARTH (JB)	


Cable diagram

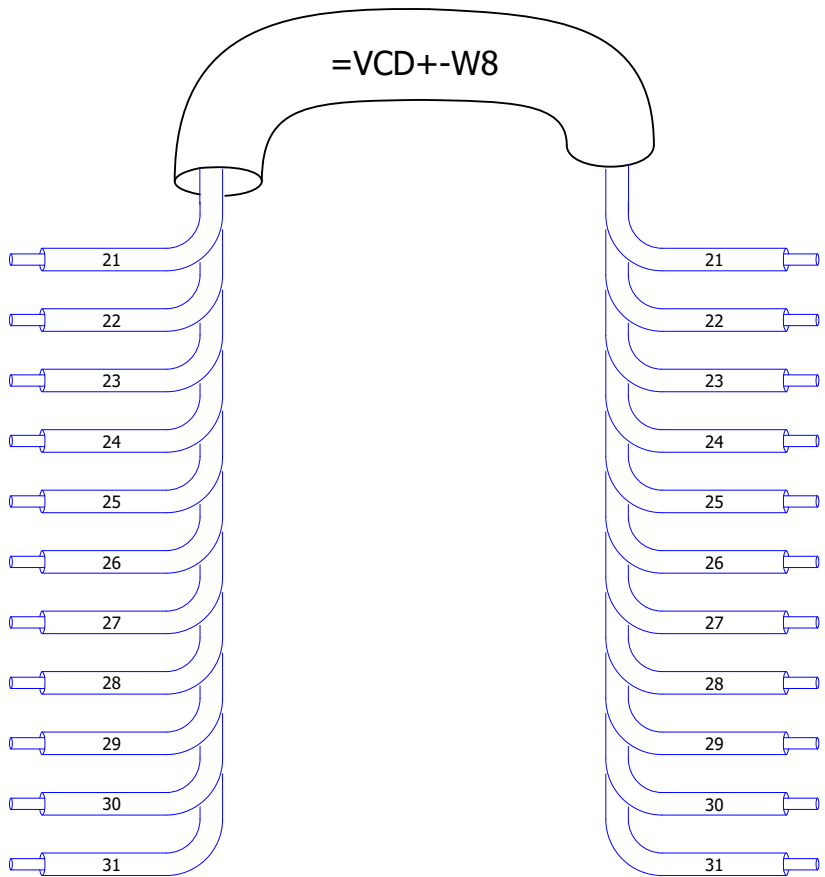		No. of conductors	Cable type		Cross-section	Function text		
		31			1 mm ²	SENSOR & SOV CONNECTION		
						Length		
Function text	X-Ref	Target designation from	Target designation to			X-Ref	Function text	
1-RTD1+	/45.1	-X8:1	21	+JB-XJ:21	/45.1	1-RTD1+ (JB)		
1-RTD2-	/45.1	-X8:2	22	+JB-XJ:22	/45.1	1-RTD2- (JB)		
1-RTD3-	/45.2	-X8:3	23	+JB-XJ:23	/45.2	1-RTD3- (JB)		
2-RTD1+	/45.3	-X8:4	24	+JB-XJ:24	/45.3	2-RTD1+ (JB)		
2-RTD2-	/45.3	-X8:5	25	+JB-XJ:25	/45.3	2-RTD2- (JB)		
2-RTD3-	/45.3	-X8:6	26	+JB-XJ:26	/45.3	2-RTD3- (JB)		
3-RTD1+	/45.4	-X8:7	27	+JB-XJ:27	/45.4	3-RTD1+ (JB)		
3-RTD2-	/45.4	-X8:8	28	+JB-XJ:28	/45.4	3-RTD2- (JB)		
3-RTD3-	/45.5	-X8:9	29	+JB-XJ:29	/45.5	3-RTD3- (JB)		
PT+	/45.6	-X8:10	30	+JB-XJ:30	/45.6	PT+ (JB)		
PT-	/45.6	-X8:11	31	+JB-XJ:31	/45.6	PT- (JB)		

Cable diagram

		No. of conductors	Cable type		Cross-section	Function text	
		15			1.5 mm²	INDICATOR	
				Length			
		=VCD+-W9					
Function text	X-Ref	Target designation from			Target designation to	X-Ref	Function text
SPEED SET POINT FROM RPM INDICATOR	/33.1	-X9:1	1	1	+LOP-X9:1	/33.1	SPEED SET POINT FROM RPM INDICATOR
SPEED SET POINT FROM RPM INDICATOR	/33.1	-X9:2	2	2	+LOP-X9:2	/33.1	SPEED SET POINT FROM RPM INDICATOR
SPEED SET POINT FROM RPM INDICATOR	/33.1	-X9:3	3	3	+LOP-X9:3	/33.1	SPEED SET POINT FROM RPM INDICATOR
SPEED SET POINT FROM RPM INDICATOR	/33.2	-X9:4	4	4	+LOP-X9:4	/33.2	SPEED SET POINT FROM RPM INDICATOR
RTD SENSOR-1 (1+)	/33.4	-X9:5	5	5	+LOP-X9:5	/33.4	RTD SENSOR-1 (1+)
RTD SENSOR-1 (2-)	/33.4	-X9:6	6	6	+LOP-X9:6	/33.4	RTD SENSOR-1 (2-)
RTD SENSOR-1 (3-)	/33.4	-X9:7	7	7	+LOP-X9:7	/33.4	RTD SENSOR-1 (3-)
RTD SENSOR-2 (1+)	/33.4	-X9:8	8	8	+LOP-X9:8	/33.4	RTD SENSOR-2 (1+)
RTD SENSOR-2 (2-)	/33.5	-X9:9	9	9	+LOP-X9:9	/33.5	RTD SENSOR-2 (2-)
RTD SENSOR-2 (3-)	/33.5	-X9:10	10	10	+LOP-X9:10	/33.5	RTD SENSOR-2 (3-)
RTD SENSOR-3 (1+)	/33.7	-X9:11	11	11	+LOP-X9:11	/33.7	RTD SENSOR-3 (1+)
RTD SENSOR-3 (2-)	/33.7	-X9:12	12	12	+LOP-X9:12	/33.7	RTD SENSOR-3 (2-)
RTD SENSOR-3 (3-)	/33.7	-X9:13	13	13	+LOP-X9:13	/33.7	RTD SENSOR-3 (3-)
PRESSURE TRANSMITER (PT+)	/33.8	-X9:14	14	14	+LOP-X9:14	/33.8	PRESSURE TRANSMITER (PT+)
PRESSURE TRANSMITER (PT-)	/33.8	-X9:15	15	15	+LOP-X9:15	/33.8	PRESSURE TRANSMITER (PT-)


Cable diagram

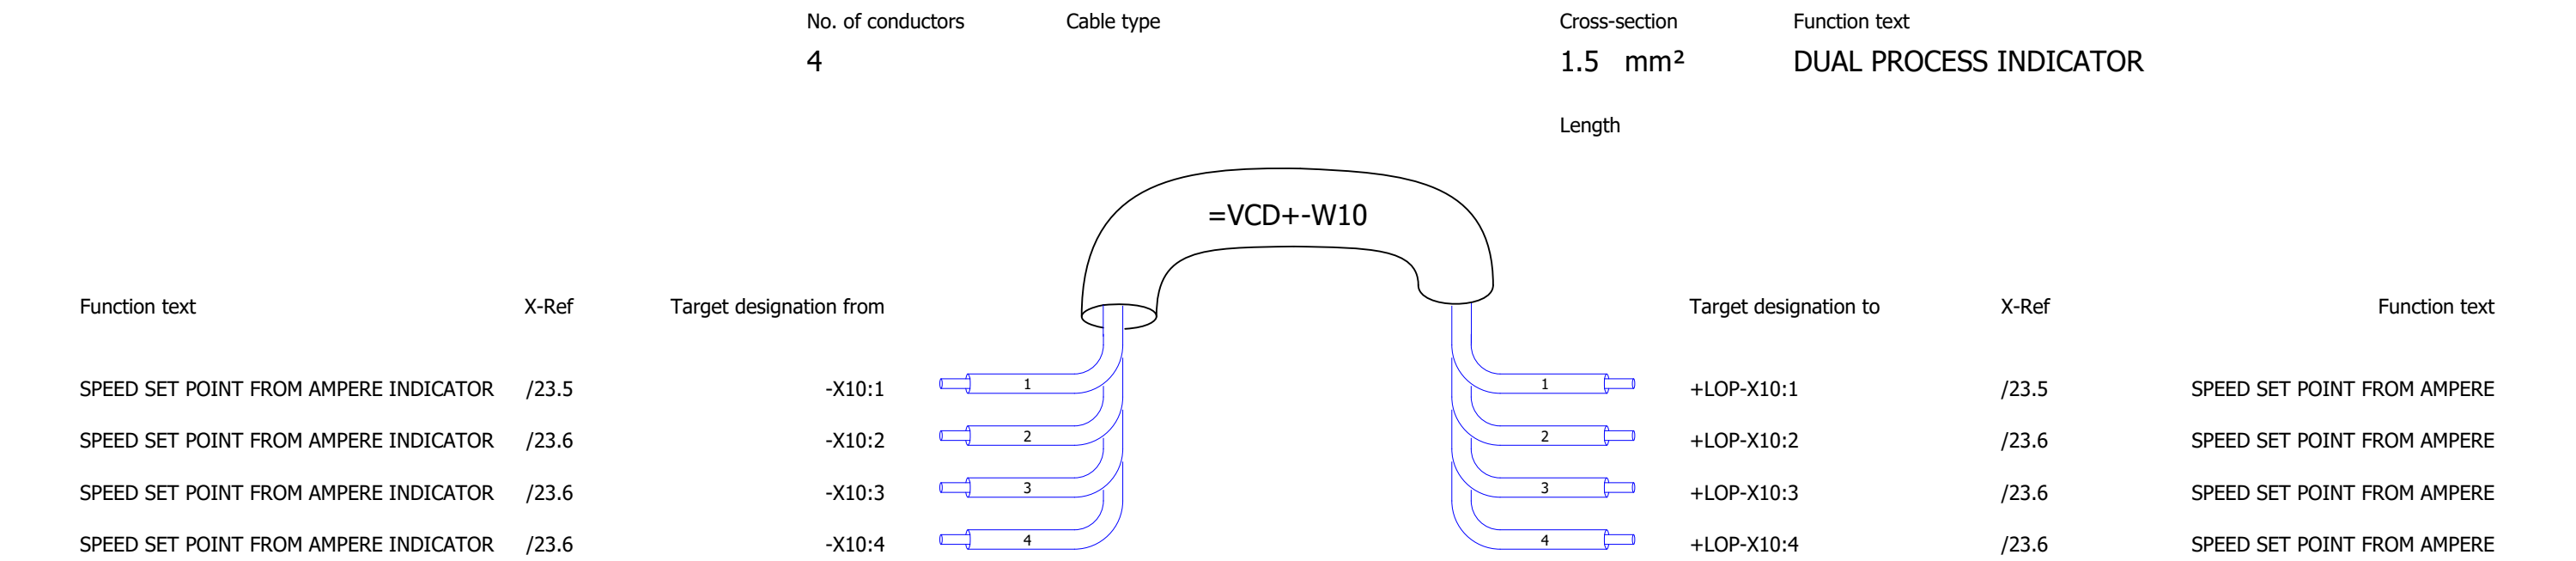

Cable diagram

		No. of conductors	Cable type	Cross-section		Function text	
		6		0.5 mm²		RS485 COMMUNICATION	
				Length			
Function text	X-Ref	Target designation from	=VCD+-W11 1 2 3 4 5 6 1 2 3 4 5 6		Target designation to	X-Ref	Function text
INDICATOR-1 RS485+	/33.2	-XCOM:12			+LOP-XCOM:1	/33.2	INDICATOR-1 RS485+
INDICATOR-1 RS485-	/33.3	-XCOM:13			+LOP-XCOM:2	/33.3	INDICATOR-1 RS485-
INDICATOR-2 RS485+	/33.6	-XCOM:14			+LOP-XCOM:3	/33.6	INDICATOR-2 RS485+
INDICATOR-2 RS485-	/33.6	-XCOM:15			+LOP-XCOM:4	/33.6	INDICATOR-2 RS485-
INDICATOR-3 RS485+	/33.9	-XCOM:16			+LOP-XCOM:5	/33.9	INDICATOR-3 RS485+
INDICATOR-3 RS485-	/33.9	-XCOM:17			+LOP-XCOM:6	/33.9	INDICATOR-3 RS485-

Cable diagram

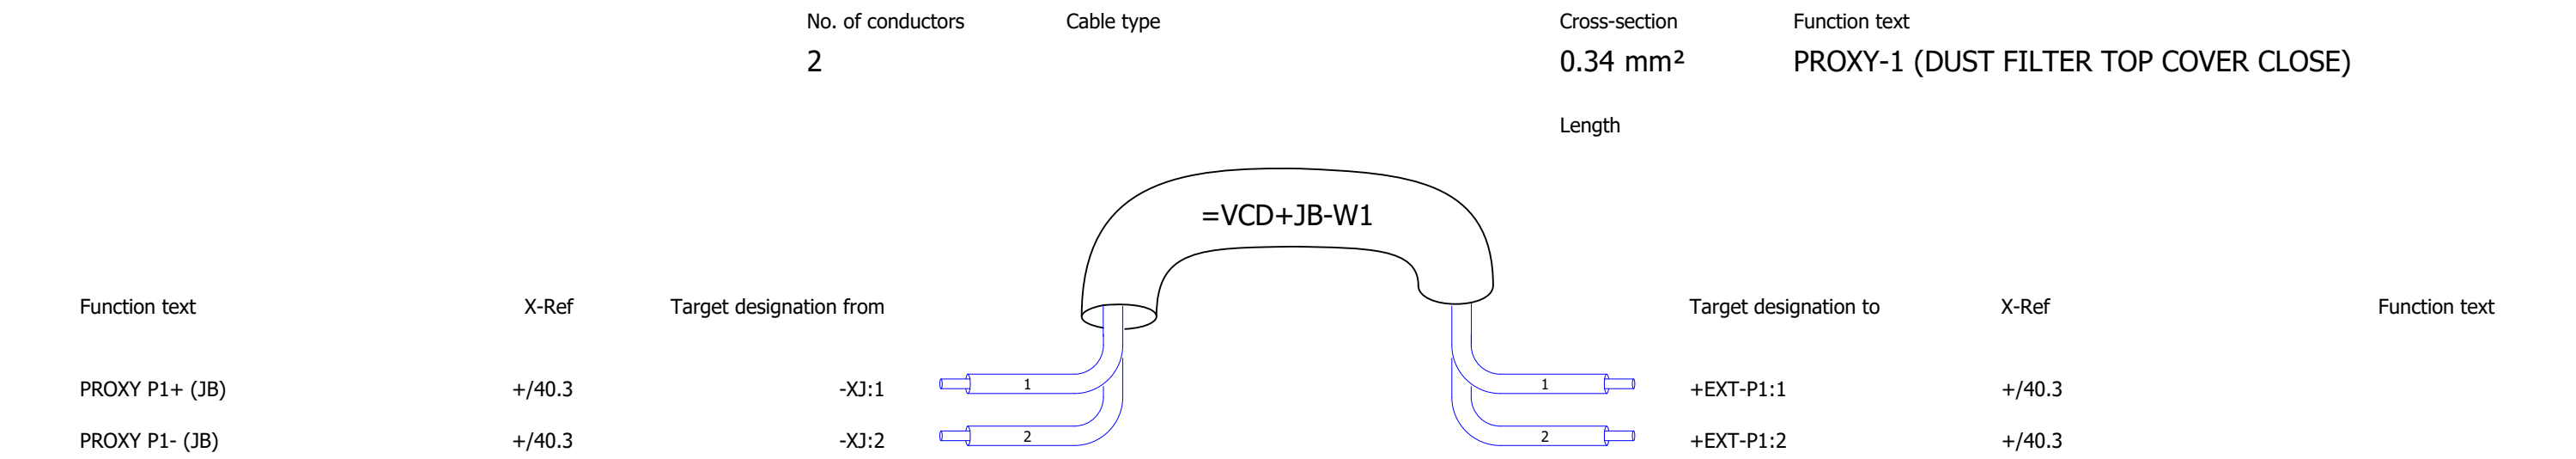


Cable diagram

		No. of conductors	Cable type	Cross-section	Function text		
		2		0.34 mm²	PROXY-2 (MANOLE COVER CLOSE)		
				Length			
=VCD+JB-W2							
Function text	X-Ref	Target designation from			Target designation to	X-Ref	Function text
PROXY P2+ (JB)	+ /40.4	-XJ:3	1		+EXT-P2:1	+ /40.4	
PROXY P2- (JB)	+ /40.4	-XJ:4	2		+EXT-P2:2	+ /40.4	


Cable diagram

		No. of conductors	Cable type		Cross-section	Function text		
		2			0.34 mm²	PROXY-3 (BODY FLANGE CLOSE)		
				Length				
		=VCD+JB-W3						
Function text	X-Ref	Target designation from		Target designation to		X-Ref	Function text	
PROXY P3+ (JB)	+/41.3	-XJ:5		+EXT-P3:1		+/41.3		
PROXY P3- (JB)	+/41.3	-XJ:6		+EXT-P3:2		+/41.3		


Cable diagram

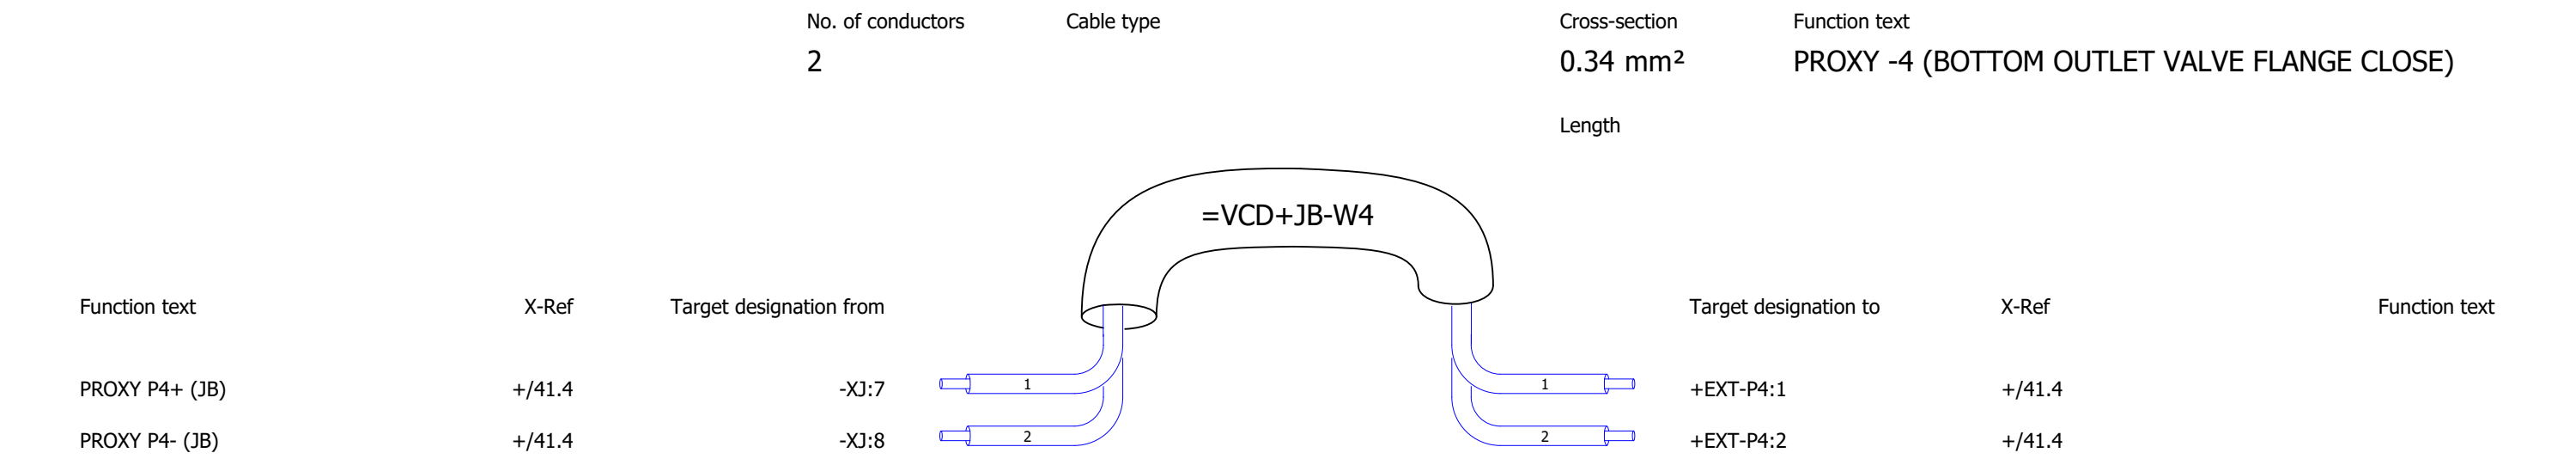


Cable diagram

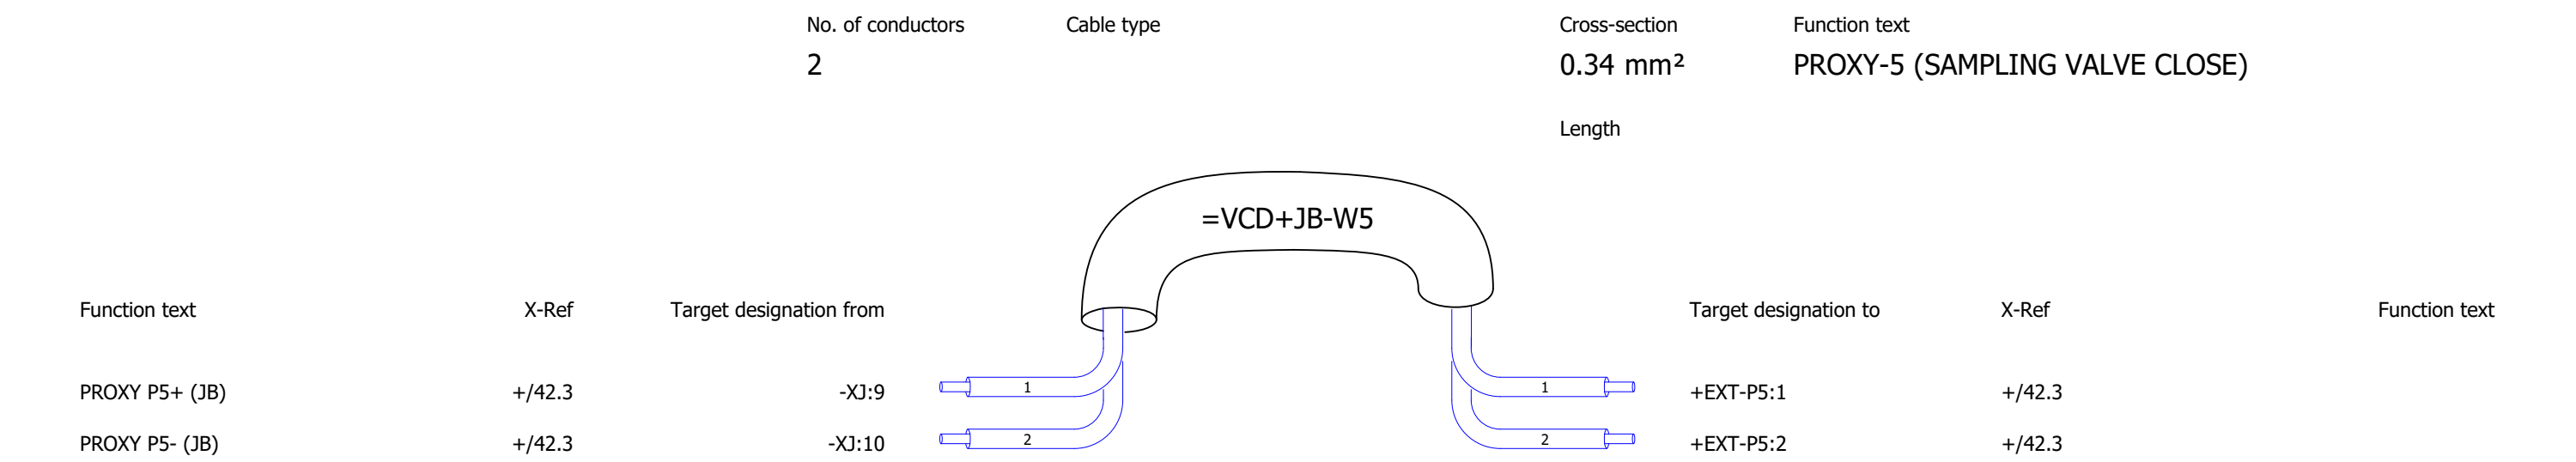


Cable diagram

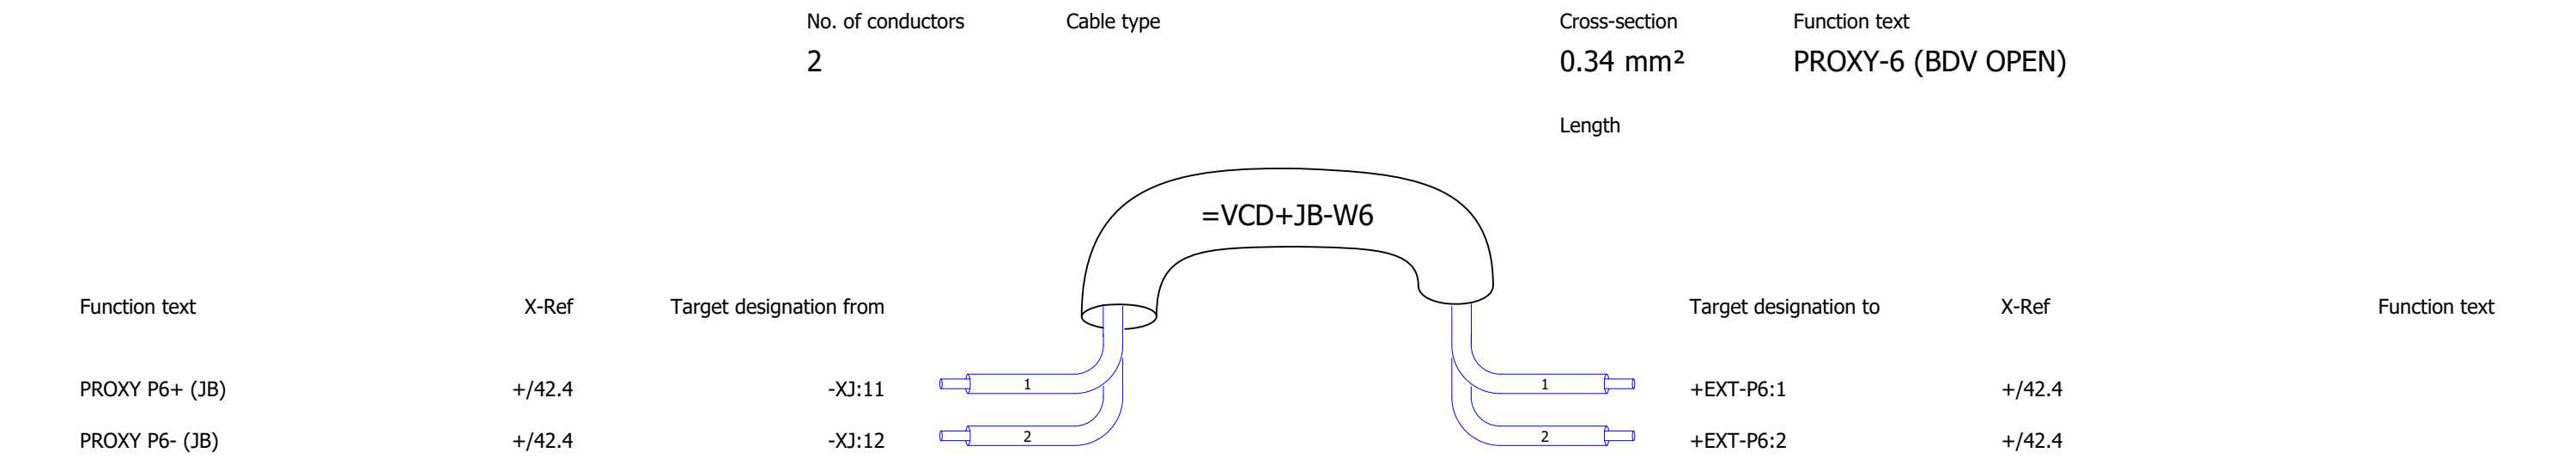


Cable diagram

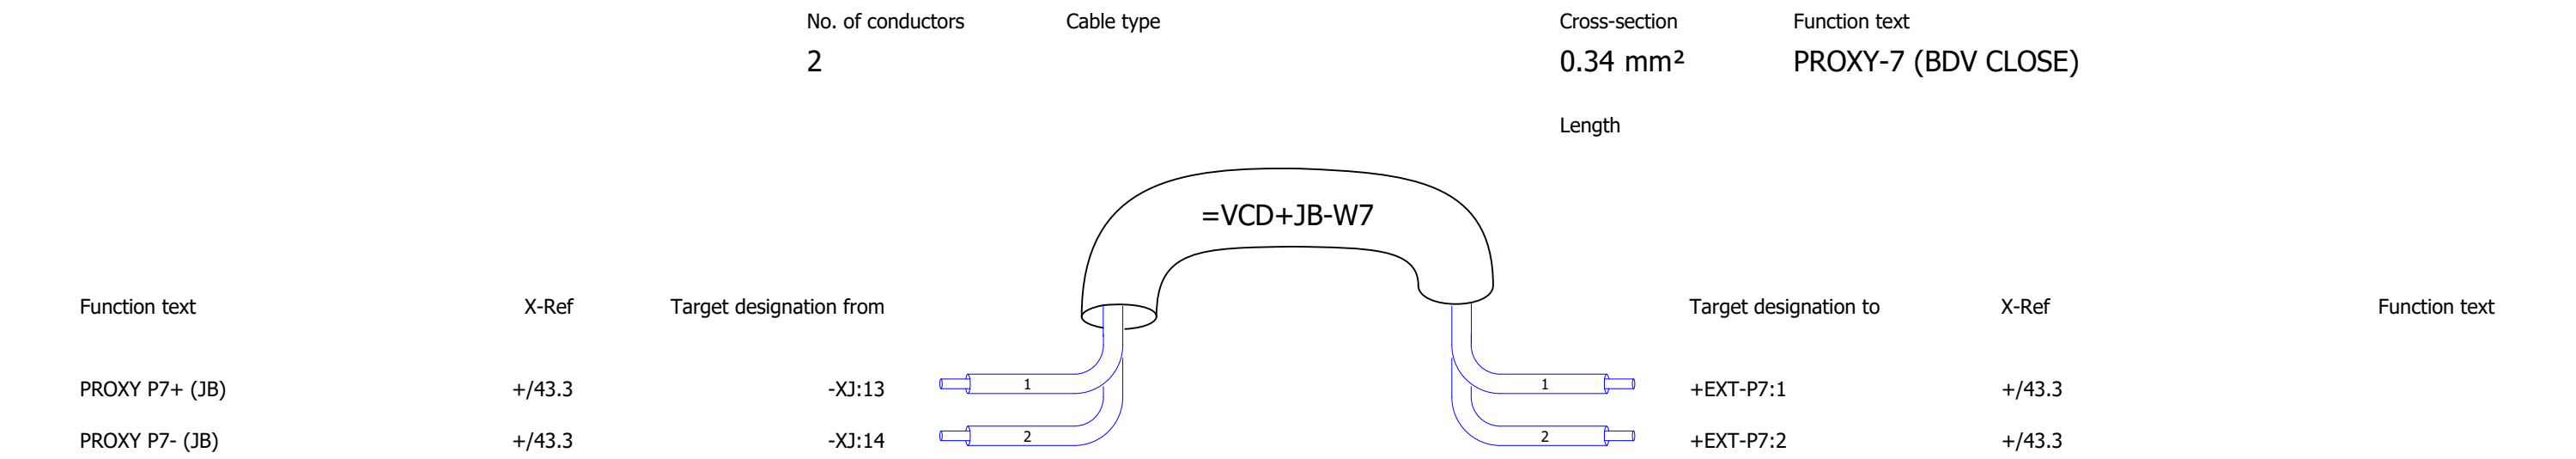


Cable diagram

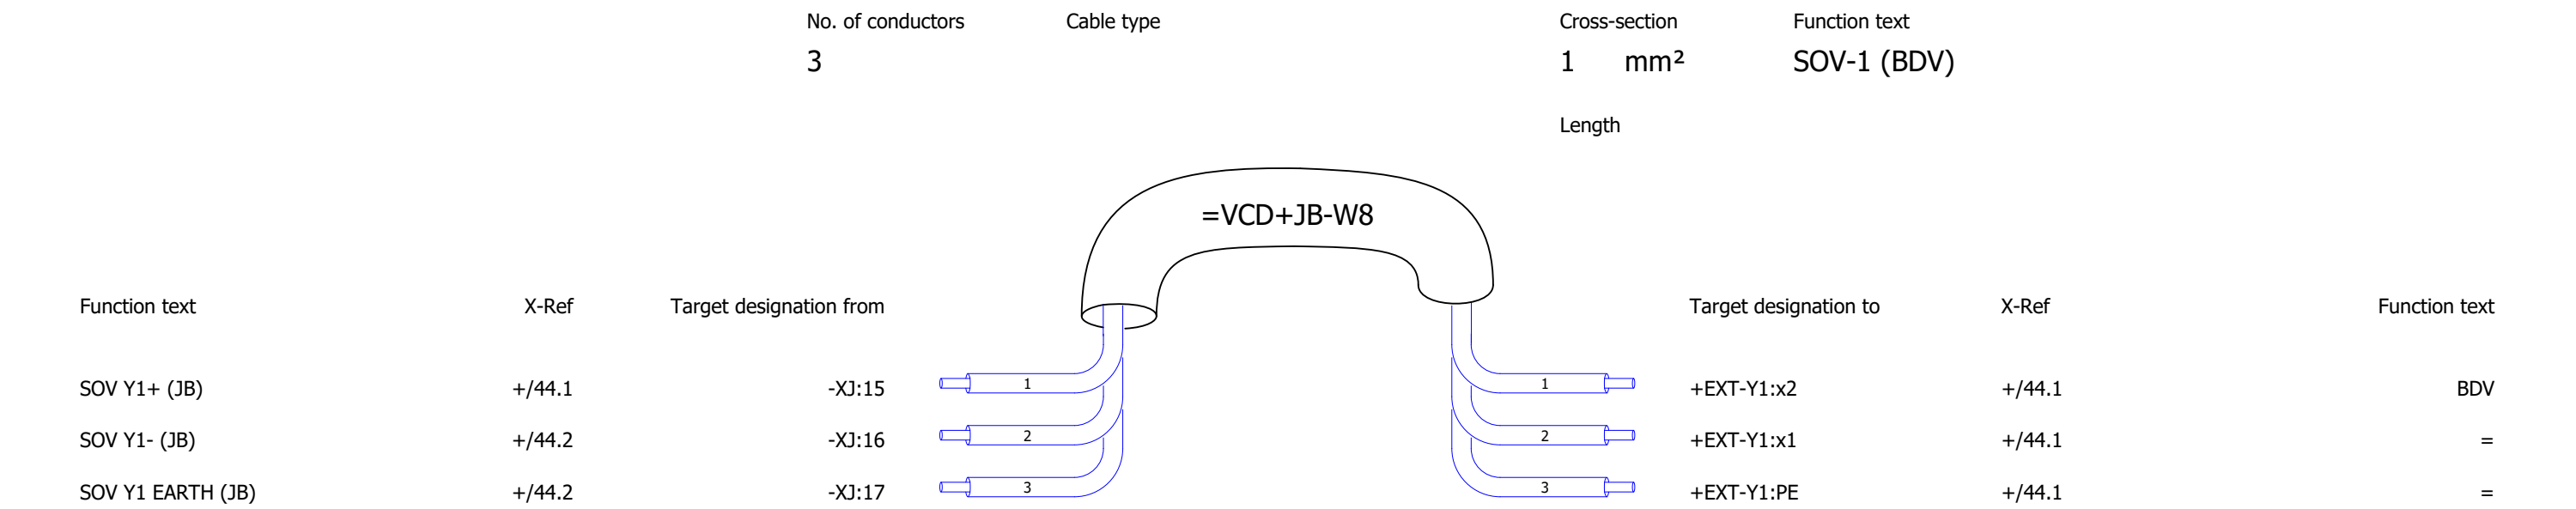


Cable diagram

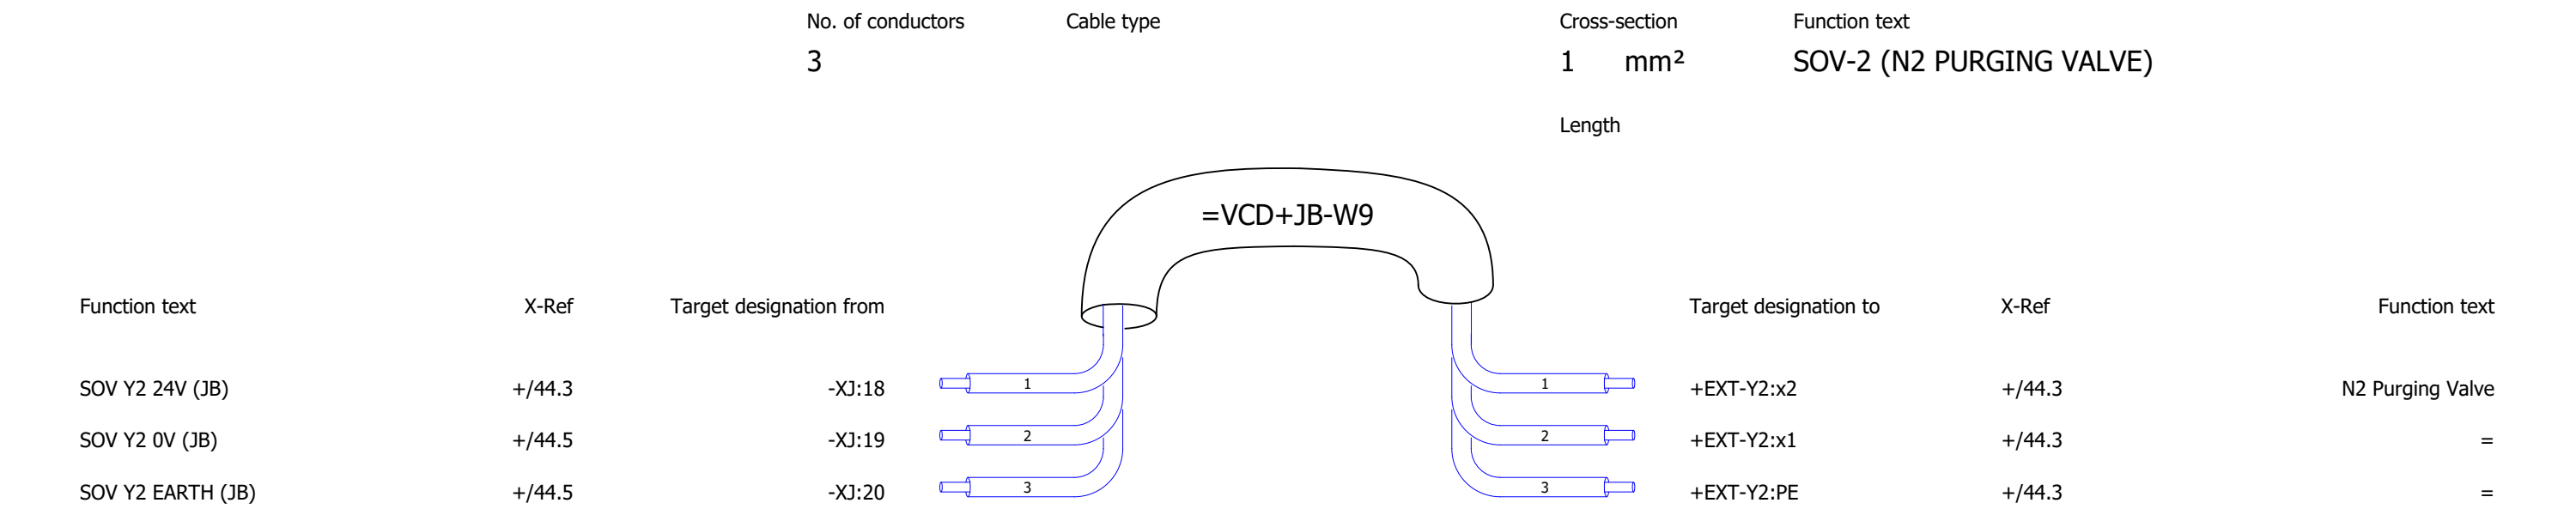


Cable diagram

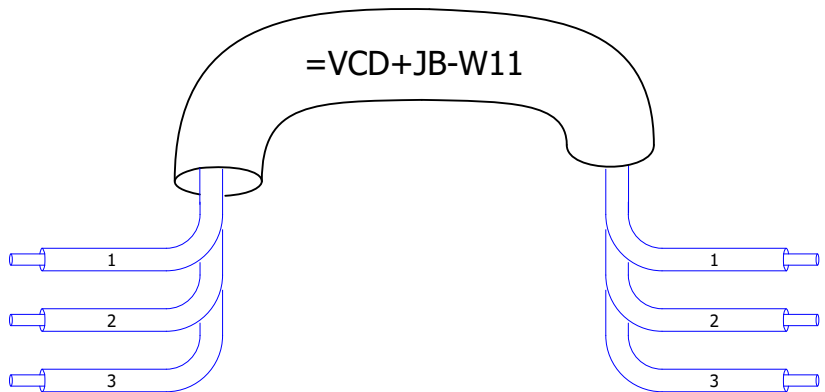		No. of conductors	Cable type	Cross-section	Function text		
		3		0.5 mm ²	RTD SENSOR-2 (PRODUCT TEMPERATURE-2)		
		Length					
		=VCD+JB-W11					
Function text	X-Ref	Target designation from			Target designation to	X-Ref	Function text
+	+/45.3	+EXT-RTD-2:1	1	1	-XJ:24	+/45.3	2-RTD1+ (JB)
-	+/45.3	+EXT-RTD-2:2	2	2	-XJ:25	+/45.3	2-RTD2- (JB)
=	+/45.3	+EXT-RTD-2:3	3	3	-XJ:26	+/45.3	2-RTD3- (JB)

Cable diagram

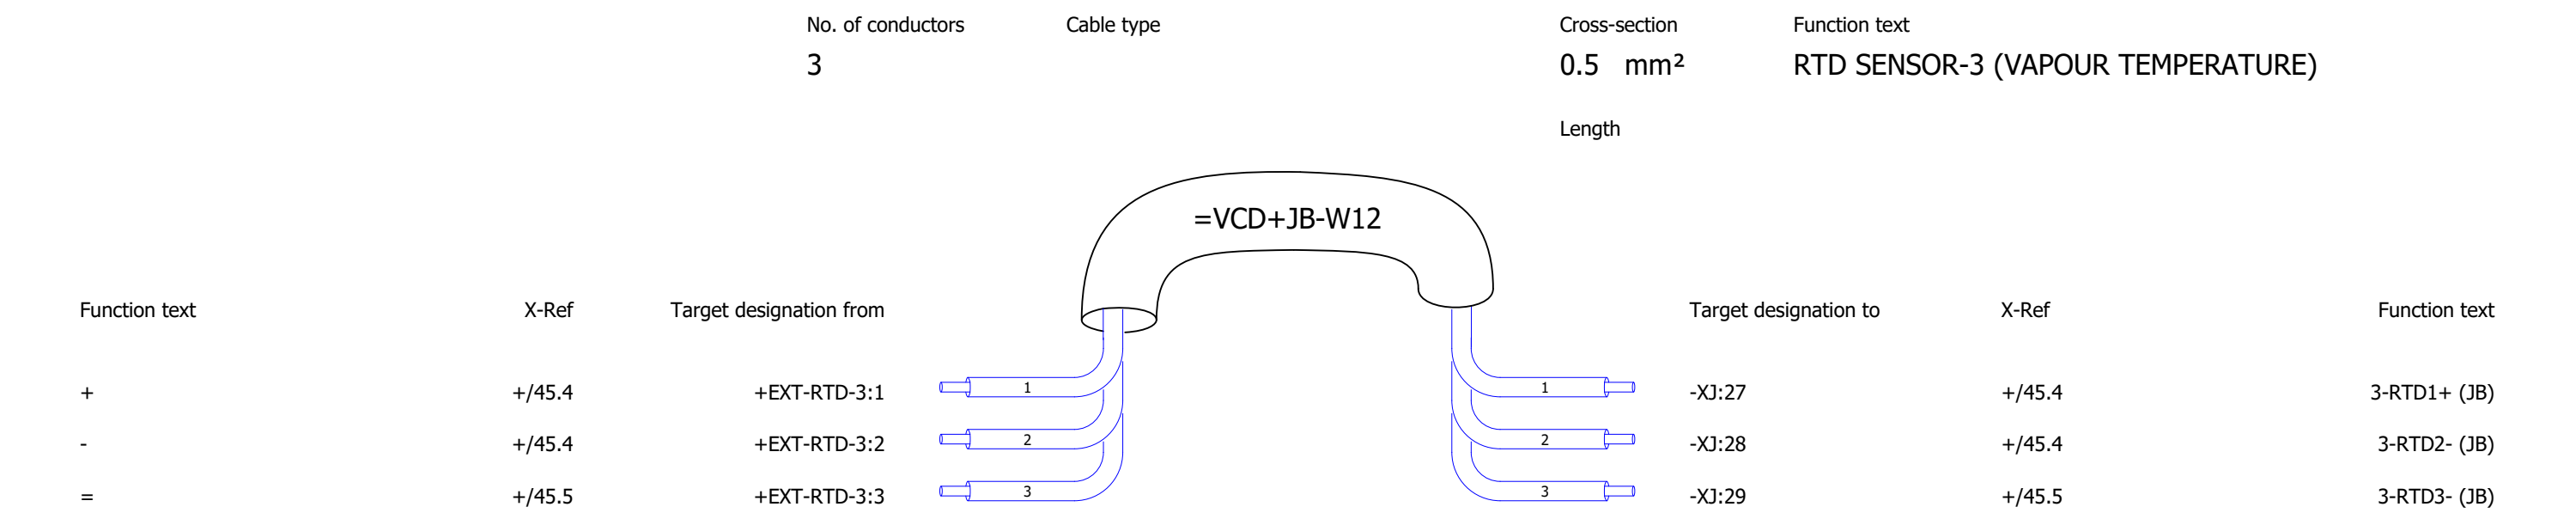

Cable diagram

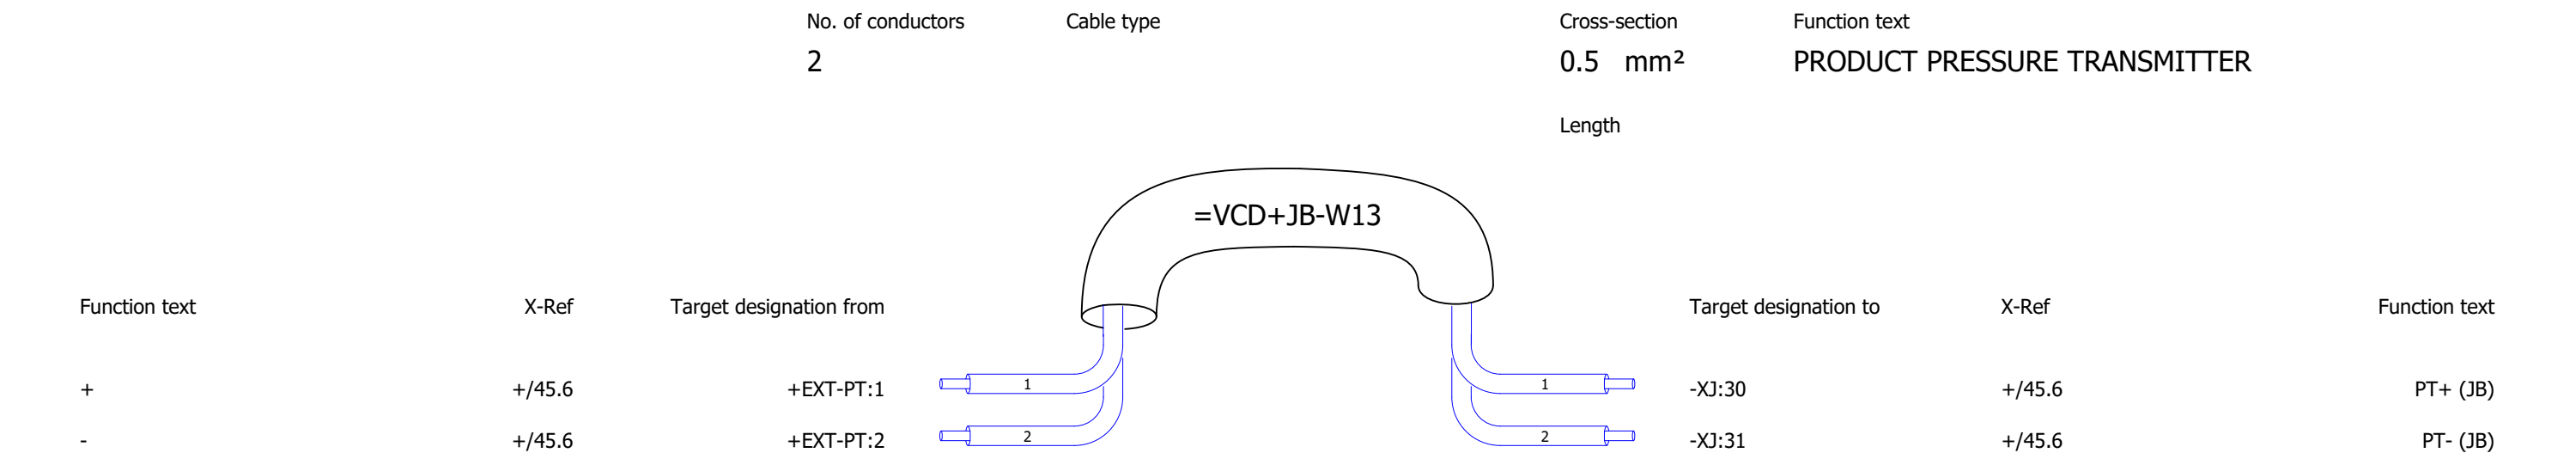

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X2	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 79
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 79 OF 105	

Terminal diagram

[illegible]

Terminal diagram

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X4	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 81
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 81 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X5	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 82
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 82 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O NO.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X6	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 83
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 83 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X7	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 84
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 84 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	 VIS-CON AUTOMATION	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X8	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 85
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	85 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O NO.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X9		= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 86
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	86 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X10		= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION	 VIS-CON AUTOMATION	VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 87
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	87 OF 105	

Terminal diagram

1		Strip =VCD+-X12 DCS DIGITAL INPUT										1											
2												2											
3												3											
4												4											
5												5											
6												6											
7												7											
8												8											
9												9											
10												10											
11												11											
Function text		1	2	3	4	5	6	7	8	9	10	11	Page / column										
PROXY-1 FB (DCS)																							/46.0
=																							/46.1
PROXY-2 FB (DCS)																							/46.1
=																							/46.2
PROXY-3 FB (DCS)																							/46.2
=																							/46.2
PROXY-4 FB (DCS)																							/46.3
=																							/46.3
PROXY-5 FB (DCS)																							/46.4
=																							/46.4
PROXY-6 FB (DCS)																							/46.5
=																							/46.5
PROXY-7 FB (DCS)																							/46.6
=																							/46.6
N2 PURGE OPEN FB (DCS)																							/46.6
=																							/46.7
SAP E-STOP FB (DCS)																							/46.7
=																							/46.8
LOP E-STOP FB (DCS)																							/46.8
=																							/46.9
LOCAL/REMOTE FB (DCS)																							/46.0
=																							/46.1
AGI. START FB (DCS)																							/46.1
=																							/46.2
AGI. FWD. FB (DCS)																							/46.2
=																							/46.3
AGI. REV. FB (DCS)																							/46.3
=																							/46.4
AGI. TRIP FB (DCS)																							/46.4
=																							/46.5

Terminal diagram

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X12	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 89
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 89 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	 VIS-CON AUTOMATION	TITLE : Terminal diagram =VCD+-X13		= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 90
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :	SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			VA-199	90 OF 105

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X14	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 91
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 91 OF 105	

Terminal diagram

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X15	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 92
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 92 OF 105	

Terminal diagram

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-X15	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 93
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 93 OF 105	

Terminal diagram

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-XCOM		= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 94
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :	SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			VA-199	94 OF 105

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+-XS	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 95
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 95 OF 105	

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+LOP-X2		= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 96
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :	SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			VA-199	96 OF 105


Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+LOP-X3		= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasán, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 97
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD			DRAWING No. :	SHEET
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199			VA-199	97 OF 105

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+LOP-X10		= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION	 VIS-CON AUTOMATION	VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. :	Page : 101
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. :	SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199	101 OF 105	

Terminal diagram

[illegible]

Terminal diagram

[illegible]

04	31/03/2026	FOR APPROVAL	NAYAN PANCHAL	W/O No.	VA-199	CLIENT : GMM PFAUDLER	PANEL QUANTITY :- 2	TITLE : Terminal diagram =VCD+LOP-XS	= REPORT
03	02/03/2026	FOR APPROVAL	NAYAN PANCHAL	PREPARED BY	NAYAN PANCHAL	PURCHASER : VISCON AUTOMATION		VIS-CON AUTOMATION G-1,13-14-15, Rajdhani Complex, B/H. Pramukh Arcade, Reliance Cross Roads, Kudasan, Gandhinagar-382421 Gujarat (INDIA)	PANEL TAG No. : Page : 103
02	17/02/2026	FOR APPROVAL	NAYAN PANCHAL	CHECK BY	RUTVIK VADGAMA	PROJECT NAME : FND000698_10KL VCD		DRAWING No. : SHEET	
REV.	Date	DESCRIPTION	Created By	APPROVED BY	RAVI DARJI	PROJECT NO. : VA-199		VA-199 103 OF 105	

