

Index

Chapter 1: Introduction

MCOMS and its role in mini-grid management

Chapter 2: Mini-grid Operations and Workflows

Key activities for customers, field agents, and managers

Chapter 3: Field Agent App

User guide for the MCOMS Field Agent App

Chapter 4: Customer App

User guide for the MCOMS Customer App

Download content of this website in PDF format

1. Chapter 1: Introduction. MCOMS and its role in mini-grid management

1.1. Mini-grid Overview and Operational Challenges

Renewables-based mini-grids offer an innovative and compelling solution for last-mile electricity delivery. They facilitate the injection of much-needed private capital to accelerate progress in the electricity access space; at the same time, their tight focus on local catchment areas enables them to offer high quality of service to customers, and to support the flourishing of lives and livelihoods in the local community. However, mini-grid companies face many challenges in creating a sustainable business, including:

- Remote and dispersed sites, with corresponding demands on personnel mobility and communications
- Low-income customers, who face restrictions in their levels of energy consumption
- Lack of labour force training, including business management skills and technical experience

As the mini-grid sector matures, robust streamlining of management and on-ground operations is needed. The Mini-grid Communications, Operations, and Management Suite (MCOMS) fulfils this need through a comprehensive IT-based solution, which will help to unleash mini-grids' potential in delivering high-quality electricity and responsive customer service around the world.

1.2. The Role of MCOMS in Managing Mini-grids

1.2.1. Purpose

The goal of MCOMS is to provide a platform for different mini-grid stakeholders to effectively communicate, through standardised workflows, easy-to-use interfaces, third-party hardware interoperability, rapid and automated data aggregation, and transparent and reliable record-keeping.

1.2.2. Functionalities

MCOMS is built upon two critical design principles, shown in Figure 1.

Accurate and comprehensive record keeping	Real-time communication, control, and updates
<ul style="list-style-type: none">Including centralised databases of historical technical and financial data, user information, plant specifications, system changes, etc.	<ul style="list-style-type: none">Accurately propagating and distributing commands issued from any node, to provide up-to-date information to all users

High-level system functionalities are detailed in Figure 2.

FIGURE 2:HIGHEST-LEVEL COMS FUNCTIONALITIES.



Portfolio Performance Monitoring

At-a-glance metrics for a single plant or a mini-grid portfolio



Financial Reporting

Details on plant revenues & expenses, business-level P&L statements



Technical Analysis

Benchmarking & monitoring equipment performance to safeguard smooth operation



Field Force Management

Allocation of roles & responsibilities, & personnel performance



Customer Management

Customer profiles, consumption, & payment information



Customer Service

Portal for communications between customers & the company, with service quality monitoring



Tariffs and Management

Allows customers to select from a range of energy service options suited to their needs



Inventory Management

Tracking assets & equipment stored in company warehouses



Remote Monitoring & Control

Hardware control access for manual override of electrical equipment and meters



Plant Maintenance

Logging and automated scheduling of asset maintenance and servicing



Installation & Commissioning

Tracks plant development from site selection to final commissioning



Standardised Reports

Customisable report templates for managers, investors, & other stakeholders

MCOMS is designed to cover all aspects of business monitoring, and places sales and finance metrics alongside technical performance and analysis of trends in customer demand. This synthesis of information gives mini-grid developers a deeper understanding of their projects' operations.

1.2.3. Users

Mini-grid businesses are multi-faceted, with many personnel and stakeholder roles. MCOMS caters to these user groups' requirements and workflows, as described in the following sections.

1.2.3.1. Company Personnel

To achieve operational efficiency and business performance, it is critical to clearly define the roles for each team member. The personnel hierarchy of a mini-grid operator is sketched in Figure 3, followed by a detailed description in Table 1.

Figure 3: Typical mini-grid operator organisational hierarchy.

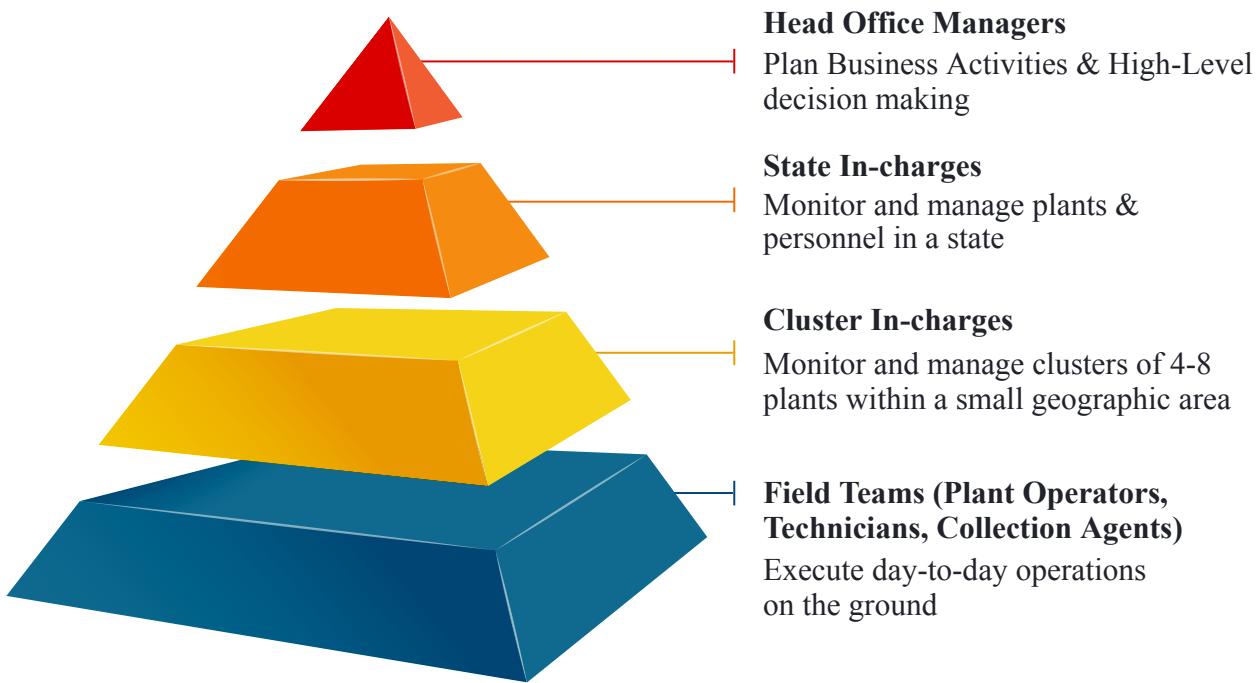


Table 1: Description of the roles and responsibilities of mini-grid personnel.

Designation	Role	Responsibilities
Operator	An operator is present 24x7 to look after the mini-grid plant	<ul style="list-style-type: none"> • Monitor plant equipment to ensure correct operation • Restore electricity supply after plant trips • Record routine operations data, such as plant meter readings • Handle complaints of customers who come to the plant
Technician	A technician addresses technical issues encountered by customers or at the plant	<ul style="list-style-type: none"> • Respond to customer connection problems • Diagnose and fix equipment faults throughout the mini-grid • Connect new consumers to the network • Record customer energy consumption
Customer Service Agent (CSA)	A CSA manages customer relationships and conducts sales activities	<ul style="list-style-type: none"> • Market mini-grid services and schemes to potential customers in the catchment area

		<ul style="list-style-type: none"> Issue bills and collect payment from customers, and make deposits Intervene in the case of non-payment Respond to customer complaints or difficulties faced Administer requested package upgrades / downgrades
Cluster In-charge	A Cluster In-charge supervises personnel and operations at several nearby plants	<ul style="list-style-type: none"> Track the sales performance of plants in the cluster and highlight problems Track and verify operational costs borne by the cluster Monitor pending tasks, and allocate them to members of the field team Arrange for any maintenance or equipment replacement Handle personnel training
State In-charge	A State In-charge supervises operations at all plants within a state	<ul style="list-style-type: none"> Create monthly business performance targets, including revenue and customer numbers, and track progress towards them Coordinate schemes and initiatives between all plants within the state Create sales and operations reports for the head office Create recruitment plans Coordinate and plan portfolio expansion, construction, and recruitment
Head Office Manager	Head Office Managers are key decision-makers who manage portfolio and business development	<ul style="list-style-type: none"> Develop strategies and initiatives to enhance business performance Reconcile expenses and earnings reports Perform cross-plant analyses of technical health, and arrange interventions to optimise the asset portfolio Create new packages and services Plan the strategic, technical, and financial elements of business expansion

1.2.3.2. Mini-grid Customers

One of the strengths of mini-grids is their ability to cater to a variety of consumer segments with different energy needs and expectations. For example, while a household may require modest levels of power to run simple appliances in the evening, shops' peak consumption may be in the daytime, while commercial enterprises with specialised equipment will require a much higher load allowance.

That said, all electricity consumers share the same basic requirements of monitoring their bills and consumption history, receiving alerts and notifications from the electricity supplier, updating their account details, and getting in touch when something is amiss. MCOMS aims to facilitate these kinds of communications, and ensure that customers are kept in the loop with easy access to all the information and service support that they need.

1.2.3.3. Access Permissions

Different users of MCOMS will require different levels of access to the system's databases and management functionality. As such, a core component of MCOMS is the ability to set the access permissions for each user. This not only simplifies the interface, allowing each user to focus on content relevant to them, but also ensures that sensitive data is secure.

For example:

- Customers should only be able to view their own bills, and not those of other customers.
- Plant operators should only be able to input and record data pertaining to their plant.
- Maintenance activities and control of equipment operation should be in the hands of the cluster or state in-charge, rather than plant CSAs and technicians.
- Bank deposits and expense reports for the portfolio should be visible to upper management only.

This manual documents all of the MCOMS system's features which would be visible to the top-level user (e.g. the company CEO). A given reader may be able to only access some subset of these features, depending on their designation; this will be clear from the context on a case-by-case basis.

1.2.4. Communication

As already noted, communications between stakeholders are of central importance to the smooth running of a mini-grid business. Effectively connecting different levels of the business, for instance allowing managers in the head office to gather information from distributed field teams, underpins efficient operations.

Wherever possible, this is achieved through passive communications:

- Well-structured workflows which guide the user in completing tasks
- Automatically generated notifications for routine or scheduled activities
- Automated prioritisation of information according to internally programmed logic
- Rapid data consolidation so that all users have access to up-to-date information
- OTPs for customers and managers to authorise certain transactions

There are also various mechanisms for active communication between users:

- Notifications and data entry pushed via the smartphone apps
- Notifications and data entry pushed via the web platform
- Notifications pushed through email
- Notifications and requests pushed through SMS


Multi-modal communications are especially important when different users will have different preferences. For example, those customers who cannot use the smartphone app will receive bills, receipts, and notifications via SMS.

1.3. MCOMS Interfaces and System Integration

1.3.1 Front-end Interfaces

The real-time integration of mini-grid customers, field agents, and management onto a single information platform is shown in Figure 4.


Figure 4: Integration of MCOMS interfaces.

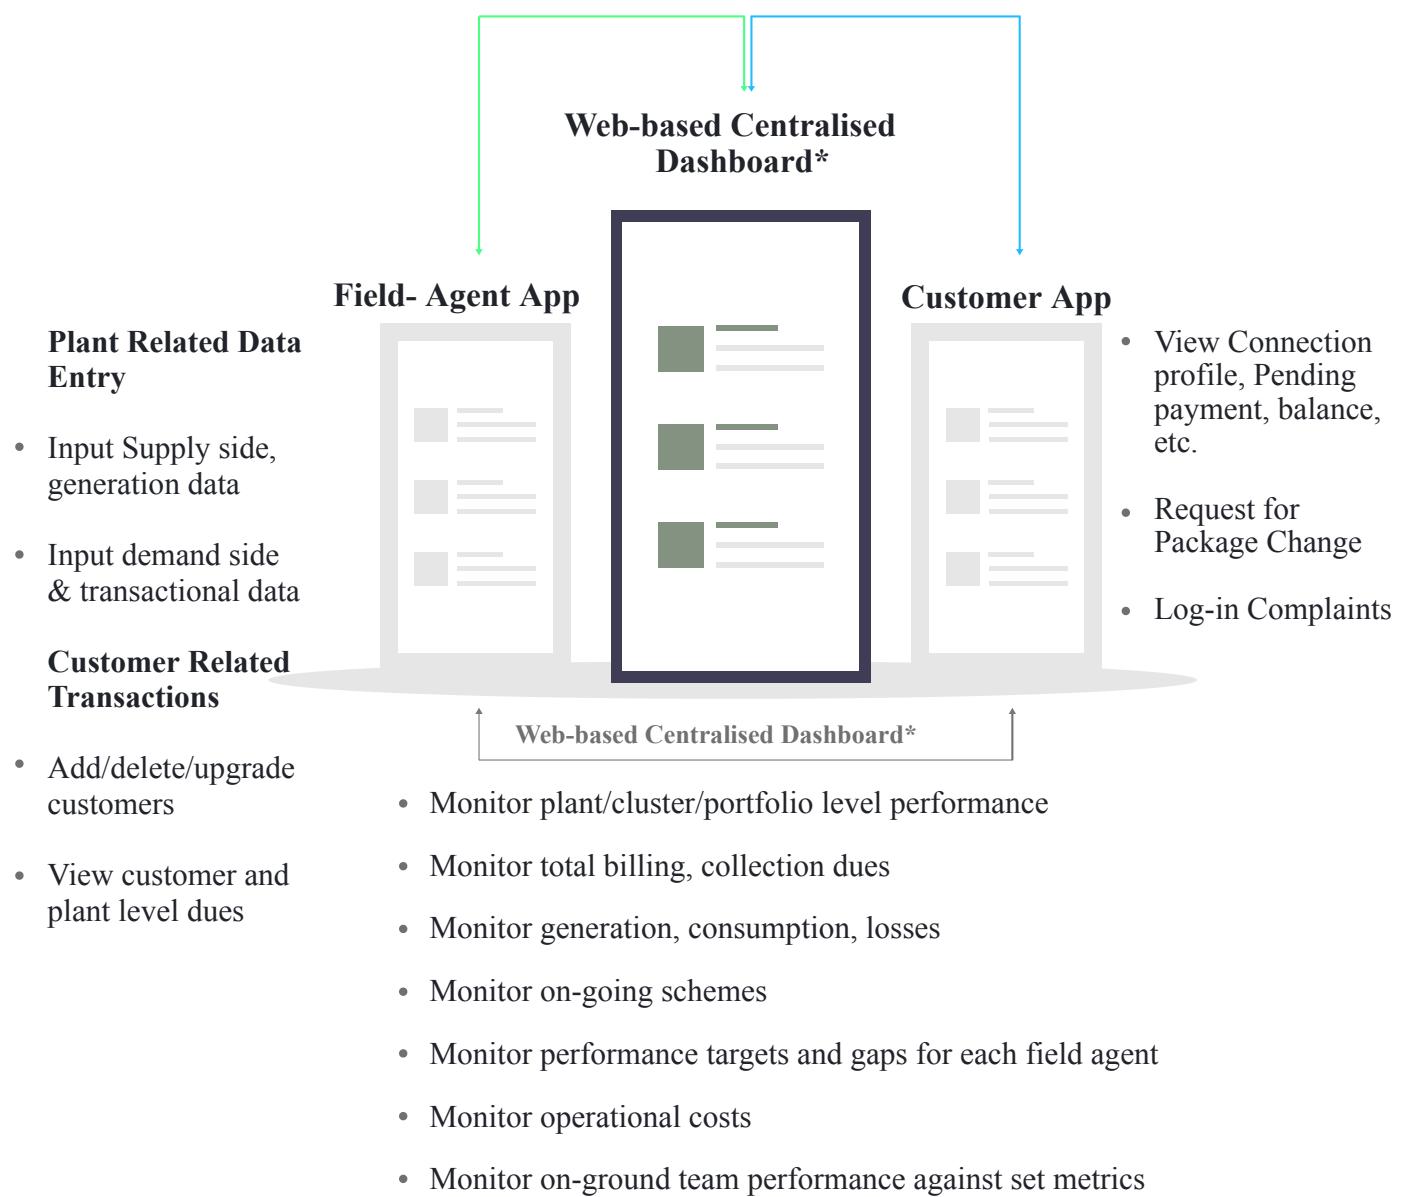

The following sections describe each interface.

1.3.1.1. Customer App

Figure 5: Screenshot of the customer app.

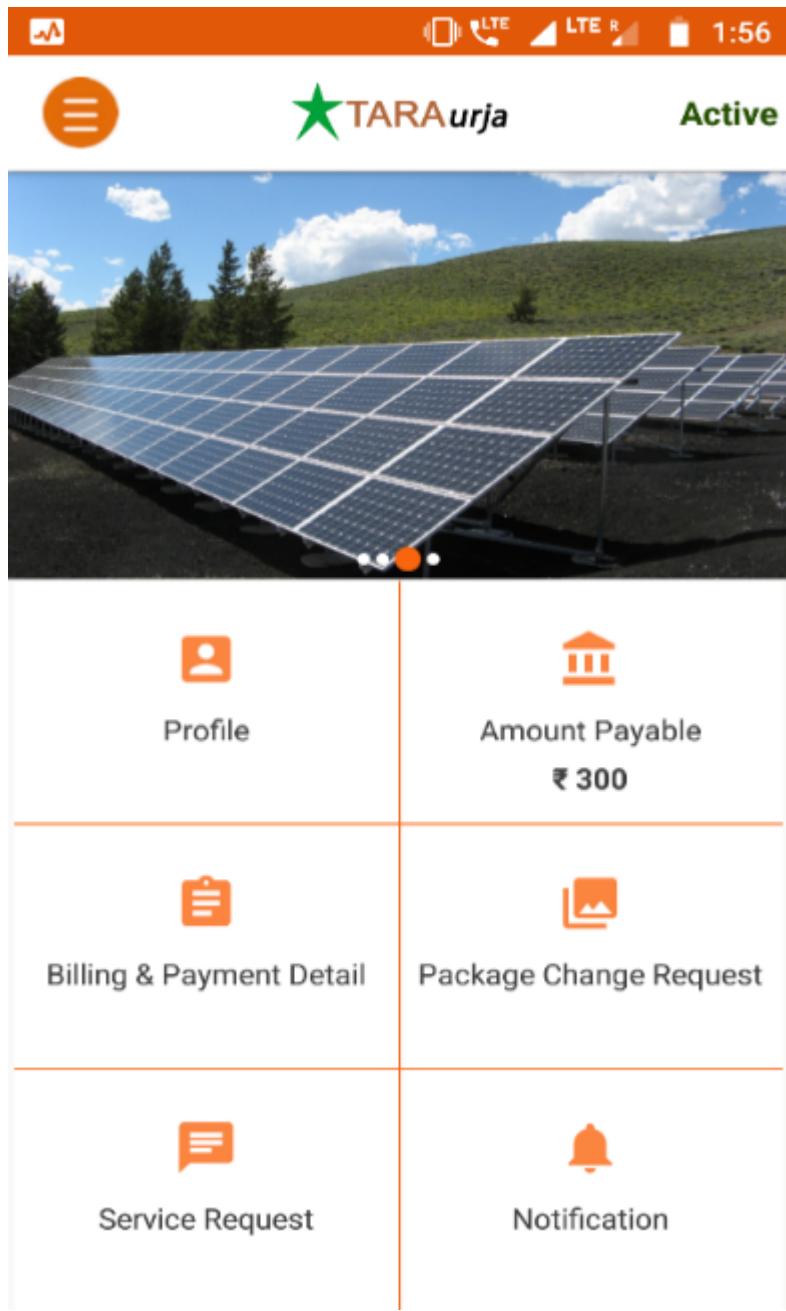


The customer smartphone app provides an intuitive graphical interface through which mini-grid customers can:

- View their consumption, billing, and payment history
- Store receipts
- View and edit their customer profile
- Register service and package change requests.
- Directly contact mini-grid field personnel
- Receive alerts and notifications about their account, electricity supply, or other operational matters.

Customers without smartphones can avail some limited functionality through SMS (see Figure 6).


The customer app is fully documented in Chapter 0.

Figure 6: Screenshot of SMS services.

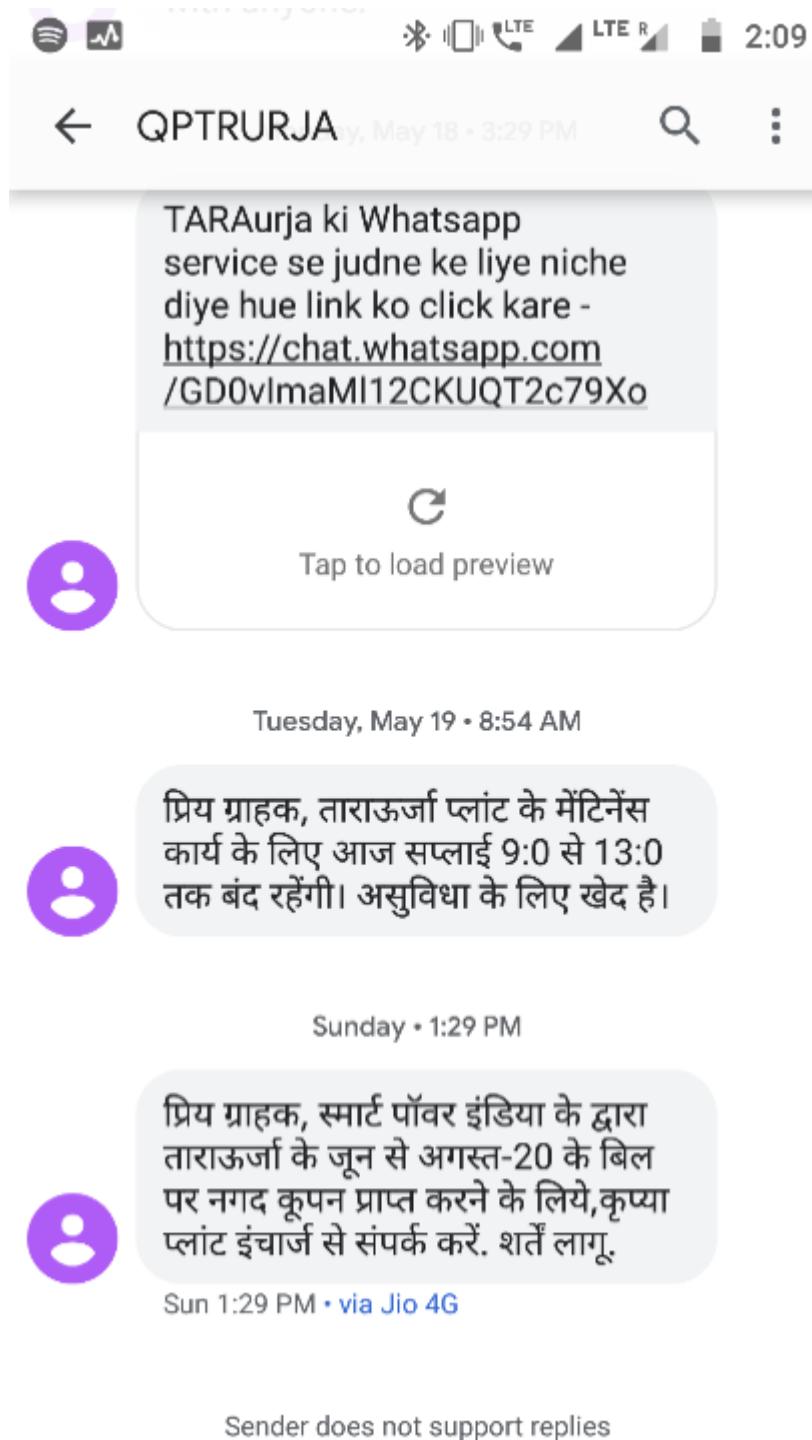


1.3.1.2. Field Agent App


Figure 7: Screenshot of the field agent App.

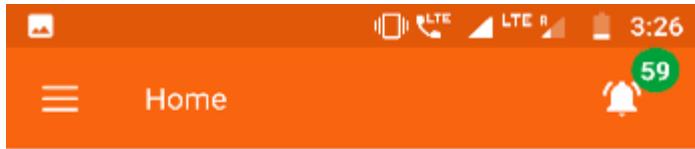

Consumer

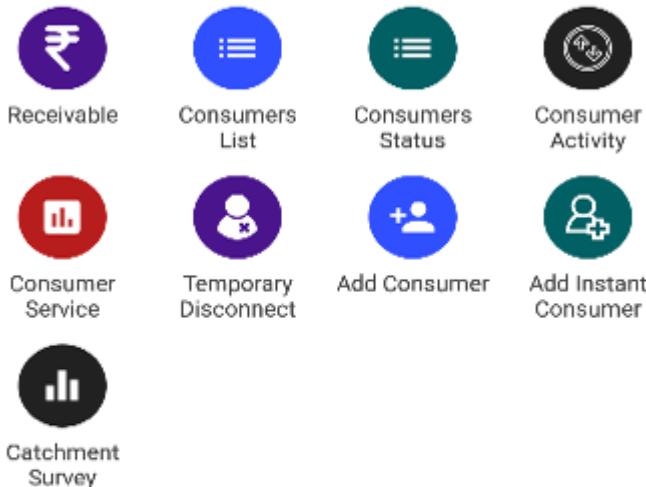

Package & Scheme

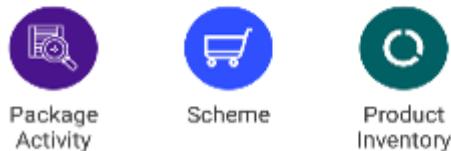

Plant



The field agent smartphone app provides a comprehensive interface for mini-grid personnel at all levels of the business hierarchy.

For personnel on the ground, the app allows:

- Viewing customer accounts
- Recording transactions
- Receiving assignments and notifications
- Registering customers and changing their package

For management personnel, the app allows:

- Tracking sales and business performance
- Communication with the field team
- Identifying emerging issues requiring intervention
- Monitoring technical operation of the mini-grid

The field agent app is fully documented in Chapter 3.

1.3.1.3 Web Platform

The web platform is the primary MCOMS front-end for use by the management teams at cluster, state, and HQ levels. It provides detailed dashboards and data analysis functionalities, and allows users to view and edit database records.

A detailed guide to the web interface will be included in a future edition of this manual, but in this edition it is omitted.


1.3.2. Data Sources and Transmission

The MCOMS components discussed in the preceding Section 1.3.1 all exchange commands and information in real time. To fully appreciate and leverage the potential of MCOMS, it is necessary to get a basic overview of the various information pipelines, and how distributed hardware and software talk to each other.

1.3.2.1. System Overview

The central data management system acts both as a data repository and a command router, and can push information and notifications to specific users or hardware. Principal hardware nodes and the two-way interactions between them are depicted in Figure 8. The following sections describe data collection and transmission mechanisms in more depth.

Figure 8: Data flow between MCOMS components.

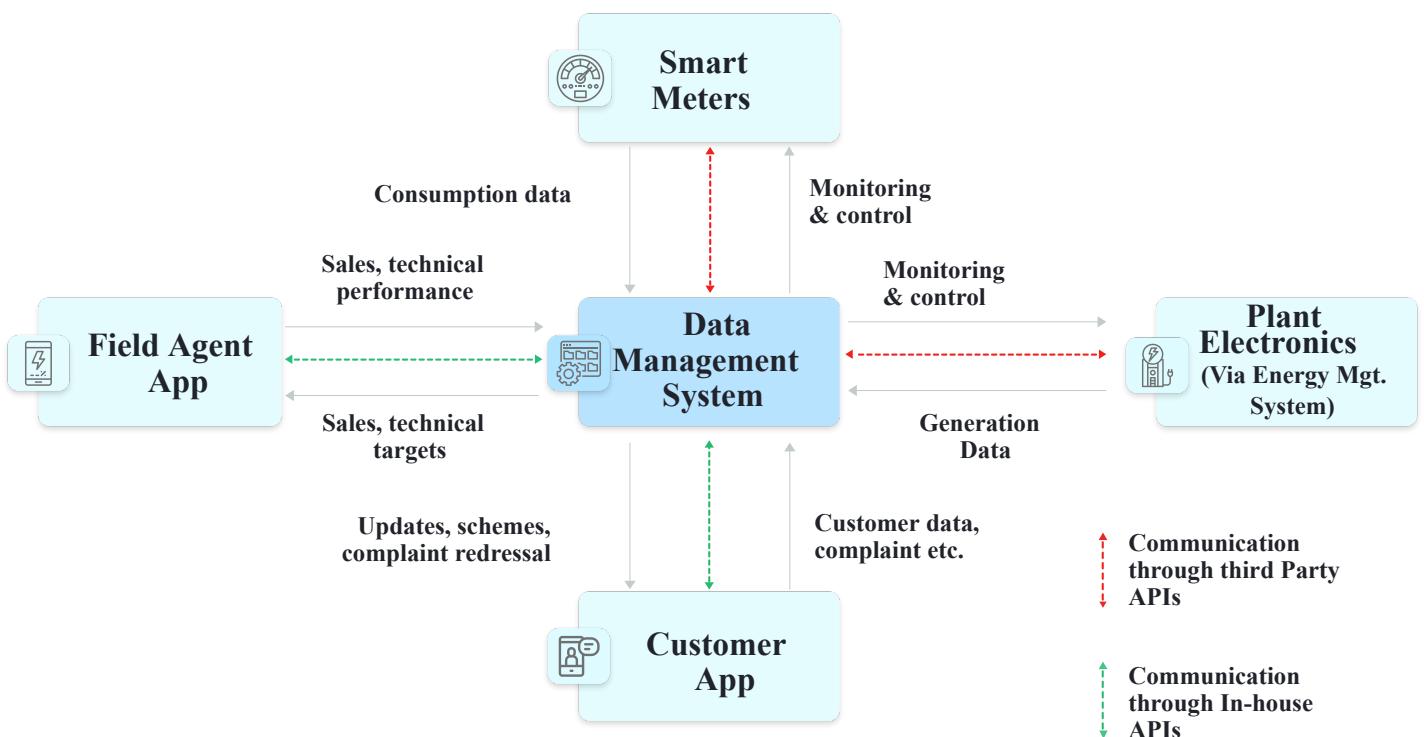

1.3.2.2. Manual Data Input

Sales and customer-related information is entered into the system by field agents and customers. This critical ground intelligence is then relayed to all levels of the business hierarchy.

Some activities are input subject to requirement – example include adding new customers or registering payments. Others are routine activities, such as logging solar energy generation or performing customer meter readings.

1.3.2.3. Smart Meters

Smart energy meters connect the demand side to cloud servers for automated data upload and remote-control capabilities. While specific technologies differ, such systems generally offer a variety of advantages over conventional meter setups, as captured in Figure 9.

Figure 9: Benefits of smart metering.



Automatic meter reading to facilitate billing and collection activities



Remotely adjustable load limits and ability to switch meters on and off



Programmable electricity packages including multiple time of day slots



Usage and credit limitations, with automated shutdown for non-paying customers



Tracking of customer power usage patterns



Detailed monitoring of parameters related to power supply quality

Communication with smart meters typically operates through the hardware manufacturer's software and cloud servers. Data can be pulled from the servers and commands issued to individual meters (or collections thereof) through the manufacturer's portal and/or through their APIs.

1.3.2.4. Plant Equipment

A detailed record on the state of supply-side equipment—including inverters, batteries, and solar panels—can be collected from data-loggers installed in the mini-grid control room. Such records allow plant management to assess performance and health of their systems.

More sophisticated setups may combine data collection with automated real-time performance optimisation, as well as two-way communication capabilities which allow technicians to remotely control plant operations.

1.4. Organisation of this User Manual

Scheduled manual collection of key data points



01

Automated high frequency data gathering & communication



02

Remote control of plant equipment



03

Energy management system to optimise plant technical operations



04

Figure 10: Technical monitoring of mini-grid supply-side equipment.

This section provides some guidance about navigating and using the remainder of this manual.

Chapter 2: Mini-grid Operations and Their Workflows outlines core operating principles of running a mini-grid, and elaborates the various tasks and responsibilities pertaining to mini-grid personnel and mini-grid customers. The functionality discussed in the following chapters will be founded on a familiarity with this material.

Chapter 3: Field Agent App provides a detailed guide to the smartphone application used by mini-grid employees. The app provides a wide range of functionality, and constitutes the bulk of this manual. Each “module” of the app is introduced in a separate sub-section, which states the purpose of the module, its key users and use cases, along with a step-by-step explanation of how to navigate it.

Chapter 4: Customer App consists of a working guide to the customer application. As with Chapter 3, each functionality is explained in depth, for the benefit of both customers and field agents who are assisting customers in using the app.

2. Chapter 2: Mini-grid Operations and Workflows. Key activities for customers, field agents, and managers

2.1. Introduction to Mini-grid Operational Activities

Mini-grid projects depend for their sustainability on delivering high quality of service to their customers, and value to the local community. This chapter details some of the day-to-day activities undertaken by mini-grid field teams to support smooth technical operations and responsive customer engagement. This information will be critical for fully understanding the MCOMS functionalities described in the chapters that follow.

2.2. Customer-related Operations

2.2.1. Creating Packages


Packages allow customers to prioritise their electricity needs and balance them against price for different levels of service. In designing and choosing packages, three major supply characteristics must be considered:

- The maximum power or load supported by the connection
- The timings during which the connection is active
- The tariff per unit of energy consumed, if any

A package combines allowances in these three dimensions, in a way that is designed to suit the consumption patterns of existing and potential customers, while covering the cost of electricity supply and business requirements. Multiple packages are generally offered at a given plant.

Post-paid packages are billed at the end of each billing period after energy has been consumed; these connections are typically metered and the bill depends on the amount of consumption. Pre-paid packages require the customer to pay a fixed amount in advance to maintain a given level of supply availability.


Figure 10: Package ID construction example.

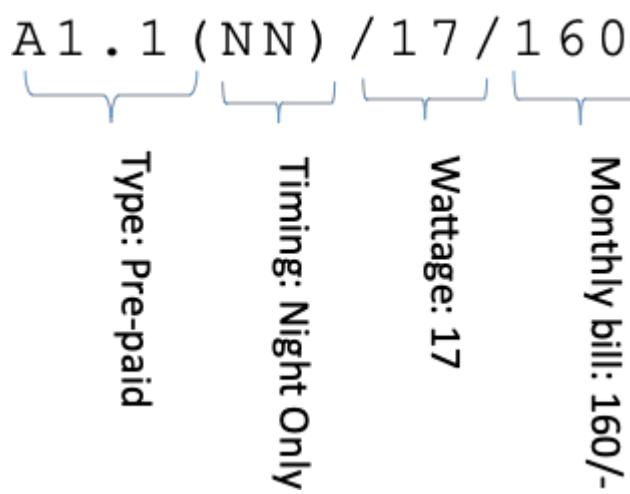

2.2.1. Customer Acquisition

The step-by-step customer acquisition process is depicted in Figure 11. Note that all steps coloured green or blue are done through the MCOMS apps.

Figure 11: Adding customers detailed workflow.

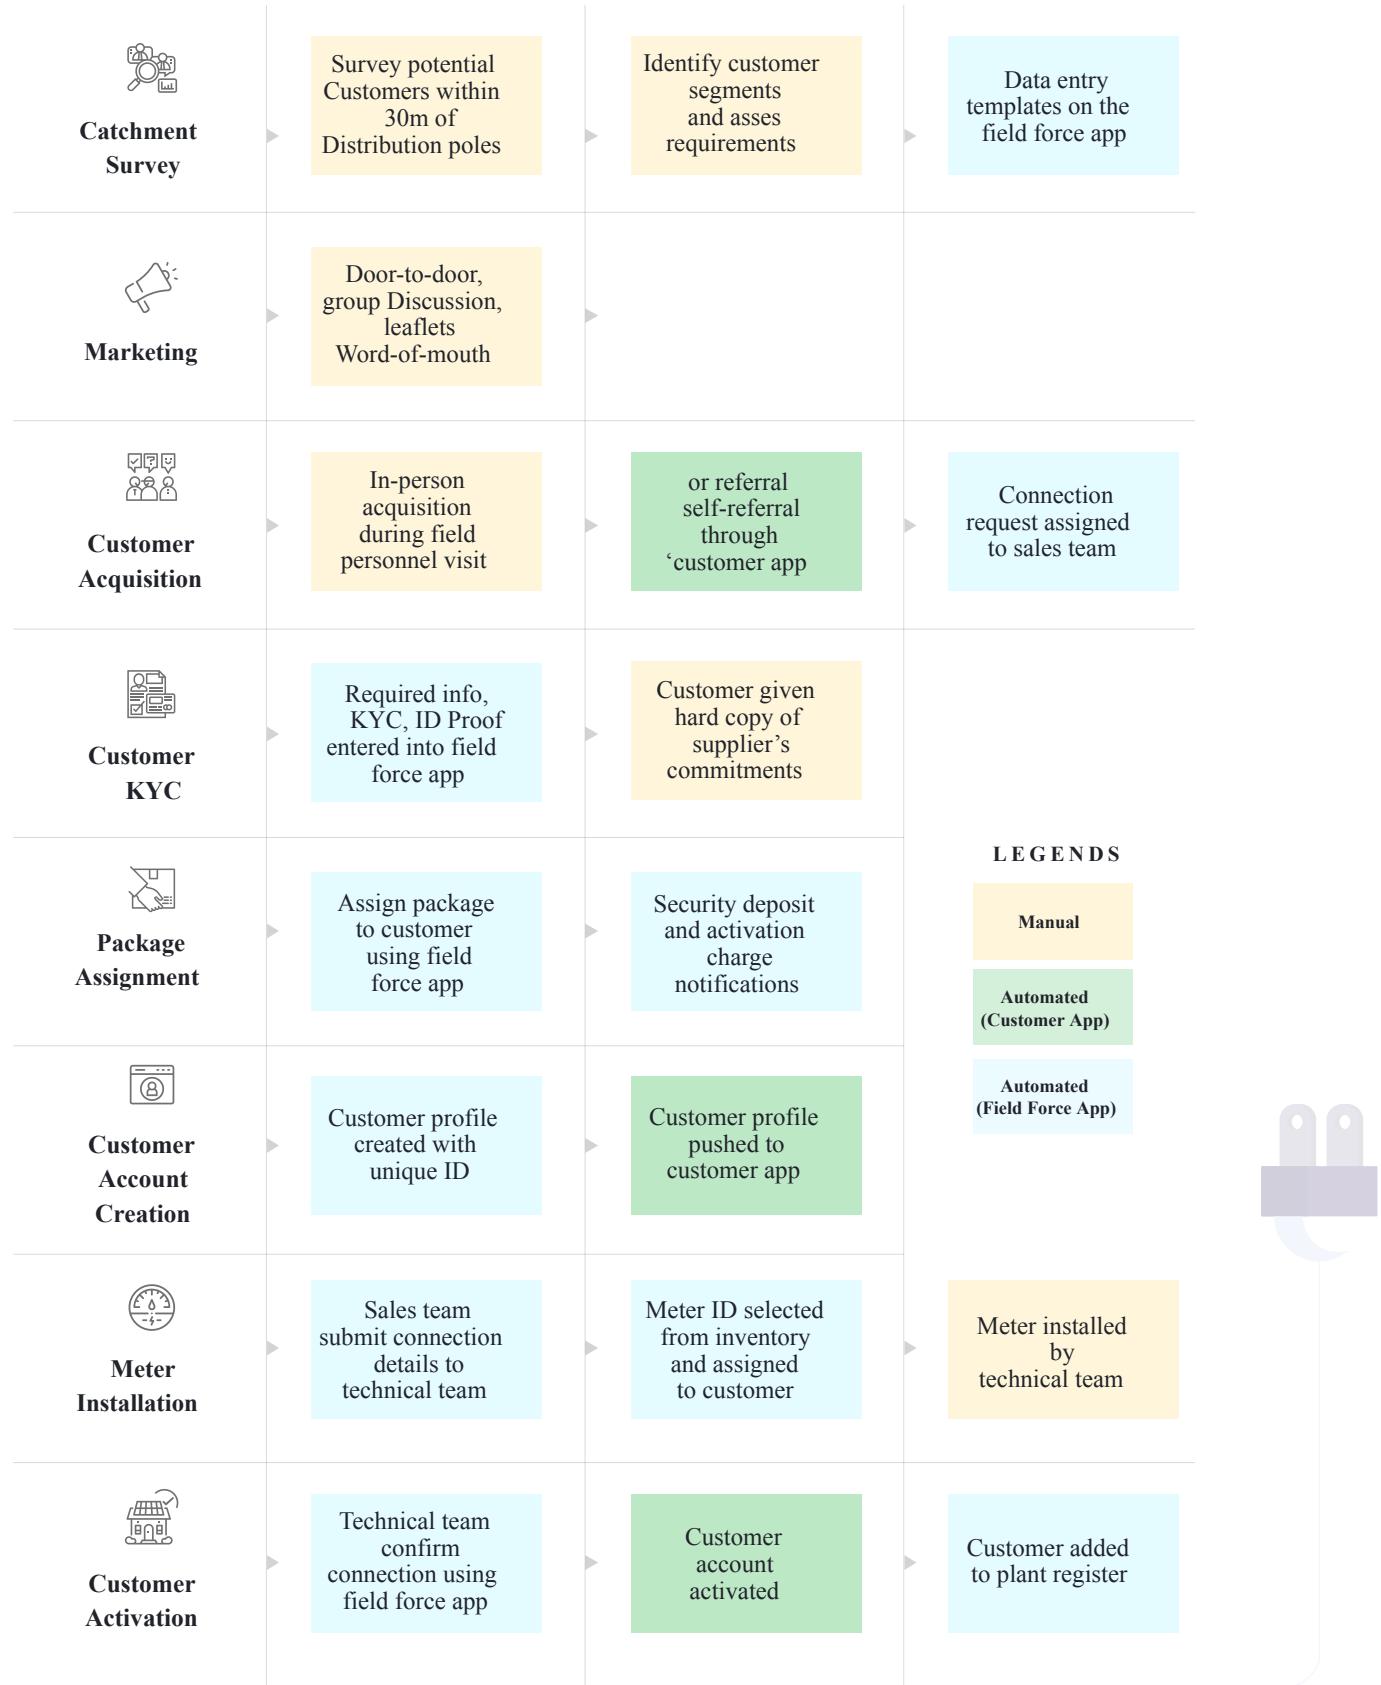


2.2.2.1. Unique Customer IDs

Each customer is assigned a unique identification number the moment their account is created. These numbers play a pivotal role in the structure of MCOMS, as the databases for energy consumption,

payment history, etc. are indexed according to this ID. An example customer ID is shown in Figure 12.

Figure 12: Customer ID construction example.

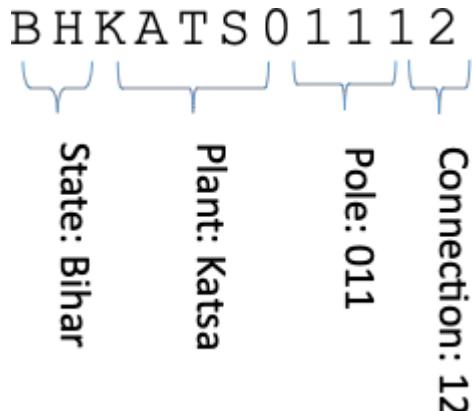

2.2.3. Customer Status

A customer's status can be either "active" or "inactive"/"banned":

- Active customers have kept up to date with bills (i.e. have not exceeded their credit limit), and are continuing to avail the services of the mini-grid.
- Inactive / banned customers are those whose connection has been terminated – either because of non-payment, or the customer's preference, or in rare cases because electricity demand is exceeding the plant capacity and customers must be dropped.

MCOMS automatically flags customers who are to be deactivated; when the customer is connected through a smart meter, this process can be automatic.


2.2.4. Metering, Billing, and Collection

Metering, billing, and collection (MBC) is the process by which a customer pays for the electricity they have consumed. The process is summarised below and illustrated in Figure 13.

- Metering
 - For customers with conventional energy meters, the new reading is noted at the end of the billing period.
 - For customers with smart meters (see Section 1.3.2.3), energy consumption is automatically calculated.
 - For customers with load limiters (pre-paid), no metering is necessary.
- Billing
 - For metered customers, energy consumption is multiplied by the appropriate tariff to arrive at the final bill.

- For unmetered customers, the bill is a fixed amount per month so no calculation is necessary.
- Bills are delivered to customers either electronically or in person by field agents.
- Collection
 - The customer makes payment against their bill, as well as any outstanding debt.
 - Payment can be made in person in cash (point of sale (POS)), through a mobile wallet (e.g. PayTM), or by card.
 - Partial payments are acceptable, but will require repeated field agent visits.

Figure 13: Metering, billing, and collection workflow.

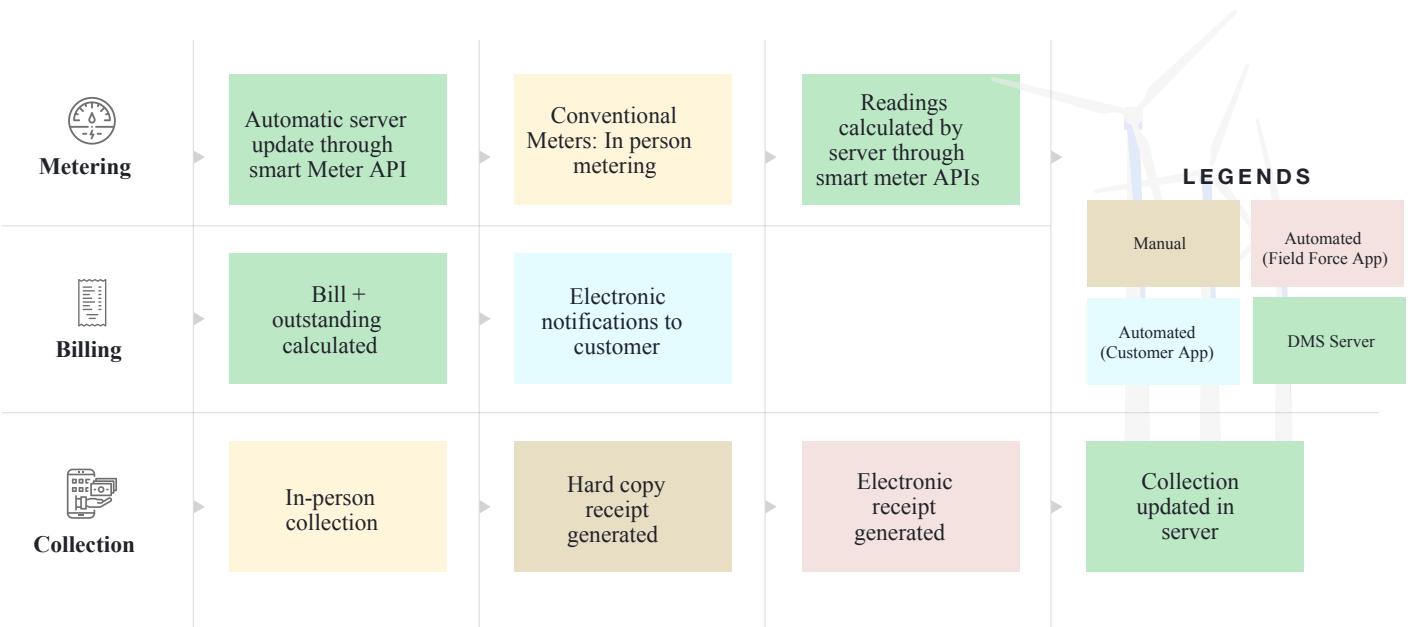

2.2.5. Customer Receipts

Ensuring that company and customers alike have access to records of bills and payments is important for transparency and trust, and for forestalling / resolving payment disputes. Customer receipts are the primary proof of billing for any active consumer, and come in a variety of formats:

- **Print-out:** a paper receipt of a transaction can be printed by field agents upon request, using a portable printer.
- **Digital record:** customers using the smartphone app gain access to their complete transaction history, as seen by company agents.
- **Screenshot:** customers without the app may request a screenshot of the receipt from a company agent, to be saved as an image file.
- **SMS:** customers may automatically receive SMS messages notifying them of bills and confirming payment received.

2.2.6. Editing Profiles

It is important to maintain up-to-date customer records, including information like address and contact number. This ensures that customers can receive bills and payment receipts, and be informed of any service disruptions or company promotions.

Customers may update their own information through the customer app, or field agents may do so with approval (and an OTP) from the customer.


2.2.7. Service Requests

Service requests are made by customers when they experience supply disruptions or other issues with their electricity connection. Service requests can be made though:

- The customer app, which has an easy-to-use service request module
- The field agent app, where the customer contacts the company field agent directly, and the agent logs the service request on their behalf

The processing of every Service Request made by all customers is as follows:

Figure 14: Service requests workflow.

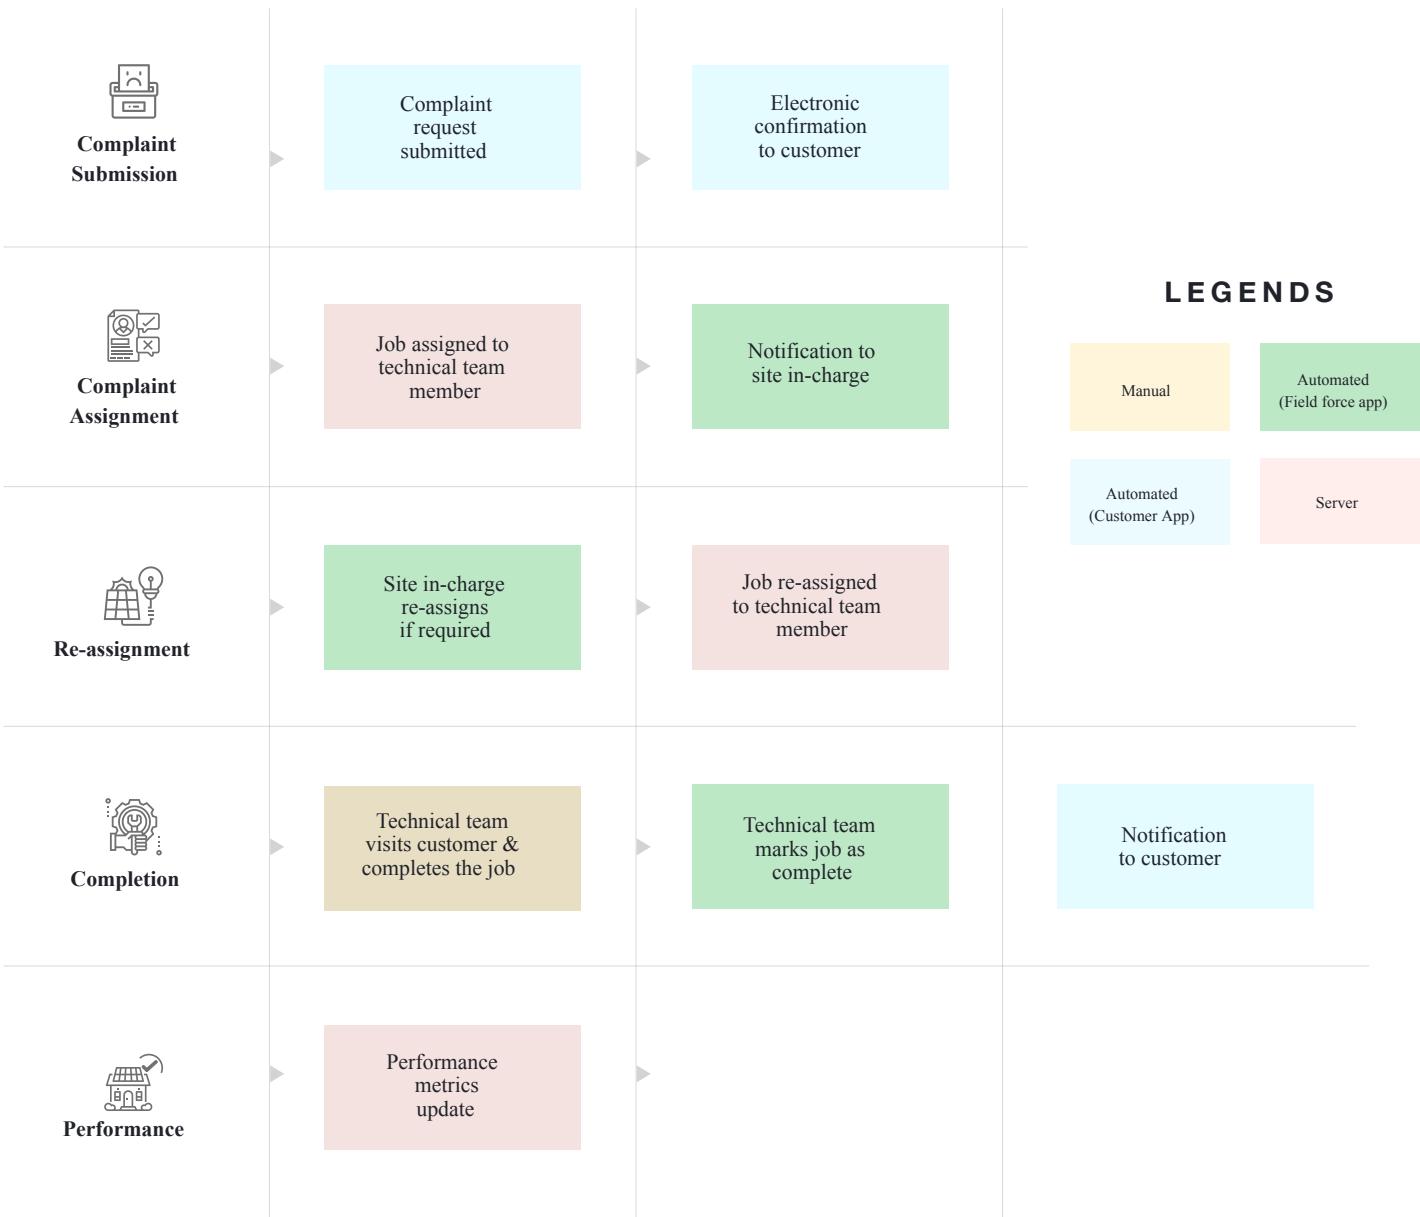

2.2.8. Security Deposits

A refundable security deposit is typically taken from every new customer, with the amount depending on their anticipated monthly bill. In the event of a lapse in regular payments, the company can recoup the outstanding amount from the deposit. Otherwise, the deposit is refunded in full when a customer discontinues their subscription. The process for collecting the security deposit is illustrated in **Error! Reference source not found.**

2.2.9. Package Changes

Customers whose energy requirements or circumstances change may shift to a different package. For example, a household may upgrade to a higher load limit after buying new electrical appliances, or may opt for longer hours of access.

A package change can be initiated via the customer app, or by a field agent on behalf of the customer. The main steps of the process are:

- **Logging the request:** the package change request is registered in the system
- **Approval:** the request is screened by the appropriate mini-grid employee; in some circumstances the request may be rejected
- **Payment:** the customer and company settle necessary payments, such as changing the security deposit
- **Database update:** the customer's assigned package is updated; the change may be implemented immediately or at the beginning of the next billing period
- **Connection update:** smart meter or load limiter is reprogrammed with the new package details (namely load limit and timing), or the customer is connected to a different feeder

2.2.10. Complementary Business Services

Value-added services are those activities which go beyond the core role of providing electricity. These activities are intended to serve multiple purposes: to bring value and opportunities to customers, to positively impact the local community, to raise the profile of the mini-grid operator, and to increase electricity sales.

Some value-added services are geared towards businesses and micro-enterprise development, while others are more focussed on households and personal use. Two examples are given.

Example 1: Water Sales

Many mini-grid operators have established water treatment units at their plants. These provide the amenity of clean and chilled water to the local community, while generating economic activity and acting as a dependable electricity consumer for the mini-grid. Depending on the company's level of involvement, they may wish to keep track of the water treatment unit's throughput, sales and electricity consumption. Such functionalities are available through MCOMS.

Example 2: Appliance Promotion

Company-run schemes offering electrical appliances to customers have been successful in the past. Such schemes are intended attract potential customers to avail an electricity connection, and increase the consumption levels of existing customers. Buyers can pay for their appliances as a package bundled with their electricity bill, which is much more attractive than paying the whole lump sum up front.

2.3. Technical Operations

Technical monitoring and maintenance keep the plant running efficiently with minimal service interruptions, while enabling managers to optimise the utilisation of the plant and hence deliver as much energy to consumers as possible.

2.3.1. Plant Technical Data Submission

Data from plant equipment yields important insights into technical performance. Part of the ground team's daily activities is observing and logging certain critical datapoints, including:

- Energy generated from each solar array
- Energy generated from backup generators
- Runtime of backup generators
- Energy dispatched from the plant (through each feeder)

Pre-programmed algorithms within MCMS then update the plant utilisation, solar yield, and other relevant metrics which can be tracked by managers.

##2.3.2 Plant Maintenance Plant maintenance involves various operations to prevent and repair damage to plant equipment. Maintenance is scheduled by MCMS at appropriate time intervals, with notifications pushed to the relevant personnel when the system detects that maintenance is required.

Some activities, such as changing the oil of diesel generators or cleaning solar panels, can be carried out by plant personnel. Others, like generator servicing or battery equalisation, may require external oversight arranged by the cluster or state in-charge.

##2.3.3 Customer Connection There are a number of stages to connecting new customers to the distribution network. Each stage requires different hardware and infrastructure.

- First, the distribution network—i.e. the poles and wires—must be within some minimum distance from the customer's property.
- Second, service wires connecting the property to the distribution network must be installed.
- Finally, the customer's electricity access points must be installed, and connected via a meter (or load limiter) to the service wire.

Meters may be mounted in the customer's property itself (which shields the meter from the elements), or on the nearest pole (which avoids possible tampering or accidental damage).

##2.3.4. Meter Status To connect new customers, a spare meter or load limiter must be available at the plant or at a nearby warehouse. It is important to keep track of how many are free and where they are stored.

Since meters may be in short supply, customers who have deactivated their accounts may have their meters removed and re-assigned to another customer, or sent to storage. This process is also called "releasing" the meter.

2.4. Site Financial Reporting

Site financial reporting encompasses all revenues, expenses, and deposits made at the site or cluster level. Diligent recording of cash flow is crucial for monitoring company finances, as well as accountability at each level of the hierarchy. Routine audit procedures carried out by the cluster in-charge and state in-charge are advisable.

2.4.1. Fuel Expenses

Fuel expenses incurred at the plant level must be logged and approved for reimbursement (this can be done through the field agent application). This allows fuel use and efficiency to be monitored, and pilferage to be automatically flagged.

Typically, fuel is purchased from stations with an established relationship with the company. The field agent may then upload an image of the receipt, along with other information such as the generator's meter reading at the time of the purchase. Once the registered expense has been checked and verified by the head office, costs can be reimbursed to the agent who made the payment.

2.4.2. Other Expenses

Other expenses include fixed monthly costs such as land lease and salaries, and variable costs such as maintenance. These are input into MCOMS for creating routine financial reports.

2.4.3. Cash Flow

Cash collected from customers must eventually be deposited in the company's bank account. The total collection is updated automatically every time a customer makes a payment; cash deposits to the bank are logged by field agents, and verified and approved by the head office; the remainder is tracked as cash in-hand at the plant.

Each company will have its own guidelines about how often field agents should make deposits, and limits on the permissible cash in-hand. MCOMS can be scheduled to push notifications to designated agents to keep these operations on time.

2.5. Data Verification Steps

To ensure the accuracy and validity of data in the system, several layers of checks can be implemented.

2.5.1. Input Checks

MCOMS applications may restrict the range of input to different data fields. Different mechanisms will be appropriate for different occasions. For example:

- Dropdown lists ensure the user can only select from a limited set of options, for example the list of plant names (so the user cannot write in an invalid name)
- Limited input value, where only certain inputs are deemed valid – for example, an energy meter reading must be greater than the previous reading to be registered as valid

2.5.2. User Review

The MCOMS applications invite users to review and confirm all information that they input into the applications, before submitting it to the central database.

2.5.3. Database Edit

Many database entries can be amended from the front-end of the web platform, provided the user has the appropriate access rights.

2.5.4. Change Logs

All edits to MCOMS databases are logged, along with the timestamp of the change and which user made the change. This ensures that all data can be restored in the case of accident, and it also guards against malicious meddling with stored information.

2.5.5. Numerical Checks

Certain automated checks are programmed into the MCOMS server to ensure that database entries make sense. An example would be ensuring that equipment efficiencies are between 0% and 100%, or that daily energy generation falls within expected ranges. There is some overlap between this and the checks in

Section 2.5.1; the difference is that here, database calculations are scheduled on the server side, whereas in Section 2.5.1 the input into the database is restricted before it is submitted.

2.5.6. Customer Validation

Where changes to customer information, or updates of customer accounts are involved, MCOMS will frequently require the customer themselves to validate the change. A common way to do this is for the customer to confirm the change with an OTP sent to their registered mobile number.

2.5.7. Chain of Approvals

Many operational workflows discussed in this chapter involve multiple levels of the mini-grid organisational hierarchy. For such multi-person processes, MCOMS automatically notifies different personnel when their input, approval, or action is needed.

For example, to change a customer's package, a customer must first submit a request, which passes to the cluster in-charge, who may push the request to a CSA for follow-up with the customer before approving it and handing over to a technician for implementation. Once the technician marks the task as complete, the cluster in-charge is notified; they must confirm that the work has been done properly, after which the change is finalised and logged in the central database for the state in-charge and upper management to see in their monthly reports.

2.5.8. Data Audit

Data audits represent an important consistency check of the MCOMS database. Independent in-situ copies of certain field data may be compared with values in the central database to ensure agreement. For example, the daily solar energy generation values are recorded through the field agent app and also noted down manually in a register in the plant control room. The cluster in-charge can compare the two records for consistency.

3. Chapter 3: Field Agent App.

User guide for the MCOMS Field Agent App

3.1. Introduction

The field agent smartphone app is the portal through which intelligence from the ground is consolidated and communicated back to mini-grid management. It is also a critical tool for guiding and supporting field agents to carry out their duties.

3.2. Installation and Setup

- The field agent app runs on the Android operating system
- It can be downloaded from the Google Play store and other app repositories.

Figure: Field agent app icon.



TARA
TARA

- The user should type “Tara” into the search bar and select the app shown in the figure.
- Hardware requirements are shown below.

Table: Field agent app installation requirements.

App version	1.4.5
Operating system	Android
Storage	20.8 MB
Cache	16.8 kB
Web connectivity	Enabled

-

Upon opening the application, the user is prompted for their login credentials.



3.3. Home Screen

3.3.1. Overview

- The Home Screen is the first page the user views upon logging in.
- The various functionalities of the application are accessible via the circular module icons.
- These icons are organised under several headings for ease of navigation, see the figure


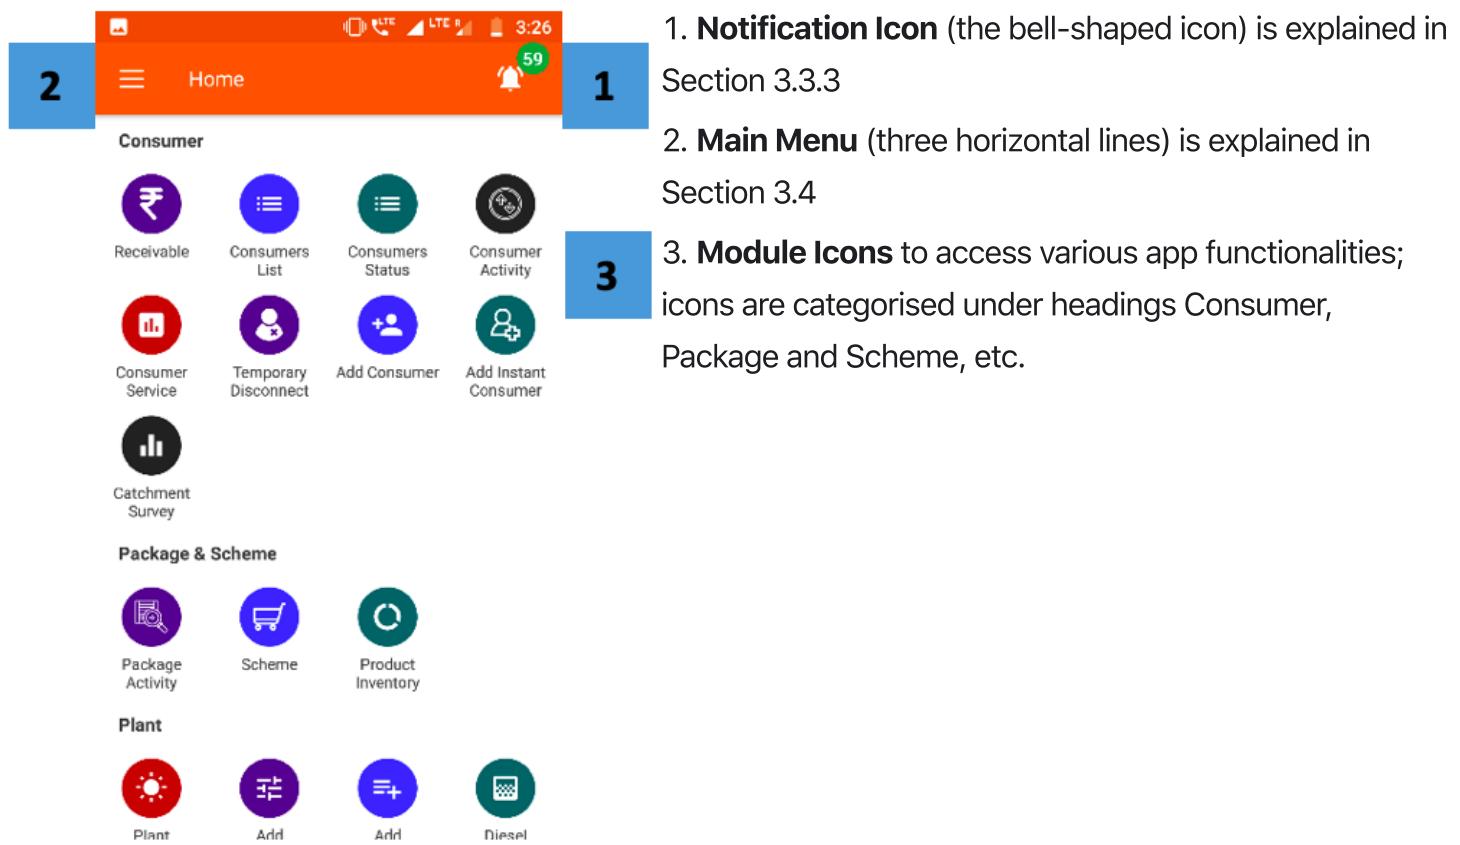


FIGURE: FIELD AGENT APP SECTION HEADINGS.

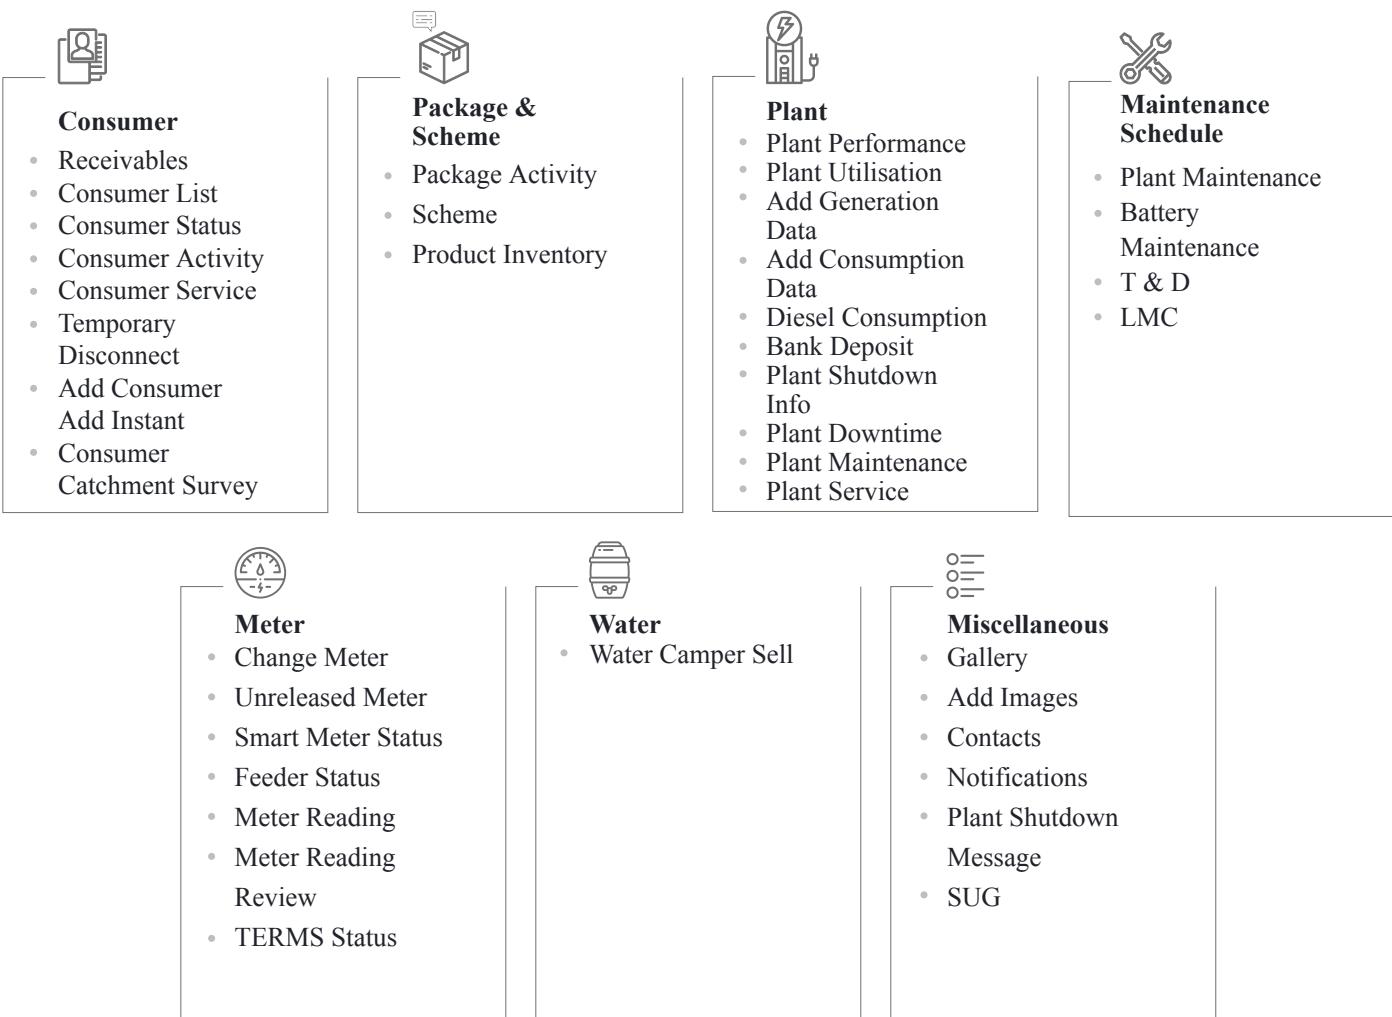

3.3.2. Pop-up Notifications


Functionality

- Upon logging in, the user may see one or more automatic pop-ups.
- These pop-ups notify the user about outstanding tasks which require attention.
- The notifications may also alert the user of specific urgent issues like coronavirus precautions.

Page Details

The main types of pop-up notifications are elaborated below.

Plant Maintenance Reminder	Generation Error	Consumption Data Reminder	Generation Data Reminder
Concerns technical servicing issues across various plants	Alert users to anomalies in solar generation	Notifies a user on incomplete consumption data logging	Notifies a user on incomplete generation data logging

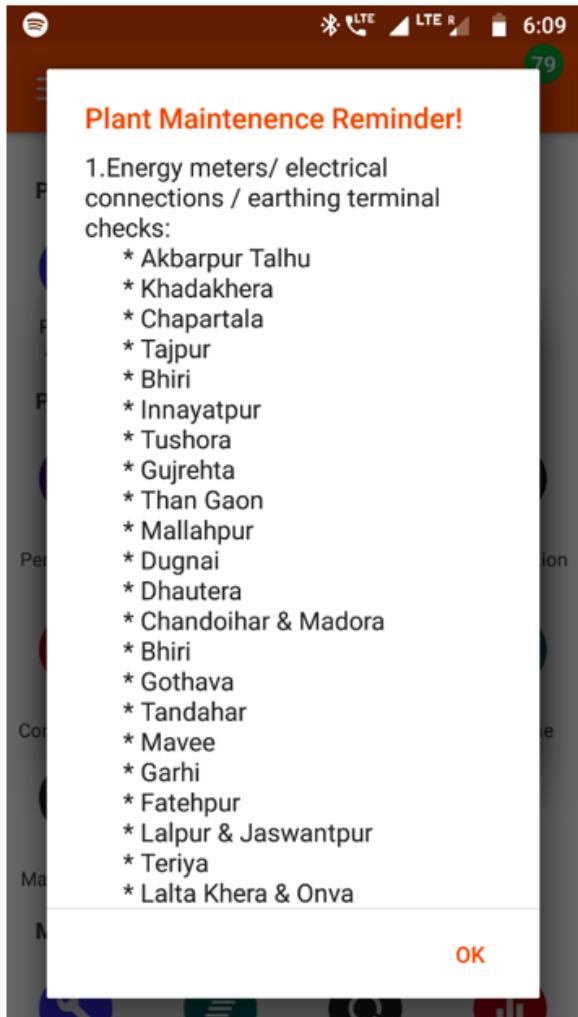

Plant Maintenance Reminder

1. Energy meters/ electrical connections / earthing terminal checks:

- * Akbarpur Talhu
- * Khadakhera
- * Chapartala
- * Tajpur
- * Bhiri
- * Innayatpur
- * Tushora
- * Gujrehta
- * Than Gaon
- * Mallahpur
- * Dugnai
- * Dhautera
- * Chandoihar & Madora
- * Bhiri
- * Gothava
- * Tandahar
- * Mavee
- * Garhi
- * Fatehpur
- * Lalpur & Jaswantpur
- * Teriya
- * Lalta Khera & Onva

1



2

3

1. **List of Maintenance** Items enumerates the various service issues that need attention
2. **List of Plants** which require the particular service
3. **Tap OK** to close the pop up


Generation Error

1. **List of Plants** itemises the specific solar arrays / MPPTs which are underperforming at various mini-grid plants
2. **Tap OK** to close the pop up

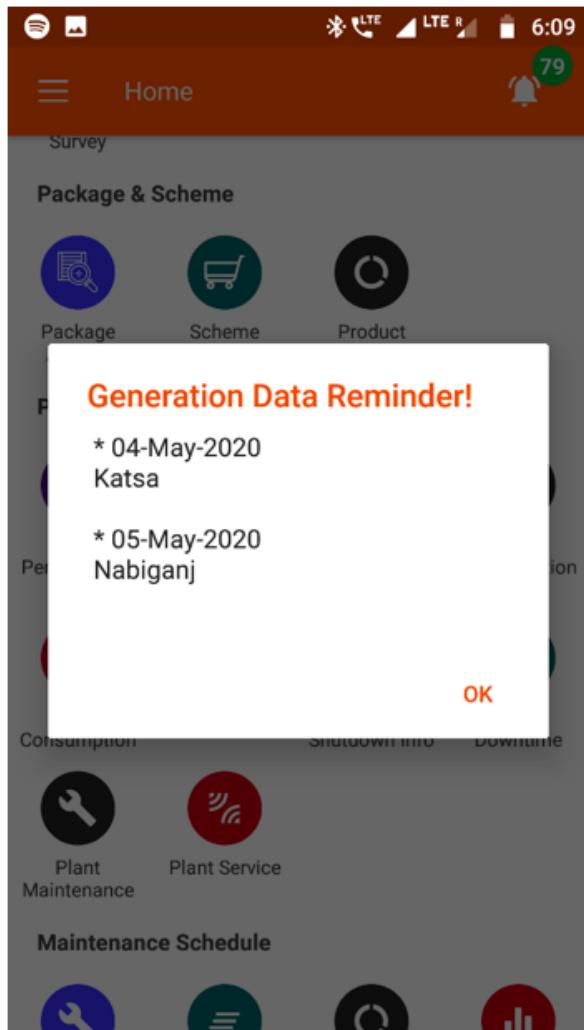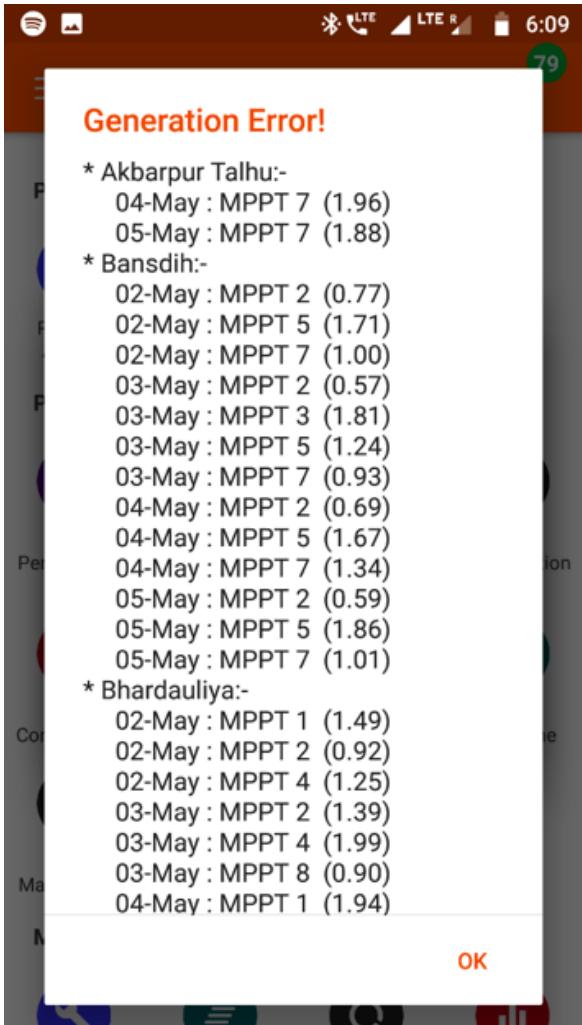

Generation Data Reminder

1. **List of Plants and Dates** for which generation data is missing
2. **Tap OK** to close the pop up

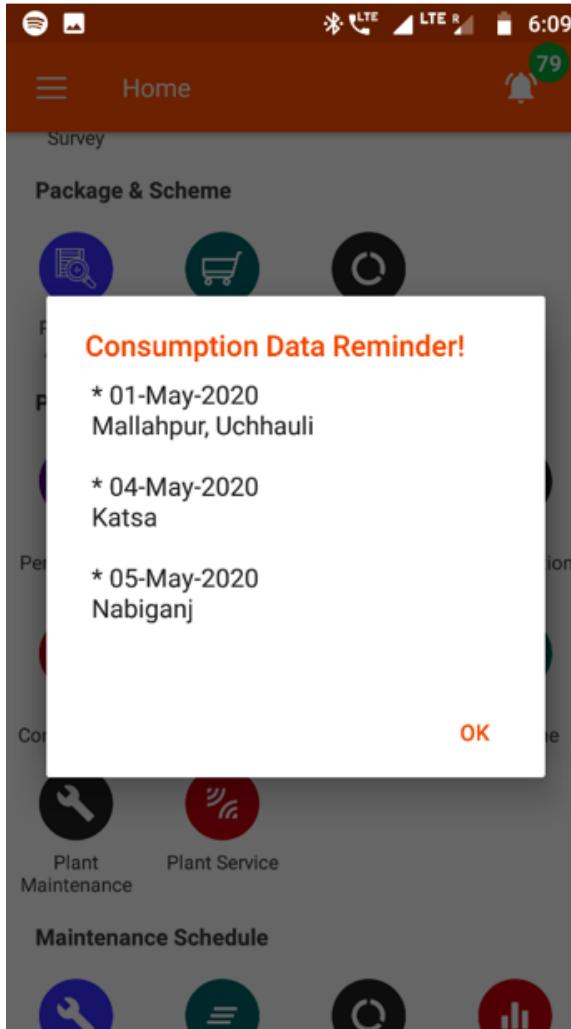

Consumption Data Reminder

1. **List of Plants and Dates** for which dispatch data is missing
2. **Tap OK to close the pop up**


3.3.3. Notifications Icon

Functionality

- Shows the number of active Customer Service Requests and Meter Release Requests.
- Tapping navigates to a detailed list of requests.
- This icon is present on most pages.

Page Details


1. **Notification Icon:** shows the total number of pending requests; tapping the icon presents the following options

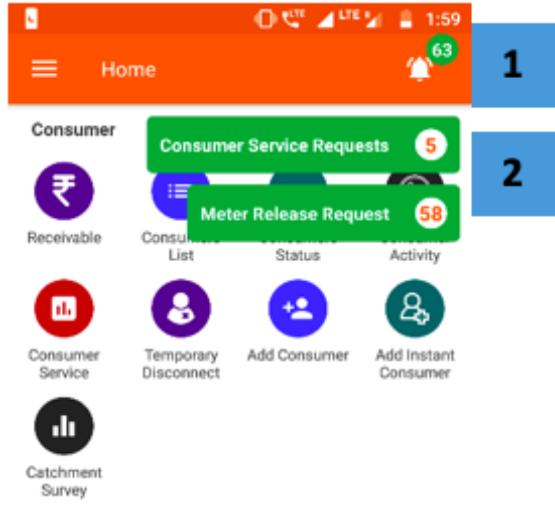

2. **Customer Service Requests** redirects to the service request section when tapped (Section 3.5.7)

3. **Meter Release Request** redirects to the Unreleased Meter Section when tapped (Section 3.8.3)

Package & Scheme

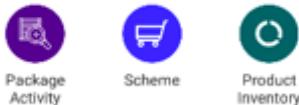

Plant



3.4. Main Menu

3.4.1. Overview

-

The Main Menu provides shortcuts to the key sections, shown below.

FIGURE: MAIN MENU SHORTCUTS.



Home



Dashboard



Cash Register




Spark Server



Receivable



Contacts

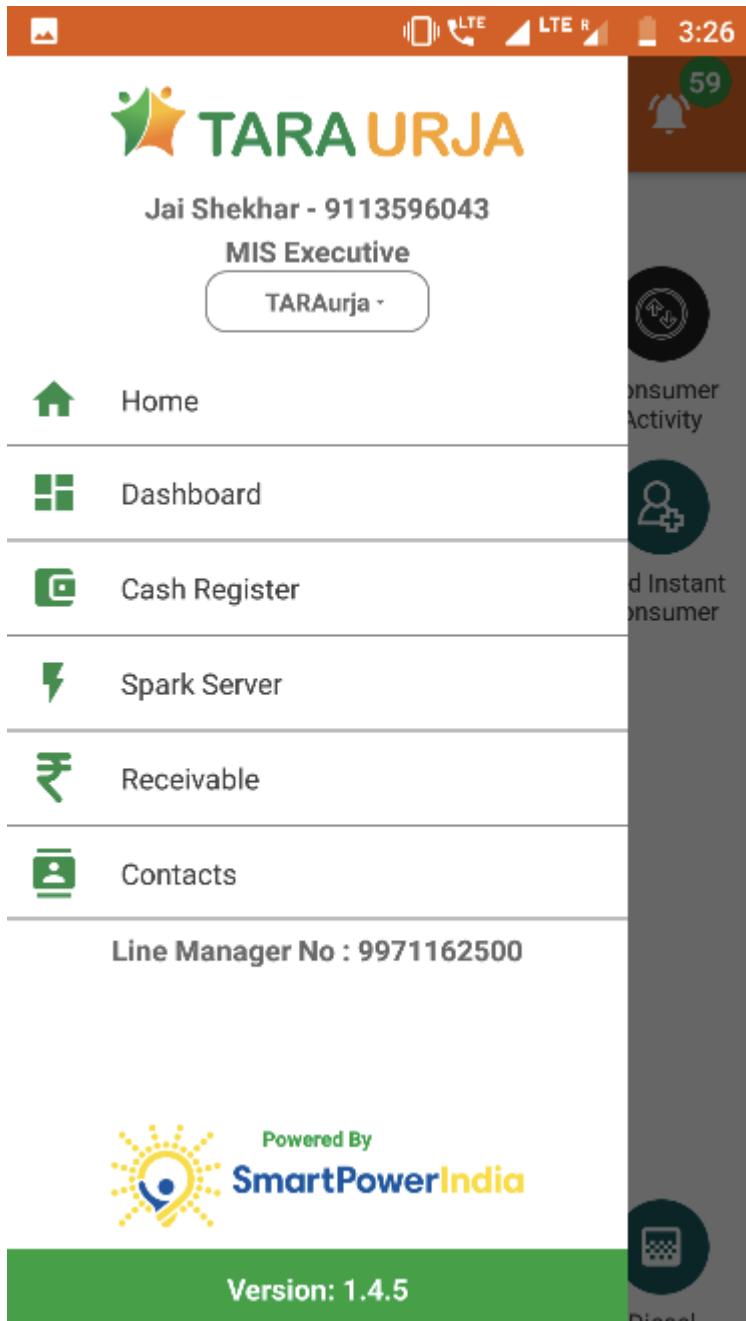

•

It can be accessed from any page in two ways:



Tapping the icon at the upper left of the screen, or



Swiping right from the left edge of the screen



3.4.2. Home

Returns user to the Home Screen (Section 3.3).

3.4.3. Dashboard

Functionality


- Provides at-a-glance collection and billing data from various sources of the company
- Updated in real time as payments are made and recorded

Key Users

Designation	Main Purpose	Example Use Case
CSA	Reviewing the plant-wide collections that need to be made	Assessing the percentage of billed revenue which is still outstanding
Cluster In-charge	Summary of billing and collections in a specified time interval	Tracking amount collected for different services (energy, connection, water, etc.) in the cluster
State In-charge	View current billing and collection for the portfolio	Tracking total revenue, and the expected cash-flow from collections at each plant in the State

Page Details

1. **Total Billing** is explained in Section 3.4.3.1
2. **Total Collection** is explained in Section 3.4.3.2
3. **Amounts** billed and collected for various services
4. **Filter** to select a specific plant and/or time interval

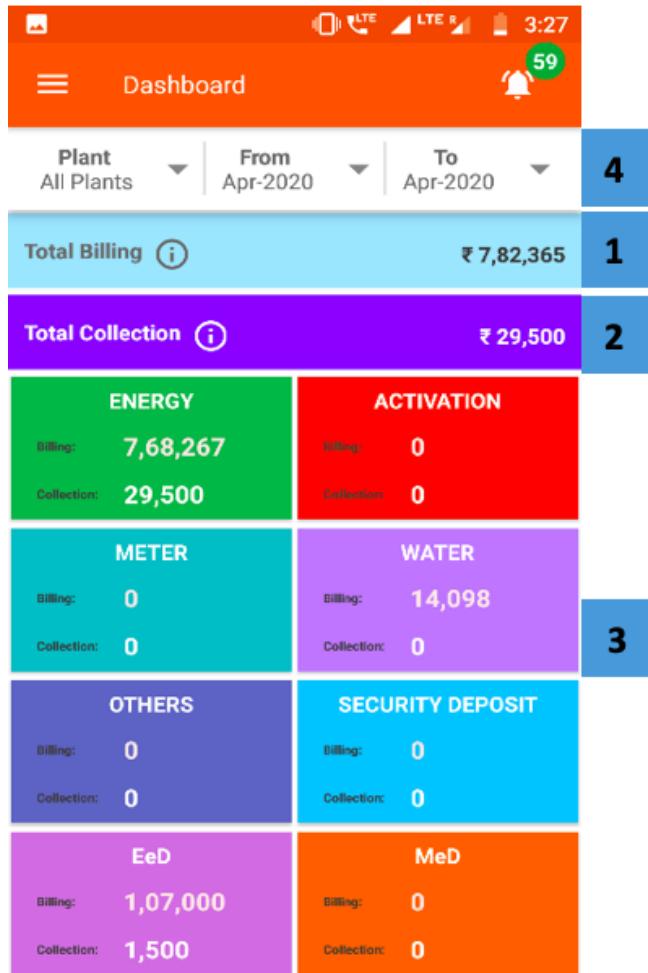

5. **Collection Detail** details how the collection has been made:

- o POS — Collected in person by a field agent
- o Wallet — Payment made through an electronic wallet
- o Cash Card — Payments made through credit/debit cards

6. **YTD Outstanding** refers to the outstanding payments that are yet to be made by customers from the beginning of the Calendar year



5

6

3.4.3.1. Total Billing

Functionality

- The Total Billing page summarises the revenue from each site

Page Details

1. **Tabular Data** of each plant is described here. The columnar data includes:

- Amount billed to prepaid customers
- Amount billed to post-paid customers
- Total amount billed to all customers
- Percentage of customers billed

Arrows indicate month-on-month change in revenue:

- Red ↓ -- revenue decrease

The screenshot shows a mobile application interface titled "Billing Percentage". At the top, there are icons for signal strength, battery level, and the time (12:37). Below the title is a back arrow icon.

Table Headers:

Site	Prepaid	Postpaid	Total	Billing %
------	---------	----------	-------	-----------

Data Rows:

Dumarsan	22,200	35,407	57,607	97%
Hardiya	29,950	15,860	45,810	104%
Nabiganj	9,260	33,219	42,479	93%
Taraiya	6,300	24,472	30,772	84%
Gopalganj (Cluster)	**67,710**	**1,08,958**	**1,76,668**	**95%**
Bansdih	4,520	8,498	13,018	95%
Fakirtoli	9,250	10,482	19,732	101%
Katsa	19,440	14,039	33,479	98%
Saran 1 (Cluster)	**33,210**	**33,019**	**66,229**	**98%**
Total	**5,08,978**	**5,68,292**	**10,77,270**	**106 %**

Annotations:

- 1** is placed over the "Gopalganj (Cluster)" row.
- 2** is placed over the "Total" row.
- 3** is placed over the "Billing %" column header.

- Green -- revenue increase

2. **Total Bar** shows the total amount for all plants

3. **Green Rows** show total amounts for each cluster of plants

3.4.3.2. Total Collection

Functionality

- The Total Collection page summarises collections at each site

Page Details

1. **Tabular Data** of each plant
2. **Total Bar** shows the total amount for all plants
3. **Green Rows** show the total amounts for each cluster of plants



3.4.4. Cash Register


Functionality

- The Cash Register page provides a historical account of each customer's transactions
- It is updated in real time as payments are made and recorded
- A pie chart summarises the aggregate collections

Key Users

Designation	Main Purpose	Example Use Case
CSA	Tracking customer bills and payments	Resolving disagreements about whether or when a bill was paid via a particular method or not
Cluster In-charge	Summary of collections in a specified time interval	Tracking amount collected for different services (energy, connection, water, etc.) for plants in the cluster
State In-charge	Summary of collections within the state	Tracking amount collected for different services for the entire state

Page Details

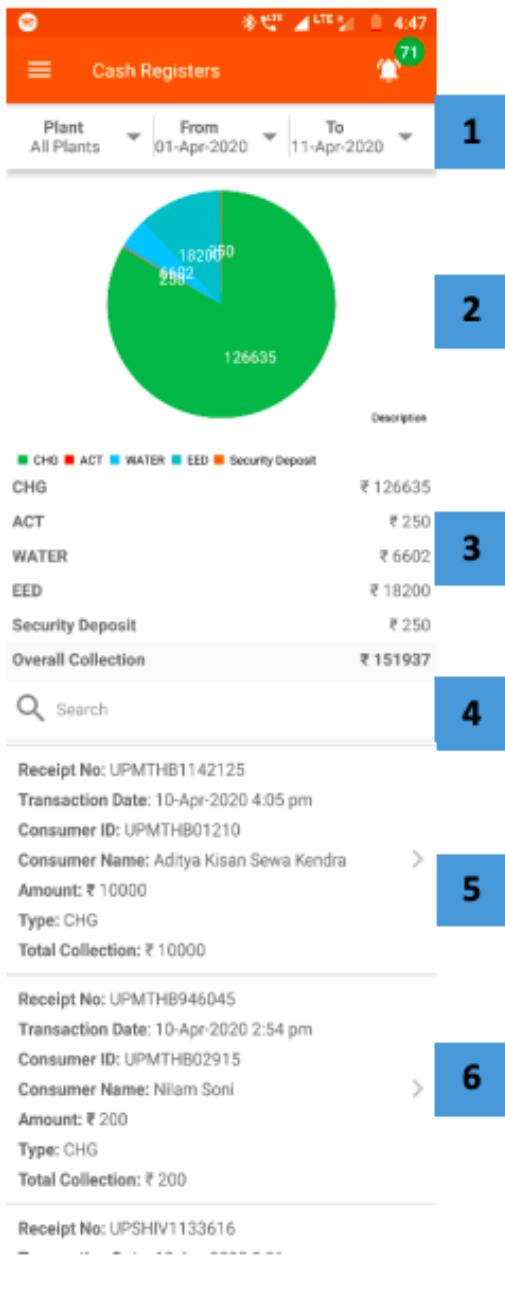

1. **Filter Bar** for selecting a plant and time interval
2. **Pie Chart** splits the total collection into contributions from different services
3. **Numerical Data** of amount collected for each service
4. **Search Bar** for quickly locating a particular customer: user can type the name or the unique customer ID
5. **Transaction Details** presents a list of all payments collected from customers in the selected time-frame, with most recent first
6. **Tap** any entry to view customer's account page (Section 3.5.2)

3.4.5. Spark Server

Functionality


- Gives limited access to smart Spark meter data
- The user may remotely switch meters on and off from here

Key Users

Designation	Main Purpose	Example Use Case
Technician	Review the status of the meter associated with a particular customer at the plant	Checking whether the meter has automatically tripped into the off state

CSA	Same as Technician	Checking the status of a particular meter
Cluster In-charge	Control the state of the meter for a particular customer or group of customers	Shutting off the meter of a customer whose faulty appliance is impacting the whole distribution network
State In-charge	Same as Cluster In-charge	Shutting down multiple meters at one time in the state of a technical emergency

Page Details

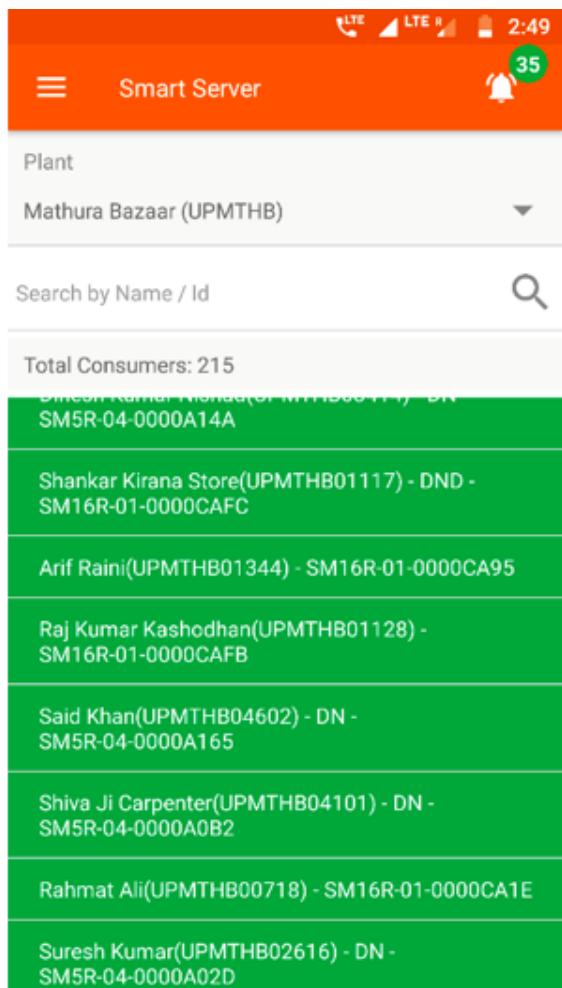

1. **Meter List**, with one row per meter, shows the associated customer and meter state:
 - o * Red - Inactive
 - o * Green - Active
 - o * Blue - Auto
2. **Search Bar**: find a specific entry by typing the customer name, ID, or meter number.
3. **Plant Dropdown** used to select a particular plant

On tapping any particular meter, the application redirects to the meter's page

1. **Master Details** includes key customer and meter information
2. **Meter Status** gives us the current meter activity status, and allows switching between ON, OFF, and AUTO
3. **Reset Meter** option used to reset meter settings and details to default



S LTE LTE 1:06

← Spark Meter Reset

Consumer Name: Mainuddin
Consumer ID: BHDMNSN03307
Credit Limit: ₹ 250
Outstanding: ₹ 400
Notional Balance: ₹ 400
Meter Number: SM5R-02-00002B09
Consumer Status: active
Meter Status: ON

Meter Status

OFF

ON

Auto

OR

Reset Meter

1

2

3

3.4.6. Receivable

Functionality

- The receivables section displays the bills and balance for every customer at a given plant
- Agents may register payments from customers to update their balance
- For users with access to multiple plants, information will only be displayed once a particular plant is selected

Key Users

Designation	Main Purpose	Example Use Case
Operator	Validate whether a customer is active	Checking the cause when a customer comes to the plant to complain of a connection issue
CSA	View the expected revenue and	Prioritising which customers (or ex-

	outstanding from each customer at the plant	customers) the sales team should approach for settling arrears
Cluster In-charge	Summary of collections in a given time interval	Comparing different plants' collection performance for the current month
State In-charge	View customers with high outstanding accounts	Reviewing customer payment history when deciding whether to deactivate or reactivate an account

Navigation Note that this page is also accessible directly from the Home Screen – see Section 3.4.2

Page Details

Customer Name	Opening Balance	Bill	Collection	Outstanding
Rudra Pratap Singh BHBANS00101	0	0	0	0
Nitish Kumar BHBANS00102	0	2000	0	2000
Sanjay Ray BHBANS00103	0	0	0	0
Krishna Mahato BHBANS00201	368	0	0	368
Junarbi Mahto BHBANS00203	233	0	0	233
Bangali Mahto BHBANS00204	283	0	0	283
Phoolmati Devi BHBANS00205	155	120	0	275
Total	69,308	15,018	2,920	81,406

1. **Filter Bar** used to show information according to:
 - Plant (number of customers in brackets)
 - Active/inactive customers
 - List sorting by billed amount or outstanding amount
 - Which service is being billed
2. **Billing Amounts** listed for each customer (with customer ID)
 - **Green** : active customer
 - **Red** : inactive customer
3. **Total Bar** shows the sum of each column, given the selected filters
4. **Search** quickly for a particular customer by typing their name or customer ID
5. **Dotted Icon** tapped to show the following options
 - Send SMS

3.4.6.1. Aging Receivables

Functionality

- The Aging Receivables section displays separate lists of active and banned customers of a particular plant that are yet to pay their dues to the company.
- There are two lists – Active and Banned

The following are the pages that can be viewed through this functionality:

Active	Banned
Detailed list of Active consumer statistics for every plant	Detailed list of Banned consumers for every plant



The screenshot shows a mobile application interface titled "Ageing Receivable". At the top, there's a navigation bar with a back arrow and the title. Below it is a table divided into two main sections: "Active" and "Banned". The "Active" section has columns for "Sites", "45-60", "61-90", "91-120", and "Greater than 120". The "Banned" section has a single column. Data rows are listed for Dumarsan, Hardiya, Nabiganj, Taraiya, Gopalganj (Cluster), Bansdih, and Fakirtoli. Each row includes site names, total amounts, and counts in parentheses. A summary row at the bottom provides totals for each category.

Sites	Active		Banned	
	45-60	61-90	91-120	Greater than 120
Dumarsan	22,877 (61)	0	0	0
Hardiya	19,405 (60)	772 (2)	7,636 (2)	0
Nabiganj	0	27,000 (1)	0	0
Taraiya	11,728 (33)	3,169 (5)	0	0
Gopalganj (Cluster)	54,010 (154)	30,941 (8)	7,636 (2)	0
Bansdih	4,252 (8)	0	0	0
Fakirtoli	3,584 (9)	7,689 (3)	2,400 (2)	0
Total	6,46,288 (3077)	1,83,950 (342)	25,555 (55)	63,971 (226)

On tapping Send SMS

The user must confirm that an SMS should be sent to all customers at a plant (see Section 3.10.6).

On tapping Aging Receivables

You will be directed to the active list of customers at the plant:

1 **Tabular Column** of all the active consumers at a particular site along with the total receivable that is still to be collected is displayed. The number in the brackets under the amount show the total number of consumers. The columnar data includes:

- 45-60 days
- 61-90 days
- 91-120 days
- Greater than 120 days

2 **Total Bar** displays the aggregated columnar results of the table.

3. Navigation Bar used to navigate between the Active consumer column and the Banned consumer column

4. Green Rows show total amounts for each cluster of plants



The next screenshot displays the result on tapping 'Banned'

Ageing Receivable				
	Active		Banned	
Sites	Less than 30	30-60	60-90	Greater than 90
Dumarsan	20 (1)	8 (1)	50 (1)	4,759 (18)
Hardiya	0	440 (1)	714 (1)	80,544 (62)
Nabiganj	0	4,500 (1)	0	1,31,095 (97)
Taraiya	0	0	400 (1)	2,030 (9)
Gopalganj (Cluster)	20 (1)	4,948 (3)	1,164 (3)	2,18,428 (186)
Bansdih	0	1,554 (2)	2,526 (2)	58,095 (67)
Fakirtoli	2,529 (2)	0	0	1,50,216 (126)
Total	24,203 (15)	9,884 (8)	8,977 (15)	5,89,593 (568)

3

1. **Tabular Column** of all the banned or inactive consumers at a particular site along with the total receivable that is still to be collected is displayed. The number in the brackets under the amount show the total number of consumers. The columnar data includes (Section XX):

- o Less than 30 Days
- o 30-60 Days
- o 60-90 Days
- o Greater than 90 Days

2. **Total Bar** displays the aggregated columnar results of the table.

3. **Navigation Bar** used to navigate between the Active consumer column and the Banned consumer column



2


3.4.7. Contacts

Functionality

- The contacts page is a list of all company personnel, along with details such as their designation and mobile number
- The operators have been divided based on the company and the state they are working in

Key Users

Designation	Main Purpose	Example Use Case
All Employees	Access to individual employees contact	To verify a decision made by another agent working at the company

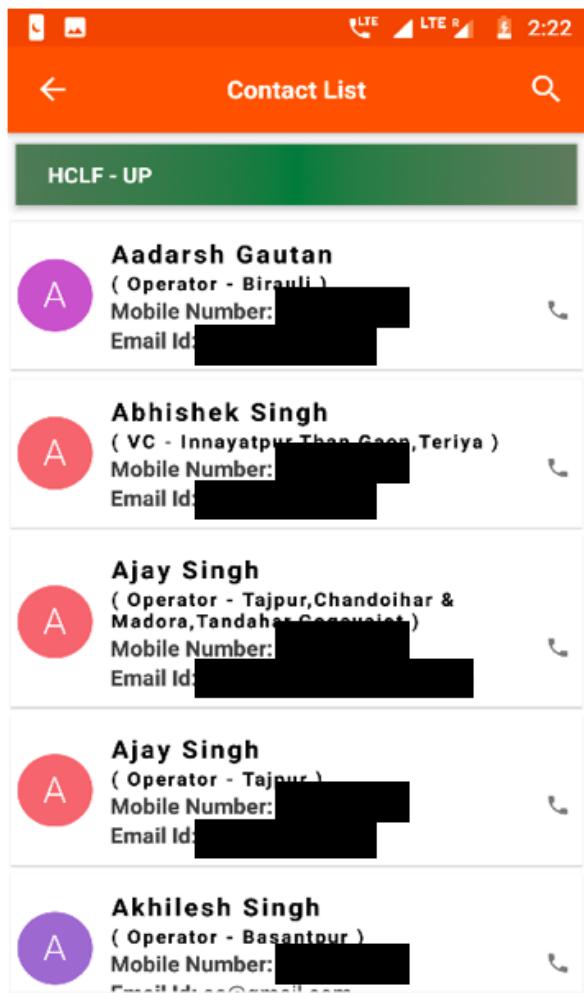


1. **Search** for a particular contact by name, plant, or designation
2. **Contact Details** of each operation is provided in alphabetical order

2

3.5. Consumers

3.5.1. Overview

	Receivable Overview of cash collection
	Consumer List View consumers at every plant
	Consumer Status Survey customer's connection status
	Consumer Activity Track active and inactive customers
	Consumer Service Navigate through service requests
	Temporary Disconnect Remote cut supply to customers
	Add Consumer Add a customer
	Add Instant Consumer Fast-track customer addition
	Catchment Survey An HCLF functionality

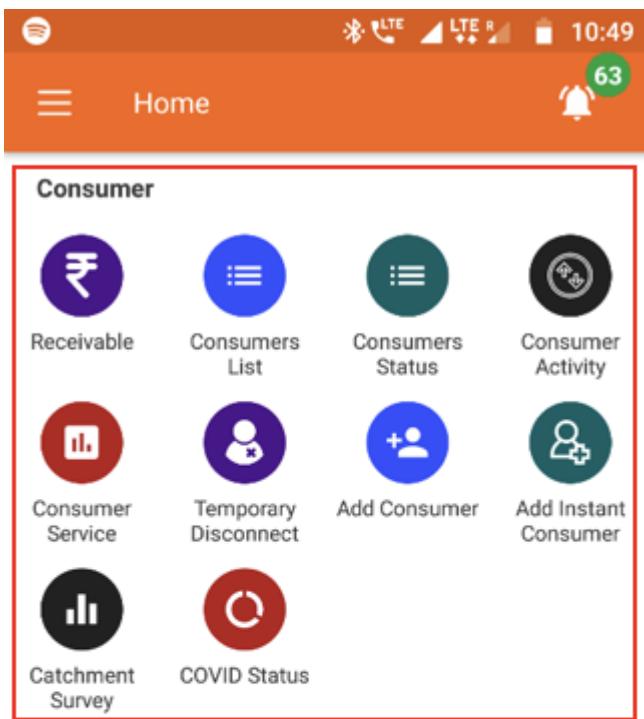

3.5.2. Account Details

Functionality

- The Account Detail page contains complete information on a customer's profile, their package, and payment history.

Key Users

Designation	Main Purpose	Example Use Case
Operator	Validating the activeness of a customer	Prioritising which customers (or ex-customers) the sales team should approach for settling arrears
Technician	Reviewing meter reading data for a specific consumer	Reviewing the meter reading data to check for overload on electrical apparatus

CSA	View the expected revenue and outstanding from each customer at the plant	Prioritising which customers (or ex-customers) the sales team should approach for settling arrears
Cluster In-charge	Summary of collections in a specified time interval	Comparing different plants' collection performance for the current month
State In-charge	View customers with high outstanding accounts	Confirming a customer's balance when collecting payment, and resolving confusion about when past bills were paid.

•

Information is organised into several tabs, detailed below.

A Note on Navigating to this Page

This page is central to on-ground operations, and is frequently used by sales agents in managing the relationship with individual customers. However, there is no icon for this module on the Home Screen. Instead, field agents will be able to reach this page from:


- The cash register of a particular plant (Section 3.4.4)
- The customer list (Section 3.5.4)
- The customer status list (Section 3.5.5)

Page Details

The Account Detail page is organised into several tabs, which summarise particular information about a given customer:

Profile	Transaction	Cash Ledger	Security and Deposite Ledger	Meter Reading	Service
detailed account information	chronological list of individual payments	running record of bills, payments, and balance	running record of security charges and payments	energy consumption data from meter reading	service request history and completion information

Switching between tabs can be done either using the top navigation bar, or simply swiping the screen horizontally.



Each of these tabs will be discussed in the following sections.

3.5.2.1. Profile tab

Functionality

- The Profile tab shows detailed information about the selected customer and their account
- Some information can be updated/edited by the user

Page Details

Account Detail

Profile Transaction Cash Ledger Security Dep...

Master Information

Plant: Sonwa

Feeder: FEEDER6 (Consumer (DN) [09am-11pm])

Consumer ID: UPSONW07107

Consumer Name: Sahaj Ram Yadav

Father's Name: Ram Achal Yadav

Email Id: sravasti@tara.in

Pole Number: 071

Activation Date: 09-Jan-2017

Credit Limit: ₹ 160

Notional Balance: ₹ 243

Current Month Consumption: 0

Consumer Category: Shop Basic

Consumer Type: Garment Shop

Status: active

App Downloaded: No

Mobile

Print Profile Detail

1. **Navigation Bar** indicates the current tab and allows switching between tabs



2. **Pencil Icon** for editing selected details

3. **Master Information** gives basic information about the customer background and relationship with the company

4. **Print Profile Detail** tapping will send the page to a connected printer


5. **Mobile** shows the registered mobile number; tapping the phone icon starts a call

6. **Outstanding** details, the aggregate payment due for all services

7. **Package** details the customer's electricity package, including fees, load limit, and unit rates

8. **Schemes** contains information on any promotions in which the customer is participating, including EMI arrangements



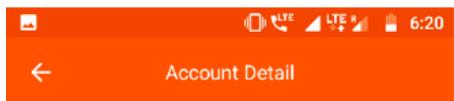

Profile Transaction Cash Ledger Security Dep

Mobile

Mobile No: 8757760101
(Primary)

Outstanding

Security Deposit ₹ 750 (13-Jan-2019 9:37)
Energy ₹ 9791 / Due: ₹0
Activation ₹ 500 / Due: ₹0
Total ₹ 0

Packages

Package Name: MM (DND)/300/10/27
Sanctioned Load: 300 W
Minimum Amount: ₹ 300
Free Units: 10

Print Profile Detail

5

6

Profile Transaction Cash Ledger Security Dep

Activation ₹ 1750 / Due: ₹0
EeD ₹ 2500 / Due: ₹0
Total ₹ 0

Packages

Package Name: ME (DD)/0
Sanctioned Load: 5000 W
Unit Rate: 0

Schemes

Scheme Name: Summer cooler - 50 ltrs
Down Payment: ₹ 2500
EMI Amount: ₹ 1000/month
EMI Duration: 3 months
Validity: 3 months
Equipment: Cooler

Print Profile Detail

7

8

Edits must be confirmed via an OTP from the customer.

3.5.2.2. Transaction tab


Functionality

- The Transaction page provides a historical account of each customer's payments
- Updated in real time as payments are made and recorded

Page Details

- Print Icon** to print a receipt, or, if not printer is connected, take a shareable screenshot
- List of Payments** in chronological order, along with other relevant data
- Navigation Bar** used swipe right across different panels of the account details



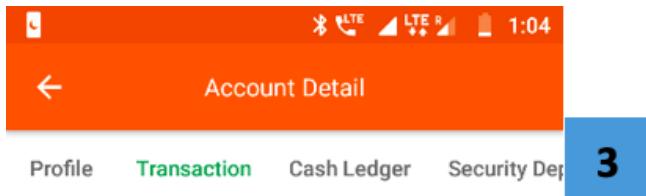

Receipt No: UPMTHB946033

Date: 05-Apr-2020 6:15 pm

Charges: ENERGY

Amount: ₹ 250

Total Amount: ₹ 250



1

Receipt No: UPMTHB945864

Date: 04-Mar-2020 5:13 pm



Charges: ENERGY

Amount: ₹ 250

Total Amount: ₹ 250

Receipt No: UPMTHB945555

Date: 02-Feb-2020 2:31 pm



Charges: ENERGY

Amount: ₹ 250

Total Amount: ₹ 250

Receipt No: UPMTHB945458

Date: 06-Jan-2020 6:02 pm



Charges: ENERGY

2

3.5.2.3. Cash Ledger tab

Functionality

- Provides a running record of historical bills, payments, and outstanding dues for the selected customer.

Page Details

- List of Transactions** including bills and payments/credits, along with the cumulative balance owed by the customer



- Navigation Bar** indicates the current tab and allows switching between tabs

Details	Dr	Cr	Bal
Transaction Date: 05-Apr-2020 6:15 pm			
Particulars: Collection-Apr, 2020-CHG	-	250	-3
Credit By: Rajkumar Soni			
Transaction Date: 01-Apr-2020 12:49 am			
Particulars: CHG-Apr, 2020-A2.1(DN)/24/250	250	-	247
Credit By: Server			
Unit Count: 0.00			
Transaction Date: 04-Mar-2020 5:13 pm			
Particulars: Collection-Mar, 2020-CHG	-	250	-3
Credit By: Rajkumar Soni			
Transaction Date: 01-Mar-2020 1:28 am			
Particulars: CHG-Mar, 2020-A2.1(DN)/24/250	250	-	247
Credit By: Server			
.....			

2

1

3.5.2.4. Security Deposit Ledger tab

Functionality


- Provides a record of security deposits for the selected customer.

Page Details

1. **List of Transactions** including bills and payments/credits, along with the cumulative balance owed by the customer



2. **Navigation Bar** indicates the current tab and allows switching between tabs

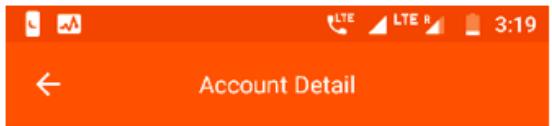

3.5.2.5. Meter Reading Ledger tab

Functionality

- A chronological list of the customer's energy meter readings.
- Only applies to metered customers.

Page Details

1. **Meter Number Panel** is a drop-down list of meters associated with the customer

2. **Daily Meter Readings** gives you important detail such as:

- Date of the reading
- Customer's electricity package
- Meter reading (kWh)
- Units consumed since the last reading (kWh)



3. **Navigation Bar** indicates the current tab and allows switching between tabs

Account Detail

Security Deposit Ledger **Meter Reading** Service

3

Meter Number

SM5R-04-0000A0B0 (A2.1(DN)/24/250) **1**

Date: 06-Apr-2020 1:00 am (06-Apr-2020 12:45 am)

Package: A2.1(DN)/24/250

Meter Reading: 77.67

Units: 0

Date: 05-Apr-2020 11:30 pm (05-Apr-2020 11:15 pm)

Package: A2.1(DN)/24/250

Meter Reading: 77.67

Units: 0.26

Date: 04-Apr-2020 11:30 pm (04-Apr-2020 10:45 pm)

Package: A2.1(DN)/24/250

Meter Reading: 77.41

Units: 0.44

2

Date: 03-Apr-2020 11:30 pm (03-Apr-2020 11:30 am)

Package: A2.1(DN)/24/250

Meter Reading: 76.07

3.5.2.6. Service tab

Functionality

- Provides a record of the service requests made by the customer, and the response by the field team.

Page Details

- Service Issue** lists details about each service request made by the customer
- Request Summary** shows the total number of requests, along with a break-down into pending and completed requests of each type. The average turnaround time is also recorded.
- Search** allows the user to filter the list of requests by typing in specific information



- Navigation Bar** indicates the current tab and allows switching between tabs

The screenshot shows the 'Account Detail' screen with the following data:

Service Type	Total	Pending	Complete	TAT
Light Issue	10	0	10	420 m/s
Total	10	0	10	420 m/s

Ticket Id: UPMTHB-5381
Request For: Light Issue
Closed Via: Without OTP
Requested Via: Mobile App
Request On: 19-Sep-2019 8:01 pm

Turn Around Time: 3 Hrs : 55 Mts

Requested By: Rajkumar Soni (CSA)
Serviced By: Sanoj Kumar (Technician)
Completed By: Sanoj Kumar (Technician)

The screenshot shows the 'Account Detail' screen with the following data:

Service Type	Total	Pending	Complete	TAT
Light Issue	10	0	10	420 m/s
Total	10	0	10	420 m/s

Ticket Id: UPMTHB-5300
Request For: Light Issue
Closed Via: Without OTP
Requested Via: Mobile App
Request On: 17-Sep-2019 10:00 pm

Turn Around Time: 1 Hrs : 17 Mts

Requested By: (empty)
Serviced By: (empty)
Completed By: (empty)

3.5.3. Receivable

Functionality

- The receivables section displays customer balances and allows agents to register payments.

Navigation

This page is also accessible from the Main Menu. More details can be found in Section 3.4.6.

3.5.4. Consumer List

Functionality

- The Consumer List displays the current number of active and inactive customers at each plant.
- After selecting a particular plant, the user is shown the list of customers, along with records of unpaid bills.

Key Users

Designation	Main Purpose	Example Use Case
Technician	Access to the list of active members on the plant	To check the consumer ID of a particular consumer
CSA	Same as Technician	To check the number of active customer
Cluster In-charge	Summary of total number of customers in the cluster	To create a report on the customers served at a cluster in a given time frame
State In-charge	Summary of the total number of customers in the state	To create a report on the customers served in a state in a given time frame

Page Details

Consumer List			
Site	Banned	Active	Total
Dumarsan	156	170	326
Hardiya	86	143	229
Nabiganj	126	87	213
Taraiya	20	80	100
Gopalganj (Cluster)	388	480	868
Bansdih	94	40	134
Fakirtoli	165	62	227
Katsa	105	109	214
Saran 1 (Cluster)	364	211	575
Bheldi	169	88	257
Derni	37	97	134
Total	1711	1729	3440

1. **List of Plants** showing the number of banned, active and total customers in every plant

2. **Green Rows** show total amounts for each cluster of plants

3. **Total Bar** shows the sum of each column

Tapping any plant will redirect you to the consumer list for that plant, as shown in the next screenshot

1

3

2



1. **Individual Customer** shown in each tab along with important information such as:

- o Customer ID

2

- Package number
- Active/banned status
- Outstanding amount

2. **Search Icon** to filter out the customer list by typing in the name or customer ID

3. **Adding Consumer** explained in Section 3.5.9

Tapping a consumer allows the user to add a transaction, as explained in the next screenshot

Lalan Tiwari BHTARI00601 Package: MM (DN)/300/10/27	Banned ₹ 18 Outstanding
Raju Kumar BHTARI00602 Package: A2.1 (NN)/24/200	Banned ₹ 0 Outstanding
Shristy Bajrang Homio BHTARI00603 Package: MM (DND)/300/10/27	Active ₹ 296 Outstanding
Sujit Kumar Singh BHTARI00604 Package: MM (DND)/300/10/27	Active ₹ 300 Outstanding
Awadhesh Kumar Yadav BHTARI00701 Package: MM (DND)/300/10/27	Active ₹ 299 Outstanding
Munna Kumar Yadav BHTARI00705 Package: A2.1 (NN)/24/200	Banned ₹ 0 Outstanding
Philips Taraiya BHTARI00706	₹ 0

1

3



Tapping on a consumer allows the user to choose from three options:


- Profile — links to account detail which is explained in section 3.5.2
- Add Transaction — explained below
- Cancel — returns to the previous page

1. **Customer Details** shown with important information

2. **Outstanding Value** that displays the total amount of money owed and for which service it was charged

3. **Adding Collection** to manually add any payments made by the customer, and for which service

4. **Review Tab** to finalise the transaction

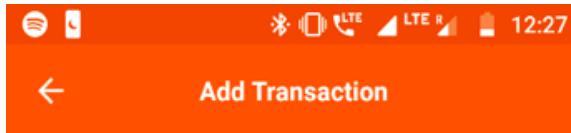

3.5.5. Consumer Status

Functionality


- The Consumer Status section tracks progress towards connecting customers to the distribution network.
- Division of installation status is made into 4 parts namely – At Pole, House wire, Service Wire and Review
- The section also displays the number of denied package requests per plant
- This functionality is only available for HCLF users

Key Users

Designation	Main Purpose	Example Use Case
CSA	Assessing the installation status of the meters for all the customers	Reporting the number of pending meter reading reviews at the end of the month
Cluster In-charge	Same as CSA	Reviewing the status of hardware installation for customers within the cluster

State In-charge	Same as CSA	Launching an audit drive at a plant to improve customer service quality
-----------------	-------------	---

Page Details

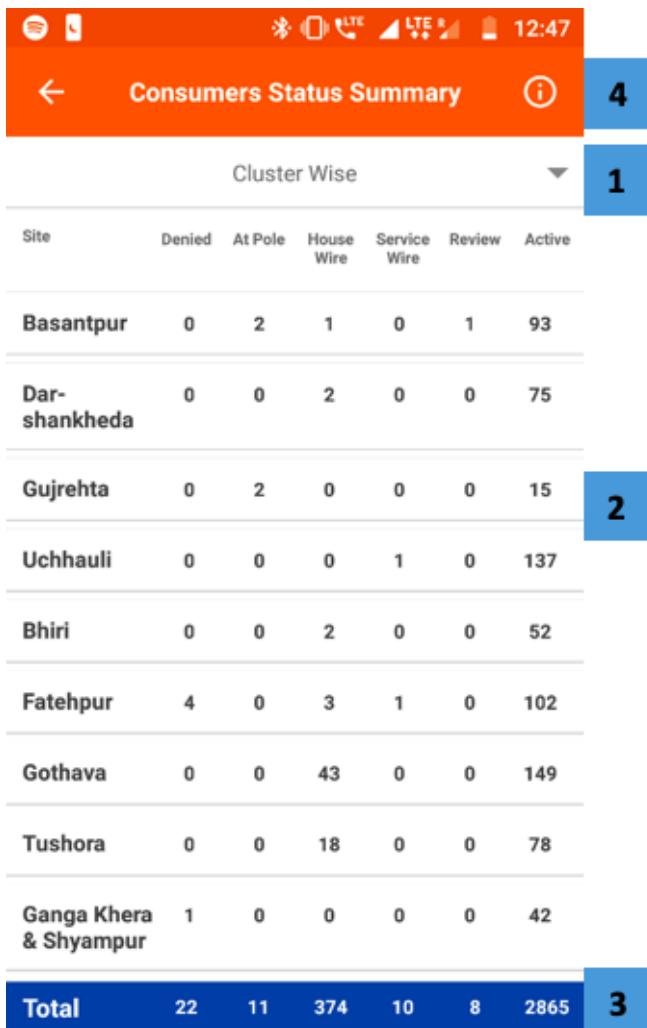

Site	Denied	At Pole	House Wire	Service Wire	Review	Active
Basantpur	0	2	1	0	1	93
Dar-shankheda	0	0	2	0	0	75
Gujrehta	0	2	0	0	0	15
Uchhauli	0	0	0	1	0	137
Bhiri	0	0	2	0	0	52
Fatehpur	4	0	3	1	0	102
Gothava	0	0	43	0	0	149
Tushora	0	0	18	0	0	78
Ganga Khera & Shyampur	1	0	0	0	0	42
Total	22	11	374	10	8	2865

1. **Filter Bar** gives options for displaying results either cluster-wise or NTP-wise
2. **List of Plants** with number of customers at each stage of connection
3. **Total Bar** aggregates over plants
4. **Information Icon** redirects to the Customer Status Trend page, explained in the next screenshot

2

3



Tapping on the information icon redirects to the Customer Status Trend page

1. **Filter Bar** modifies result display according to:
 - o Cluster/NTP wise
 - o Month and Year

Sites	Apr,2020	Mar,2020	Feb,2020	Jan,2020
Basant-pur	0	1	4	2
Darshank-heda	0	2	0	0
Gujrehta	0	0	0	0
Uchhauli	0	0	0	6
Bhiri	0	1	0	1
Fatehpur	0	1	3	3
Gothava	0	9	25	13
Tushora	0	0	19	34
Ganga-Khera &	~	~	~	~
Total	75	60	581	278

- Acquired/Active
- 2. **List of Plants** with the number of new active customers over four months
- 3. **Total Bar** aggregates over plants

3.5.6. Consumer Activity

Functionality

- Provides an interface for deactivating and reactivating customer electricity connections.
- Changes undergo a chain of approval before they are accepted.
- Activity changes are summarised for each plant.

Key Users


Designation	Main Purpose	Example Use Case
Technician	To execute requested changes to customer status	Reviewing which customers need to be de-/reactivated, and making the necessary changes to their connection
CSA	Same as Technician	Same as Technician
Cluster In-charge	To register a change to customer status and assign to field personnel	Using the app to check with a field agent whether they are available for executing the change

State In-charge	Approve customer status requests at plants in the state	Checking how many status change requests are pending and at which plants
-----------------	---	--

Page Details The Consumer Activity page is organised into several tabs, which follow the process of the account status change.

Request	In Process	Review	Completed
Register a customer for de-/re-activation	List of customers whose connection requires attention	Confirming the action has been completed	Historical list of all customer de-/re-activation details

3.5.6.1. Request tab

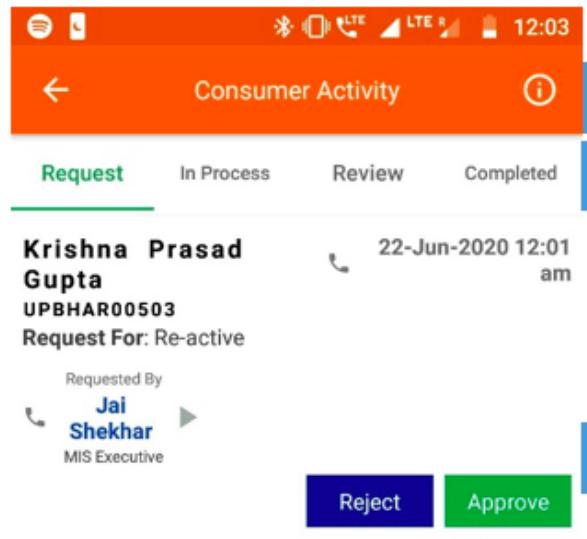

1. **Information Icon** redirects to a plant-by-plant breakdown of the number of customer de-activations and re-activations, as shown in a subsequent screenshot

2. **Add Activity Icon** used to register a customer status change, as explained in the next screenshot

3. **Request Tab** gives us more information on the requested customer request, this can be either rejected or approved

4. **Navigation Bar** used to navigate between various



sections of the section



2



1. **Select Plant** dropdown list



Plant

Select Plant

Activity Type

Select Activity Type

Consumer Name

Select Consumer

Connection Id :

Your Comments

1
2
3

2. **Activity Type** dropdown list
3. **Consumer Number** dropdown list of all eligible / relevant customers Additional comments can be added at this point
4. **Submit Button** completes the information submission



4



From	To	
01-Apr-2020	01-Apr-2020	
Site	Banned	Re-active
Dumarsan	0	0
Hardiya	0	0
Nabiganj	0	0
Taraiya	0	0
Gopalganj (Cluster)	0	0
Bansdih	0	0
Fakirtoli	0	0
Katsa	0	0
Saran 1 (Cluster)	0	0
Bheldi	0	0
Total	0	0

1
2
3

1. **Filter Bar** used to select a date range
2. **List_of plants** showing the number of banned and reactivated customers in the selected time interval
3. **Total Bar** sums the values for all plants

3.5.6.2. In Process tab

The screenshot shows the 'Consumer Activity' screen with the following details:

- Request Tab:** Shows 'Krishna Prasad Gupta' with ID 'UPBHAR00503'.
 - Request For:** Re-active
 - Previous Package:** A1.1(DN)/17/200
 - New Package:** A4.1 (DD)/40/300
- Approved Date:** 22-Jun-2020 12:02 am
- Request Date:** 22-Jun-2020 12:01 am
- Requested By:** Jai Shekhar (MIS Executive)
- Assign To:** Ram Kumar (Technician)
- Action Buttons:** Red 'Reject', Blue 'Re-assign', Green 'Execute'.

1

1. **Information Icon** redirects to a plant-by-plant break-down of the number of customer de-activations and re-activations

2. **Request Tab** gives us more information on the in process customer request, including who registered the request and who is tasked with dealing with it

The request can be either rejected, re-assigned to a different agent or executed (processed)


2



3.5.6.3. Review tab

1. **Information Icon** redirects to a plant-by-plant break-down of the number of customer de-activations and re-activations

2. **Request Tab** gives us more information on the completed customer request being reviewed, this can be either rejected or marked completed (processed)

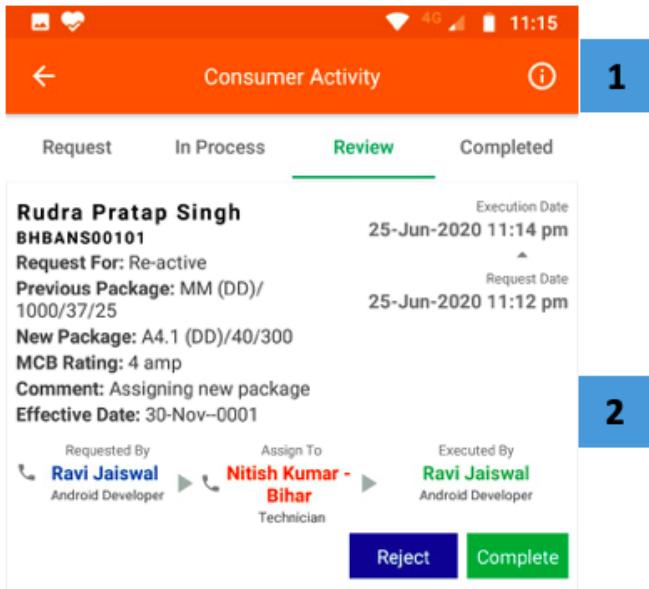

3.5.6.4. Completed tab

1. **Information Icon** redirects to a plant-by-plant break-down of the number of customer de-activations and re-activations
2. **Request Details** includes information on historical customer requests in the time period in question, including the personnel responsible

Mithlesh Kumar Completed On
BHBHLD00204 06-Jun-2020 3:03 pm

Request For: Re-active
 Previous Package: A2.1 (DD)/
 24/200

New Package: A2.1 (DD)/24/200

New Meter Number: 1050

Opening Reading: 5

MCB Rating: 1 amp

Comment: done

Effective Date: 06-Jun-2020

Execution Date: 06-Jun-2020

3:03 pm

2

Requested By
Manoj Rajawat
 Web Developer

Executed By
Manoj Rajawat
 Web Developer

Completed By
Manoj Rajawat
 Web Developer

Mithlesh Kumar Completed On

BHBHLD00204 06-Jun-2020 3:03 pm

Request For: Re-active

Previous Package: A2.1 (DD)/
 24/200

New Package: A2.1 (DD)/24/200



3.5.7. Consumer Service

Functionality

- View existing customer service requests—both technical and non-technical—at different stages of completion
- Add new service requests
- Assign outstanding requests to field personnel for follow-up
- Close requests which have been resolved

Key Users

Designation	Main Purpose	Example Use Case
Technician	To review service requests assigned to them	Prioritising pending requests, depending on when they were registered and the nature of the work
CSA	Same as Technician	Phoning customers to understand what issue is being faced, and marking a request as complete when it has

		been resolved
Cluster In-charge	To view all requests from customers in the cluster	Reviewing pending requests and assigning them to personnel for follow-up
State In-charge	To gain an overview of service request statistics in the state	Tracking targets on personnel response time and customer satisfaction

Page Details




Report	Request	Completed
Overview statistics on completed and pending service requests	Detailed list of pending requests and personnel assignments	Record of all completed requests

3.5.7.1. Report tab

1. **Navigation Bar** indicates current tabs; user can switch tabs by tapping or swiping horizontally




2. **Filter Bar** for selecting particular plants and changing the time interval
3. **Pie Chart** summarises service request numbers:
- **Blue** — Pending Requests
 - **Green** — Completed Requests
4. **Total Service Request** is the number of requests registered in the selected time-frame
5. **Average Completion Time** between the customer registering a request and marking it complete
6. **Rating** of customer satisfaction
7. **Add Service Requests** icon to register a new request; explained in the next screenshot

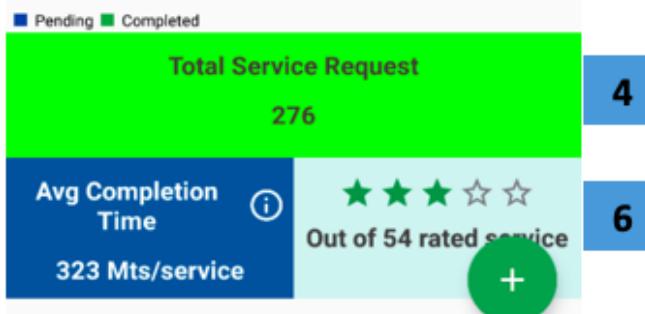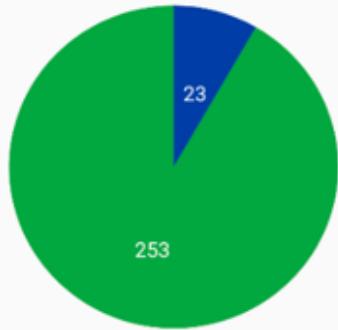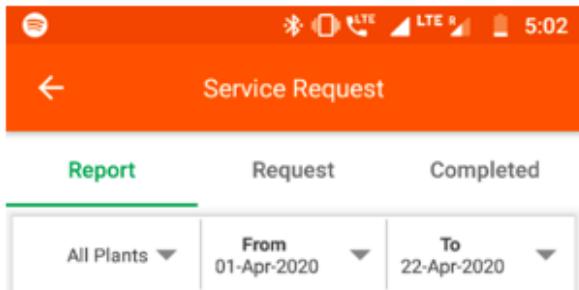

Tapping the add service request Icon leads to the new service request page

1. **Add Service Information** to input details of the new service request, including
 - Plant name (dropdown list)
 - Consumer name
 - Type of issue
 - Other comments
2. **Submit Icon** tapped when all information is complete

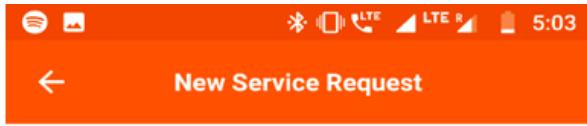


3.5.7.2. Request tab

1. **Navigation Bar** (same as previous tab)
2. **Filter Bar** (same as previous tab)
3. **Service Request List** where pending requests are shown chronologically, along with current personnel assignment.

Complete/Re-assign Users may manually close the request or assign it to a different agent

Tap an agent's name to call them

4. **Add Service Request** (same as previous tab)

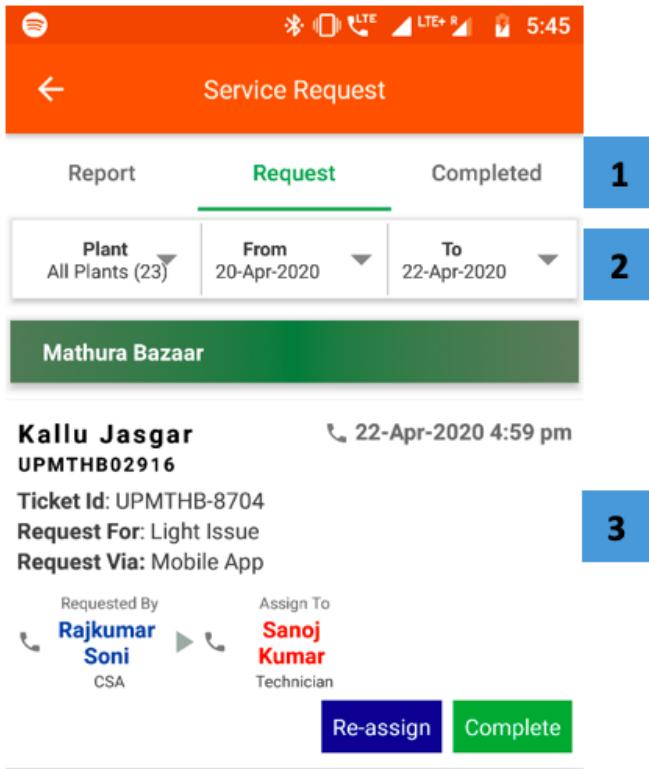

3.5.7.3. Completed tab

1. **Navigation Bar** (same as previous tab)
2. **Filter Bar** (same as previous tab)
3. **Completed Service Requests** shown chronologically, with specific details including the turnaround time along with the names of each agent handling the request
4. **Add Service Request** (same as previous tab)
5. **Search Icon** to filter the list according to customer name, field agent name, or any other relevant parameter

The screenshot shows the 'Service Request' app interface. At the top, there are navigation icons (back, search, etc.) and a timestamp of 5:03. Below the header, there are three tabs: 'Report', 'Request', and 'Completed'. The 'Completed' tab is selected, indicated by a green underline and a blue box containing the number '1'. Below the tabs, there are filters for 'Plant' (All Plants (253)), 'From' (01-Apr-2020), and 'To' (22-Apr-2020). A large blue button labeled '2' is positioned below these filters.

Completed Requests:

- Rupak Adhikari** (UPBHAM00902) - Completed On: 22-Apr-2020 11:09 am. Turn Around Time: 1 Mts. Rating: ★★★★☆. Details: Ticket Id: UPBHAR-8696, Request For: Light Issue, Consumer Comment: lagbhag 1ghante se light nahi jal rahi hai, Closed Via: Without OTP, Requested Via: Mobile App, Request On: 22-Apr-2020 11:08 am. Requested By: Rupak Adhikari (Consumer), Serviced By: Ram Kumar (Technician).
- Devendra Kumar** (MG28053135) - Completed On: 22-Apr-2020 8:56 am. Turn Around Time: 53 Mts. Rating: +. Details: Ticket Id: MG28-8692, Request For: Light Issue, Consumer Comment: No Light, Completion Comment: Resolved over load pole MCB Trip, Closed Via: Without OTP.

3.5.8. Temporary Disconnect


Functionality

- Allows a user to remotely disconnect the supply of particular customers
- This functionality is only available for TaraUrja users

Key Users

Designation	Main Purpose	Example Use Case
Technician	Disconnecting specific customers at a plant	Disconnecting high-load customers when a demand surge causes the plant to trip, until system stability is restored
Cluster In-charge	Disconnecting all customers at a plant	Disconnecting all customers for safety during network maintenance

Page Details

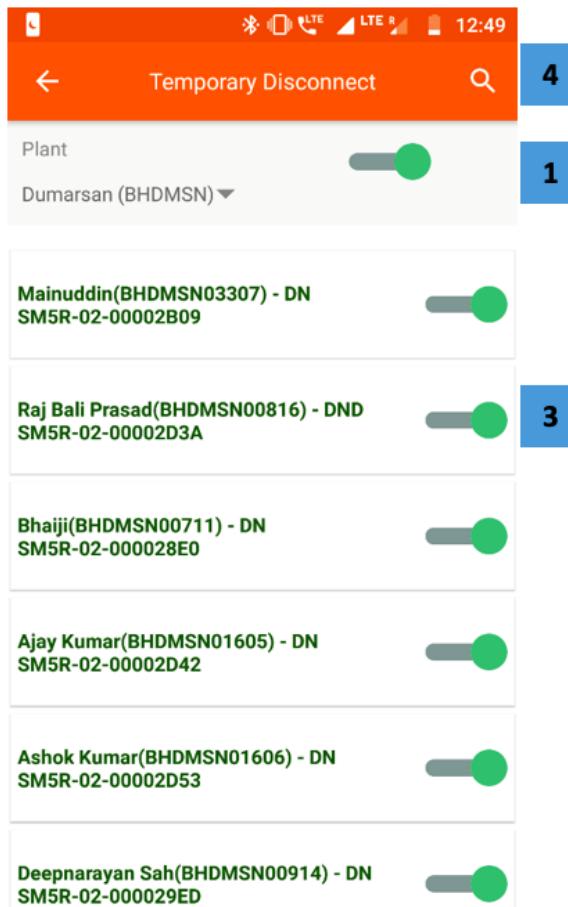

1. **Plant Dropdown** to show customers of a particular plant
2. **Plant Master Switch** used to temporarily disconnect all customers of the plant
3. **Individual Customer Switch** displaying the customer name, customer ID, package, and meter number, along with the master power switch
4. **Search** for specific customers by typing in their name, customer ID, package ID, or meter number

3.5.9. Add Consumer

Functionality

- Create a new customer account in the MCOMS system

Key Users

Designation	Main Purpose	Example Use Case
Technician	To add a consumer into the company database	Manual addition of a customer who cannot request an account through the customer smartphone app
CSA	Same as Technician	Same as Technician
Cluster In-charge	Same as Technician	Same as Technician
State In-charge	Same as Technician	Same as Technician

Page Details

9:21

Add Consumer



1

1. **Customer Information** required is specified line by line

State
Select State

Consumer Category
Select Consumer Category

Consumer Type
Select Consumer Type

Consumer Initiator
Anil Shukla

Pole Number
|


Consumer Name

Father's Name

NEXT



2. **Customer Information** continues, and includes which package they have selected
3. **Next Button** completes the data submission

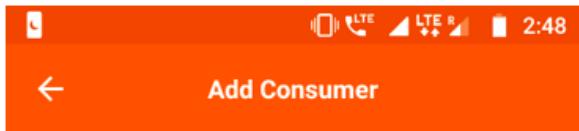

3.5.10. Add Instant Consumer

Functionality

- Quickly create a new customer account in the MCOMS system, with only critical information recorded
- This functionality is only available for TaraUrja users

Key Users

Designation	Main Purpose	Example Use Case
CSA	To quickly add a new customer into the company database	During a recruitment drive in a public place, many prospective customers may need registration in a short period of time
Cluster In-charge	Same as CSA	Same as CSA
State In-charge	Same as CSA	Same as CSA

Page Details

The screenshot shows a mobile application interface for adding a consumer. At the top, there is a header bar with icons for signal strength, battery level, and time (2:56). Below the header, the title "Add Instant Consumer" is displayed. The main form area contains the following fields:

- Plant:** A dropdown menu labeled "Select Plant".
- Consumer Name:** An input field with a placeholder icon.
- Father's Name:** An input field.
- Mobile No.:** An input field.
- Total:** A label indicating the total number of entries.
- Confirm:** A checkbox labeled "Confirm".



- Customer Information** to be added includes only the most critical data
- Confirm** tapped once data has been reviewed for accuracy
- Submit** tapped to complete the process

1

2

3

3.5.11. Catchment Survey

Functionality

- The Catchment Survey Section showcases an overview of all the customers and potential customers present at a plant
- The 'catchment' created intends to assist in reviewing customer behaviour over a period of time
- It also gives a detailed list on the penetration made into the potential customer base

Key Users

Designation	Main Purpose	Example Use Case
Operator	To record survey responses of energy consumers	Interviewing a local who comes to the plant to enquire about getting a connection
Technician	Same as Operator	Updating an existing customer's profile and contact information

CSA	Same as Operator	Interviewing locals in the catchment area to understand energy needs and use patterns
Cluster In-charge	Same as Operator	Reviewing the number of active, inactive, and prospective customers in the cluster

Page Details

Cluster Wise						
Site	Active	Acquired	Banned	Converted	Prospective	Total (% Penetration)
Basantpur (139)	93	4	0	6	37	97 (70%)
Dar-shankheda (90)	75	2	0	2	14	77 (86%)
Gujrehta (45)	15	2	0	0	12	17 (38%)
Uchhauli (182)	137	1	0	5	55	138 (76%)
Bhiri (57)	52	2	0	2	4	54 (95%)
Fatehpur (139)	102	8	0	7	86	110 (79%)
Gothava (65)	149	43	0	47	143	192 (88%)
Total	2865	425	0	213	875	3290 (75%)



- o Update Profile
- o Complete Survey

Tapping any of these options will redirect you to either the update profile page or the survey page, both of which have been explained in the following screenshots

1. **Filter Section** to show customer data Cluster Wise or NTP wise

2. **List of Plants** shows the segregation between the status under which customers have been grouped, plant wise

3. **Total Bar** aggregates the columnar data in the tabular column

Tapping on a particular plant will redirect the user to its consumer list page

1. **Filter Bar** used to narrow down the results

2. **List of Consumers** showing their activity status, and whether their profile has been updated / survey administered

The green tick validates the completion

3. **Update Profile** option will allow the user to update the profile of any consumer (both active customers and others)

4. **Tapping** a consumer will allow the user to:

LTE LTE 3:11

Consumer List - Darshankheda (90)

Status All Type All 1

Aganvadi Center Active
MG09048073

Profile Update Survey

Akhilesh Kumar Active
MG09019067

Profile Update ✓ Survey ✓ 2

Angad Prashad Active
MG09017009

Profile Update ✓ Survey ✓

Anil Active
MG09039058

Profile Update ✓ Survey ✓ 4

Anil Kumar Active
MG09012059

Profile Update ✓ Survey ✓ 3



Update Profile

1. Consumer Profile Information to be filled by the field agent



Consumer Name

Connection Id

1

Father's Name

Mobile Number

Email Address

Pole Number

Date of birth



Gender

Male Female

Consumer Status

UPDATE



2. **Submit** tapped to complete the update

LTE LTE 3:12

← Update Profile

Email Address

Pole Number

Date of birth



Gender

Male Female

Consumer Status

Active Banned Prospective

Consumer connection status at ground

House Wire Service Wire At Pole No

Consumer Category

Select Consumer Category

2

Consumer Type

Select Consumer Type

UPDATE

The Survey page allows the user to record information about an existing/prospective customer's energy usage needs

1. Survey Information to be filled by the agent

LTE LTE 3:12

Survey

Address

darashnkhed

Distance from nearest pole (meter)

25

Main occupation

agricultural

1

MED

None



Products available in home

- | | | | |
|-----------------|--------------------------|---------|-------------------------------------|
| TV | <input type="checkbox"/> | FAN | <input checked="" type="checkbox"/> |
| Ceiling Fan | <input type="checkbox"/> | Freezer | <input type="checkbox"/> |
| Refrigerator | <input type="checkbox"/> | Cooler | <input type="checkbox"/> |
| Washing Machine | <input type="checkbox"/> | None | <input type="checkbox"/> |

Wattage

60

SUBMIT



2. **Submit** tapped to complete the survey

Survey

MED

None

Products available in home

- | | | | |
|-----------------|--------------------------|---------|-------------------------------------|
| TV | <input type="checkbox"/> | FAN | <input checked="" type="checkbox"/> |
| Ceiling Fan | <input type="checkbox"/> | Freezer | <input type="checkbox"/> |
| Refrigerator | <input type="checkbox"/> | Cooler | <input type="checkbox"/> |
| Washing Machine | <input type="checkbox"/> | None | <input type="checkbox"/> |

Wattage

60

Interested in buying a product on EMI

- Yes No

Do you want to increase your load ?

- Yes No

Do you want to increase your supply hour ?

- Yes No

SUBMIT

2

3.5.12. Theft Complaint

Functionality

- Used to register possible pilferage from the mini-grid, for follow-up investigation
- This functionality is only available for HCLF users

Key Users

Designation	Main Purpose	Example Use Case
Operator	To register a possible theft for follow-up	Registering a complaint from a customer who visits the plant
Technician	To view pending theft complaints	Checking the distribution network cables as directed by the Cluster In-charge
CSA	Same as Operator	Registering a complained after noticing new unsanctioned cables
Cluster In-	To review logged theft complaints and	Reviewing the total number of theft


charge

assign them to field agents for investigation

complaints within a given time frame

Page Details | Pending| In Process| Completed| |---|---|---| | The theft reports that are reported| Theft reports that are currently being investigated| Theft reports that have been appropriately dealt with|

3.5.12.1. Pending tab

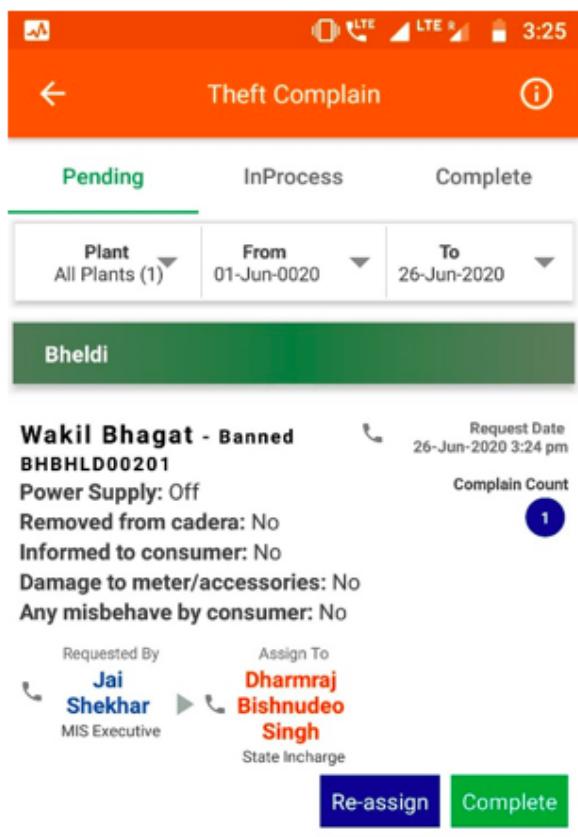

1. **Information Icon** tapped for plant-wise overview of complaints, as explained in the next screenshot

2. **Navigation Bar** indicates the current tab and allows switching between tabs



3. **Filter Bar** allows the user to restrict attention to a specific plant and time frame

4. **Complaint Tab** contains relevant information regarding the theft complaint lodged by a user

5. **Add Complaint Button** redirects the user to the New Theft Report page, detailed below

4

5



Theft Complaint Summary

1. **Filter Bar** allows the user to produce results between a given period of time at a plant
2. **Tabular Information** on the theft complaints at various plants is shown
3. **Total Bar** gives the user a representation of the aggregated columnar data



Theft Complain Summary

1

Site	Theft Complain	Banned	Re-connect
Bhardauliya	0	0	0
Laliya	0	0	0
Maharajganj Terai	0	0	0
Shivpura	0	0	0
Shivpura1	0	0	0
Balrampur (Cluster)	0	0	0
UP (State)	0	0	0

2

Total 0 0 0

3



← New Theft Request

Plant
Select Plant

Consumer Name
Select Consumer

Power Supply Status
 On Off

Connection removed from cadera
 Yes No

Informed to consumer
 Yes No

Meter/accessories damaged by consumer
 Yes No

Any misbehave by consumer
 Yes No

Theft image

1

New Theft Report

- Plant Selection** must be made before filling in the form
- Complaint Information** itemised line by line, including possibility of adding a photograph
- Submit** completes the registration process




2

SUBMIT

3

3.5.12.2. In Process tab

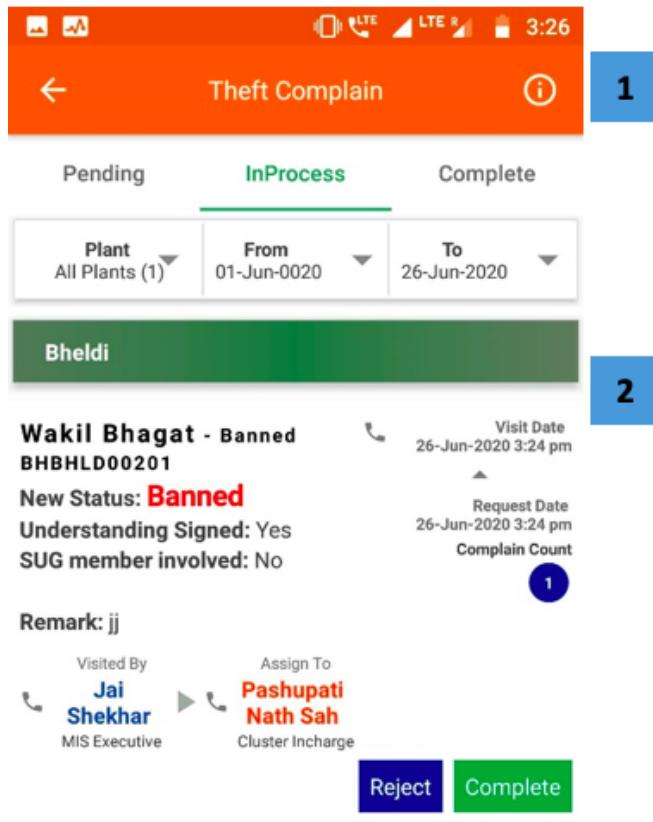

1


1. **Information Icon** tapped for plant-wise overview of complaints
2. **Complaint Tab** gives the user relevant information on a complaint request that is currently being investigated. It can either be rejected or completed

2

3.5.12.3. Completed tab



1. **Information Icon** tapped for plant-wise overview of complaints
2. **Complaint Tab** gives the user relevant information on a complaint request that has been completed.

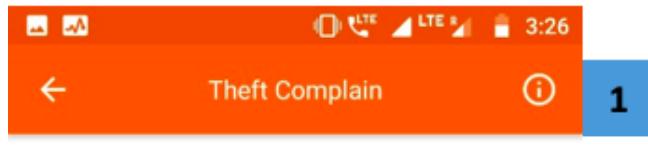

3.5.13. Coupon Discount

Functionality

- Allows plant personnel to generate coupons for customers
- Tracks the number of redeemed coupons

Key Users

Designation	Main Purpose	Example Use Case
Operator	To generate coupon codes on behalf of customers	Assisting a customer who doesn't have a smartphone to avail a company promotion
Technician	Same as Operator	Same as Operator
CSA	Same as Operator	Same as Operator
Cluster In-charge	To track the customers whose coupons are going to expire	Following up with customers who have generated coupons but not redeemed them

State In-charge	To monitor the results of coupon schemes at different plants	Calculating the proportion of eligible customers who participated in the initiative
-----------------	--	---

Page Details

Site	Active Consumers	Coupon Generated	Coupon Redeemed	Coupon Expired
Bhardauliya	62	57	0	0
Laliya	49	41	0	0
Maharajganj Terai	112	93	0	0
Shivpura	137	108	0	0
Shivpura1	1	0	0	0
Balrampur (Cluster)	361	299	0	0
UP (State)	361	299	0	0
Total	361	299	0	0

1. **Filter Bar** narrows to a given time period

2. **List of Plants** showing the number of coupons generated and redeemed at each plant

3. **Total Bar** aggregates over all plants

Tapping on any plant will redirect the user to a list of customers at that plant, as explained in the next screenshot

3

1. **Search Icon** can be used to find a specific customer

2. **Filter Bar** allows narrowing the results to a given time period and plant

3. **Generate Coupon Code** allows an agent to enable the customer to generate a coupon code that could be redeemed

The particular customer can be contacted by tapping on the phone icon present in every tab

The screenshot shows a mobile application interface. At the top, there is a header bar with various icons on the left and the time '2:16' on the right. Below the header, the title 'Consumers (Maharajganj Terai)' is displayed, along with a search icon and a menu icon. A blue button labeled '1' is positioned to the right of the title. Below the title, there is a date range selector with three fields: 'All' (with a dropdown arrow), 'May', and '2020'. To the right of this selector is another blue button labeled '2'. A horizontal line separates this section from the consumer list below.

Ranjeet Coupon Status

UPMGTR01004

Mobile Number: 0

Package: A1.1(DN)/17/200

Coupon Status

Not Generated

Generate Coupon Code

3

Irshad Ahmed Coupon Status

UPMGTR02503

Mobile Number: 0

Package: A1.1(DN)/17/200

Coupon Status

Not Generated

Generate Coupon Code

Lalla Coupon Status

UPMGTR01601

Mobile Number: 0

Package: A1.1(DN)/17/200

Coupon Status

Not Generated

Generate Coupon Code

3.6. Package and Scheme

3.6.1. Overview



Package Activity

- Get an overview of the package status
- Add a package activity request




Scheme

- Get an overview of the schemes being used
- Add a scheme




Product Inventory

- Get an overview of leased products
- Check availability of a product

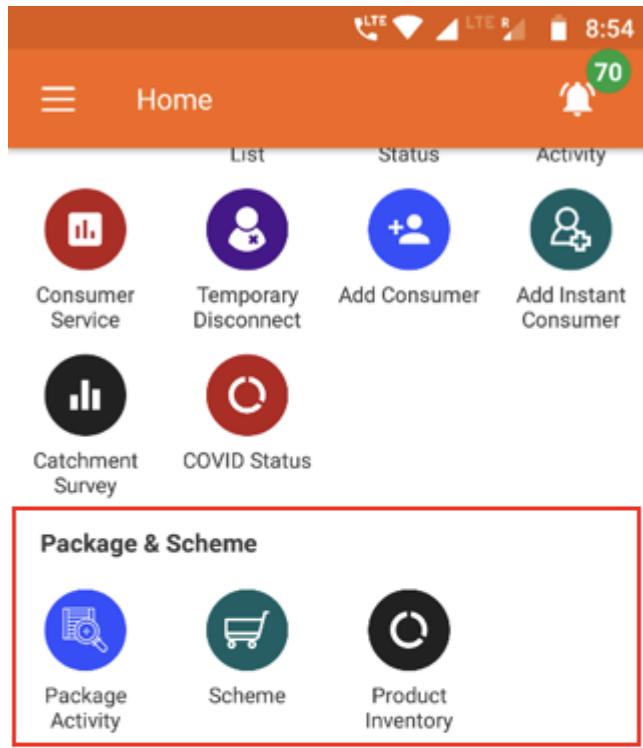

Plant

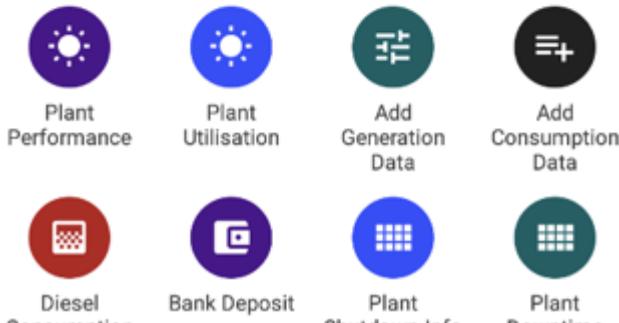

3.6.2. Package Activity

Functionality

- The Package Activity section is an interface for changing the package assigned to customers
- Changes undergo a chain of approval, with details passed to the relevant agent
- Package changes are summarised for each plant

Key Users


Designation	Main Purpose	Example Use Case
Technician	To implement package changes requested by customers	Reviewing the list of customers who require up/downgrades to their connection
CSA	To register and view package change requests	Registering a change on behalf of a customer who isn't using the customer smartphone app
Cluster In-	To check the number of	Notifying a field agent that they are responsible

charge	requests and assign to field personnel	for following up with the customer
State In-charge	To check the number of requests at plants in the state	Checking how many package change requests are pending and at which plants

Page Details

Request	In Process	Review	Completed
Information on package request	Lists requests that are being worked on	Completed requests that are awaiting approval	Details of historical package requests

3.6.2.1. Request tab

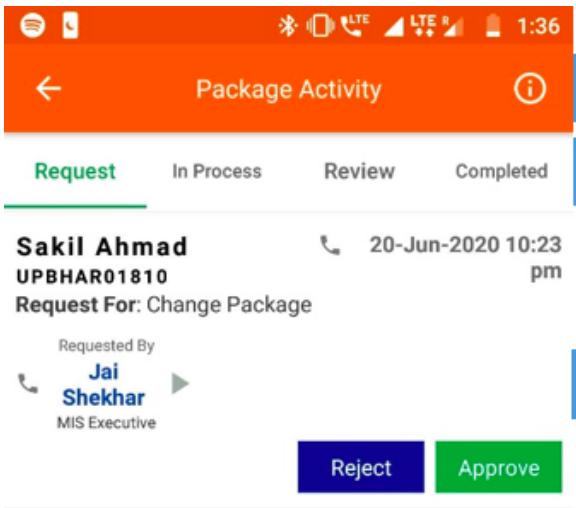

1. **Information Icon** redirects to a plant-by-plant package activity summary, explained in the next screenshot
2. **Add Package Activity** redirects to the add package activity page explained below
3. **Navigation Bar** used to navigate between the Active consumer column and the Banned consumer column
4. **Package Change Request Tab** that gives relevant details on the latest package change requests



Tapping the information icon redirects to the Package Activity Summary

The screenshot shows a mobile application interface titled "Package Activity Summary". At the top, there is a filter bar with "From" set to "01-Apr-2020" and "To" set to "23-Apr-2020". Below the filter bar is a table with four columns: Site, Banned, Active, and Total. The table lists various locations with their respective counts of banned and active customers. A blue box labeled "1" highlights the filter bar. A blue box labeled "2" highlights the row for "Gopalganj (Cluster)". A blue box labeled "3" highlights the "Total" row.

1. **Filter Bar** selects the time interval
2. **Plant List** with data on the number of banned and active customers in the time interval
3. **Total Bar** aggregating the columnar data in the table


The screenshot shows a mobile application interface titled "Package Activity Request". It includes fields for "Select Plant" (dropdown), "Consumer Name" (text input), "Select Consumer" (dropdown), "Request For" (dropdown), and a "Your Comments" text area. A blue box labeled "1" points to the "Select Plant" dropdown. A blue box labeled "2" points to the "Select Consumer" dropdown. A blue box labeled "3" points to the "Request For" dropdown. A blue box labeled "4" points to a green "SUBMIT" button at the bottom.



- 1 Tapping the add package activity icon redirects to **Package Activity Request**
2. **Select Plant** from a dropdown list
3. **Select Consumer** for whom the request is being added
3. **Request for** the particular service
4. **Submit Button** finalises and logs the request

4

3.6.2.2. In Process tab

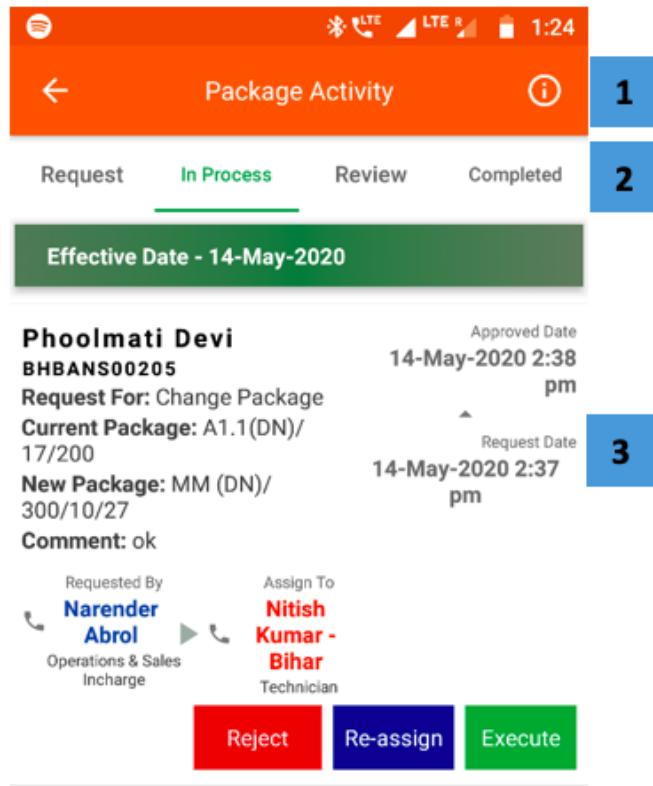

1. **Information Icon** redirects to a plant-by-plant package activity summary
2. **Navigation Bar** for switching between tabs
3. **Request Details** provides relevant details on the request, including who is tasked with dealing with it


The request can be Rejected, Re-assigned or executed (Processed) using the buttons at the bottom

3

3.6.2.3. Review tab


1. **Information Icon** redirects to a plant-by-plant package activity summary
2. **Navigation Bar** for switching tabs
3. **Request Details** provides relevant details on the completed request that must be reviewed, including the personnel responsible for executing each stage of the process

Tapping Complete will close the request and add it to the historical database, while Reject re-opens it and notifies the relevant personnel.

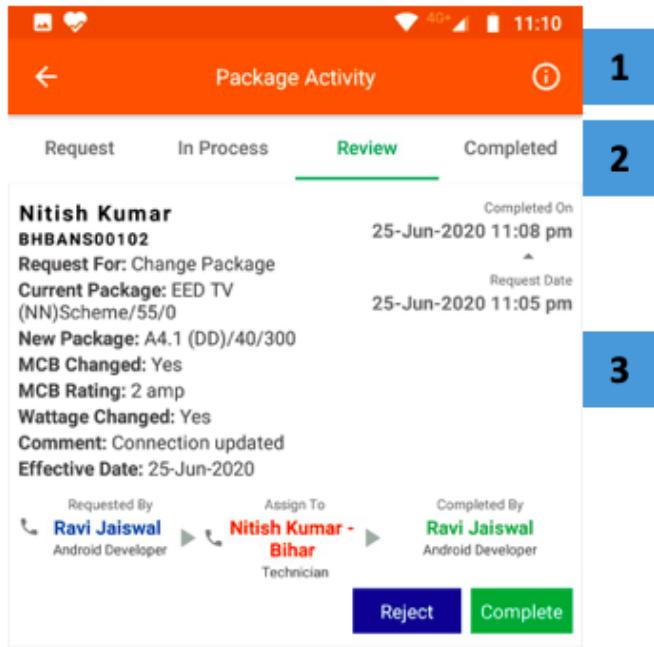

3.6.2.4. Completed tab

1. **Information Icon** redirects to a plant-by-plant package activity summary
2. **Navigation Bar** for switching tabs
3. **Request Details** provides relevant details on each historical completed request in the time period in question

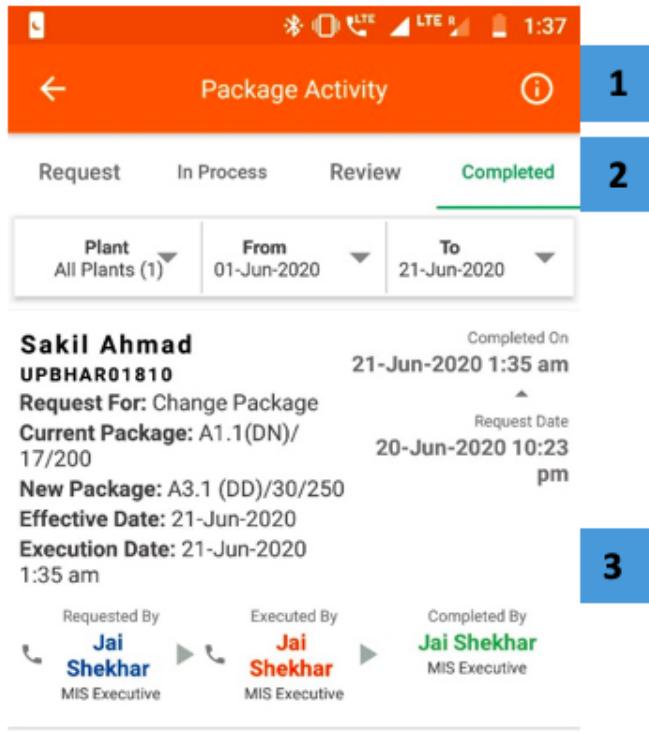

3.6.3. Scheme

Functionality

- List of customers who are participating in a promotional scheme which offers electrical appliances along with an electricity connection
- Option to add new customers to a scheme

Key Users

Designation	Main Purpose	Example Use Case
CSA	To check the list of participating customers	Enrolling a customer in a scheme upon their request
Cluster In-charge	Same as CSA	Checking which customers are falling behind on their scheme repayments
State In-charge	To assess the schemes ongoing within the state	Assessing the popularity of different schemes

Page Details

The screenshot shows a mobile application interface titled "Schemes". At the top, there is a filter bar with dropdowns for "Plant" (set to "All Plants (27)"), "From" (set to "01-Apr-2020"), and "To" (set to "30-Apr-2020"). The time is displayed as "12:42". Below the filter bar is a list of customers:

- Md. Ali**
UPSHIV02003
Product: Washing Machine - LG - P7015SRAY
Scheme: LG-Washing Machine-7 Kg
Validity: 01-Apr-2020 to 31-Aug-2020
Scheme Status: **Running**
Outstanding: ₹ 2350
- Manoj ***
UPMTHB00106
Product: Washing Machine - LG - P7015SRAY
Scheme: LG-Washing Machine-7 Kg
Validity: 01-Apr-2020 to 31-Aug-2020
Scheme Status: **Running**
Outstanding: ₹ 1600
- Soni Raj Jewelris**
BHBHLD02505
Product: Washing Machine - LG - P7015SRAY
Scheme: LG-Washing Machine-7 Kg
Validity: 01-Apr-2020 to 31-Aug-2020
Scheme Status: **Running**
Outstanding: ₹ 2118
- Smt Nirmala Devi**
.....
Outstanding: 27 results found

A green circular button with a plus sign is located at the bottom right of the list.

1. Filter Bar narrows results by plant, time frame, scheme type, and customer status:

2. List of Customers registered for different schemes, along with important information and the amount still to be paid


A consumer can be called by tapping

3. Add Scheme redirects to a page for enrolling customers, as shown in the next screenshot



4. Add Customer Information

5. Submit the information to generate a scheme code for the customer

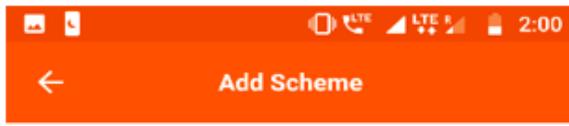

3.6.4. Product Inventory

Functionality

- Displays all the electrical appliances (for customer schemes) in the company's warehouse

Key Users

Designation	Main Purpose	Example Use Case
Operator	To view available appliances in the company warehouse	Checking on behalf of a customer whether a particular appliance is available as part of a scheme
Technician	Same as Operator	Same as Operator
CSA	Same as Operator	Same as Operator
Cluster In-charge	Same as Operator	Requesting purchase of an appliance which is in demand
State In-charge	Same as Operator	Checking inventory levels and whether new purchase orders are required

Page Details



1. Filter Bar allows selection of state and type of product

2. Information Bar gives an overview of the product list

3. Product List shows information on each type of product in the inventory, including number currently available and location

LG - GLB201APZY
Refrigerator - Bihar

Available Qty: 2
Purchase Qty: 3

Summer Cool -
Summercool
Cooler - UP

Available Qty: 10
Purchase Qty: 10

Super Fan - X1 White
Ceiling Fan - UP

Available Qty: 25
Purchase Qty: 25

3

LG - GL-B201APZY
APZZEBN
Refrigerator - UP

Available Qty: 1
Purchase Qty: 5


LG - GL-B20 APZY
APZZEBN
Refrigerator - UP

Available Qty: 2
Purchase Qty: 5

3.7. Plant


3.7.1. Overview

The section consists of the following functionalities:


	Plant Performance Plant technical performance metrics
	Plant Utilization Plant technical performance metrics
	Add Generation Data Record and submit plant generation data
	Add Consumption Data Record and submit plant consumption data
	Diesel Consumption Record and submit diesel consumption
	Bank Deposit Bank deposits and plant cash balance
	Plant Shutdown Information Remote access to plant shutdowns
	Plant Downtime Overview plant downtime details
	Plant Maintenance Record plant maintenance activities
	Plant Service Overview status on plant service request



Package & Scheme

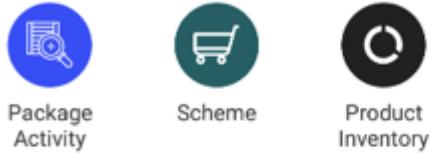

Plant

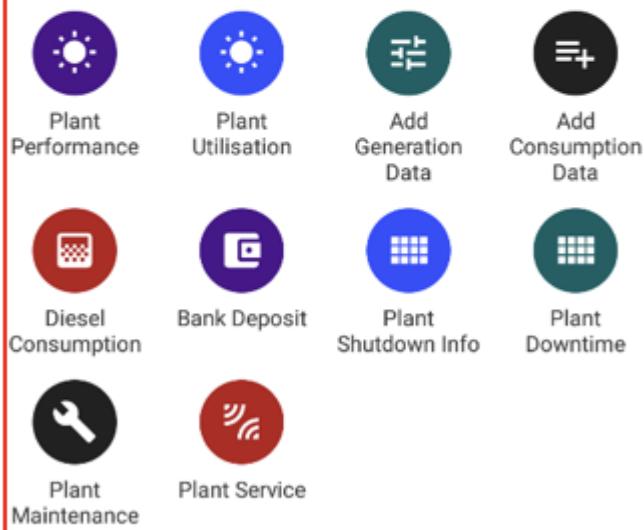

Maintenance Schedule



3.7.2. Plant Performance

Functionality


- The Plant Performance Section summarises technical performance metrics for each plant

Key Users

Designation	Main Purpose	Example Use Case
Operator	To check data logs for a particular plant	Ensuring that the database agrees with ground measurements
Technician	To assess the performance of the equipment at the plant	Calculating in-plant and distribution efficiency
CSA	To check units sold in a	Comparing units sold in one month with the

	particular timeframe	previous month
Cluster In-charge	To compare technical performance of multiple plants	Same as Technician
State In-charge	Same as Cluster In-charge	Calculating the utilisation of the plant to inform whether more customers should be connected

Page Details

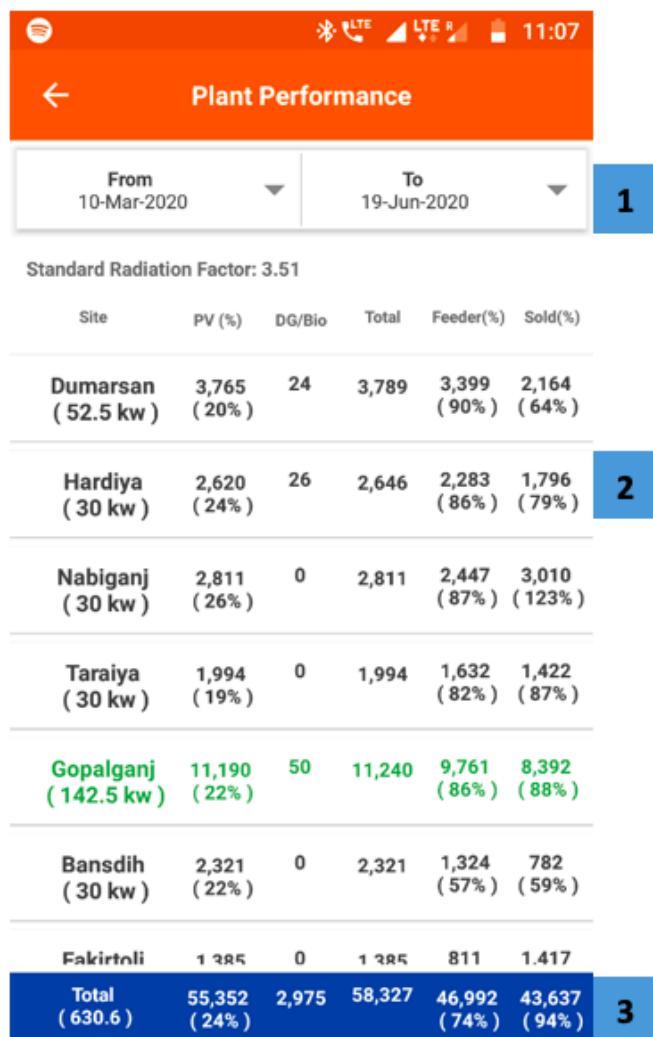

1. **Filter Bar** selects a time interval
2. **List of Plants** and associated technical information, including:
 - o Plant PV capacity
 - o Units generated, dispatched, and billed
 - o Solar generation utilisation
 - o In-plant and distribution efficiencies
3. **Total Bar** aggregates the columnar values

Tapping a plant opens an option of viewing detailed generation or dispatch ("consumption") data. This is explained in the next screenshots.

Generation Data



The energy generated at a particular plant is shown date-wise

Date	Total	DG	PV Sub Total	MPPT 1	MPPT 2	MPPT 3	MPPT 4	MPPT 5	MPPT 6	MPPT 7
20-Apr-20	53.25	0.00	53.25	7.27	4.18	7.99	5.56	5.43	14.10	5.56
19-Apr-20	30.59	0.00	30.59	3.34	1.71	4.19	2.77	2.43	11.49	2.00
--										

The number of PV MPPTs will differ from plant to plant

Consumption Data

Date	Total	FEEDER1	FEEDER2	FEEDER4	FEEDER6
		Plant (DN)	Consumer (DD) [10am-8pm]	Consumer (NN) [5pm-11pm]	Consumer (DN) [10am-11pm]
22-Apr-2020	24.00	1.00	1.00	2.00	20.00
21-Apr-2020	24.00	2.00	2.00	1.00	19.00
--					



The energy dispatched ("consumed") from a particular plant is shown date-wise

The number of feeders will differ from plant to plant

3.7.3. Plant Utilisation


Functionality

- The Plant Utilisation Section summarises technical performance metrics and energy consumption for each plant
- This functionality is only available for HCLF agents

Key Users

Designation	Main Purpose	Example Use Case
Technician	To assess the performance of equipment at the plant	Calculating in-plant and distribution efficiency
Cluster In-charge	To check units consumed by different user groups	Comparing month-on-month electricity demand from micro-enterprises
State In-charge	To compare technical performance of multiple plants	Calculating the utilisation of the plant to inform whether more customers can be connected

Page Details

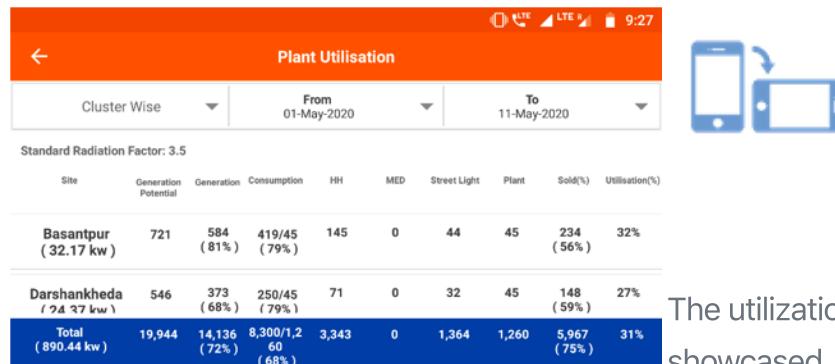

The utilization data for each component and variable is showcased.

The utilization percentage will differ from plant to plant

3.7.4. Add Generation Data


Functionality

- The Add Generation Data module allows the user to input energy generation data into the company database

Key Users

Designation	Main Purpose	Example Use Case
Operator	To add generation data for a particular date	Reading units generated at each solar MPPT daily, and recording in the app
Technician	Same as Operator	Same as Operator
Cluster In-charge	Same as Operator	Same as Operator
State In-charge	Same as Operator	Same as Operator

Page Details

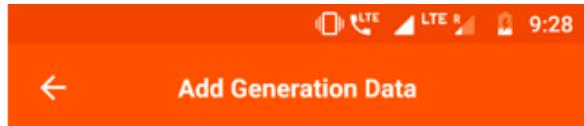

Plant

Bheldi (BHBHLD)

1

- 1. Plant Selection** must be done as the first step
- 2. Date Selection** for data input (only the dates with orange dots can be selected, and the oldest data must be entered first)


April 2020						
Mon	Tue	Wed	Thu	Fri	Sat	Sun
			1	2	3	4
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29				

2

Tapping the desired date redirects to the data addition page shown in the next screenshot



- 1. Generation Data Entry** is done MPPT-wise
- 2. Data Header** consisting of the plant and date are given at the top of the page

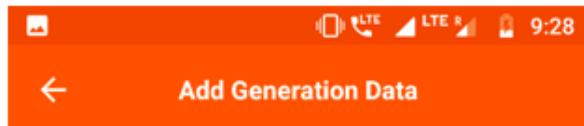

Plant: Bheldi (BHBHLD)

Selected Date: 27-Apr-2020

2

MPPT 1

Last Reading: 2.35

Last Updated On: 26-Apr-2020

Enter New Reading

MPPT 2

Last Reading: 3.30

Last Updated On: 26-Apr-2020

Enter New Reading

1

MPPT 3

Last Reading: 6.00

Last Updated On: 26-Apr-2020

Enter New Reading

MPPT 4

Last Reading: 3.32

Last Updated On: 26-Apr-2020

Enter New Reading

MPPT 5

Last Reading: 4.27

Last Updated On: 26-Apr-2020

.....



1. **Confirm and Submit** having checked the accuracy of the entered data

MPPT 8
Last Reading: 2.27 Last Updated On: 26-Apr-2020

Enter New Reading

MPPT 9
Last Reading: 1.79 Last Updated On: 26-Apr-2020

Enter New Reading

MPPT 10
Last Reading: 3.22 Last Updated On: 26-Apr-2020

Enter New Reading

DG
Last Reading: 123.4 Last Updated On: 26-Apr-2020

Enter New Reading

Same as last reading

Confirm

1

Submit

3.7.5. Add Consumption Data


Functionality

- The Add Consumption Data module allows the user to input energy dispatch data into the company database

Key Users

Designation	Main Purpose	Example Use Case
Operator	To add dispatch data for a particular date	Reading units through each feeder daily, and recording in the app
Technician	Same as Operator	Same as Operator
Cluster In-charge	Same as Operator	Same as Operator
State In-charge	Same as Operator	Same as Operator

Page Details

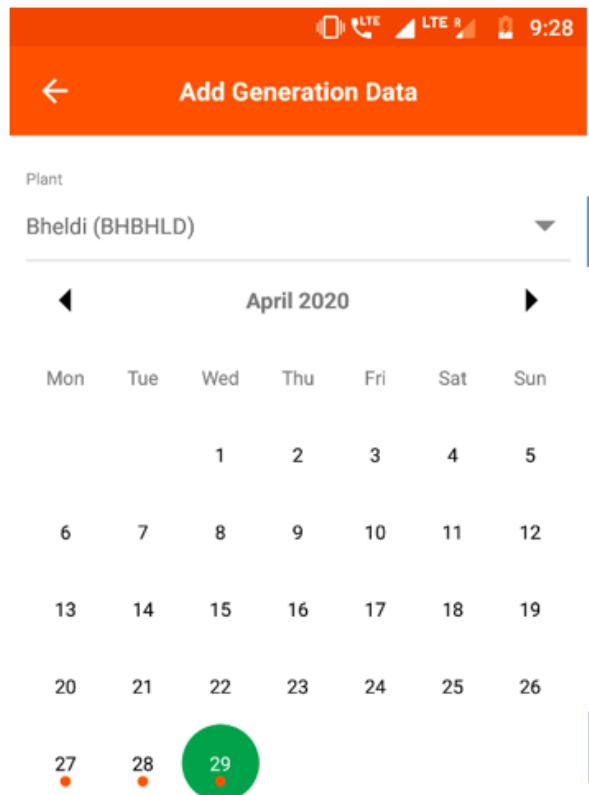

1. **Plant Selection** must be done as the first step
2. **Date Selection** for data input (only the dates with orange dots can be selected, and the oldest data must be entered first)

Tapping the desired date redirects to the data addition page shown in the next screenshot



1. **Data Header** consisting of the plant and date are given at the top of the page
2. **Consumption Data Entry** is done feeder-wise, with details of the previous reading shown for reference
3. **Confirm and Submit** having checked the accuracy of the entered data

Plant: Basantpur (MG04)
Selected Date: 30-Apr-2020

FEEDER1(DND)(24 Hour) (00:00 to 00:00)
Last Reading: 12758.30 Last Updated On: 29-Apr-2020

1

Enter New Reading

Same as last reading

Confirm

2

3

Submit

3.7.6. Diesel Consumption

Functionality

- The Diesel Consumption Section allows the user to input details on plant fuel expenses, along with photos of receipts
- Past expenses and DG usage data can also be reviewed
- Fuel bills are to be reimbursed by the Head Office

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To maintain a record of diesel expenses and fuel use	Adding a diesel purchase made at a particular plant within the cluster
State In-charge	To review diesel expenses and DG usage at different plants	Checking for fuel pilferage by comparing fuel efficiencies at different plants / times

Page Details

The screenshot shows the 'Diesel Consumption' screen. At the top, there's a filter bar with 'From' set to '01-Apr-2020' and 'To' set to '30-Apr-2020'. Below the filter bar, the summary data is displayed:

Total Amount:	₹ 20848.0
Total Units (ltrs):	330.0
Average Rate / ltr:	₹ 63.18
Total Run Hours:	54.12
Total DG Units:	828.00
Generation Cost / Unit:	₹ 25.18

1. **Filter Bar** selects a time interval for reviewing fuel expenses and use

2. **Summary** gives key data-points surrounding fuel use and expenses



The information icon in the top right redirects to a plant-by-plant comparison, as explained in the next screenshot

2

3. **List of Purchases** details diesel purchases

4. **Add Consumption Data** button allows user to submit a new fuel expense, as explained in a subsequent screenshot

3

5. **Filter Button** has the same functionality as the Filter Bar



Invoice No: 60
Plant: Shivpura
Purchase Date: 28-Apr-2020
Entry Date: 28-Apr-2020 6:44 pm
Amount: ₹ 1896
Rate: ₹ 63.19
Unit: 30.00
DG Run Hour: 2790.00
DG Reading: 419.80



Invoice No: 30
Plant: Shivpura
Purchase Date: 26-Apr-2020
Entry Date: 27-Apr-2020 5:45 pm
Amount: ₹ 1896
Rate: ₹ 63.19
Unit: 30.00



4



The Add Diesel Consumption page allows the user to record new fuel expenses

3. **Consumption Data** must be added for company records and for reimbursement

4. **Invoice Number** can be found on the bill

5. **Bill Picture** must be added as proof



LTE LTE 9 2:44



Add Diesel Consumption

Plant

Select Plant



Purchase Date



Invoice Number

2

Total Amount

Rate

1

DG Run Hour

DG Reading

Attachment



3



4. **Confirm** must be tapped after information is reviewed

5. **Submit** tapped to complete data entry

Invoice Number

Total Amount

Rate

DG Run Hour

DG Reading

Attachment

Confirm

Submit

4

5

This page allows user to view recent diesel expenses for each plant

1. **Filter Bar** for specifying date of interest
2. **List of Plants** with monthly data on fuel expenses
3. **Green Rows** show aggregated cluster data
4. **Total Bar** aggregates all plants

Apr 2020

Sites Apr,2020 Mar,2020 Feb,2020 Jan,2020

Du-marsan	0	2,040	0	6,662
Hardiya	0	7,814	7,435	15,097
Nabiganj	0	2,625	0	8,602
Gopal-ganj (Cluster)	0	12,479	7,435	30,361
Katsa	0	5,000	2,300	2,500
Saran 1 (Cluster)	0	5,000	2,300	2,500
Garkha	0	12,252	10,326	5,167
Parsa	0	2,408	0	2,584
Total	20,848	62,166	59,020	1,34,685

1

2

3

4

3.7.7. Bank Deposit

Functionality

- Interface for registering a deposit of collected cash into the company bank account
- Record and summary of past deposits can be viewed, along with in-plant cash records

Key Users

Designation	Main Purpose	Example Use Case
CSA	To register new deposits	Depositing cash collected from customers into the company bank account
Cluster In-charge	To view the cash flow for plants in the cluster	Checking the amount of collected cash is still with field agents and is yet to be deposited
State In-charge	To view the cash flow for plants in the state	Ensuring bank deposits are going through correctly, and are happening on schedule

Page Details

The page is organised into the following tabs.

Bank Deposit	In Hand Cash Report	Bank Deposit Review
Detailed list of historical bank deposits	Plant-wise overview of collections and deposits	Overview of all the bank deposits made and confirmed

3.7.7.1. Bank Deposit tab



1. **Navigation Bar** indicates current tab and allows switching by tapping or swiping
2. **Filter Bar** selects a particular plant and time duration
3. **List of Deposits** details each bank deposit along with a receipt photo
4. **Add Bank Deposit Data** redirects to a page that allows the user to input a new bank deposit, shown in the next screenshot
5. **Search Icon** used to search for a particular record

9:10

Bank Deposit

5

Bank Deposit In Hand Cash Report Bank Deposit Review

1

Plant All Plants From 01-May-2020 To 01-May-2020

2

Plant: Bheldi

Deposit Date: 01-May-2020

Entry Date: 01-May-2020 7:41 pm

Amount Deposit: ₹ 6000

Deposit By: Lalbabu Singh PNB

Deposit Location: Account transfer

3



1. **Bank Deposit Details** to be filled by the agent
2. **Submit** tapped to complete the form

11:23

Add Bank Deposit

Plant

Select Plant

Deposit Date



Amount Deposit

1

Deposit By

Deposit Location

Attachment



Confirm

Submit

2

3.7.7.2. In Hand Cash Report tab



1. **Navigation Bar** indicates current tab and allows switching by tapping or swiping
2. **Filter Bar** selects a particular time duration
3. **List of Plants** with total collections, deposits, and amount of cash remaining at the plant
4. **Total Bar** aggregates over all plants
5. **Green Rows** aggregate over clusters

The screenshot shows the 'Bank Deposit' screen with the following interface elements:

- Navigation Bar:** At the top left is a back arrow icon, and at the top right are icons for signal strength, battery level, and the time (9:10).
- Title:** 'Bank Deposit' centered at the top.
- Tab Bar:** Below the title, there are three tabs: 'Bank Deposit' (selected), 'In Hand Cash Report' (highlighted in green), and 'Bank Deposit Review'.
- Filter Bar:** A date range selector with 'From' set to '01-May-2020' and 'To' set to '01-May-2020'.
- Table Header:** A table with columns: Site, Opening, Collection, Deposit, and Cash In Hand.
- Data Rows:** A list of sites with their respective deposit details. The first four rows are standard entries, while the fifth row, 'Gopalganj (Cluster)', is highlighted in green.
- Total Row:** A summary row at the bottom labeled 'Total' with values: 4,63,674, 6,000, 6,000, 4,63,674.

Callouts numbered 1 through 5 point to the following elements:

- Tab bar: 'Bank Deposit'
- Filter bar: Date range selector
- Data row: 'Gopalganj (Cluster)' entry
- Total row: 'Total' summary
- Data row: 'Gopalganj (Cluster)' entry

3.7.7.3. Bank Deposit Review tab



1. **Navigation Bar** indicates current tab and allows switching by tapping or swiping
2. **Filter Bar** selects a particular time duration
3. **List of Plants** with total deposits registered and deposits received, along with any anomalies
4. **Total Bar** aggregates over all plants
5. **Green Rows** aggregate over clusters

Bank Deposit Review

Site	Opening	Total Deposit	Credited	Non Credited
Dumarsan	5,000	0	0	5,000
Hardiya	6,500	0	0	6,500
Nabiganj	0	0	0	0
Taraiya	0	0	0	0
Gopalganj (Cluster)	11,500	0	0	11,500
Bansdih	0	0	0	0
Fakirtoli	0	0	0	0
Katsa	0	0	0	0
Total	7,76,105	6,000	0	7,82,105

3.7.8. Plant Shutdown Info

Functionality

- The Plant Shutdown Info allows the users to manually shutdown a particular feeder at a specific plant

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To temporarily shut down electricity supply	Shutting a feeder down for maintenance, for a specified time duration
State In-charge	Same as Cluster In-charge	Same as Cluster In-charge

Page Details

LTE LTE 2:29

Plant Status

Plant

Bhardauliya (UPBHAR)

1

Feeder

Consumer (DN) [9am-11pm]

 Confirm

SUBMIT

2

LTE LTE 11:51

Plant Status

Site: Bheldi (BHBHLD)

Feeder: Consumer 24Hrs (DND)

1. **Plant Details** (plant name and feeder) selected from drop-down lists

2. **Submit** must be tapped after filling in all the plant details

3. **Date Filter** must be applied to view the plant status on a particular date

June 2020

Mon	Tue	Wed	Thu	Fri	Sat	Sun
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	

1

2

SUBMIT

3



1. **Feeder Status** for a particular date is displayed, the feeders must be individually switched off by unchecking their corresponding checkboxes
2. **Submit** to complete the process



Site: Bheldi (BHBHLD)
Feeder: Consumer 24Hrs (DND)

Date: 19-Jun-2020

Please uncheck in case of plant shutdown.

00 - 1	<input type="checkbox"/>	1
01 - 2	<input checked="" type="checkbox"/>	
02 - 3	<input type="checkbox"/>	
03 - 4	<input checked="" type="checkbox"/>	
04 - 5	<input checked="" type="checkbox"/>	
05 - 6	<input checked="" type="checkbox"/>	
06 - 7	<input checked="" type="checkbox"/>	
07 - 8	<input checked="" type="checkbox"/>	
08 - 9	<input checked="" type="checkbox"/>	
	<input type="checkbox"/>	

DONE 2

3.7.9. Plant Maintenance

Functionality

- Allows the users to log technical maintenance activities which have happened at a plant

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To register a plant maintenance activity	Creating a log of DG servicing or PV panel repair
State In-charge	Same as Cluster In-charge	Same as Cluster In-charge

Page Details

Plant Maintenance



Plant

Select Plant

Activity Type

Select Activity Type

Date of Activity



Next Schedule Date



DG Run Hour

Activity By

Supervised By


Remark*



1. Add Maintenance Activity information (the form updates depending on the type of activity)

2. Remark addition to be made by the user to give additional information regarding the issue
3. Attachment photo must be added as a proof of issue

On completion of the data input, confirm and submit to complete the process

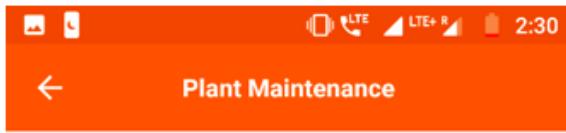

3.7.10. DG Log

Functionality

- The DG Log Section allows users to track diesel generator performance and runtime

Key Users

Designation	Main Purpose	Example Use Case
Operator	To log diesel generator runtime and units output	Recording each time the DG is switched on and off
Technician	Same as Operator	Same as Operator
CSA	Same as Operator	Same as Operator
Cluster In-charge	To view generator usage at different plants	Checking how reliance of different plants on backup generators changes over time
State In-charge	Same as Cluster In-charge	Same as Cluster In-charge

Page Details

The screenshot shows a mobile application interface titled "DG Log Summary". At the top, there is a navigation bar with icons for signal strength, battery level, and time (2:40). Below this is a header with a back arrow and the title "DG Log Summary". A filter bar allows selecting a time period from "From 01-May-2020" to "To 26-May-2020". The main content is a table with three columns: Site, Run Hour(s), and Unit(s). The data rows are:

Site	Run Hour(s)	Unit(s)
Maharajganj Terai	0	0
Shivpura	28 Hr 21 min	404
Balrampur (Cluster)	28 Hr 21 min	404
UP (State)	28 Hr 21 min	404

A large blue bar at the bottom summarizes the total data:

Total	28 Hr 21 min	404
-------	--------------	-----

1

1. Filter Bar for selecting the time period

2. List of Plants showing run hours and units generated in the time interval

2

3. Total Bar aggregates over all plants

3



Tapping a particular plant redirects to a detailed DG run log

1. **DG Log** details all instances of DG being run

2. **Add DG Log Entry** allows users to input DG runtime data, explained in the next screenshot



09-May-2020

Start Time 22:25:00	End Time 23:58:00	Run Hr(s) 1 Hr 33 min	Unit(s) 6
-------------------------------	-----------------------------	---------------------------------	---------------------

1

Entry By: Shivam Tiwari

Start Time 18:45:00	End Time 21:45:00	Run Hr(s) 3 Hr	Unit(s) 30
-------------------------------	-----------------------------	--------------------------	----------------------

Entry By: Shivam Tiwari

08-May-2020

Start Time 22:02:00	End Time 23:01:00	Run Hr(s) 0 Hr 59 min	Unit(s) 12
-------------------------------	-----------------------------	---------------------------------	----------------------

Entry By: Shivam Tiwari

Start Time 18:25:00	End Time 20:25:00	Run Hr(s) 2 Hr	Unit(s) 26
-------------------------------	-----------------------------	--------------------------	----------------------


Entry By: Shivam Tiwari

07-May-2020

Start Time 22:00:00	End Time 23:00:00	Run Hr(s) 1 Hr	Unit(s) 14
-------------------------------	-----------------------------	--------------------------	----------------------

2

Entry By: Shivam Tiwari

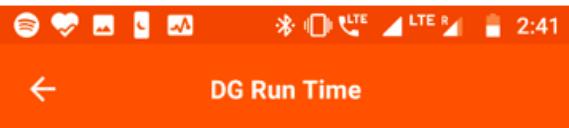

Site

Shivpura

Date

Select Date



Start Time

Select Start Time



End Time

Select End Time



Closing Reading

Remark

1

1. DG Logging information added by the user
2. Submit tapped to complete the entry


2

Submit

3.8. Meter

3.8.1. Overview

	Change Meter Review a meter status
	Unreleased Meter Review the status of a meter replacement issue
	Smart Meter Status Review the status of a Smart meter
	Feeder Status Review the status of a feeder
	Meter Reading Enter diesel consumption data
	Meter Reading Review Overview proof of bank deposits
	TERMS Status Review all TERMS meters

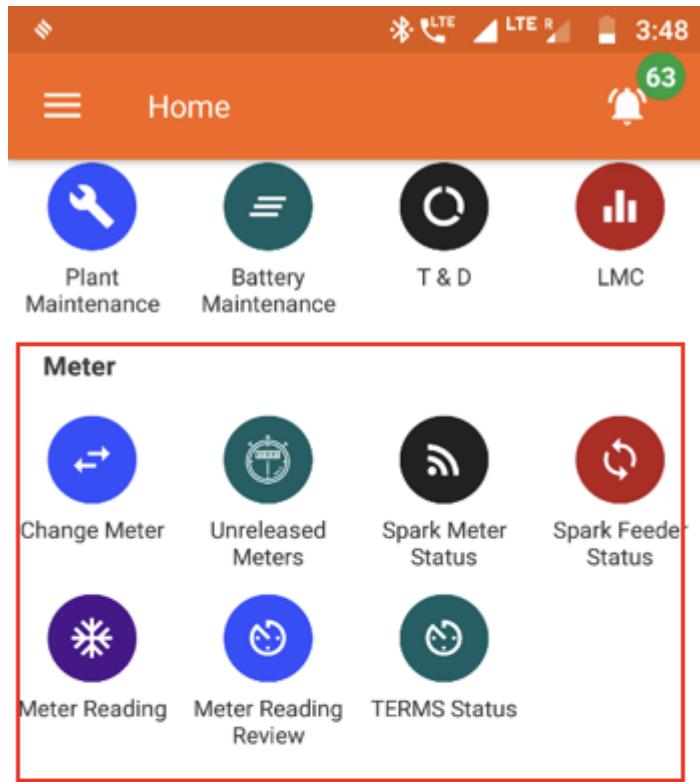

3.8.2. Change Meter

Functionality

- Allows users to request replacement of a customer's energy meter

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To request a change of meter for a customer	Registering and switching out a malfunctioning meter
State In-charge	Same as Cluster In-charge	Same as Cluster In-charge

Page Details



1. **Customer Information** to be input

2. **Meter Information** will automatically populate, along with option to select anew meter

3. **Review** tapped to complete the process

1

2

3

3.8.3. Unreleased Meter

Functionality

- Tracks pending and completed meter change tasks
- These meters are to be unmounted, either because of a malfunction or expiry of the customer's subscription
- The meter is then taken to the warehouse or assigned to a different customer's subscription

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To view pending meter change requests and assign to field agents	Contacting the agent who worked on a particular meter assignment
State In-charge	To view and acknowledge meter changes	Checking the number of pending meter assignments

The page is organised into the following tabs

Pending	Review	Completed
View of pending meter requests, assign to agent, and mark completed	List of completed meter requests	List of historical completed and acknowledged meter requests

3.8.3.1. Pending tab



1. **Navigation Bar** indicates current tab and allows



switching by tapping or swiping

2. **Pending Meter List** with information on each meter. Agents can be called by tapping on their names
3. **Task Buttons** are used to allocate tasks to field agents and register the new location of a meter

2 The task can be either reassigned to a different agent or executed (processed) towards reviewing on completion

3

3.8.3.2. Review tab



1. **Navigation Bar** indicates current tab and allows switching by tapping or swiping

2. **Review Meter List** with information on each completed meter activity that is pending review
3. **Task Buttons** used to confirm completed tasks

Unreleased Meters

Pending Review Completed

1

Vinod Kumar Sahu
UPMTHB05008
Meter Number:
SM5R-04-00009FE5
Last Meter Reading: 0.00
Meter Brand: Spark
Meter Owner: Company
Meter Location: Pole
Meter Status: Usable

Executed On
15-Apr-2020 11:47 am

Pending Date
13-Apr-2020 2:15 pm

Pending By Assign To Executed By
Lakhan Gupta **Sanoj Kumar** **Sandeep Kumar Singh**
 Cluster Incharge Technician Service Incharge

2

Reject **Complete**

Amit Kumar
UPSONW02402
Meter Number: 770676
Last Meter Reading: 49.10
Meter Brand: Indotech- MF
Meter Owner: Consumer

Executed On
10-Mar-2020 1:29 pm

Pending Date
08-Mar-2020 4:43 pm

Pending By Assign To Executed By
Lakhan Gupta **Nitesh Kumar** **Nitesh Kumar**
 Cluster Incharge Technician Technician

3

3.8.3.3. Completed tab



1. **Navigation Bar** indicates current tab and allows switching by tapping or swiping
2. **Released Meter List** with information on each completed meter release activity
3. **Filter Bar** to narrow results by plant and time interval

The screenshot shows a mobile application interface for managing smart meters. At the top, there's a header bar with icons for signal strength, battery level, and time (5:28). Below the header, a navigation bar says "Unreleased Meters" with a back arrow icon.

The main content area has three tabs at the top: "Pending" (grey), "Review" (grey), and "Completed" (green, currently selected). To the right of these tabs are three blue boxes labeled 1, 2, and 3.

Below the tabs, there are filters: "Plant" set to "All Plants (371)", "From" set to "01-May-2020", and "To" set to "02-May-2020".

The first row of data (labeled 1) is for "Oshihar Rai" (BHFAKT01201). It shows the meter completed on "01-May-2020 1:20 pm". The last meter reading was "63.10". The meter brand is "Indotech", the owner is "Consumer", and the comment is "Ok". The execution date is "01-May-2020 12:21 pm". Pending by "Narender Abrol" (Operations & Sales Incharge), executed by "Sonu Kumar" (Technician), and completed by "Dharmraj Bishnudeo Singh" (State Incharge).

The second row of data (labeled 2) is for "Asharphi Sharma" (BHPRSA03401). It shows the meter completed on "01-May-2020 1:20 pm". The last meter reading was "94.74". The meter brand is "Spark", the owner is "Company", the location is "Pole", and the status is "Usable". Pending by "Narender Abrol" (Operations & Sales Incharge), executed by "Sonu Kumar" (Technician), and completed by "Dharmraj Bishnudeo Singh" (State Incharge).

3.8.4. Smart Meter Status

Functionality

- Gives limited access to smart Smart meter data
- The user may remotely switch meters on and off from here
- Refer to Section 3.4.5 for more information

3.8.5. Smart Feeder Status

Functionality


- The Smart Feeder Status Section allows a user to reset or change configuration of a Smart Feeder through the application

Key Users

Designation	Main Purpose	Example Use Case
-------------	--------------	------------------

Cluster In-charge	Control the state of the meter for all customers on a particular feeder	Shutting off a large number of meters in case of a technical emergency
State In-charge	Same as Cluster In-charge	Shutting off the meter of a customer whose faulty appliance is impacting the whole distribution network

Page Details

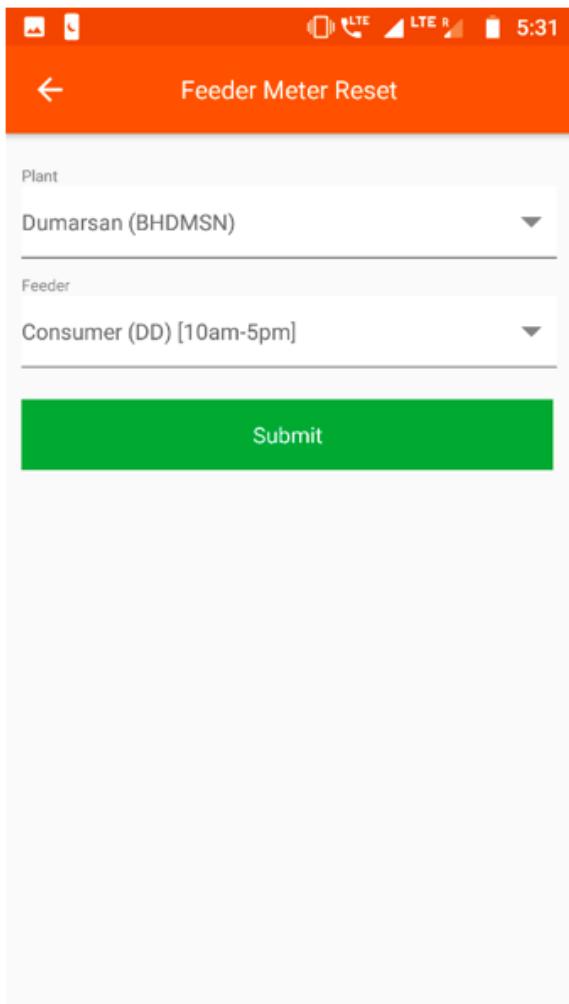

1. **Enter Details** for plant and feeder number

2. **Submit** to continue to the next page

1

Note that the feeder entry tab will only show once the plant has been selected

2

1. **Feeder Information** shown

2. **Meter Status** can be chosen between:

- Off
- On
- Auto

The user can also reset the meter to its default state by tapping the reset button



Feeder Meter Reset

Feeder Name: Consumer (DD) [10am-5pm]
Meter Number: 280348
Meter Status -

Meter Status

OFF

ON

Auto

OR

Reset Meter

1

2

3.8.6. Meter Reading

Functionality

- The Meter Reading Section shows the electricity meter readings which are required at each plant

Key Users

Designation	Main Purpose	Example Use Case
Technician	To view which customer meters need to be read	Planning which customers to visit for metering before the end of the month
CSA	Same as Technician	Same as Technician
Cluster In-charge	To check the number of pending meter readings	Contacting field agents to remind them about incomplete meter readings

State In-charge

Same as Cluster In-charge

Same as Cluster In-charge

Page Details

The screenshot shows a mobile application interface titled "Meter Readings". At the top, there are icons for signal strength, battery level, and time (5:31). Below the title is a table with columns: Site, Total, Pending, and Updated. The table lists ten sites: Dumarsan, Hardiya, Nabiganj, Taraiya, Gopalganj, Bansdih, Fakirtoli, Katsa, Saran 1, Bheldi, Derni, and a summary row "Total". The "Total" row has values 220, 220, and 0 respectively. The "Saran 1" row is highlighted with a blue background and has values 66, 66, and 0. A large blue box labeled "1" is positioned over the "Saran 1" row. Another blue box labeled "2" is positioned over the "Total" row. A third blue box labeled "3" is positioned over the "Pending" column of the "Saran 1" row.

Site	Total	Pending	Updated
Dumarsan	1	1	0
Hardiya	1	1	0
Nabiganj	42	42	0
Taraiya	0	0	0
Gopalganj	44	44	0
Bansdih	22	22	0
Fakirtoli	24	24	0
Katsa	20	20	0
Saran 1	66	66	0
Bheldi	2	2	0
Derni	42	42	0
Total	220	220	0

1. **List of Plants**, along with number of manually read meters at each plant, and number of meters still pending reading
2. **Green Rows** aggregates data for the cluster
3. **Total Bar** aggregates over all plants

Tapping a particular plant shows the user a list of pending meters, as shown in the next screenshot (note that this functionality is only available after the 24th of the month)

1. **Search Icon** allows the user to segregate the listed consumers at a plant
2. **Consumer List** enables the agent to review the consumer consumption history in terms of the previous reading values and the units consumed

Customer Name	Meter Number	Previous Reading Date	Previous Readings	Previous Units Consumed
Shiv Ji Rai BHNGNJ00301			0	0
Sukhdev Shah BHNGNJ01013			0	0
Philips Nabiganj BHNGNJ01015			0	0
Rahmuddin Alam BHNGNJ01109			0	0
Dr.anand Kumar BHNGNJ01115			0	0
Safi Ahmad BHNGNJ01221			0	0
Awadesh Pan Dukan BHNGNJ01222			0	0
Dr. Azizul Haque Ansari BHNGNJ01614			0	0

3.8.7. Meter Reading Review

Functionality

- The Meter Reading Review Section displays the number of pending meter readings reviews, plant wise
- The meter reading process is completed by agents at the beginning or end of a month to record the electricity consumption of households that do not have a smart meter

Key Users

Designation	Main Purpose	Example Use Case
CSA	To assess the number of consumers who are yet to undergo the meter reading	Assessing the number of completed reading reviews in a month
Cluster In-charge	To conduct a review on the consumers whose meter readings are still pending	Assessing the number of pending reviews within the cluster
State In-charge	Same as Cluster In-charge	Assessing the number of pending reviews at a plant

Page Details

The screenshot shows a mobile application interface titled "Meter Reading Approval". At the top, there's a header bar with icons for signal strength, battery level, and time (5:32). Below the header is a back arrow and the title "Meter Reading Approval". The main content is a table with two columns: "Site" and "Pending". The table lists several sites with their corresponding pending meter reading counts. A blue callout box labeled "1" points to the first row. Another blue callout box labeled "2" points to the second row. A third blue callout box labeled "3" points to the bottom row.

Site	Pending
Dumarsan	0
Hardiya	0
Nabiganj	0
Taraiya	0
Gopalganj	0
Bansdih	0
Fakirtoli	0
Katsa	0
Saran 1	0
Bheldi	0
Derni	0
Total	0

- Meter Readings Approvals** are shown in a tabular column with relevant data given plant wise
- Green Rows** aggregate the data for each cluster they represent
- Total Bar** aggregates the columnar data

2 Tapping onto a particular plant will give the user a functionality that is only available after the 24th of every month

3

3.8.8. TERMS Status

Functionality

- Gives access to smart TERMS meter data
- The user may remotely switch customer meters on and off from here

Key Users

Designation	Main Purpose	Example Use Case
Operator	To access information about and control of a customer's meter	Investigating why a customer meter may have tripped off – e.g. they are deactivated
Technician	Same as Operator	Switching a meter on or off
CSA	Same as Operator	Same as Technician
Cluster In-	Same as Operator	Same as Technician

charge		
State In-charge	Same as Operator	Same as Technician

Page Details

Plant
Fakirtoli (BHFAKT)

Total Consumers: 31

- Gautam Bhagat (BHFAKT03501) - BHFAKT005A
- Arun Singh (BHFAKT04005) - BHFAKT010A
- Medical Jaiprakash (BHFAKT04003) - BHFAKT010A
- Vinod Singh - 1 (BHFAKT04001) - BHFAKT010A
- Anandi Thakur (BHFAKT04103) - BHFAKT011A
- Santosh Sah (BHFAKT04006) - BHFAKT011A
- Sanjay Sah (BHFAKT04301) - BHFAKT011A
- Amit Singh (shop) (BHFAKT04104) - BHFAKT011A
- Dharmendar Sha Hotal (BHFAKT01007) - BHFAKT012A
- Nikhil Sah (BHFAKT00901) - BHFAKT012A
- Tuntun Kumar (BHFAKT00708) - BHFAKT012A

- 1.** **Plant Selection** must be made for the customer list to show
- 2.** **Customer List** of a particular plant
- **Red** —Inactive customer
 - **Green** — Active customer
- 3.** **Search Icon** used to filter the consumer list by typing in a name or meter number

Tapping a customer redirects to that meter's meter control page, shown in the next screenshot



- 1. Customer Information** provides relevant information on the customer and the assigned TERMS meter
- 2. Meter Status** can be changed by tapping ON, OFF or the Reset button



3.8.9. Battery Maintenance

Functionality

- The Battery Maintenance Section gives an overview on the battery banks at every plant
- The section allows the user to switch the battery pack on or off

Key Users

Designation	Main Purpose	Example Use Case
Technician	To change the state of a battery bank	Switching the battery status of a plant between on and off
Cluster In-charge	Same as Technician	Same as Technician
State In-charge	To check which batteries are online	Creating a report on the number of battery packs available at each plant

Page Details

Battery Bank Voltage Activity

Plant All Plants | May 2020 | 2:17

Bhardauliya

Total Battery Banks: 2
No of banks updated: 0
Remaining banks: 2
Last Updated Date:

Laliya

Total Battery Banks: 1
No of banks updated: 0
Remaining banks: 1
Last Updated Date:

Maharajganj Terai

Total Battery Banks: 2
No of banks updated: 0
Remaining banks: 2
Last Updated Date:

1

1. **Search Icon** can be used to filter out the list of plants shown

2

2. **Filter Bar** selects a particular plant and time period

3

3. **Plant List** displays relevant information on the battery status of each plant

Tapping on a plant tab will redirect the user to the plant's battery bank control page, explained in the next screenshot



Battery Banks (Bhardauliya)

Battery Bank 1

ON State

OFF State

Battery Bank 2

ON State

OFF State

1

1. **Battery Bank Status** can be used to switch a battery bank at the plant on and off

3.9. Water

3.9.1. Water Camper Sale

Functionality

- Gives an overview of water sales at relevant plants

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To monitor the water sales within the state	Understanding the number and value of water sales at different plants
State In-charge	Same as Cluster In-charge	Same as Cluster In-charge



Page Details

Coming Soon

3.10. Miscellaneous

3.10.1. Overview

	Gallery View photos taken at different plants
	Add Images Upload images from plants
	Contacts Search for employee contact details
	Notification View SMS being sent or received
	Plant Shutdown Message Send SMS alerts to customers
	SUG Information to be added

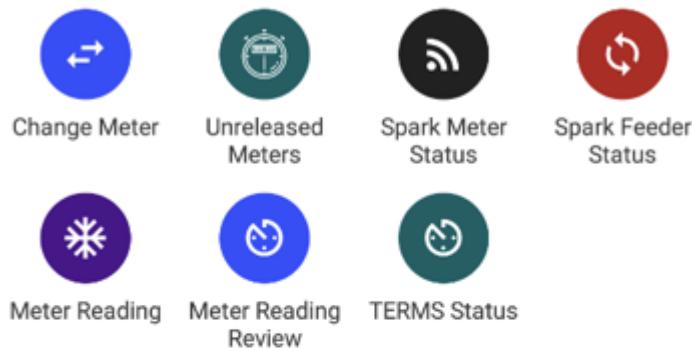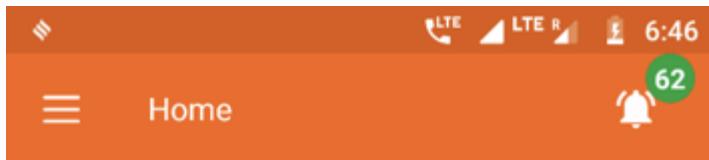


Water



Water Camper
Sell

Miscellaneous

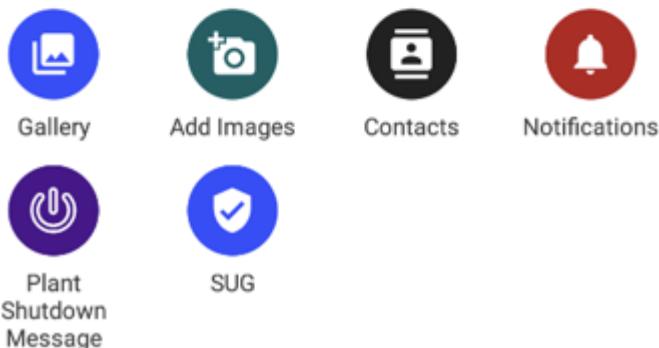

3.10.2. Gallery

Functionality

- The Gallery Section contains images of each plant

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To view pictures from various plants within the state	Viewing photos of an activity at the plant
State In-charge	Same as Cluster In-charge	Showing external stakeholders the plant layout

Page Details



1. **Gallery Section** used to display pictures from each plant

2. **Filter** used to display pictures with respect to:

- Nature of Activity
- Date

3.10.3. Add Images

Functionality

- For uploading photos relevant to a particular plant

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To add pictures onto the application data base	To add pictures based on a particular type of an activity
State In-charge	Same as Cluster In-charge	To add pictures from a visit that had taken place to a plant in the state

Page Details



Plant

Select Plant

Activity Date



Nature of Activity

1

1. **Add Images** along with relevant supporting information

2. **Image Upload** from the phone gallery or the camera

Note that only 5 images can be added at a time

Attach maximum five images at a time to upload



3.10.4. Contacts

Functionality

- Lists every operator working for the company along with their contact details

Navigation

This page is also accessible from the Main Menu: Refer to Section 3.4.7 for details.

3.10.5. Notifications

Functionality


- The Notification Section allows the user to view all the SMS messages that have been sent or received

Key Users

Designation	Main Purpose	Example Use Case

All Employees	Access to the SMS messages sent by the company	To verify an SMS sent by the company even if the agent might have deleted the SMS off the phone memory
---------------	--	--

Page Details

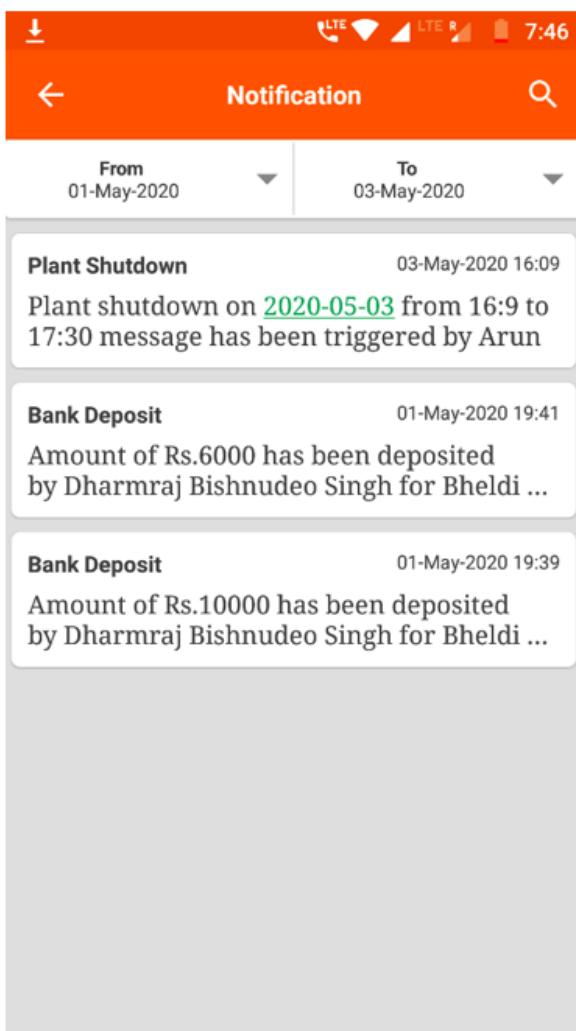

1. **Message List** displays the content of a particular SMS along with the date and time it was sent
2. **Search Icon** that helps finding a particular SMS by typing in the topic name
3. **Filter Bar** used to narrow results displayed by giving from and to dates

3.10.6. Plant Shutdown Message

Functionality

- Allows user to send an SMS to a subset of customers, warning them of a plant shutdown

Key Users

Designation	Main Purpose	Example Use Case
Cluster In-charge	To notify customers at a plant about a scheduled shut down	Messaging all customers that the plant requires maintenance for the next three hours
State In-charge	Same as Cluster In-charge	Same as Cluster In-charge

Page Details

The screenshot shows a mobile application interface for sending an SMS. At the top, there's a header bar with icons for signal strength, battery level, and time (12:22). Below the header, the title "Plant Shutdown SMS" is displayed. The form consists of several input fields:

- Site:** A dropdown menu labeled "Select Plant".
- Date:** A dropdown menu labeled "Select Date" with a calendar icon.
- Start Time:** A dropdown menu labeled "Select Start Time" with a clock icon.
- End Time:** A dropdown menu labeled "Select End Time" with a clock icon.
- SMS Template:** A text area containing the message: "प्रिय ग्राहक, ताराऊर्जा प्लांट के मैटिनेस कार्य के लिए आज सप्लाई --:- से --:- तक बंद रहेंगी। असुविधा के लिए खेद है।"

At the bottom right is a large green button labeled "Submit".

1. **Input Details** to complete the submission of data to send an SMS

2. **SMS Template** which describes the message that would be sent

3. **Submit** sends the message

2

3

3.10.7. SUG

Functionality

- The SUG Section identifies and creates consumer pools in various plants
- The section is only available for HCLF agents

Key Users

Designation	Main Purpose	Example Use Case
Operator	Maintaining a report on all the active SUGs at a plant	Reviewing the list of SUG members and contacting the relevant member
CSA	Same as Operator	Same as Operator
Cluster In-charge	Same as Operator	Same as Operator

Page Details

The screenshot shows a mobile application interface for managing SUG (Self Help Group) members. At the top, there's a header bar with icons for signal strength, battery level, and time (8:36). Below the header, the title "SUG List" is displayed, followed by a search icon and a blue button labeled "3". The main content area contains four entries, each representing a SUG with its details and a "Members" button:

- Brahm Dev Ji Saur Urja Samiti**
(Basantpur)
A/C No.: 743310110005426
IFS Code: BKID0007433
Branch Name: BOI-Tikari
- Shri Bhuihare Baba Saur Urja Samiti**
(Bhiri)
A/C No.: 743310110005434
IFS Code: BKID0007433
Branch Name: BOI-Tikari
- Bhure Baba Saur Urja Samiti**
(Darshankheda)
A/C No.: 743310110005428
IFS Code: BKID0007433
Branch Name: BOI-Tikari
- Hari Dev Raja Saur Urja Samiti**
(Fatehpur)
A/C No.: 743310110005427
IFS Code: BKID0007433

1. **SUG List** showing the SUG name and bank details
2. **Members Button** redirects to the list of SUG members, as shown in the next screenshot
3. **Search Icon** to find a particular SUG by typing the name



SUG Member List

1. **Member List** contains the name and details of the members of the SUG

The member can be called by tapping

2. **Search Icon** used to narrow down the results of the member list by typing

8:36

SUG Member List

2

Anil kumar trivedi

(President)

Mobile Number: 9621207806

Father's Name: Janardan prasad

DOB: 01-Jan-1969

Occupation: Agriculture



1

A

Parul gupta

(Treasury)

Mobile Number: 9936630069

Father's Name: Shravan kumar

DOB: 01-Jan-1996

Occupation: NA



P

Pramod trivedi

(Secretary)

Mobile Number: 9005111146

Father's Name: Jay prakash

DOB: 01-Jan-1983

Occupation: Agriculture



P

Roop narayan

(Member)

Mobile Number:



Father's Name: Umray

DOB: 01-Jan-1967

Occupation: NA

R

3.11. FAQ

(i) NOTE

How do I register a customer's payment?

- Navigate to the Receivable module (from the home page or from the main menu).
- From the list, select the customer who is making the payment and tap "Add Transaction".
- Enter the amount paid and for which service the payment is being made.
- A customer receipt can then be generated from the Transaction tab.

(i) NOTE

How do I update a customer's contact details?

- Access a specific customer's account page through the Customer List module.
- Click the pencil icon next to the relevant section.
- The customer may have to confirm the update through an OTP.

(i) NOTE

How do I assign a pending task to a field agent?

- Field agents must implement service requests, package changes, meter releases, etc.
- To assign such a task to a particular agent, go to that task's page and select the "pending" tab.
- From the list of pending tasks, locate the one you wish to assign and tap its "reassign" button.
- The field agent may then be selected from a list of available agents. They will be automatically notified of the assignment, and can be contacted through the app for clarification.

(i) NOTE

How do I identify which customers to approach for billing?

- Navigate to the Receivable module and select a plant.
- Customers are listed along with the amount owed.
- The field agent can sort the list in descending size of bill to prioritise customers

 **NOTE**

How do I monitor which customer meters to read?

- Meter readings take place towards the end of the month.
- The Meter Reading page itemises the number of pending readings for each plant.
- Selecting a plant will show a list of meters to be read.
- Readings can then be added to each meter.

 **NOTE**

How do I check the amount of cash held by the field team?

- Go to the Bank Deposit module in the Plant section of the Home Page.
- Select the In Hand Cash tab.
- The amount collected and deposited in the billing period will be shown, along with the amount of undeposited cash held locally.

4. Chapter 4: Customer App.

User guide for the MCOMS

Customer App

4.1. Introduction

The customer app gives mini-grid customers detailed access to their account and records, and is the easiest way to avail company promotions or report issues to the field team. It is recommended that all customers with smartphones download and use the app; those without smartphones may use alternative communication channels.

4.2. Installation and Setup


- The field agent app runs on the Android operating system
- Hardware requirements are shown in Table.

Table 2: Customer app hardware requirements.

App version	1.0.9
Operating system	Android
Storage	6.84 MB
Memory	17 kB
Web connectivity	Enabled


- The app can be downloaded from the Google Play store and other app repositories.

- To locate the app, the user can type “TARAurja” into the search bar.

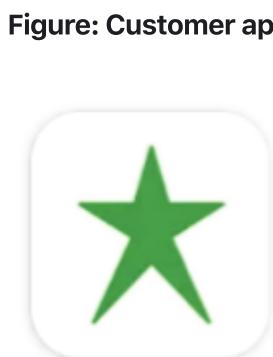

TARAurja
TARA

- Upon opening the application, the user is prompted for their login credentials, as shown in the screenshot below.

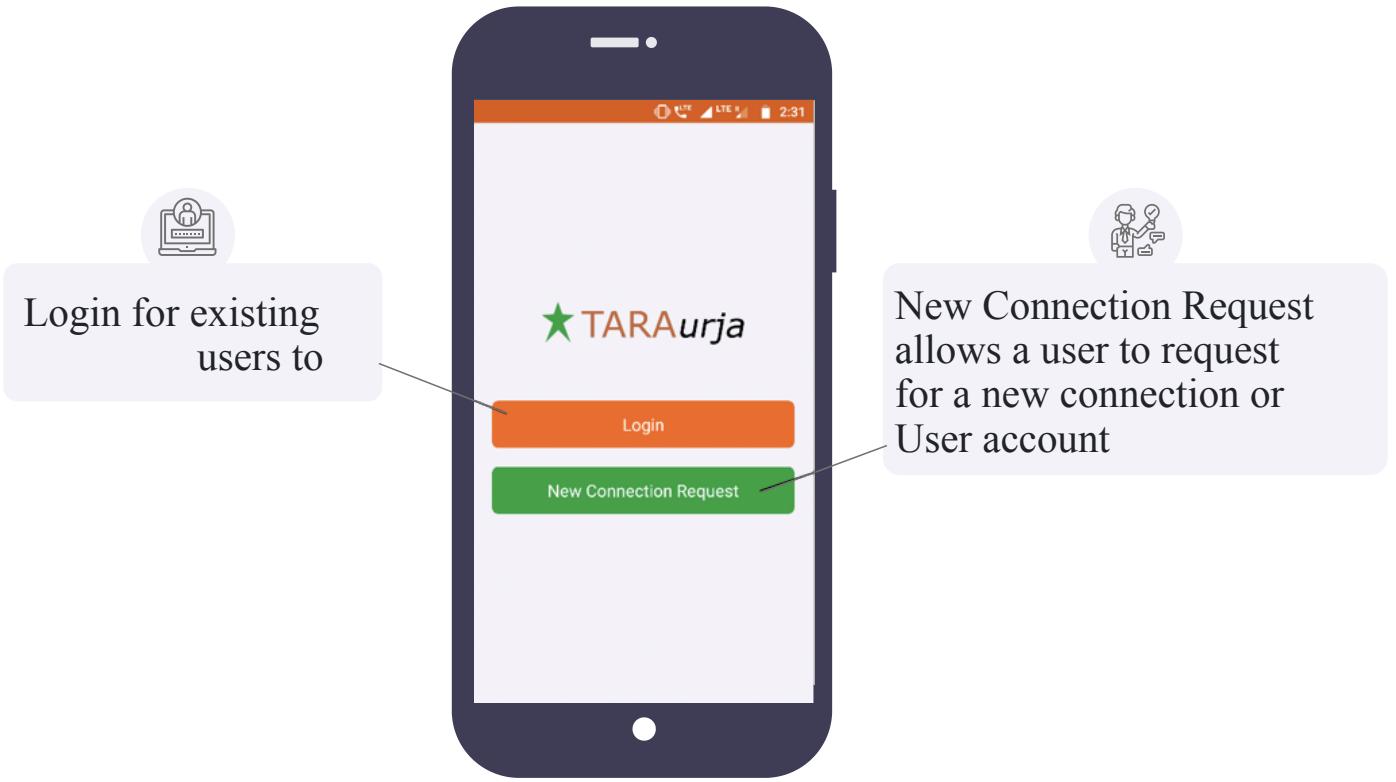

4.2.1. New Connection Request


Functionality

- Allows the app user to register a request for a new connection or account
- This can be done for the user or on behalf of another

Page Details

1. **New Customer Request** either for the app user or for someone else

Tapping on either of the two option redirects to a new connection page, explained in the next screenshots

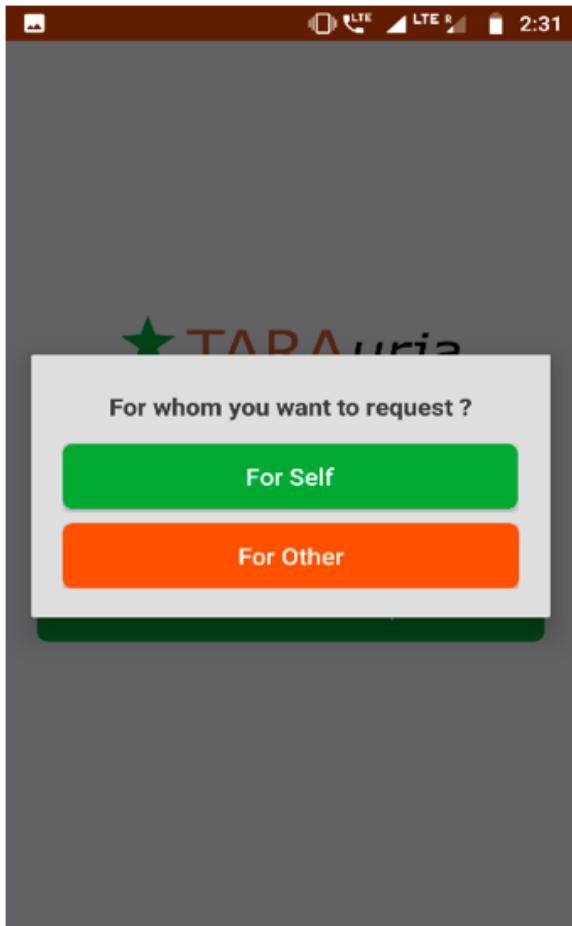

New Connection

Name

Mobile Number

State

Please select state

Plant

Please select plant


VERIFY WITH OTP

For Self

1. **Data Sheet** where the user enters relevant data
2. **Verify with OTP** button is tapped to trigger OTP sharing via SMS (sent to the submitted phone number). Confirming the OTP completes the process.

For Other

1. **Data Sheet** where the user enters relevant data

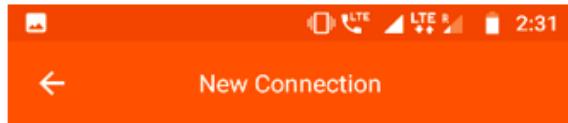

Name

Mobile Number

1

Reference Person Name

Reference Person Mobile No

State

Please select state

Plant

Please select plant

VERIFY WITH OTP


2

2. **Verify with OTP** button is tapped to trigger OTP sharing via SMS (sent to the submitted phone number). Confirming the OTP completes the process.

4.2.2. Login

Functionality *The login page allows existing users to securely access their account.

Page Details

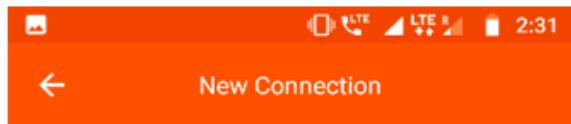

Name

For Other

Mobile Number

1

Reference Person Name

Reference Person Mobile No

State

Please select state

Plant

Please select plant

VERIFY WITH OTP

2


1. **Mobile Number** registered to the account
2. **Log in** by tapping the button

4.3. Dashboard

Functionality

- The Dashboard is the homes screen of the app.
- It lays out the various functionalities that can be used by the customer; these are discussed below.

Page Details

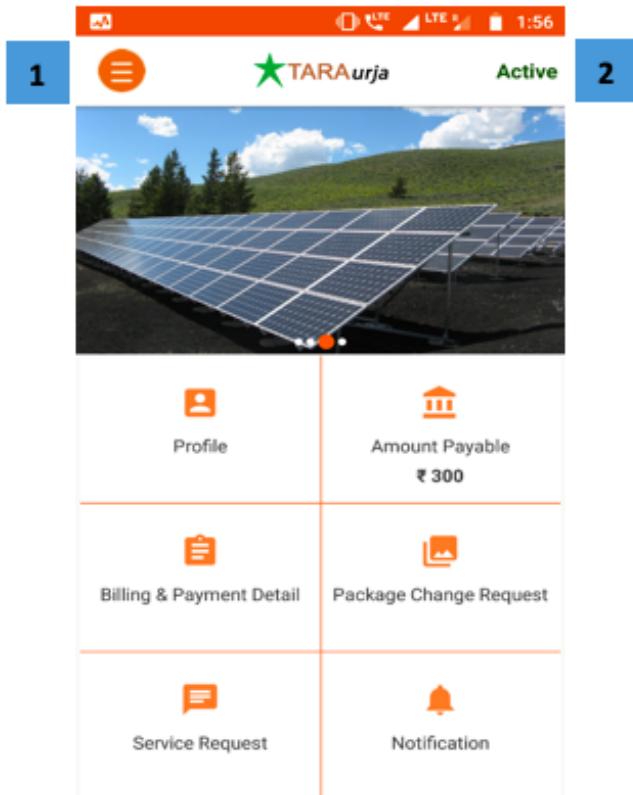

1. **Main Menu** icon (see Section 0)
2. **Status** of the consumer: either active or inactive



Profile



Amount Payable



Bill and Payment Detail



Package Change Request



Service Request



Notification



Scheme & Offers





E-Payments

4.4. Main Menu

Functionality

- The Main Menu can be accessed by tapping on the icon on the top right of the screen
- It provides an alternative method for navigating the app, accessible from several other pages.

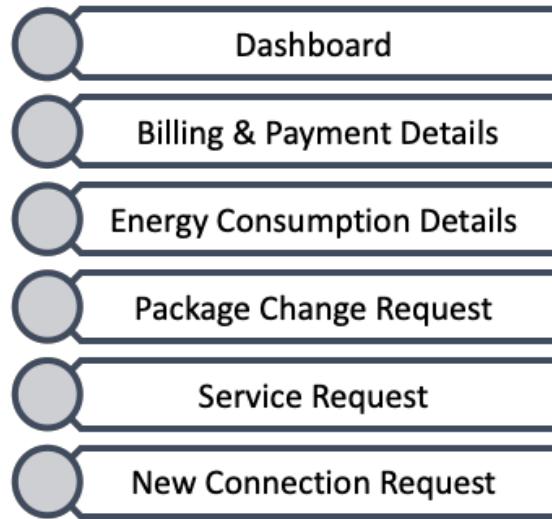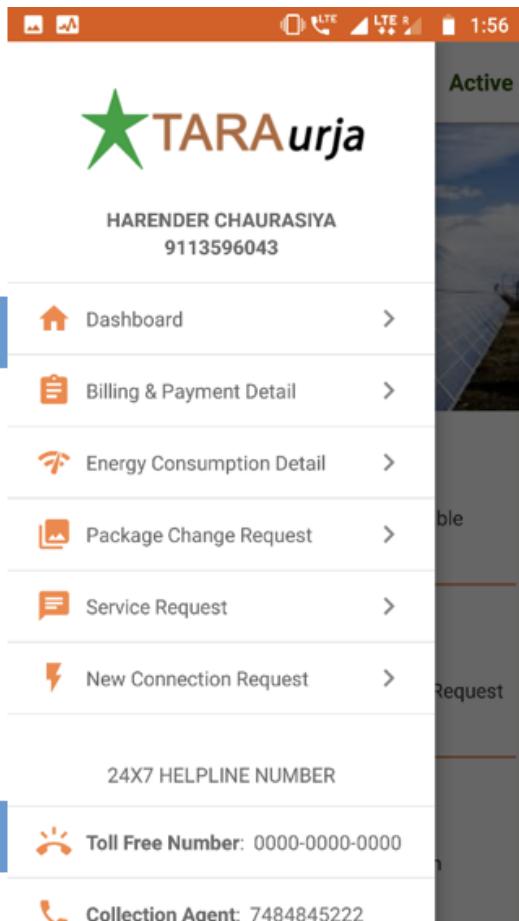

1. Main Menu Functionalities accessed by tapping
2. Phone Numbers of the central helpline and the local customer service agent

The functionality of each Main Menu item / Dashboard item is described in the sections that follow.

4.5. Profile

Functionality

- The Profile page gives the user access to their account details.
- This includes personal information, past payments, and energy consumption.

Profile	Payments	Meter Readings
Consists of profile details of the consumer	Chronological list of individual payments	Chronological record of energy consumption

4.5.1. Profile

Functionality

- The Profile section contains important profile information of the user

Page Details

The screenshot shows a mobile application interface for a profile page. At the top is a navigation bar with icons for signal strength, battery level, and time (8:51). Below the navigation bar is a header with a back arrow and the word "Profile". Underneath the header are three tabs: "Profile" (which is green and underlined, indicating it is selected), "Payments", and "Meter Reading". The main content area is divided into several sections. The first section is "Basic Profile" which contains the following information:
Consumer Id: BHMSN00611
Consumer Name: Harender Chaurasiya
Father's Name: Ganesh Bhagat
Email Id: gopalganj@tara.in
Activation Date: 24-Feb-2018. The second section is "Connection Detail" which contains:
Plant: Dumarsan
Feeder: FEEDER8 (Consumer (DND) [24Hrs])
Consumer Category: Shop Advance
Consumer Type: Computer Shop
Amount Payable: ₹ 300
Status: active. The third section is "Mobile" which contains:
Mobile Number: 9113596043
(Primary)

1. **Navigation Bar** indicates the current tab and allows



switching between tabs

2. **Basic Profile** that consists of information on the user

3. **Connection Details** shows the customer's electricity package details

4. **Mobile** number linked to the account

3

4

4.5.2. Payments

Functionality

- The Payments page gives a chronological record of bills issued to the customer, and payments they have made

Page Details

The screenshot shows a mobile application interface for managing payments. At the top, there is a navigation bar with icons for signal strength, battery level, and time (8:51). Below the bar, the word "Profile" is displayed next to a back arrow. The main content area has three tabs: "Profile" (disabled), "Payments" (selected and highlighted in green), and "Meter Reading". The "Payments" tab contains a list of four bills, each with the following details:

- Receipt No:** BHMSN887949
- Date:** 10-Mar-2020 8:32 pm
- Charges:** ENERGY
- Amount:** ₹ 250
- Total Amount:** ₹ 250

- Receipt No:** BHMSN887777
- Date:** 10-Feb-2020 3:21 pm
- Charges:** ENERGY
- Amount:** ₹ 250
- Total Amount:** ₹ 250

- Receipt No:** BHMSN887563
- Date:** 10-Jan-2020 1:47 pm
- Charges:** ENERGY
- Amount:** ₹ 250
- Total Amount:** ₹ 250

- Receipt No:** BHMSN887366
- Date:** 10-Dec-2019 3:40 pm
- Charges:** ENERGY

- Navigation Bar** indicates the current tab and allows switching between tabs
- Payments List** itemises and timestamps all payments made by the customer, along with other relevant information concerning the bill

1

2

4.5.3. Meter Readings

Functionality

- The Meter Reading page give a chronological list of the customer's energy consumption.
- The frequency of meter readings will vary depending on their connection type.

Page Details

The screenshot shows a mobile application interface for managing a profile. At the top, there's a navigation bar with icons for signal strength, battery level, and time (8:51). Below the bar, the word "Profile" is centered. Underneath, there are three tabs: "Profile", "Payments", and "Meter Reading". The "Meter Reading" tab is highlighted with a green background and white text. A blue callout box labeled "1" points to this tab. Below the tabs, the text "Meter Number" is followed by "SM5R-02-00002BC1 (A2.1(DN)/24/250)". A dropdown arrow icon is to the right of the meter number. The main content area contains four entries, each representing a different date and its corresponding meter reading details. Each entry is preceded by a blue callout box labeled "2" or "3".

1. **Meter Reading** details shown in a chronological order along with other relevant information concerning the meter reading

2. **Meter Number** can be chosen in case the customer has multiple connections

3. **Meter Reading** indicates the current tab and allows switching between tabs

Meter Number: SM5R-02-00002BC1 (A2.1(DN)/24/250)

Date: 04-Apr-2020 8:30 pm (04-Apr-2020 8:15 pm)
Package: A2.1(DN)/24/250
Meter Reading: 34.45
Unit Count: 0.04

Date: 03-Apr-2020 11:30 pm (03-Apr-2020 11:15 pm)
Package: A2.1(DN)/24/250
Meter Reading: 34.41
Unit Count: 0.04

Date: 02-Apr-2020 11:30 pm (02-Apr-2020 10:45 pm)
Package: A2.1(DN)/24/250
Meter Reading: 34.37
Unit Count: 0

Date: 01-Apr-2020 11:30 pm (01-Apr-2020 11:15 pm)
Package: A2.1(DN)/24/250
Meter Reading: 34.37

4.6. Amount Payable

Functionality

- The Amount Payable section shows the total outstanding amount that the user must pay to the company
- The amount is broken up according to the type of service

Page Details



4.7. Billing and Payment Detail

Functionality

- The Billing and Payment Details page details each transaction (credits and debits) registered to the user account.
- The customer's account information is also summarised.

Page Details

The screenshot shows a mobile application interface for 'Billing & Payment Detail'. At the top, there is a header bar with icons for signal strength, battery level, and time (8:50). Below the header, the title 'Billing & Payment Detail' is displayed. The main content area contains consumer information and a transaction table.

Consumer Information:

- Consumer Id: BHDSMN00611
- Consumer Name: Harender Chaurasiya
- Father's Name: Ganesh Bhagat
- Mobile Number: 9113596043
- Email Id: gopalganj@tara.in
- Activation Date: 24-Feb-2018
- Plant: Dumarsan
- Feeder: FEEDER8 (Consumer (DND) [24Hrs])
- Consumer Category: Shop Advance
- Consumer Type: Computer Shop
- Amount Payable: ₹ 300

Transaction Table:

Details	Cr	Dr	Bal
Transaction Date: 01-Apr-2020 12:49 am			
Particulars: CHG-Apr, 2020-A2.1(DN)/24/250	-	250	300
Entry Type: CHG	2		
Credit By: Server			
Unit Count: 0.00			
Transaction Date: 10-Mar-2020 8:32 pm			
Particulars: Collection-Mar,			

1. **Master Information** about the user account


2. **List of Transactions** stating the amounts paid by (debit) and credited to the customer, along with the running balance amount owed

4.8. Package Change Request

Functionality


- The Package Change Request section allows the customer to upgrade or downgrade their electricity package.
- It also lists the customer's past packages.

Page Details

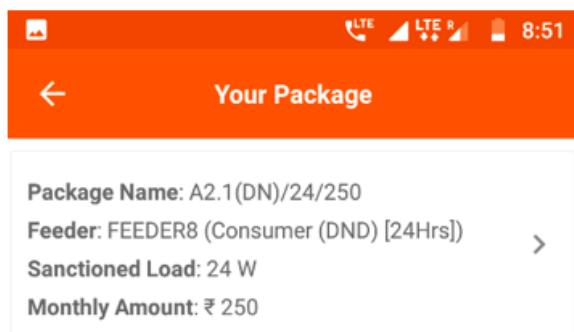

1. **Subscribed Package List** shows details of past packages

Tapping on the package list item redirects to the change package section, explained in the following screenshot

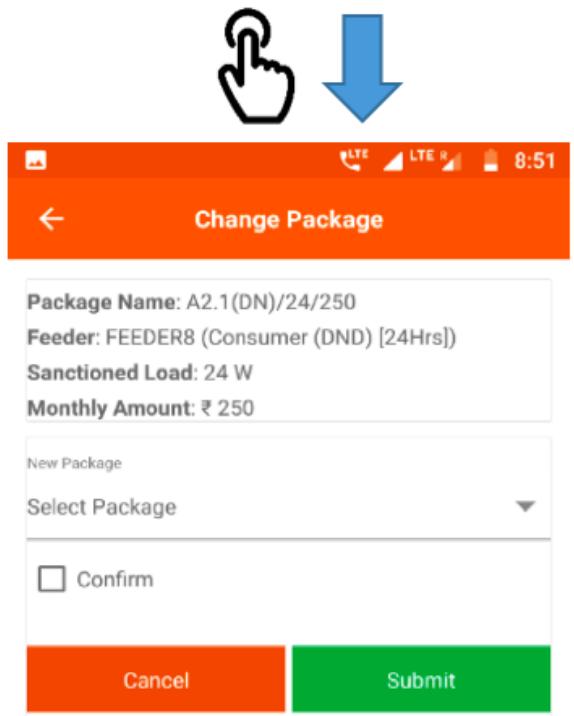

1. **Subscribed Package** shows details of the current package

2. **Select New Package** from a dropdown of available packages


3. **Submit** tapped to complete the request, having (ticked the confirm box)

4.9. Service Request

Functionality

- The Service Request page allows a customer to register a new request with the company
- It also displays a record of past requests

Page Details

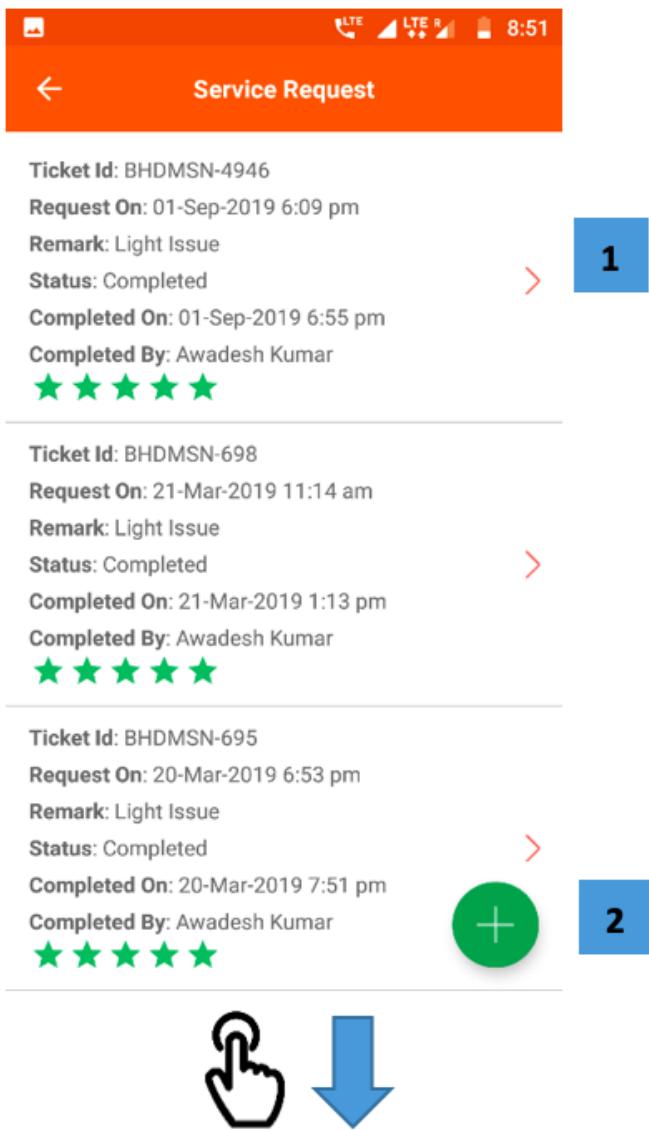


1. **Past Service Requests** shown chronologically, with relevant information

2. **Add Service Request** option allows the user to register a new service request

Tapping the Add Service Request will redirect you to the Add Service Request Page explained in the following screenshot

- Service Request** Type selected from a dropdown list
- Additional Remarks** on the nature of the request or problem being faced
- Submit** must be tapped to complete the form; the new request will be logged on the Service Request page

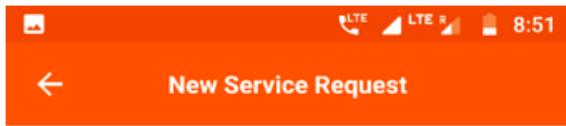

Request For

Light Issue

1

Remark

Light Issue



Your comments

2

SUBMIT


3

4.10. Notification

Functionality

- The Notification page lists all historical communications from the company, including bill alerts, payment receipts, plant shutdown messages, and more.
- The user will also receive SMS copies of the same messages; however, the ones stored here cannot be deleted.

Page Details

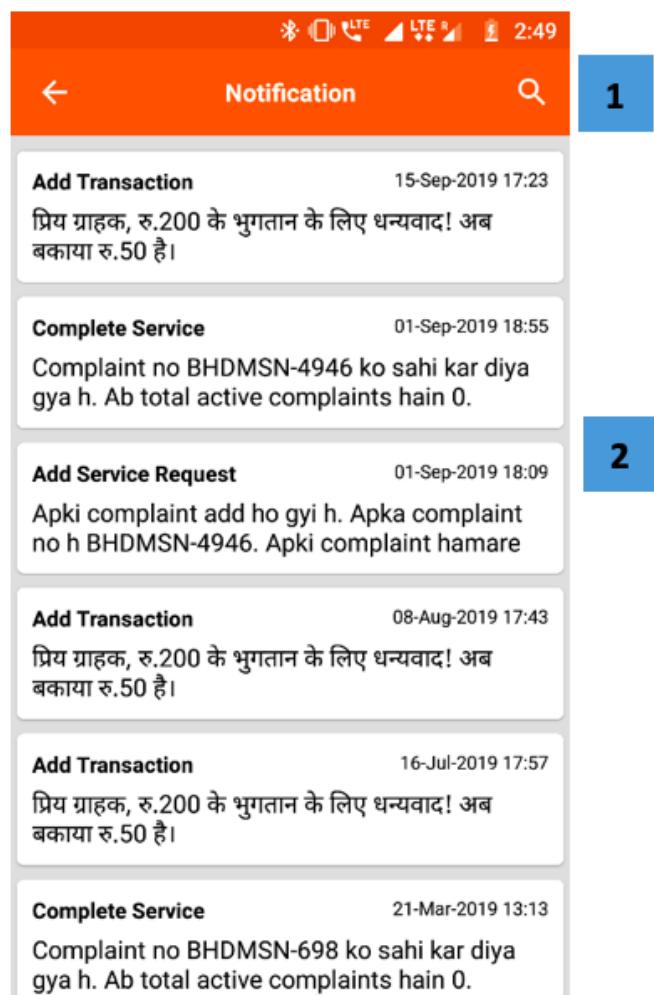

1

- Search Icon** used to filter the messages by typing in key words
- Message List** shows all communications from the company in chronological order

2

4.11. Schemes and Offers

Functionality

- The Schemes and Offers page allows customers to avail discount coupons.

Page Details



1. **Coupon Details** and reason for discounts are shared by the company at the top of the section



- Coupon List** shows dates and amounts of past coupons as well as those which will be available in the future; coupons available now can be tapped to begin redeeming them



Coupons

**SPI Coupon**

Coupon for June-2020

Redeem Date
09-Jun-2020

₹ 150

नियम और शर्तें लागू *

1

Redeemed

**SPI Coupon**

Coupon for July-2020

Activation Date
01-Jul-2020

InActive

Validity 10-Jul-2020

नियम और शर्तें लागू *

**SPI Coupon**

Coupon for August-2020

Activation Date

4.12. FAQ

NOTE

How do I contact the local company representative?

- Their number is shown in the Main Menu.
- In an emergency, you should visit the mini-grid plant in person, and the plant operator will assist you.

NOTE

How do I check my past payments?

- From the home screen Dashboard, select Billing and Payment Detail.
- This shows a complete searchable list of all past transactions.

NOTE

What do I do if my connection unexpectedly cuts?

- Check the Notifications page for any messages about planned electricity outages.
- Check your balance from the Amount Payable page -- if you have not paid your bill, your connection may be cut automatically.
- Log a service request through the Service Request page by entering the details of the problem, and a company agent will be notified.

NOTE

Can someone get a connection without the smartphone app?

- Anyone can request a new connection for themselves or for someone else through the smartphone app.
- A company representative will also be happy to assist in creating an account and registering new users.

APPENDICES

A. Glossary

A.1. Terms and Acronyms

Term	Acronym	Definition
Activation charge	ACT	Connection downpayment billed to new customers
Diesel generator	DG	Electricity generators which run on diesel fuel
Dispatch		Energy (kWh) fed into the plant's distribution network
Electricity charge	CHG	Bill amount for electricity consumption
Energy efficient device	EED	An electrical appliance that may be offered by the company to customers as part of a scheme
Equated monthly instalment	EMI	Monthly payments made against a loan or deferred charge
Generation		Energy (kWh) generated by energy sources (solar panels + DG)
Kilowatt	kW	A standard unit of power or load, equal to one thousand watts
Kilowatt-hour	kWh	The energy equivalent to one kW operating for one hour
Maximum power point tracker	MPPT	A device used to modulate the output of a solar array
Micro-enterprise development	MED	A small business supported by the company
Mini-grid Communications and Operations Management Suite	MCOMS	A set of electronic tools for mini-grid operators to improve their business performance
Point of sale	POS	Cash collection from customers in person by field agents
Turnaround Time	TAT	The amount of time taken by field agents to respond to and resolve a customer service request
Watt	W A	standard unit of power or load

A.2. Smartphone App Icons

Tapping: the user should tap on a particular area to explore the functionality



Scroll: the user may scroll up-down to explore the page




Data Entry: the user may fill in data to update the information on the application



Down: Direction in which the page would move on scrolling



Left–Right Navigation: the user may swipe left or right to navigate through a

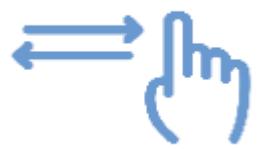

Rotate Screen: Insists the user to rotate the screen to view the given page

