

LED INDICATION

X2 CHARGER CASE left LED is charge indication/ right is subscription status

Left LED red	One or more transponders are charging
Left LED green	All transponders are fully charged
Right LED red	One or more transponders without a valid subscription
Right LED green	All transponders have valid subscription

M8 CONNECTOR ON X2 TRANSPONDER

Flashing red per second	X2 Transponder is charging
Flashing red quickly	No valid subscription or no active subscription
Green flashing	Number of flashes indicates days left before charging again
Not flashing	Battery is empty or in Power Save mode
Solid green	Battery fully charged


X2 RACEKEY

((●)) CHARGING STATUS

Red	X2 Transponder is charging
Green	X2 Transponder is fully charged
Both LEDs flashing	If both LEDs are flashing red, battery is broken.

⌚ SUBSCRIPTION STATUS

Red	No valid subscription or no active subscription
Green	Activated and valid subscription

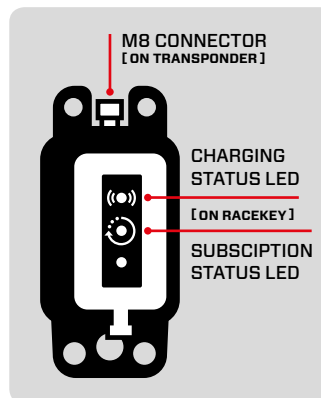

NOTE: the LED lights on the X2 RaceKey show a different status in the X2 Charger Case than when used on an X2 Transponder.

TECHNICAL SPECIFICATIONS

Dimensions:	50.8 x 37.3 x 14.7 cm (L x W x H) (20x14.7x5.8 inch)
Weight with 30 transponders:	Approx. 9 kg (19.8lb)
Weight empty:	Approx. 4.5 kg (9.9lb)
Power consumption:	Max. 60W
Operating temperature range:	-10 - 40° C (14 - 104 °F)
Operating voltage range (adapter)	100 - 240 VAC~
Frequency	50 - 60 Hz



This device complies with part 15 of the FCC rules, the EMC directive 2004/108/EC and RTTE directive 1999/5/EC and this equipment has been tested and found to comply with the limits for RoHS compliant materials. This device complies with A copy of the declaration of conformity can be obtained at: MYLAPS B.V. - Zuiderhoutlaan 4 - 2012 PJ Haarlem - The Netherlands



X2 CHARGER CASE - V1.0. - OCTOBER 2017 - © MYLAPS RIGHTS RESERVED

MYLAPS

MYLAPS.COM

X2 CHARGER CASE

QUICK START GUIDE



EXPERIENCE PROGRESS

WHAT'S IN THE BOX?

Depending on the order the X2 Charger Case either comes with or without X2 Transponders.



- ▶ X2 Charger Case
- ▶ Quick Start Guide
- ▶ USB cable (for future use)

OPTIONAL:


- ▶ 30 X2 Transponders with subscription.
- ▶ 30 X2 RaceKeys
- ▶ 50 X2 transponder holders
- ▶ Power cable

1 USB Connector.

For future functionality such as firmware update and subscription synchronization

2 Power connector.


Use the power cable and adapter to power the X2 Charger Case

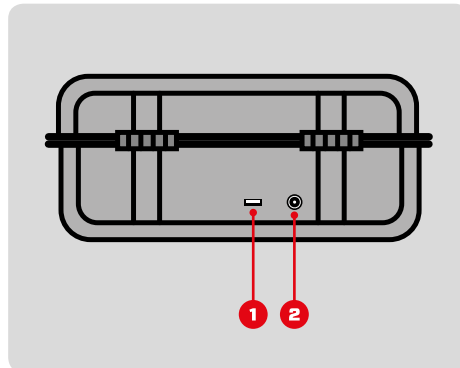


HOW TO USE THE X2 CHARGER CASE

- ▶ The X2 Charger Case charges up to 30 X2 Transponder at the same time
- ▶ The X2 Transponders will fully charge within 4 hours and then last a minimum of 5 days
- ▶ All X2 Transponders in this case have an active subscription and are ready for use

To charge the X2 Transponder connect the X2 RaceKey to the X2 Transponder and place both in the X2 Charger Case, while putting pressure on the X2 RaceKey. Once connected the LED's of X2 RaceKey will go on and remain on as long as the X2 Charger Case is connected to power.



LED INDICATION

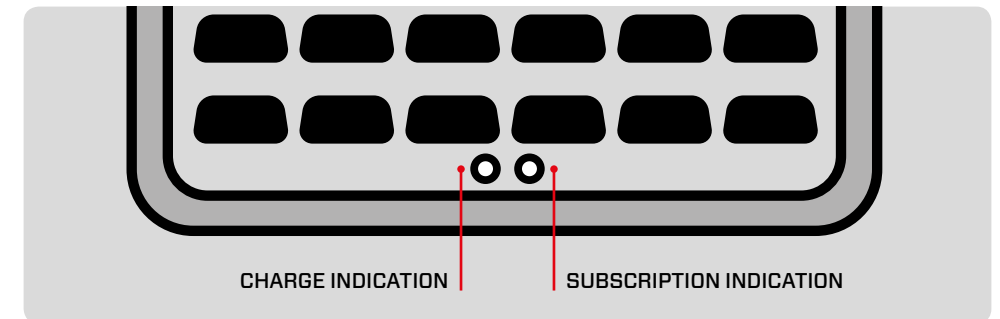

IN CASE YOU ENCOUNTER ANY ISSUES, PLEASE CONTACT YOUR LOCAL OFFICE

MYLAPS EMEA Office
Haarlem, The Netherlands
☎ +31 (0)23 760 0100
✉ info@mylaps.com

MYLAPS Americas Office
Atlanta, USA
☎ +1 678 816 4000
✉ info.americas@mylaps.com

MYLAPS Japan Office
Tokyo, Japan
☎ +81 3 6418 8209
✉ info.japan@mylaps.com

MYLAPS APAC Office
Sydney, Australia
☎ +61 2 9533 1100
✉ info.asia.pacific@mylaps.com

MYLAPS Asia Office
Selangor, Malaysia
☎ +60 3 5613 1235
✉ info.asia@mylaps.com