


TICKER SPINNER v0.2


GENERAL ARRANGEMENT - TOP, SIDE AND SECTION

A. TOP VIEW


45 TOP RGB
15 PER ARM
PITCH 2.20

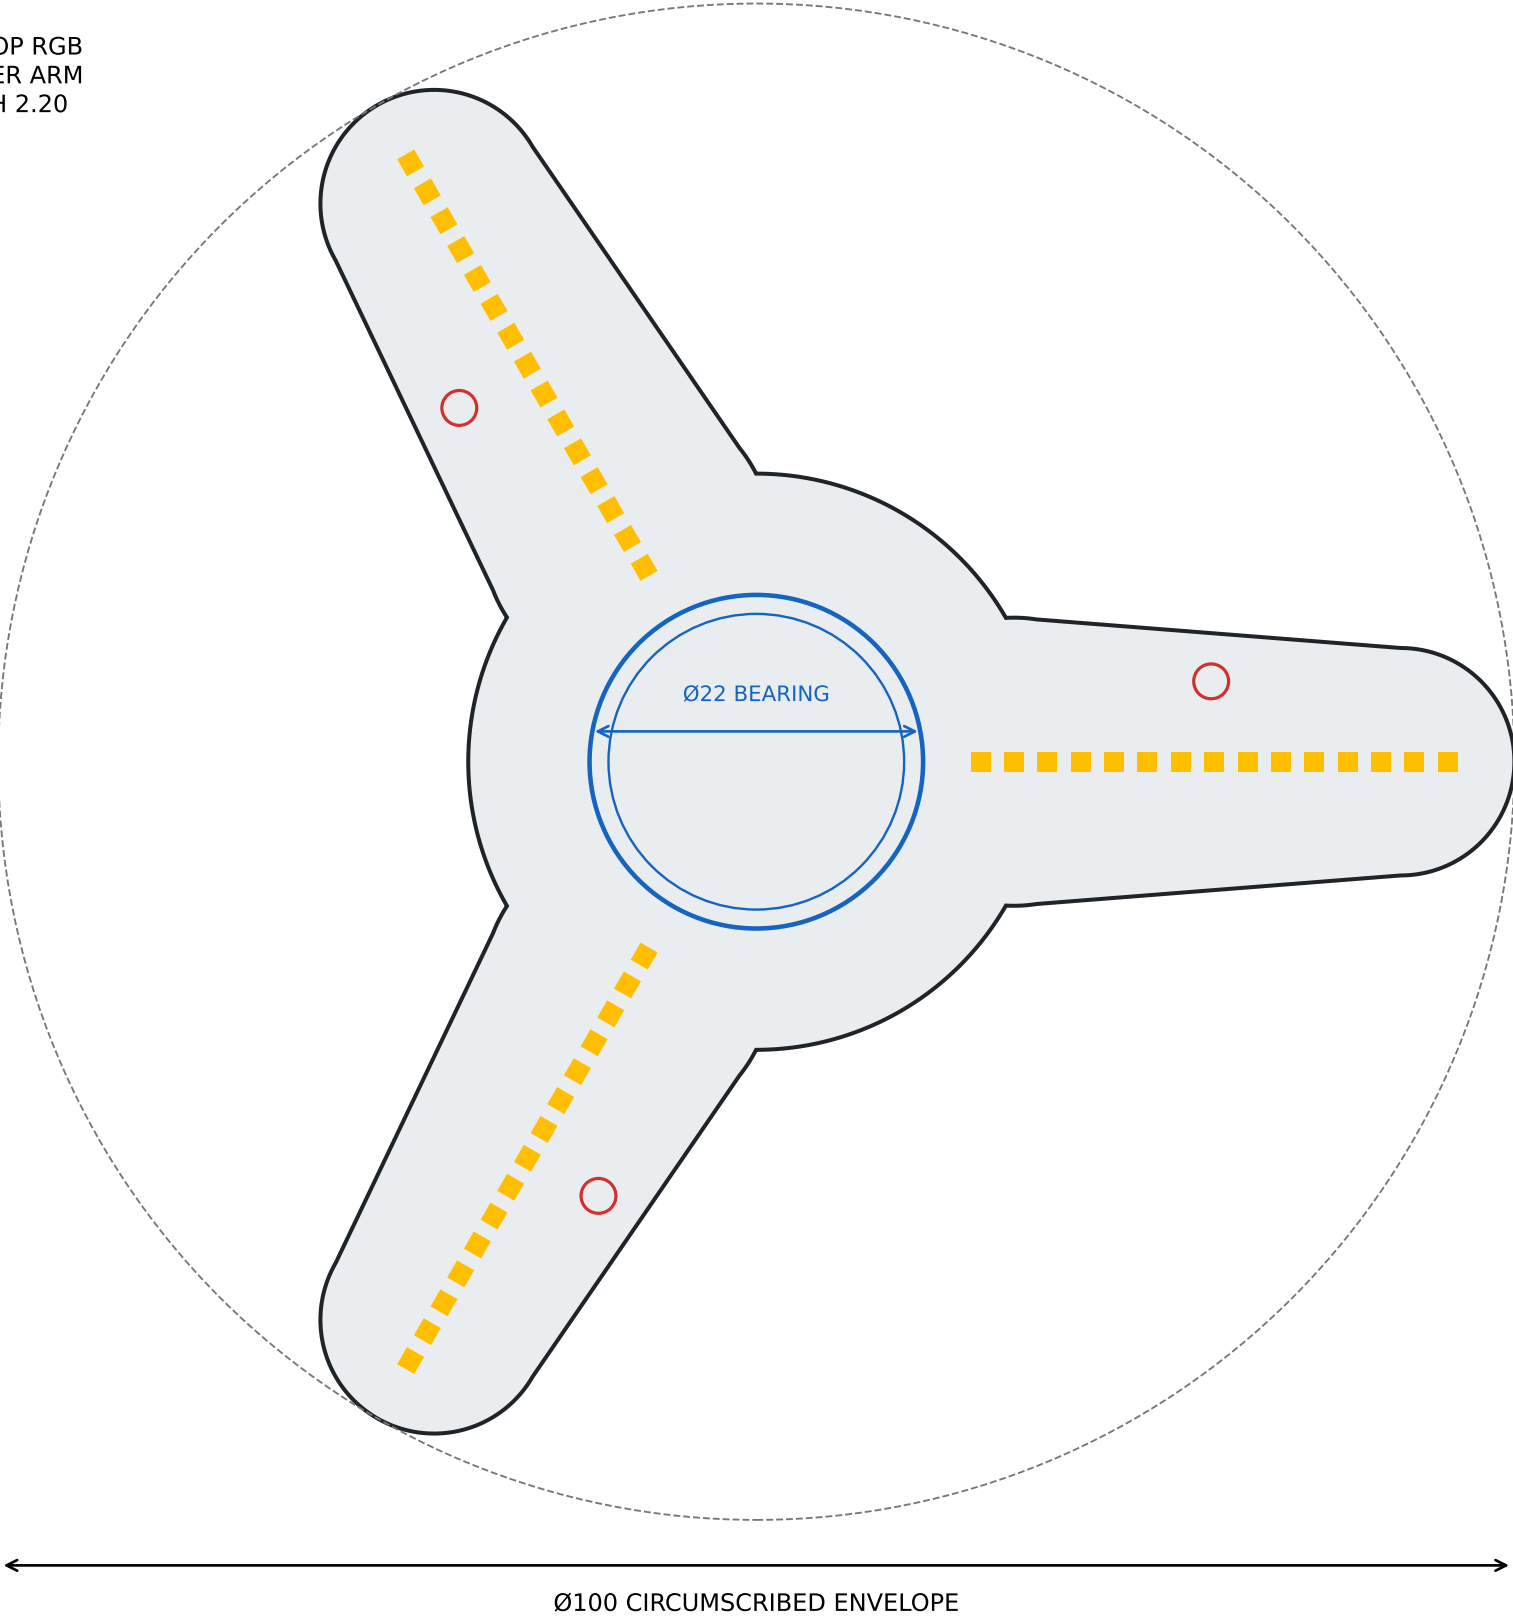

B. SIDE ELEVATION

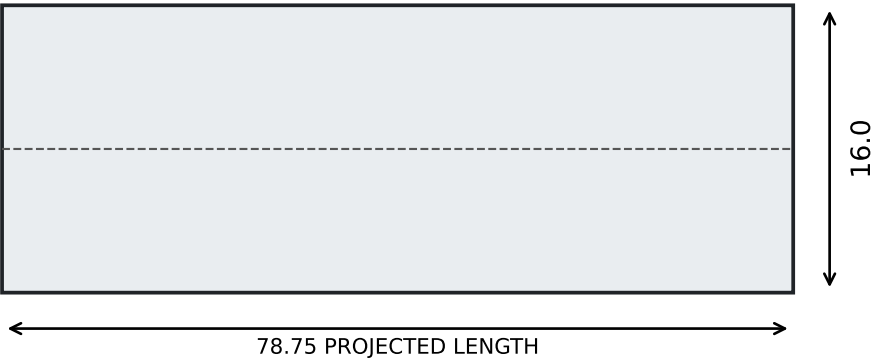

C. SECTION A-A THROUGH ARM

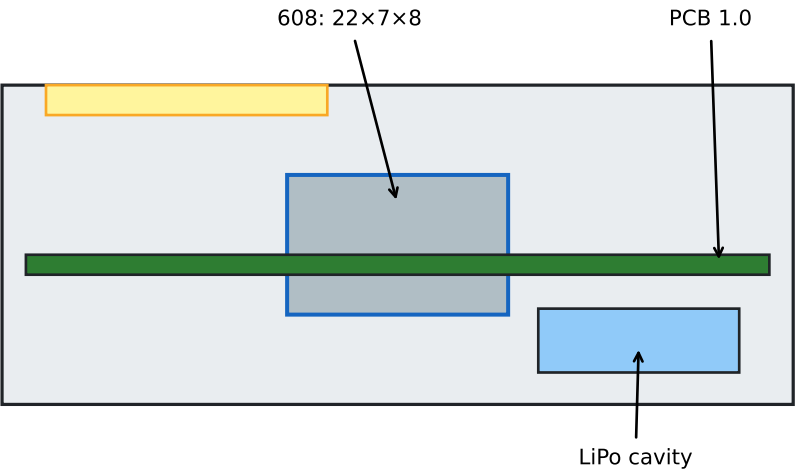


FASTENERS: 3 × M2
SPLIT LINE: Z=8.0
BEARING AXIAL POCKET: Z=4.5...11.5

TICKER SPINNER v0.2

BOTTOM HOUSING - INTERNAL VIEW AND FEATURES


A. VIEW FROM INSIDE

WALL NOMINAL 1.55
FLOOR 1.60

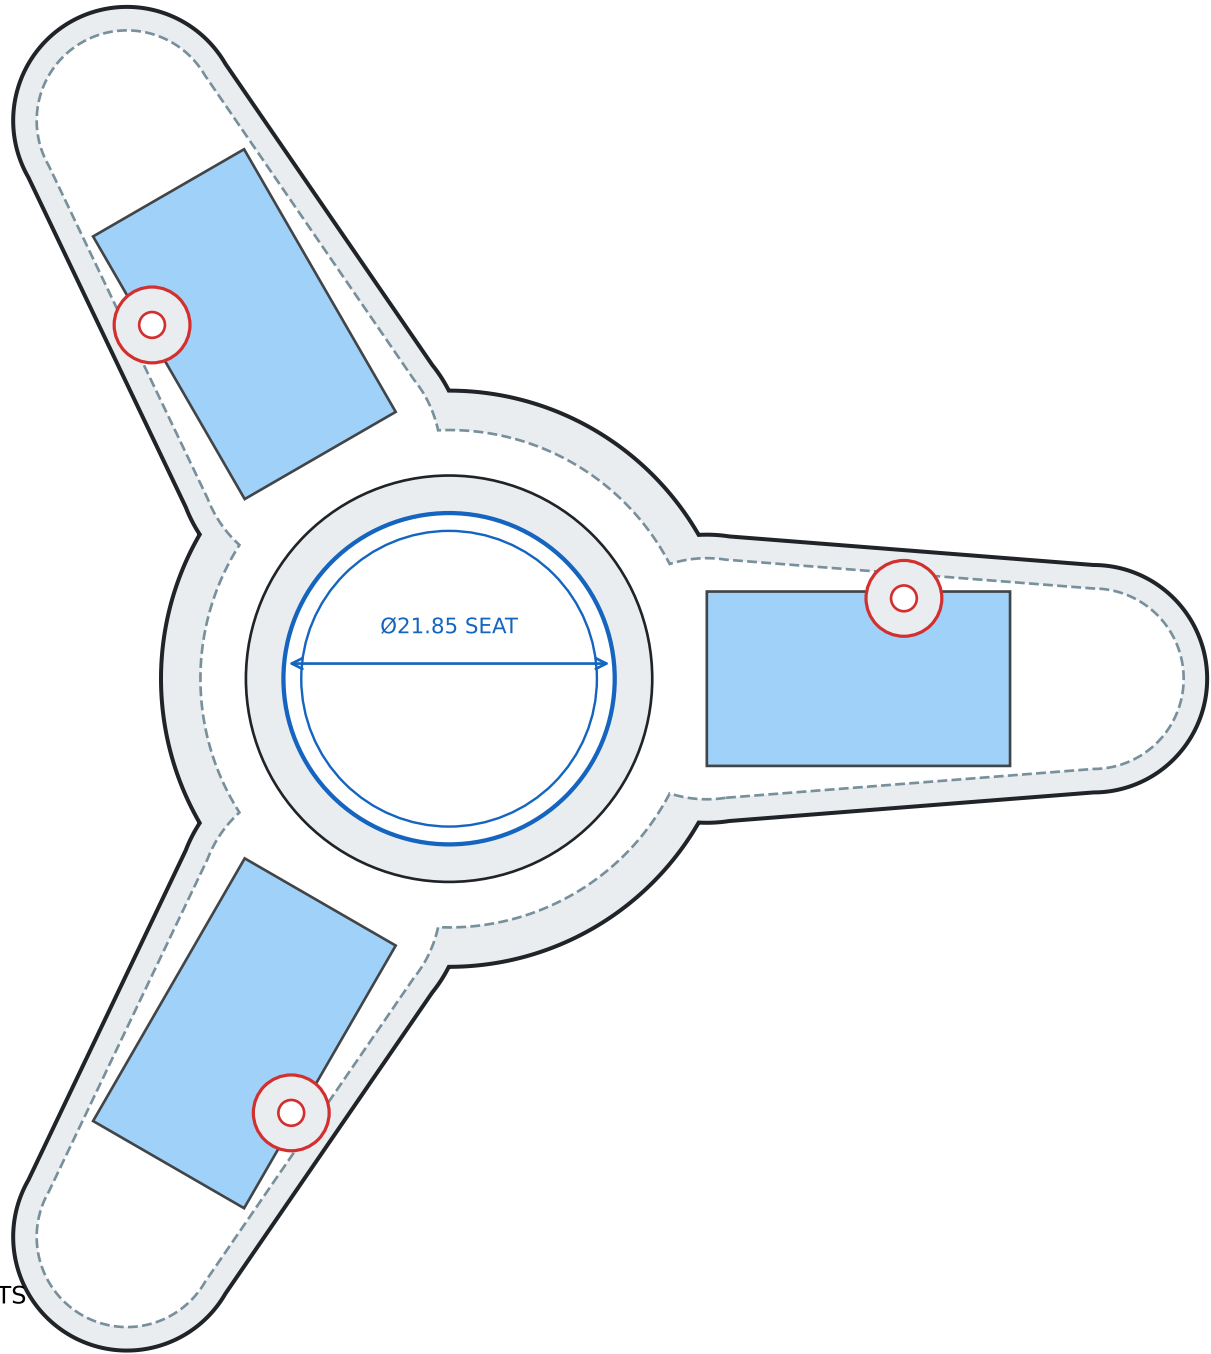

3 IDENTICAL BATTERY POCKETS
 $20.6 \times 12.1 \times 3.45$ CUT
CENTERS R27

B. BEARING RETENTION SECTION

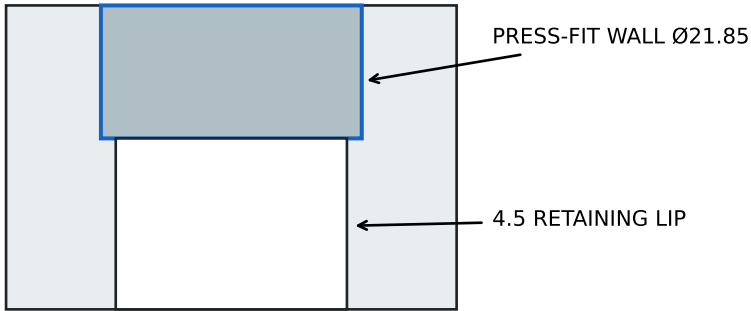

M2 BOSS
- boss $\varnothing 5.0$
- pilot $\varnothing 1.7$
- three positions at 120°
- verify self-tapping screw type


PRINT ORIENTATION
Exterior floor on build plate.
Recommended prototype: PETG, 0.20 layer,
4 walls, 30-40% infill.

TICKER SPINNER v0.2

TOP COVER - EXTERNAL/INTERNAL VIEWS AND LIGHT WINDOWS

A. EXTERNAL VIEW


3 TOP WINDOWS
32.9 × 3.0
ROUNDED ENDS

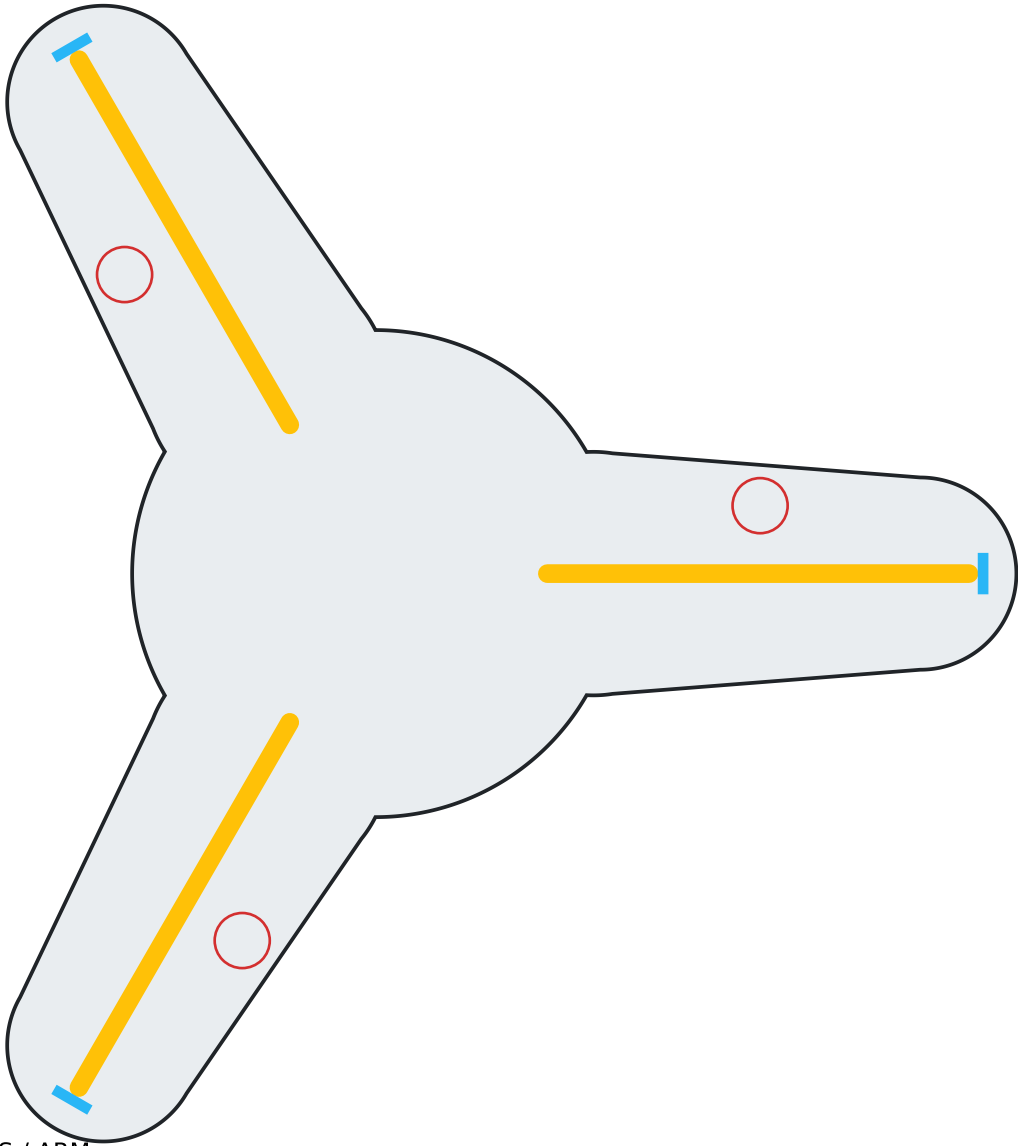

12 VERTICAL TIP WINDOWS / ARM
SEE SHEET 5

B. UNDERSIDE VIEW

ROOF 1.50
INTERNAL WALL 1.55

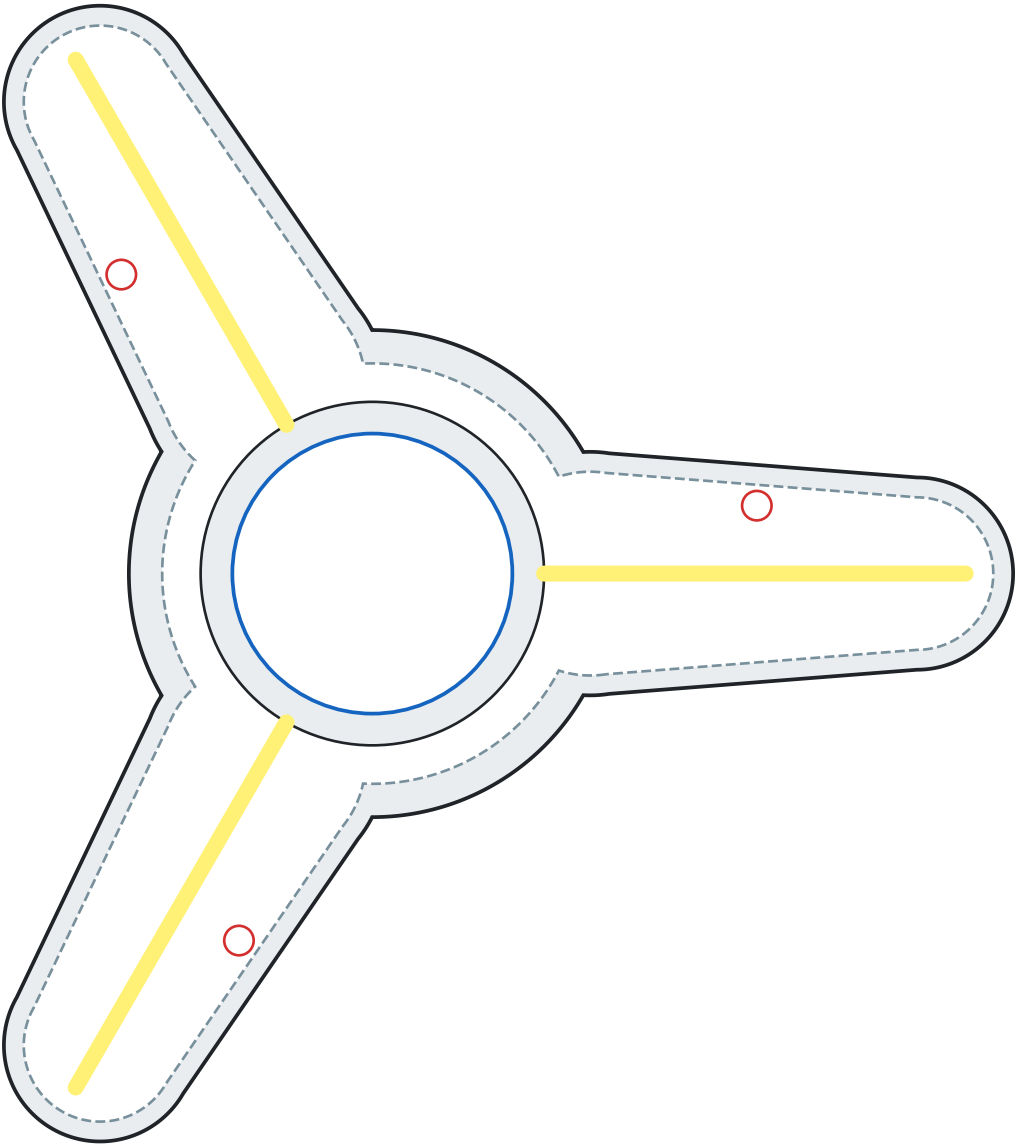


COUNTERBORE Ø4.3 × 1.1
CLEARANCE Ø2.3

DIFFUSER INSERT: 3 separate translucent strips in one STL | 32.5 × 2.6 × 1.25 nominal | XY clearance 0.20/side

TICKER SPINNER v0.2

PCB MECHANICAL TEMPLATE - OUTLINE, LED CENTERS AND RESERVED ZONES

A. PCB TOP / COMPONENT SIDE

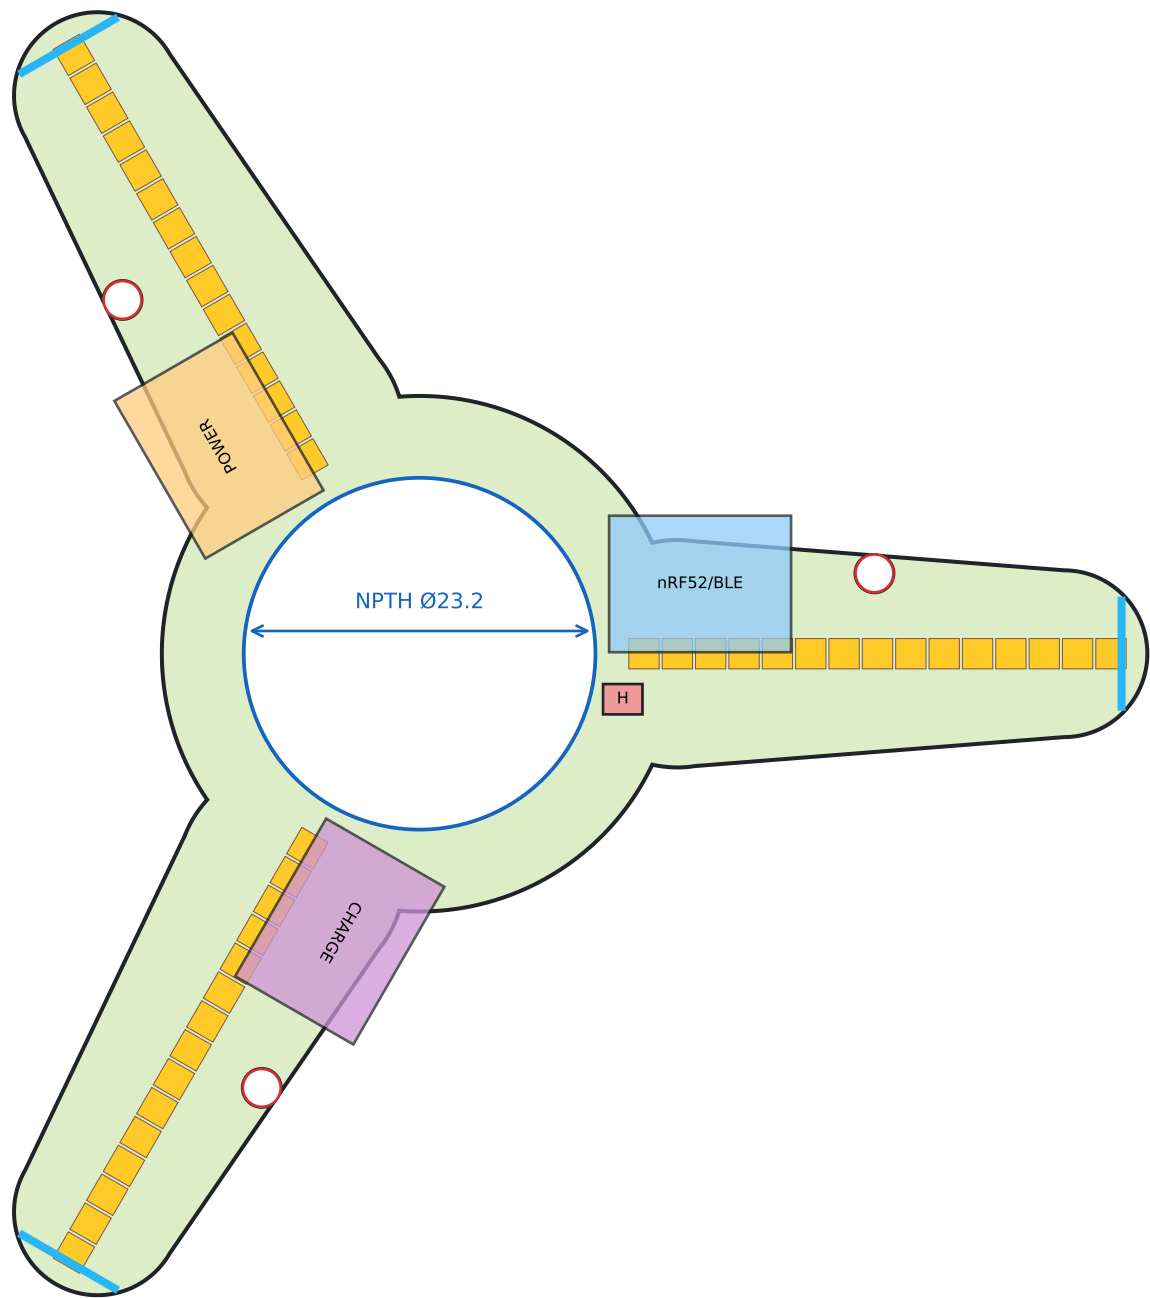

BOARD 1.0 mm
MAX RADIAL EXTENT 48.0
SHELL CLEARANCE 2.0

LEGEND / ROUTING BASIS

Yellow	45 × top RGB, 2×2 courtyard
Blue tip line	vertical daughterboard interface
Blue zone	nRF52/BLE allocation
Orange zone	power regulation
Purple zone	charge/interface
Red H	Hall index sensor

CRITICAL
DXF is a mechanical template, not a finished PCB.
Replace all provisional courtyards with selected
manufacturer footprints before routing.


BALANCE
Three trim-weight areas are provided in DXF.
Perform static and dynamic balance after population.

BATTERIES
Use a designed protected multi-cell pack, or one
cell plus two equal non-conductive dummy masses.


TICKER SPINNER v0.2

CYLINDRICAL POV TICKER - RADIAL TIP FACE AND UNWRAPPED DISPLAY

A. RADIAL END VIEW - LOOKING TOWARD HUB

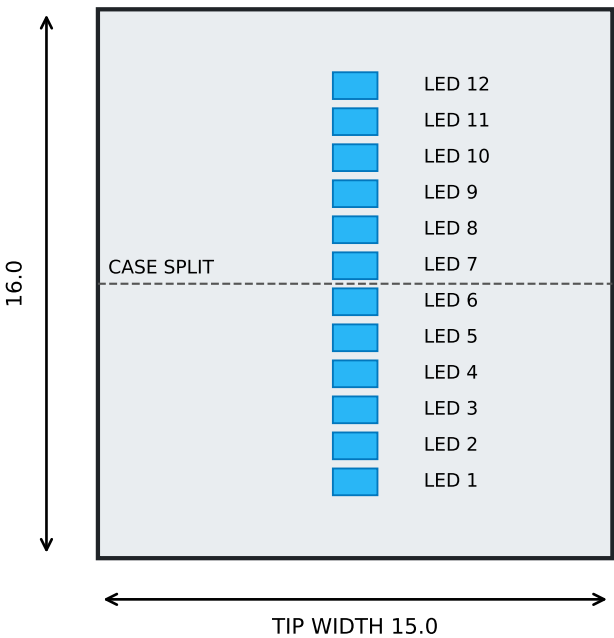


B. TIP CONNECTION SECTION

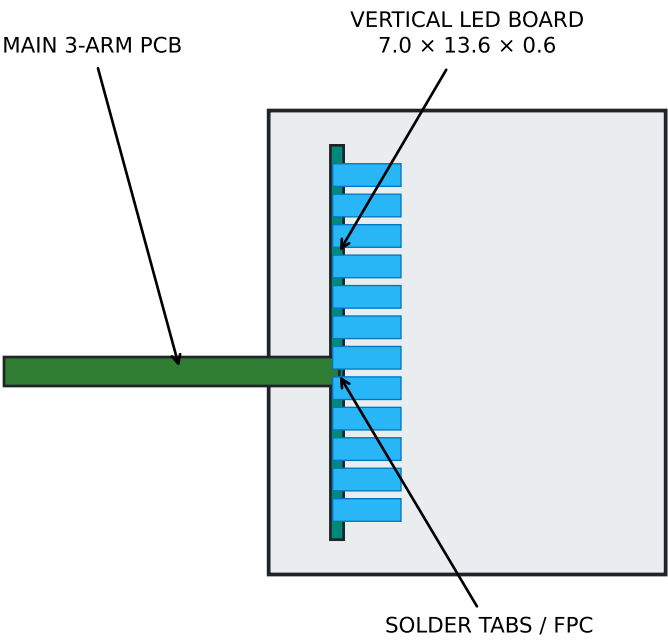

MECHANICAL CHANGE
The cylindrical ticker uses three small vertical daughterboards with 12 addressable 0909 RGB LEDs. The 16 mm housing provides manufacturable margins.

C. VIRTUAL CYLINDER - TOP VIEW

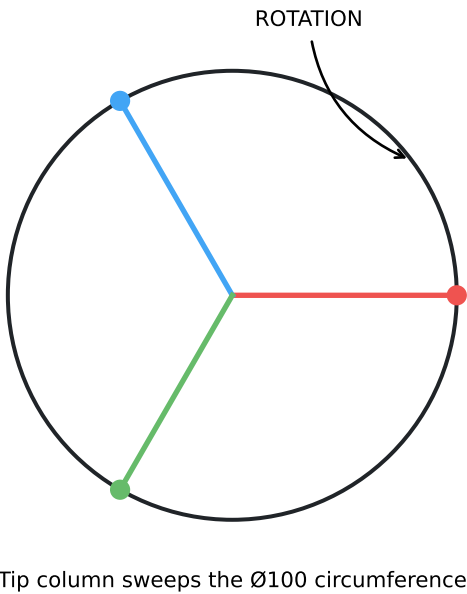

FUNCTION
Each LED height becomes one horizontal pixel row. Timed flashes create angular columns as the tip moves. The three arms are phase-shifted by 120° in firmware.

D. UNWRAPPED VIRTUAL DISPLAY SURFACE

