


MECHANICAL DATA

Dimensions in mm (inches)

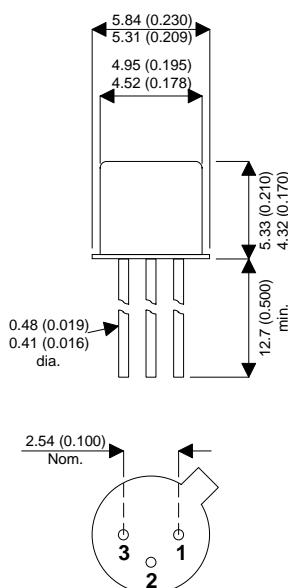

GENERAL PURPOSE PNP SILICON TRANSISTOR

DESCRIPTION

The BCY70, BCY71 & BCY72 are silicon planar epitaxial PNP transistors in Jedec TO18 metal case.

TO18 PACKAGE(TO-206AA)

Underside View

PIN 1 – Emitter PIN 2 – Base PIN 3 – Collector

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

		BCY70	BCY71	BCY72
V_{CBO}	Collector - Base Voltage ($I_E = 0$)	-50V	-45V	-25V
V_{CEO}	Collector - Emitter Voltage ($I_B = 0$)	-40V	-45V	-25V
V_{EBO}	Emitter - Base Voltage ($I_C = 0$)		-5V	
I_{CM}	Collector Peak Current		-200mA	
P_{tot}	Total Power Dissipation @ $T_{amb} < 25^\circ\text{C}$		350mW	
T_J, T_{STG}	Operating and Storage Junction Temperature Range		-65 to +200°C	
THERMAL DATA				
$R_{th-j-Case}$	Thermal Resistance Junction -case		150°C/W max	
$R_{th-j-amb}$	Thermal Resistance Junction -ambient		500°C/W max	

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{CES} Collector Cut-off Current (V _{BE} = 0)	V _{CE} = -20V V _{CE} = -50V BCY70			-10 -500	nA
	V _{CE} = -20V V _{CE} = -45V BCY71			-100 -10	nA μA
	V _{CE} = -20V V _{CE} = -25V BCY72			-100 -10	nA μA
I _{EBO} Emitter Cutoff Current (I _C = 0)	V _{EB} = -5V			-10	μA
V _{CE(sat)} * Collector – Emitter Saturation Voltage	I _C = -10mA I _B = -1mA I _C = -50mA I _B = -5mA			-0.25 -0.5	V
V _{BE(sat)} * Base – Emitter Saturation Voltage	I _C = -10mA I _B = -1mA BCY70 AND BCY71 ONLY I _C = -50mA I _B = -5mA	-0.6		-0.9 -1.2	V
h _{FE} * DC Current Gain	BCY70 I _C = -0.1mA V _{CE} = -1V I _C = -1mA V _{CE} = -1V I _C = -10mA V _{CE} = -1V I _C = -50mA V _{CE} = -1V	40 45 50 15			—
	BCY71 I _C = -0.01mA V _{CE} = -1V I _C = -0.1mA V _{CE} = -1V I _C = -1mA V _{CE} = -1V I _C = -10mA V _{CE} = 1V I _C = -50mA V _{CE} = -1V	80 90 100 15	60	600	
	BCY72 I _C = -1mA V _{CE} = -1V I _C = -10mA V _{CE} = -1V	40 50			
	I _C = -1mA V _{CE} = -10V f = 1KHz	100		400	
	I _C = -0.1mA V _{CE} = -20V f = 10.7MHz BCY71	15			
	I _C = -10mA V _{CE} = -20V f = 100MHz BCY70 BCY71 and BCY72	250 200			
	I _C = 0 V _{EB} = -1V f = 1MHz			8	
	I _E = 0 V _{CB} = -10V f = 1MHz			6	
h _{fe} Small Signal Current	I _C = -1mA V _{CE} = -10V f = 1KHz	100		400	—
f _T Transition Frequency	I _C = -0.1mA V _{CE} = -20V f = 10.7MHz BCY71	15			MHz
	I _C = -10mA V _{CE} = -20V f = 100MHz BCY70 BCY71 and BCY72	250 200			
C _{EBO} Emitter-Base Capacitance	I _C = 0 V _{EB} = -1V f = 1MHz			8	pF
C _{CBO} Collector-Base Capacitance	I _E = 0 V _{CB} = -10V f = 1MHz			6	

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

ELECTRICAL CHARACTERISTICS continued ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
NF Noise Figure	$I_C = -0.1\text{mA}$ $V_{CE} = -5\text{V}$ $R_g = 2\text{K}\Omega$ $f = 10 \text{ to } 10000 \text{ Hz}$ BCY70 AND BCY71 BCY70			6 2	dB
h_{ie} Input Impedance	$I_C = -1\text{mA}$ $V_{CE} = -10\text{V}$ $f = 1\text{kHz}$ BCY71 ONLY	2		12	$\text{K}\Omega$
h_{re} Reverse Voltage Ratio	$I_C = -1\text{mA}$ $V_{CE} = -10\text{V}$ $f = 1\text{kHz}$ BCY71 ONLY			20×10^{-4}	—
h_{oe} Output Admittance	$I_C = -1\text{mA}$ $V_{CE} = -10\text{V}$ $f = 1\text{kHz}$ BCY71 ONLY	10		60	μS
t_d Delay Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -1\text{mA}$ BCY70 AND BCY72 ONLY		23	35	ns
t_r Rise Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -1\text{mA}$ BCY70 AND BCY72 ONLY		25	35	ns
t_s Storage Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -I_{B2} = -1\text{mA}$ BCY70 AND BCY72 ONLY		270	350	ns
t_f Fall Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -I_{B2} = -1\text{mA}$ BCY70 AND BCY72 ONLY		50	80	ns
t_{on} Turn-on Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -1\text{mA}$ BCY70 AND BCY72 ONLY		48	65	ns
t_{off} Turn-Off Time	$I_C = -10\text{mA}$ $V_{EE} = 3\text{V}$ $I_{B1} = -I_{B2} = -1\text{mA}$ BCY70 AND BCY72 ONLY		320	420	ns

NOTES:

* Pulse test: $t_p \leq 300\mu\text{s}$, $\delta \leq 1\%$

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[BCY70](#) [BCY71](#)