

---

# Radio Telescope

## *Project Proposal*

---

PORTLAND STATE UNIVERSITY  
MASEEH COLLEGE OF ENGINEERING & COMPUTER SCIENCE  
DEPARTMENT OF ELECTRICAL & COMPUTER ENGINEERING

*Authors:*

BRADLEY GLAUBITZ

DAVYD GAMZA

DANIYIL KASHKAN

TRUONG LE

PAUL NGUYEN

January 24, 2025



Maseeh College of Engineering  
and Computer Science

PORTLAND STATE UNIVERSITY

ECE 412  
SENIOR PROJECT DEVELOPMENT I  
VERSION 1

## Executive Summary

The Rose City Astronomers (RCA) Radio Telescope System integrates a 3-meter parabolic dish antenna with a  $1/4$  wave-in-horn waveguide feed, a low-noise amplifier (LNA), and a software-defined radio (SDR) for signal processing. It connects to a laptop or PC running amateur radio astronomy software, enabling users to detect and analyze weak celestial signals within the 1 GHz to 2 GHz frequency range, specifically intended to view the 1.42 GHz Hydrogen Line (also referred to as the 21 centimeter line). The system is designed for amateur radio astronomers, educators, and the general public outreach.

Users adjust the antenna manually to optimize signal reception. The LNA amplifies weak signals, and the SDR digitizes and processes them for real-time analysis. A connected laptop or PC displays the processed data, allowing users to explore celestial phenomena such as the Hydrogen Line at 1.42 GHz in the Milky Way, OH masers, and pulsars in the UHF L Band.

The system will operate at RCA's SkyLark site for both private observations and for educational events, offering hands-on experience with radio astronomy.

## Contents

<b>Executive Summary</b>	<b>1</b>
<b>Background and Research</b>	<b>5</b>
Background . . . . .	6
Research . . . . .	7
<b>Product Design Specification</b>	<b>10</b>
Product Overview . . . . .	11
Stakeholders . . . . .	12
Requirements . . . . .	13
Specifications . . . . .	15
Initial Product Design . . . . .	16
Verification Plans . . . . .	17
Risks . . . . .	19
Deliverables . . . . .	21
<b>Project Management Plan</b>	<b>22</b>
Timeline . . . . .	23
Budget and Resources . . . . .	24
Intellectual Property . . . . .	25
Team . . . . .	26
Development Tools and Process . . . . .	27
<b>Appendix</b>	<b>28</b>
<b>References</b>	<b>29</b>

## List of Figures

1	3-meter-dish radio telescope systems from the sponsors' videos. . . . .	6
2	SPIDER 300A MarkII, commercial off-the-shelf 3-meter-dish radio telescope system. . . . .	8
3	Dr. Wolfgang Herrmann's 3-meter-dish radio telescope system. . . . .	11
4	Level 0 and 1 block diagrams of the Radio Telescope System. . . . .	16
5	Gantt Chart Project Timeline . . . . .	23

List of Tables

1     Component Costs for Radio Telescope Setup . . . . . 24

2     Team Members and Their Strengths . . . . . 26

# Background and Research



## Background and Research

### Background

The sponsor of our capstone is Rose City Astronomers (RCA), an organization of amateur astronomers in Portland, Oregon, dedicated to promoting education and enjoyment of astronomy to its members and the general public [1]. As a 501(C3) non-profit public benefit organization, RCA sponsors affordable activities, with members volunteering their time, personal equipment, and covering their own personal expenses to support various activities. The proposed project is RCA's first educational project related to radio astronomy. It will initiate exploring suitable equipment for amateur radio astronomy observations and equip RCA with assets to use at its dark sky site and for educational outreach in Greater Portland and other locations [2].

With a one-meter-dish radio telescope system previously built by Michael Caba, an amateur radio astronomer and co-leader of RCA's Radio Astronomy SIG, the project aims to produce a 3-meter-dish radio telescope system operating in the 1-2 GHz range able to observe: 1. Hydrogen 21-cm line in the Milky Way that would allow to plot the galaxy's rotation curve and show dark matter's impact. 2. OH masers. 3. Pulsars in the UHF L Band. The system will include a 3-meter parabolic dish antenna with 1/4 wave-in-horn waveguide feed, a low noise amplifier (LNA) and a software defined radio (SDR) for signal processing and interfacing with a laptop or PC running amateur radio astronomy software. Based on the videos provided by the sponsors [3 and 4], the system will resemble those shown in **Figure 1**.



**Figure 1:** 3-meter-dish radio telescope systems from the sponsors' videos.

## Research

The research for our capstone includes LNAs, antenna dishes, antenna receiver designs, filters, SDRs and software to design a radio telescope with the required characteristics. The videos provided by the sponsors make a good contribution to the research. The 3-meter-dish radio telescope described by Dr. Wolfgang Herrmann [3] has a “Kumar” type feed horn made from galvanized steel, which he considers not an ideal but workable solution. For LNA, it uses Triquint (or QORVO) TOPM9037 as the first stage and SPF5189Z as the second stage for extra gain, which does not affect the noise figure coming from the first stage, thus getting the noise figure of 0.4 dB. A weatherproof standard aluminum die cast housing holds the LNA with N-connectors to the feed horn. The telescope includes a home-built cavity filter made from standard aluminum profile and standard aluminum rods, which Dr. Wolfgang Herrmann recommends as easy to make and good at filtering out the frequency range of interest (1420 MHz for the hydrogen line) when mounted reasonably precisely. For SDRs, to analyze the signal, it uses standard ADALM Pluto, which Dr. Wolfgang Herrmann recommends as fairly gain-stable, though Lime SDR, HackRF, RTL-SDR, SDRPlay, and Airtyspy are other SDR options to use. The telescope uses the in-house developed software based on Soapy-SDR abstraction layer: “Spectrometer.II” for spectral measurements, and “Continuum.II” for continuum measurements, both reading pointing information from telescope control. The controller feature is not relevant for our project, since our 3-meter-dish radio telescope is going to be manually controlled. For the mechanical design, Dr. Wolfgang Herrmann puts special emphasis on the support structure to be rigid.

### *Commercial Off-the-Shelf Products*

While researching any commercial off-the-shelf projects that can help with our project, we found an offer for SPIDER 300A MarkII advanced radio telescope, a fully built 3-meter diameter radio telescope for 1420 MHz radio astronomy [5]. It is equipped with all the features desired by our sponsors, including a 3-meter diameter prime focus antenna with specially designed front and rear supports, 1420 MHz optimized feed and 2 LNAs for LHCP and RHCP circular polarization, C106-HEAVY



high load capacity pier for concrete base designed to keep the radio telescope permanently installed in the field, and RadioUniversePRO control and acquisition software for Windows 10/11, designed to control all devices of SPIDER radio telescope and to collect radio astronomy data. Described as powerful but affordable, SPIDER 300A MarkII in **Figure 2** has the price starting at 39,350.00 Euro, VAT excluded, while the system budget provided by the sponsors should not exceed \$1,000.



**Figure 2:** SPIDER 300A MarkII, commercial off-the-shelf 3-meter-dish radio telescope system.

As for SDR options that are commercially available, there are several SDR vendors that we mentioned like HackRF, Airspy, RTLSDR, and SDRPlay. From these vendors, there are 3 products that are suitable for this project: the Analog Devices ADALM-Pluto, the SDRPlay RSP1B, and the HackRF One. These SDR products are capable of providing the necessary 1-2 GHz frequency range and also are powered directly from USB. The Pluto is an SDR that contains a 12-bit ADC that can provide a sampling rate up to 61.44 MSPS. Also, the Pluto provides a 20 MHz viewable bandwidth and it is housed in a plastic construction. The SDRPlay RSP1B provides up to 10 MHz bandwidth, a 14-bit ADC that can sample 2 - 6.048 MSPS, and uses a metal construction. The RSP1B performs IQ sampling of the input signal which is first driven through several filters and then passed to the ADC. The HackRF One is an open-source SDR that provides both TX/RX capability from 1 MHz to 6 GHz, a sampling rate up to 20 MSPS at 8-bit resolution, and also uses a

metal construction similar to the RSP1B. The trade-off of the smaller resolution of the HackRF One is that it can sample a much larger frequency range compared to the other 2 SDRs. The HackRF One and the Pluto also include transmission capabilities which is not necessary for the type of application in this project. The price range of these 3 products is from \$100 to \$350 which is around the \$200 budget for the SDR.

### ***Open Source Projects***

While searching for any appropriately licensed open-source projects that can help with our capstone, we found PICTOR, a free-to-use Radio Telescope [6]. Unfortunately, it has a 1.5-meter parabolic dish, not a 3-meter one, but there are schematics and PCB designs, code libraries, and other information that might be useful while designing our radio telescope. This open source has a GNU General Public License, which allows us to use their designs and distribute copies if we are an open source as well and act under the same license, which we do.

To complement the SDR we will use in the project, we found several open-source SDR softwares to choose from: SDR++, Virgo, SDRAngel, GQRS, and CubicSDR. A majority of these SDR softwares are GUI-based and have similar functionality of providing the user visual data of SDR readings. The main three softwares to consider in the project will be SDR++, SDRAngel, and GQRS since their releases are recent as of 2024 and they are GUI-based. SDR++ is a popular open-source SDR software that provides an easy-to-use GUI, quick connect menu for SDRs, and simple navigation across the RF FFT graph. SDRAngel is the most complex software out of the three, but it includes many additional radio astronomy features such as sky maps, rotator controls, star trackers, and a radio astronomy plugin. GQRS is the simplest software of the three which provides an RF FFT display, draggable window navigation, and the ability to save settings into files for easy configuration.

### ***Patents, Papers, White Papers, Articles, Conference Proceedings***

Despite a thorough research for any patents, commercial white papers, scholarly articles or conference proceedings related to the subject, we could not find anything applicable to our project. We are leaving this section in the document, though, in case something shows up.

# Product Design Specification



**Maseeh College of Engineering  
and Computer Science**

PORTLAND STATE UNIVERSITY

# Product Design Specification

## Product Overview

The RCA Radio Telescope System combines a 3-meter parabolic dish antenna with 1/4 wave-in-horn waveguide feed, provided by the sponsor, with a low noise amplifier (LNA) and a software defined radio (SDR) for signal processing and interfacing with a laptop or PC running amateur radio astronomy software to detect and analyze weak celestial signals in the 1 GHz to 2 GHz frequency range, designed by the capstone team. We create the radio telescope system for amateur radio astronomers, educators, and the general public outreach. Users manually adjust the antenna for optimal signal reception. The LNA amplifies weak signals, which are then digitized and processed by the SDR for real-time analysis. The data is displayed on a laptop or PC for visualization and analysis, enabling users to explore phenomena like the hydrogen 21-cm line in the Milky Way at 1.42 GHz, OH masers, and pulsars in the UHF L Band. The system will work for both private observations at RCA's SkyLark site and for educational events, offering hands-on experience with radio astronomy. The final product will resemble the one described by Dr. Wolfgang Herrmann [3] in **Figure 3**.



**Figure 3:** Dr. Wolfgang Herrmann's 3-meter-dish radio telescope system.

## Stakeholders

### **Industry sponsor:**

- Rose City Astronomers represented by Art Koehler and Michael Caba

### **Users of the product:**

- Rose City Astronomers members
- The general public

### **Faculty advisors:**

- Andrew Greenberg
- Joshua Mendez

### **Design team members:**

- Brad Glaubitz
- Davyd Gamza
- Daniyil Kashkan
- Truong Le
- Paul Nguyen

## Requirements

### Must:

- Must display real-time signal data on a laptop or PC interface.
- Must allow the user to adjust the antenna to track celestial bodies across  $\pm 180^\circ$  azimuth and  $\pm 90^\circ$  altitude.
- Must generate data for weak celestial signals with sufficient signal-to-noise ratio (SNR  $\geq 20:1$ ).
- Must be able to interface with a Software Defined Radio (SDR) for signal acquisition.
- Must have a Low Noise Amplifier (LNA) with a noise figure  $\leq 0.7$  dB at 1.42 GHz.

### Should:

- Should have a Low Noise Amplifier (LNA) with a noise figure  $\leq 0.7$  dB at 1 GHz to 2 GHz.
- Should have a Low Noise Amplifier (LNA) with a gain of at least  $\geq 30$  dB for the 1 GHz to 2 GHz frequency range.
- Should not exceed the total project budget of \$1000 in component costs.
- Should run off a 12 V DC power system.
- Should last 12 hours with continuous use.
- Should have an intuitive software interface for real-time data visualization and analysis.

**May:**

- May operate in various temperature ranges (from  $-25^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ ) with appropriate passive cooling.
- May utilize solar power which is available on site.
- May run off of a car battery.


## Specifications

The design specifications for the Radio Telescope come from a few major goals. Technical specifications will be further elaborated once selection is finalized by the design team and the industry sponsors.



## Initial Product Design

### Hardware Architecture

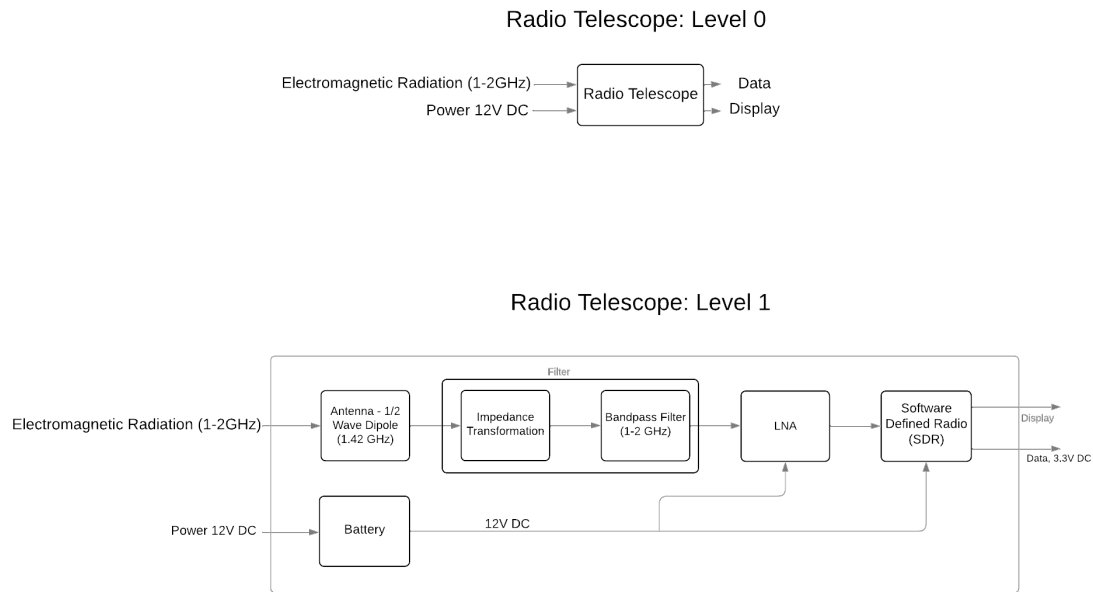

**Figure 4:** Level 0 and 1 block diagrams of the Radio Telescope System.

### Software Architecture (TBD)

Languages and development environments

Data flow diagrams

### User Interface / Experience

Usage instructions

### Other Considerations

## Verification Plans

A testing procedure for the RCA Radio Telescope System should ensure the functionality and accuracy of all components, as well as the system's ability to detect and process celestial signals. Here's an outline of a potential testing procedure.

### Testing Procedure for the RCA Radio Telescope System:

- **Visual Inspection:** Check the parabolic dish for physical damage, misalignment, or debris. Inspect the waveguide feed, low-noise amplifier (LNA), and software-defined radio (SDR) for proper connections and secure mounting. Verify the integrity of all cables and connectors, ensuring there are no breaks or loose connections.
- **Power and Signal Flow Check:** Power on the system components (LNA, SDR, laptop/PC). Verify the LNA receives power and amplifies signals by checking voltage levels or using a signal generator and oscilloscope. Confirm the SDR initializes correctly and interfaces with the laptop or PC without errors.
- **Calibration:** Use a known signal source (e.g., a calibrated signal generator) to simulate a weak signal within the 1 GHz to 2 GHz range. Adjust the system to ensure the detected signal matches the input frequency, amplitude, and characteristics. Record and verify the system's response to signals of varying strengths and frequencies to confirm linearity and sensitivity.
- **Antenna Alignment Test:** Point the antenna at a terrestrial source, such as a geostationary satellite, with a known signal (e.g., weather satellites or communication satellites within the system's frequency range). Measure the signal strength and adjust the antenna manually to verify the alignment process and optimize reception.
- **Celestial Signal Detection:** Point the telescope toward a strong celestial source, such as the Sun, to confirm it detects expected signals. Test the system's ability to observe the hydrogen 21-cm line at 1.42 GHz by pointing it toward

the Milky Way's plane. Log signal strength, frequency spectrum, and any detected features.

- **Software and Data Analysis Verification:** Open the SDR software on the laptop or PC. Confirm that the software processes and displays the signal data in real-time (e.g., frequency spectrum, time-domain signals). Analyze the displayed data to ensure accurate representation of input signals.
- **Long-Term Stability Test:** Operate the system continuously for a set period (e.g., 24–48 hours) to monitor stability and detect any thermal drift or noise issues. Evaluate signal consistency and identify potential interference or environmental factors affecting performance.
- **Outreach and Educational Simulation:** Simulate an educational event by guiding users through the setup, alignment, and signal analysis process. Verify the ease of use and the ability to detect and interpret meaningful signals.
- **Documentation and Reporting:** Record all test results, including screenshots of the software interface and any measured values. Identify any issues or inconsistencies, and propose solutions or adjustments.
- **Final Performance Verification:** Revisit all critical tests (e.g., signal detection, software processing, and alignment) to confirm optimal performance before operational use.

## Risks

### Technical Risks:

- Ensuring the LNA noise figure is maintained at  $\leq 0.7$  dB.

### Budget Constraints:

- Components such as the parabolic dish and SDR must be sourced cost-effectively to stay within the \$1000 BOM limit

### Environmental Constraints:

- Wind and temperature stability of the dish system, ensuring robustness in the field.

### Design Constraints:

- No cryogenic cooling or extreme temperature control systems will be incorporated into the system.
- The system should be modular and scalable for future upgrades or integration into other radio astronomy systems.
- The system shall include coaxial input and output connections and electronics shall be enclosed in a weather tight enclosure, suitably shielded for its specified performance.
- Anticipate that the final project report will be submitted to the “Radio Astronomy, Journal of the Society of Amateur Radio Astronomy.”
- Anticipate presenting the design, prototype performance, and project lessons learned at a General Meeting of the Rose City Astronomers. This is to be scheduled with Mark Martin, Teaching Assistant Professor, PSU.
- The design shall be documented, open source, accessible via arXiv, GitHub, or another reputable open-source server.

**Expected Challenges and Risk Mitigation:**

- **Component Availability:** Limited availability of specialized components might affect the timeline. Mitigation: Identify alternative components and commercial off the shelf subsystems early in the design process.
- **Prototype Performance:** Achieving the target performance metrics (gain, noise figure, etc.) within the specified cost may be challenging. Mitigation: Extensive simulation and design optimization will help reduce the number of prototype iterations required.
- **Budget Constraints:** Ensuring the BOM stays under \$1000 USD could require strategic selection of components. Mitigation: Focus on cost-effective transistors and minimize the use of expensive specialized components.

## Deliverables

By the end of our capstone, we are going to deliver to our industry sponsor:

- Project Proposal
- Weekly Progress Reports
- Final Report
- ECE Capstone Poster Session poster
- Detailed design documentation, explaining what our design does, how it works, and why we've made such decisions
- Simulations, including both the simulation inputs and outputs
- Bill of materials and pricing
- Version control, including checked in previous revisions of our design (GitHub repo)
- A working prototype

Our deliverables can be accessed via a GitHub repo and a Google Drive.

# Project Management Plan




**Maseeh College of Engineering  
and Computer Science**

PORTLAND STATE UNIVERSITY

# Project Management Plan

## Timeline

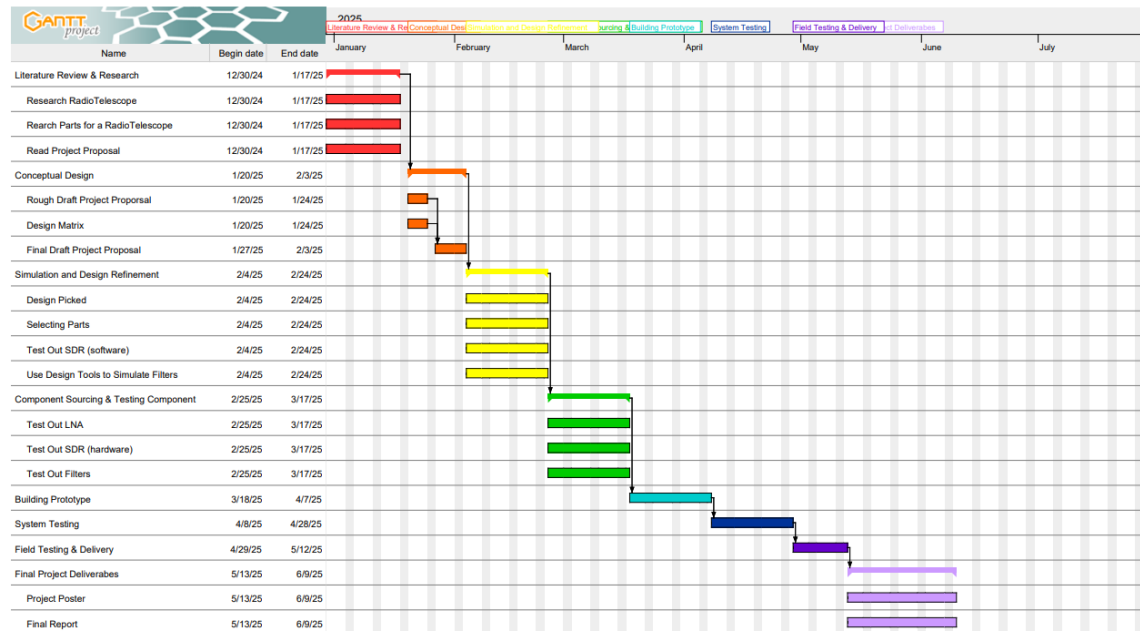

**Figure 5:** Gantt Chart Project Timeline

\*Note\* Gantt Chart to be updated throughout the term to represent the timeline better. The timeline can be shifted from 1 to 2 weeks due to unforeseen problems that can occur.



## Budget and Resources

### Total Estimated BOM Cost: \$1000

(Parabolic Dish could potentially be removed to reduce budget and other things need to be discussed)\*

Component	Estimated Cost (USD)
Parabolic Dish Antenna (Aluminum Mesh, Frame, Hardware)	\$400
Low Noise Amplifier (COTS components)	\$150
Dipole Feed with Horn and Waveguide	\$100
Software Defined Radio (SDR)	\$200
FPGA Development Board	\$100
Shielded Coaxial Cables and Connectors	\$50

**Table 1:** Component Costs for Radio Telescope Setup

### Resources:

- EPL (PSU)
- Capstone Lab (PSU)
- Locker (PSU)

## Intellectual Property

(Upcoming discussion with RCA representatives)

## Team

Design team members:

- Brad Glaubitz (Main Communicator)
- Davyd Gamza
- Daniyil Kashkan
- Truong Le
- Paul Nguyen

Name	Strengths
Brad	Analog & Radio Frequency Design, Antenna Design, Optics, Python, C, MatLab, Soldering, Fabrication, PCB Layout and design, Schematics
Davyd	Power systems, linguistics, soldering, welding, metal-working, general handiwork
Daniyil	Documentation, formatting, organization, presentation, proofreading, communication (email, Discord, calls, etc.), programming (Python, MATLAB), soldering
Truong	Programming (C/Assembly/Probably Python), read/make documentation, review other people's work, microsoldering/soldering, 3D modeling (Fusion 360) and 3D printing, schematic layout/planning
Paul	Documentation, Soldering, PCB Layout and Design, Schematics

**Table 2:** Team Members and Their Strengths

## Development Tools and Process

To get the project done, we are using the following tools:

- Discord for regular team meetings and for meetings with the Faculty Advisor
- Microsoft Teams for weekly meetings with the industry sponsor
- Google Drive for sharing all project-related documentation
- GitHub as a repo for files and code
- Virtual Network Analyzer (VNA)
- Function Generators
- Python
- Keysight ADS
- KiCad

## Appendix

(All the non-project-specification links will go here)

## References

- [1] RCA. <https://www.rosecityastronomers.net/new-events-1> (Accessed Jan. 19, 2025)
- [2] Project Proposal: Senior Engineering Capstone Design Project. Design and Build of a Radio Telescope System for 1 GHz to 2 GHz Operation. *RCA*. (Accessed Jan. 19, 2025)
- [3] Dr. Wolfgang Herrmann. Building Small/Medium Size Radio Telescopes. [Online video]. Available: <https://www.youtube.com/watch?v=BcsYIM3FhKY&list=PL0gh0Mfq7afMzufQk6mN4VZMEQsAJYDyu&index=5> (Accessed Jan. 20, 2025)
- [4] Dr. Wolfgang Herrmann. Keynote Amateur Radio Astronomy Possibilities and Limitations, Do's and Don'ts. [Online video]. Available: <https://www.youtube.com/watch?v=8j1bVpC6M94&list=PL0gh0Mfq7afMzufQk6mN4VZMEQsAJYDyu&index=4> (Accessed Jan. 20, 2025)
- [5] PrimaLuceLab. <https://www.primalucelab.com/radio-telescopes-for-radio-astronomy/spider-300a-markii-30-meter-diameter-advanced-radio-telescope.html> (Accessed Jan. 20, 2025)
- [6] PICTOR. <https://github.com/0xCoto/PICTOR?tab=readme-ov-file> (Accessed Jan. 20, 2025)