


Launch firefox and disable CORS.

Type about:config in the address bar.


Search for security.fileuri.strict_origin_policy.

Set it to false.

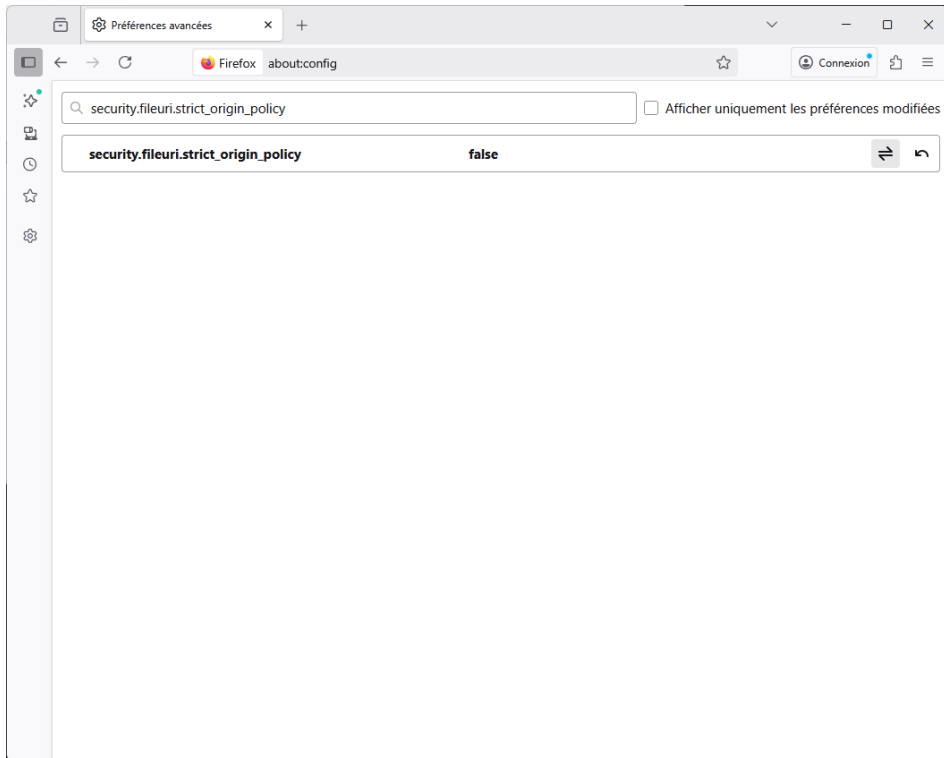


Double click in **index.html**

and select PCB that you want to explore

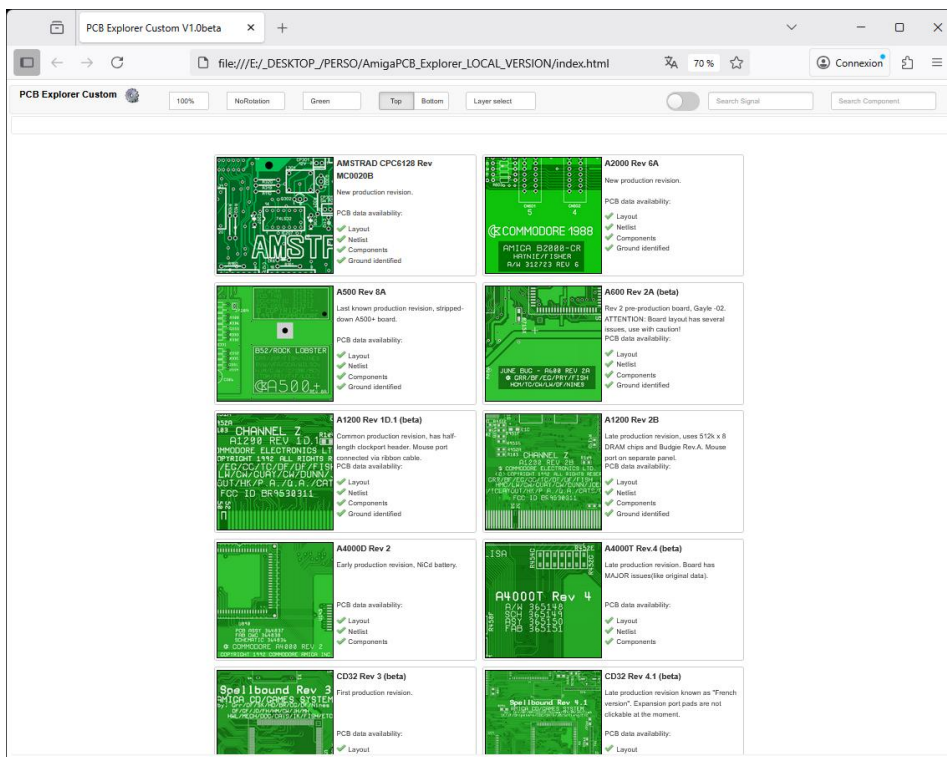


The PCB is now displayed.

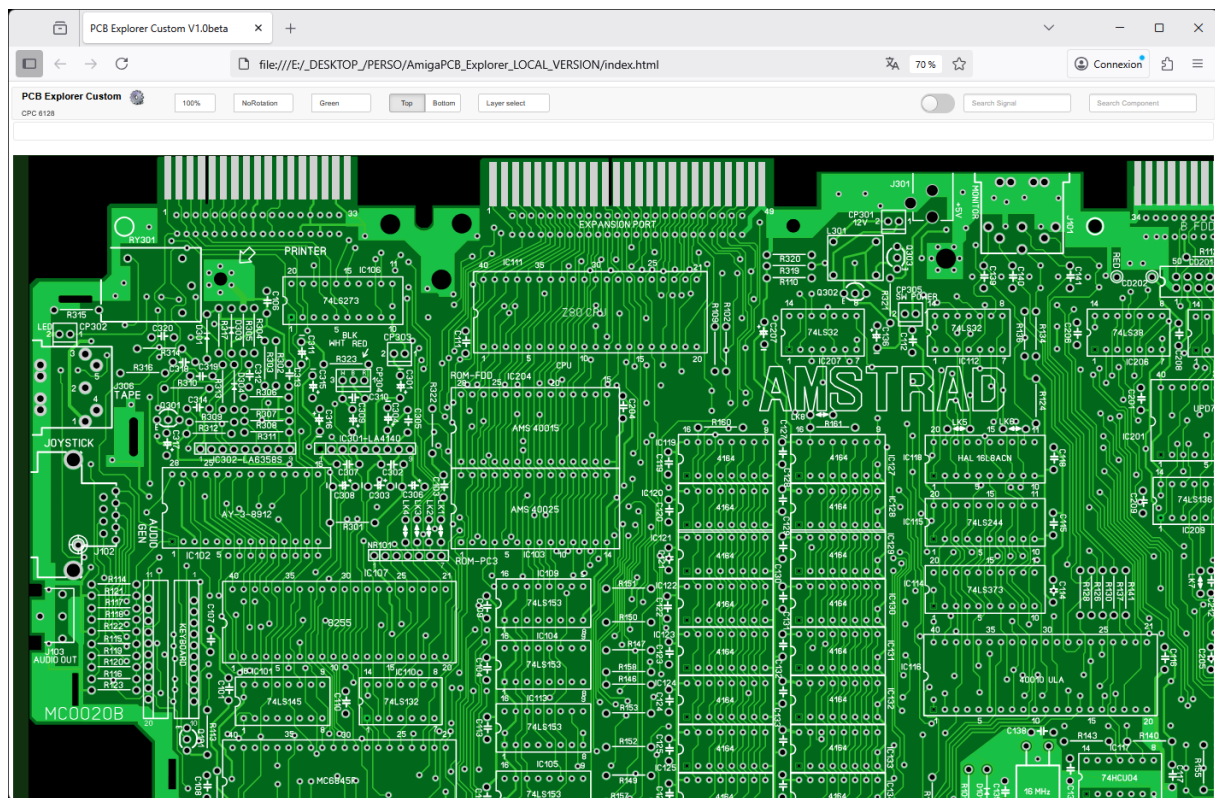


When hovering over connections, lines are pre-displayed in yellow.


Information is also displayed concerning the signal, line, and component concerned.

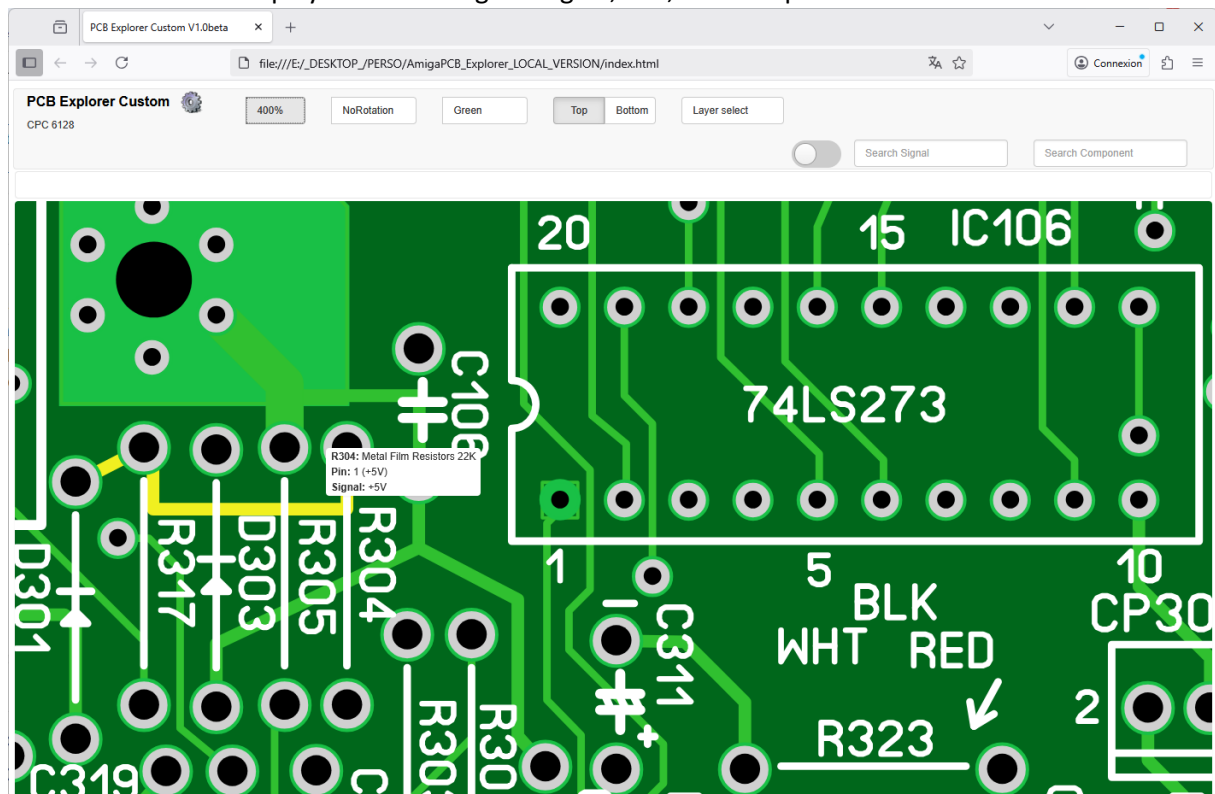


you can change the zoom level

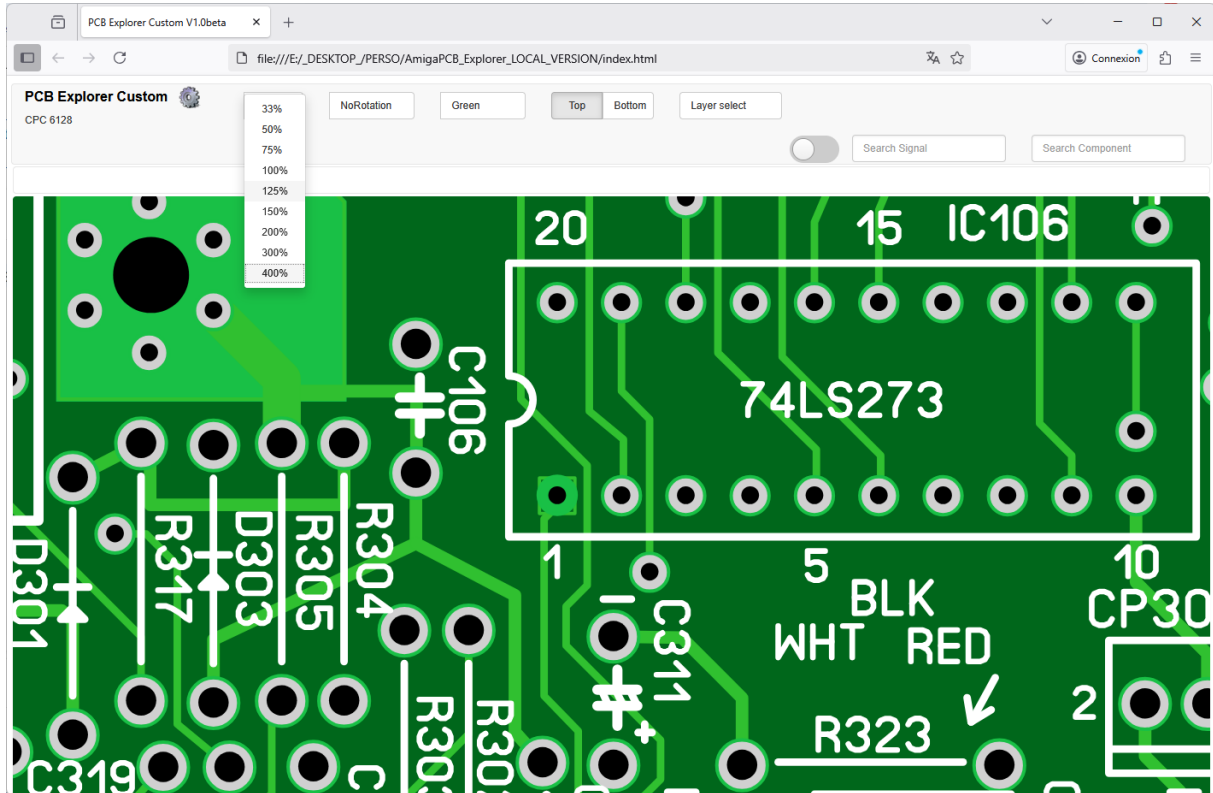


Change the rotation view.

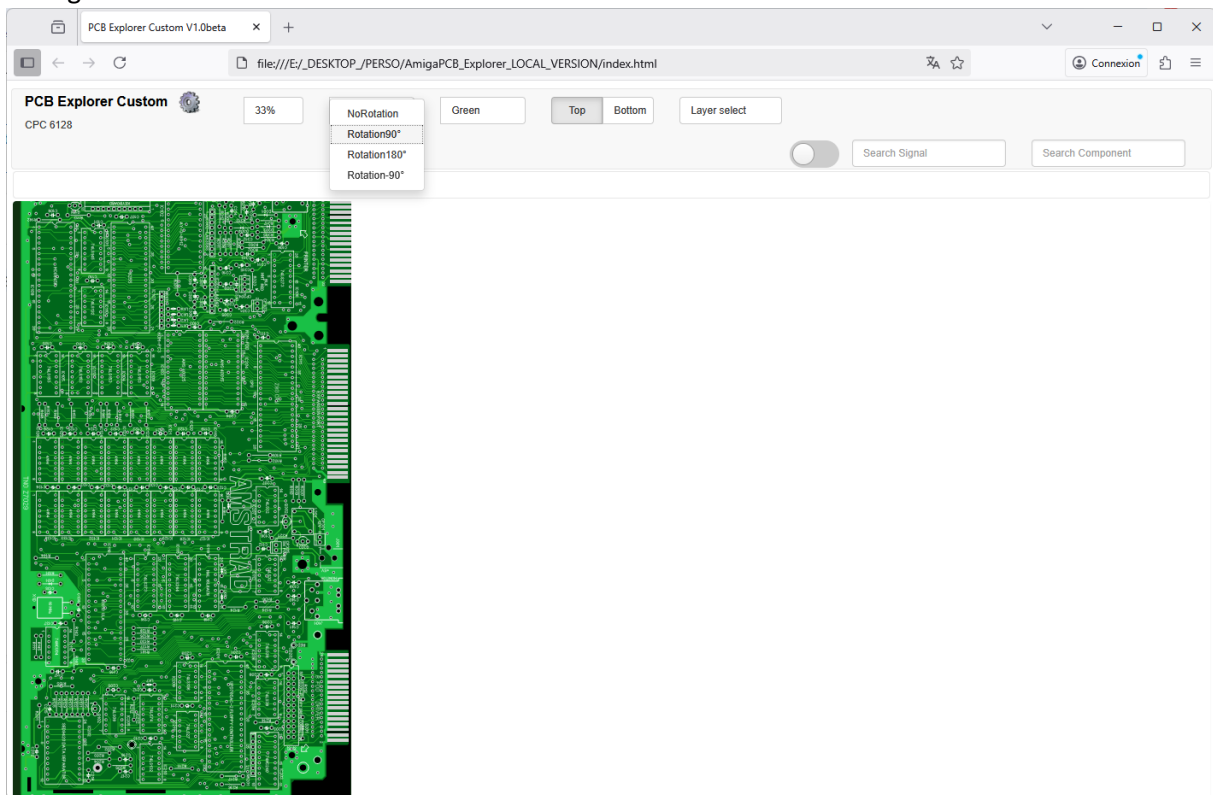



Change the Color Style of PCB

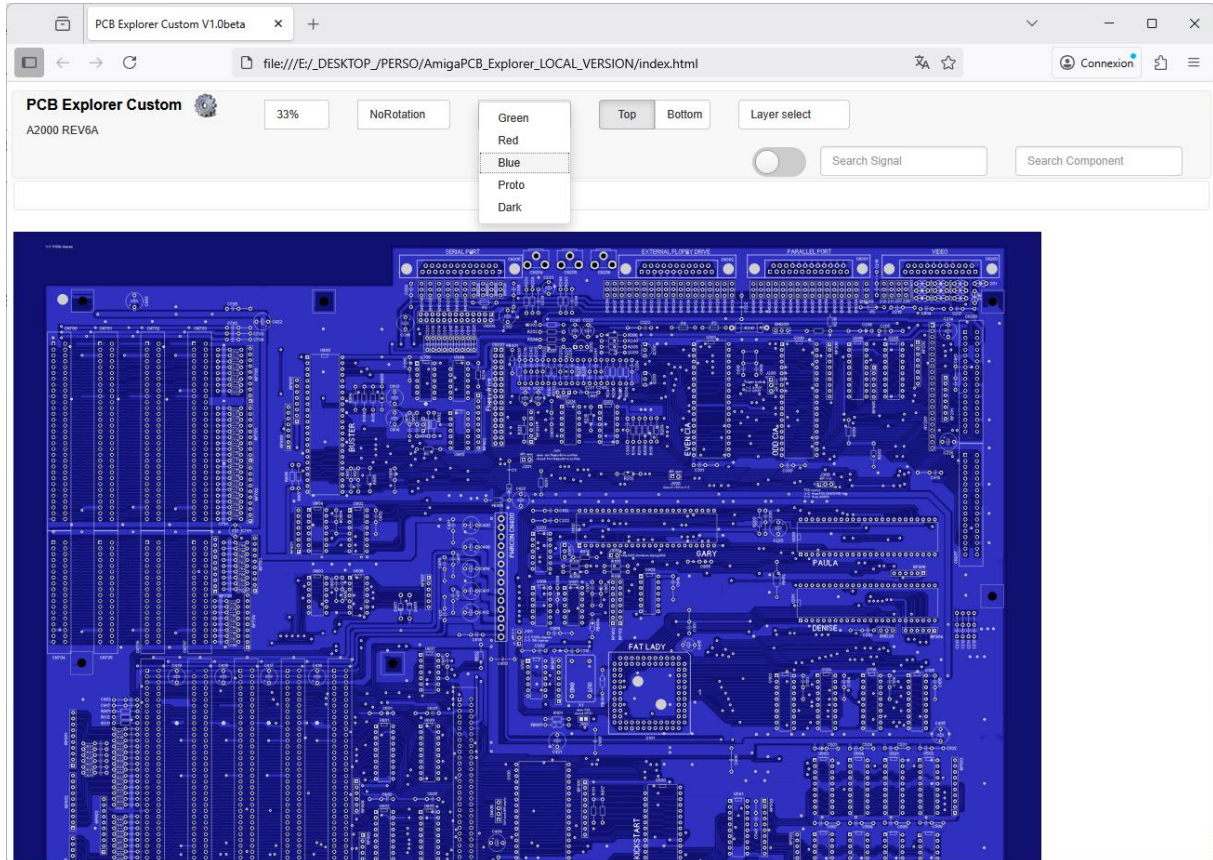


Of course, change sides

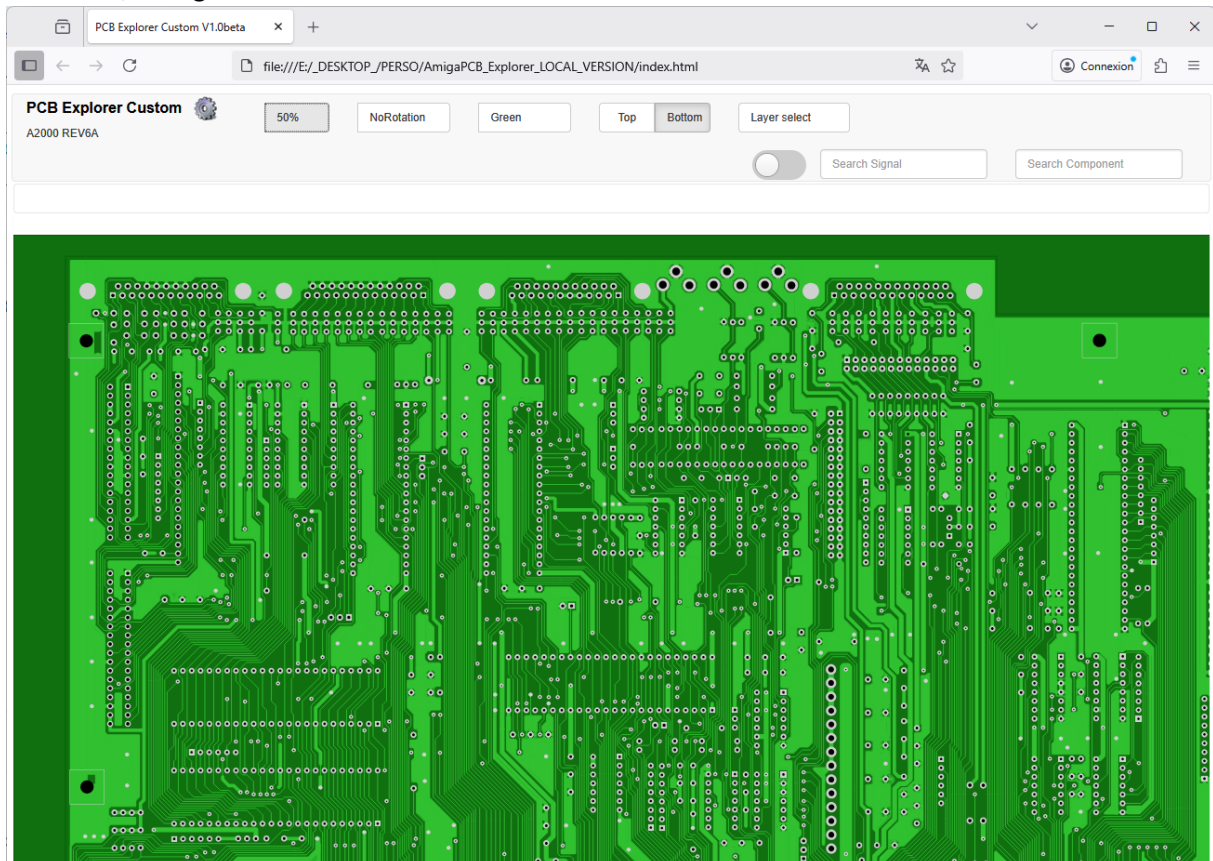


In the layer_select menu, you can choose what should be displayed or not.

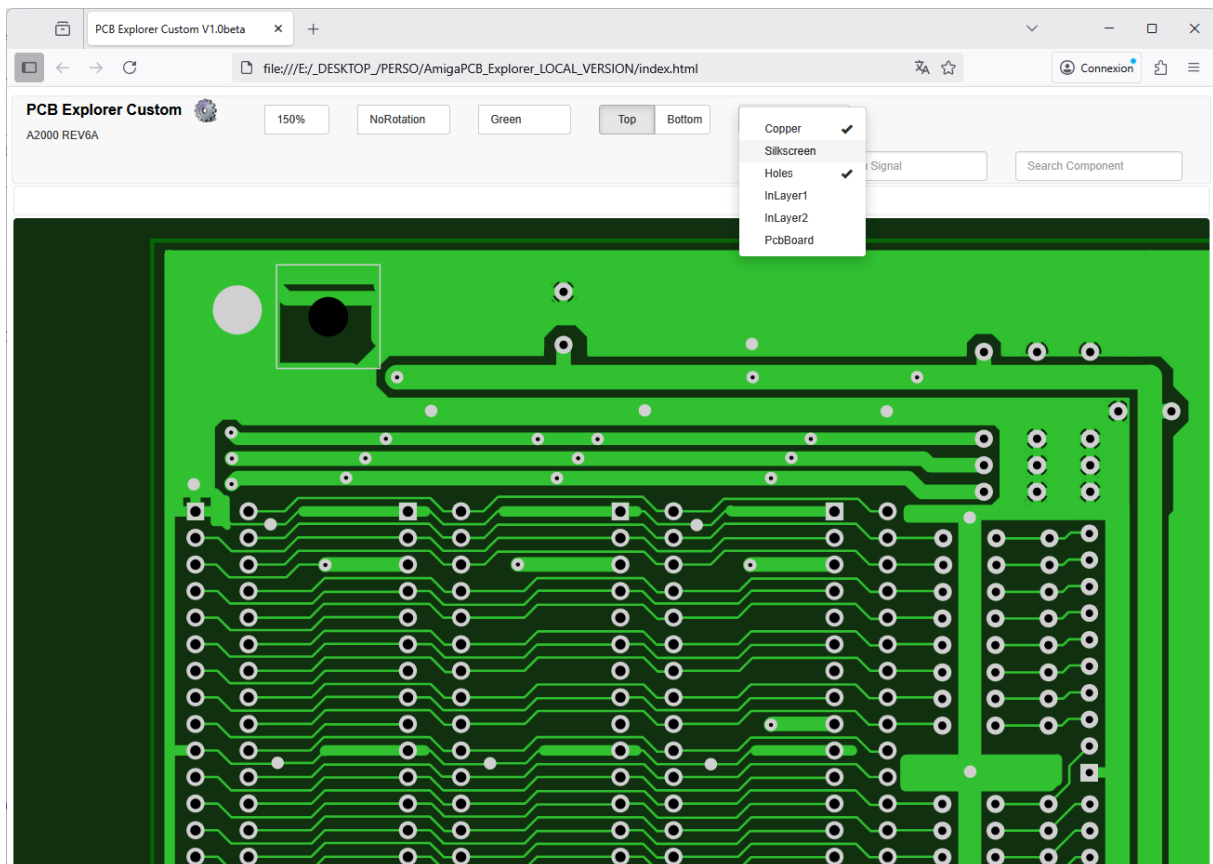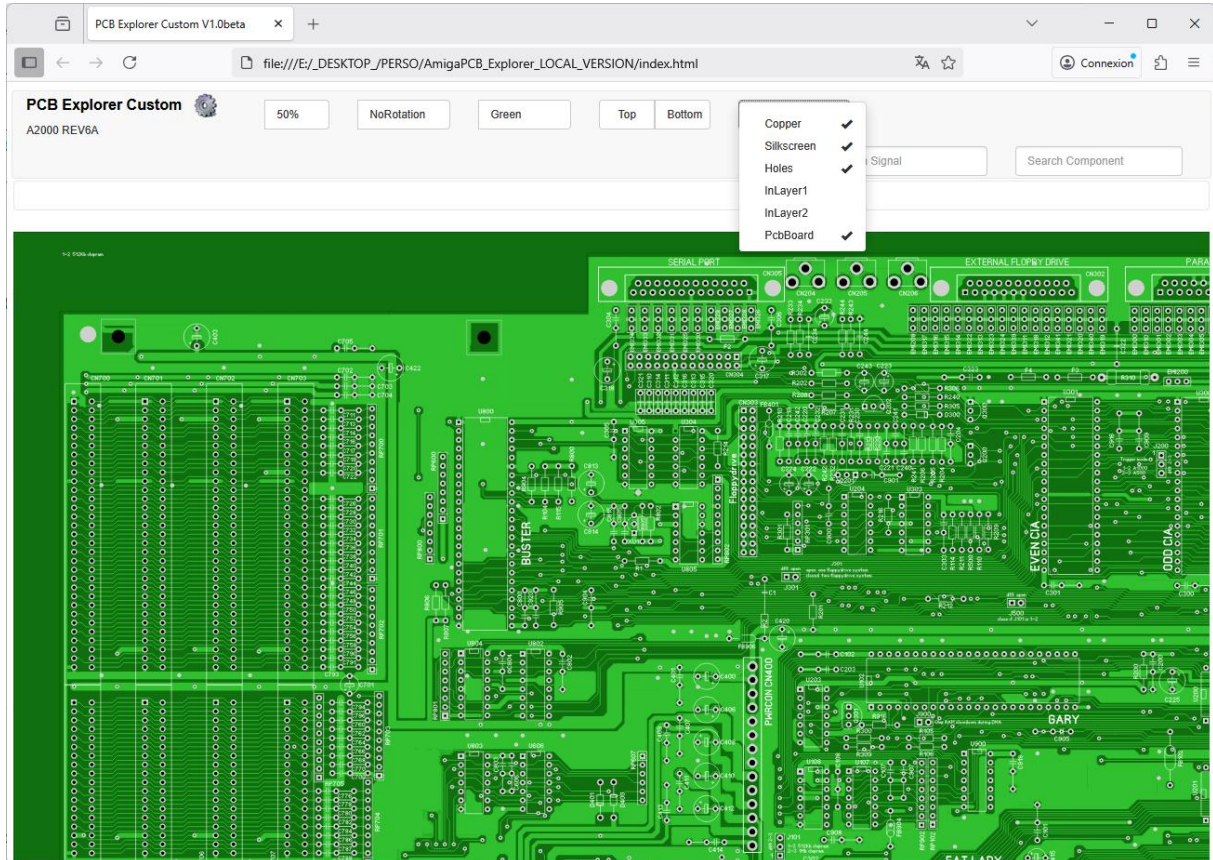


In the box 'Search Signal', you can seek a specific signal, exemple A1, RST, ...

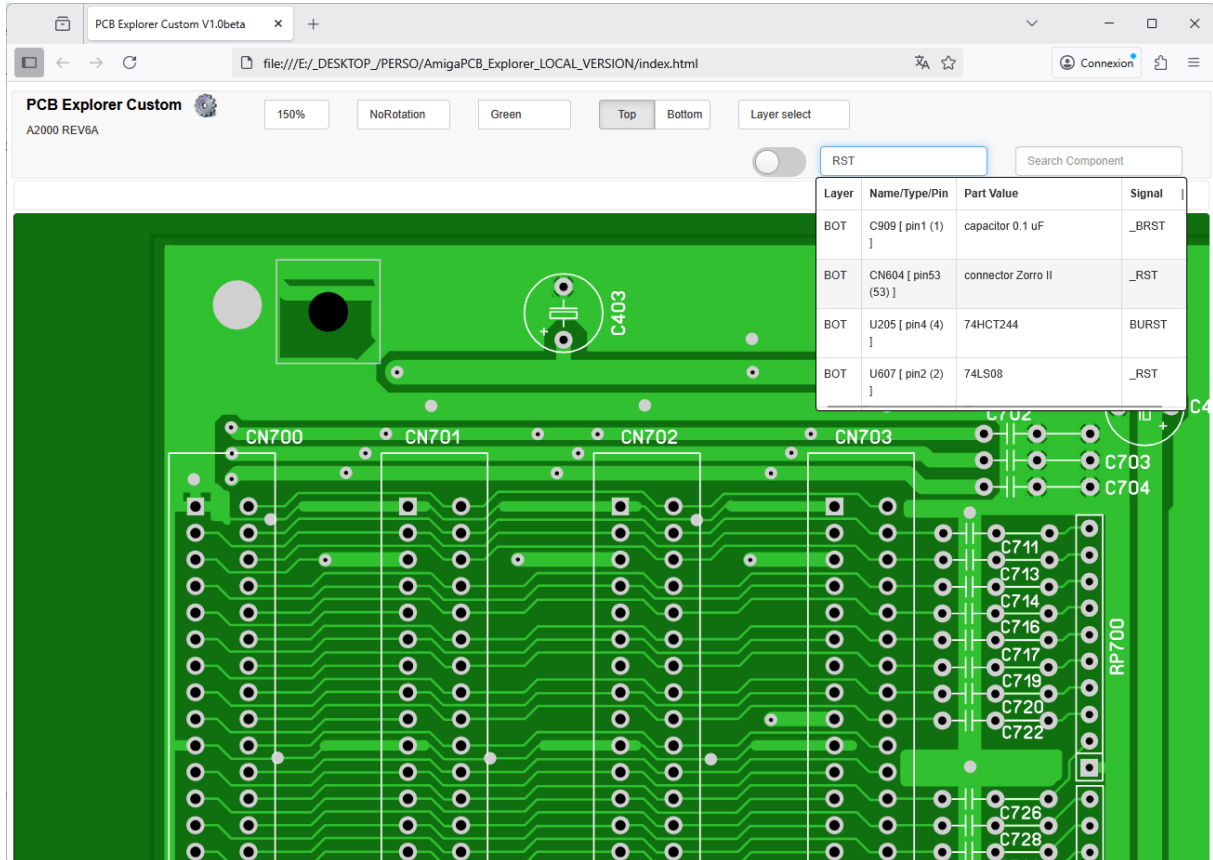

In this box, you can also click on the Name/Type/Pin and an automatic move will be performed to the Component

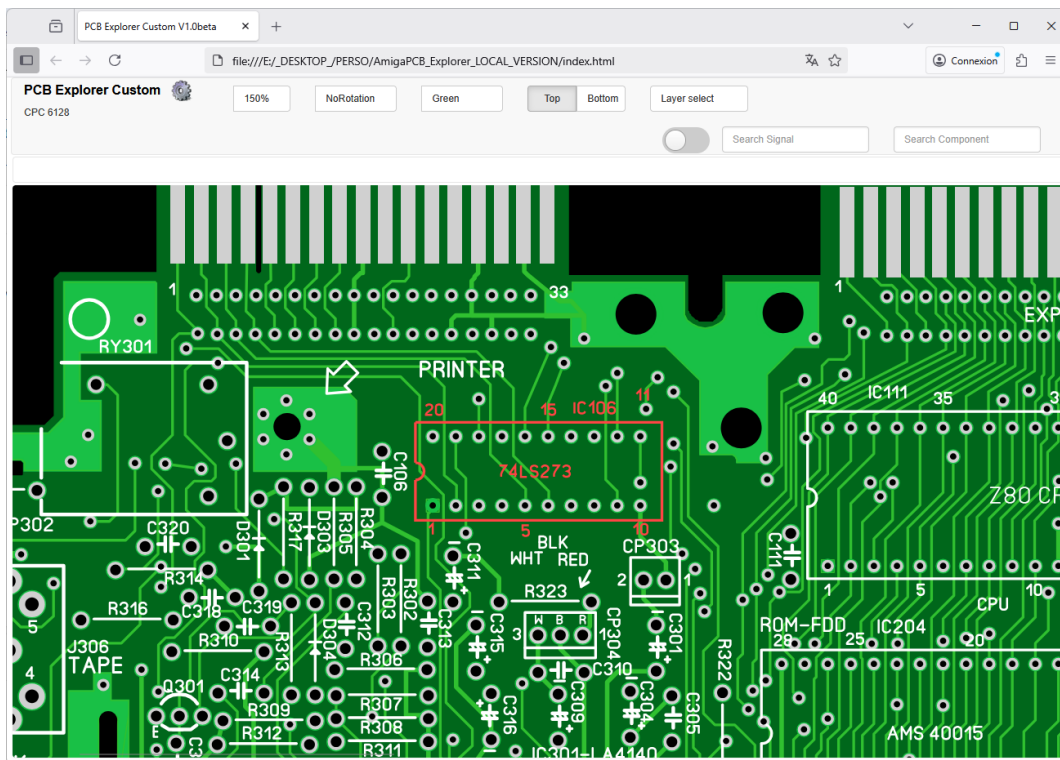

In 'Search Component' box, it's exactly the same thing but with a component name or value.
 Ex : 10 μ F or IC106 or 74LS273

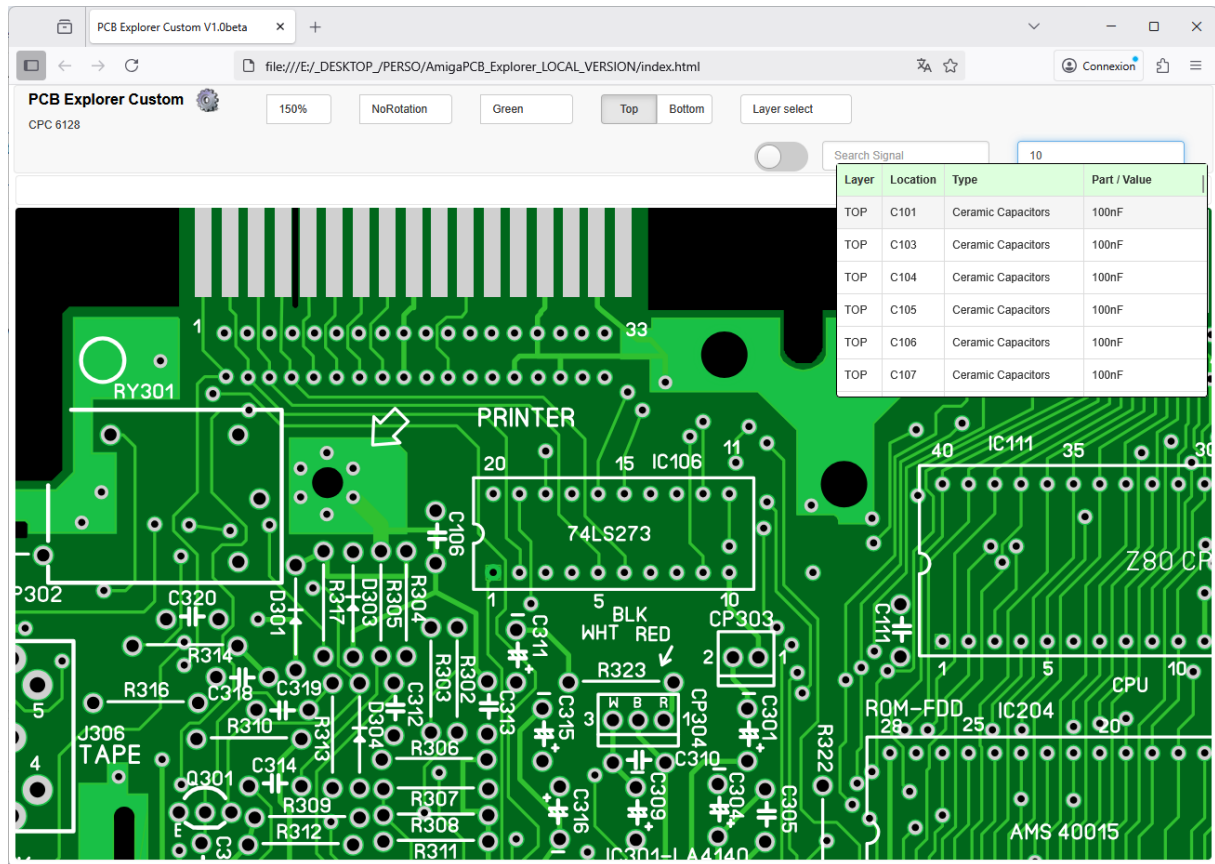


As before, on click on 'location' and an automatic move will be performed to the Component.


With this **Toogle_GND** button, you can choice if you want to display the GND LINE (when you click on GND trace of course). This may be of interest depending on your configuration.

In fact, changing a very large set of lines such as the GND line on the fly is inevitably CPU/memory intensive.

Exemple : [Base] Gnd is NOT displayed when a GND line is selected

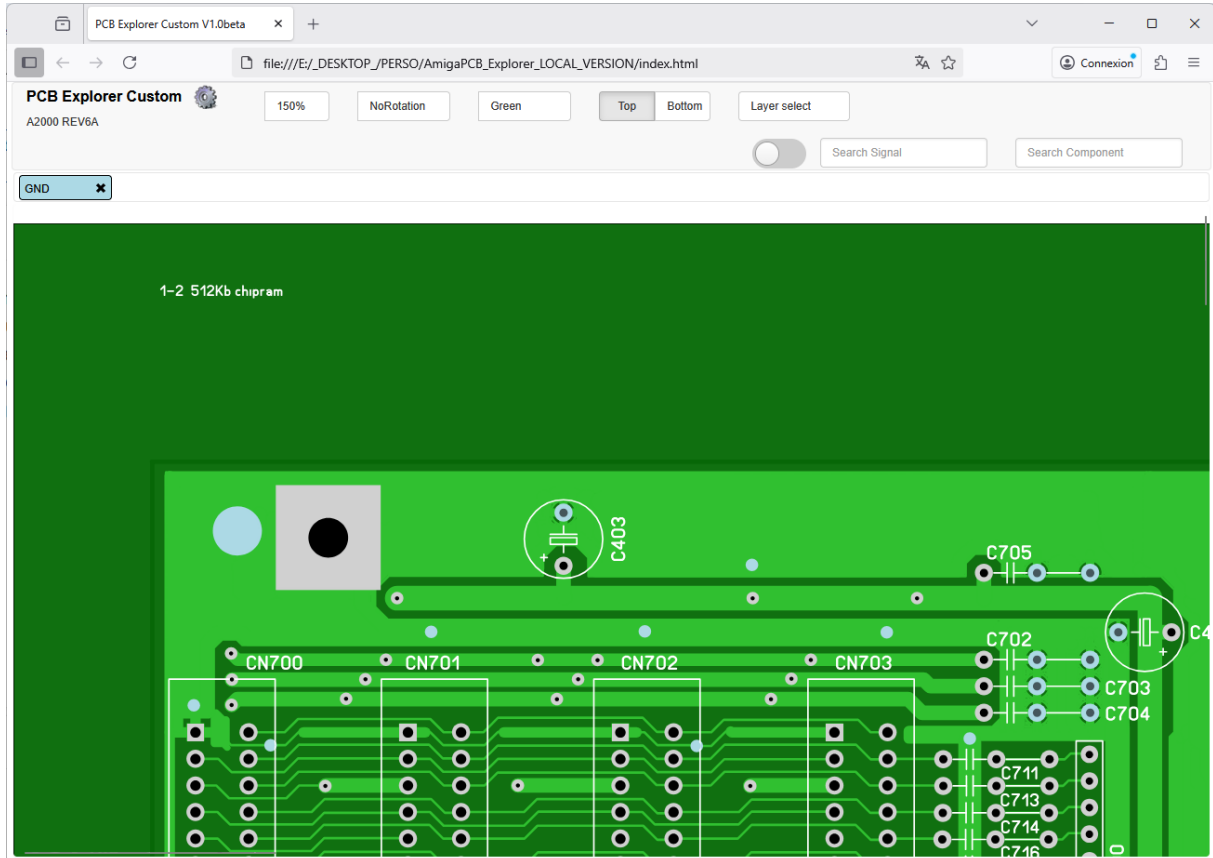


But, if you toggle the GND button and re-do the same thing.

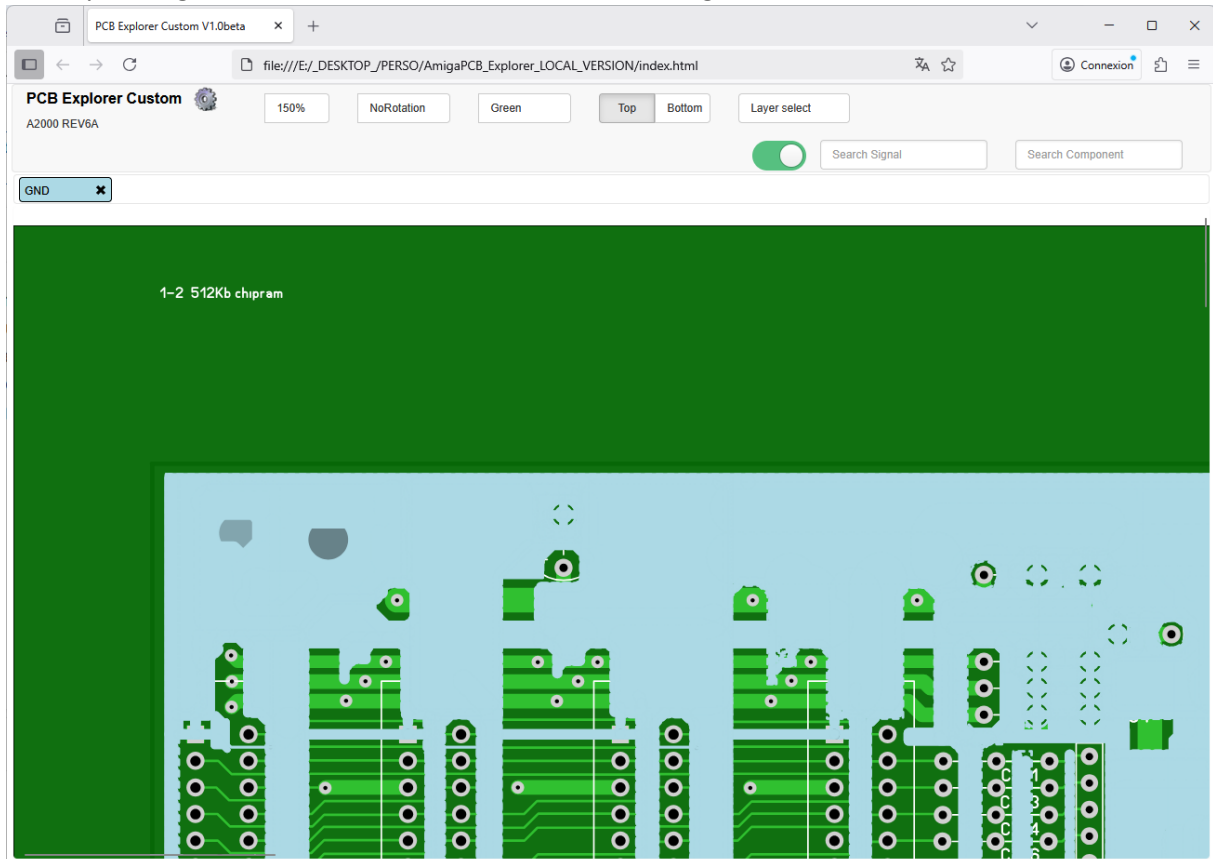

On each line selected, a new onglet will be available (16 max)

Each onglet contain all information of the Line.

Ex : **A2** here

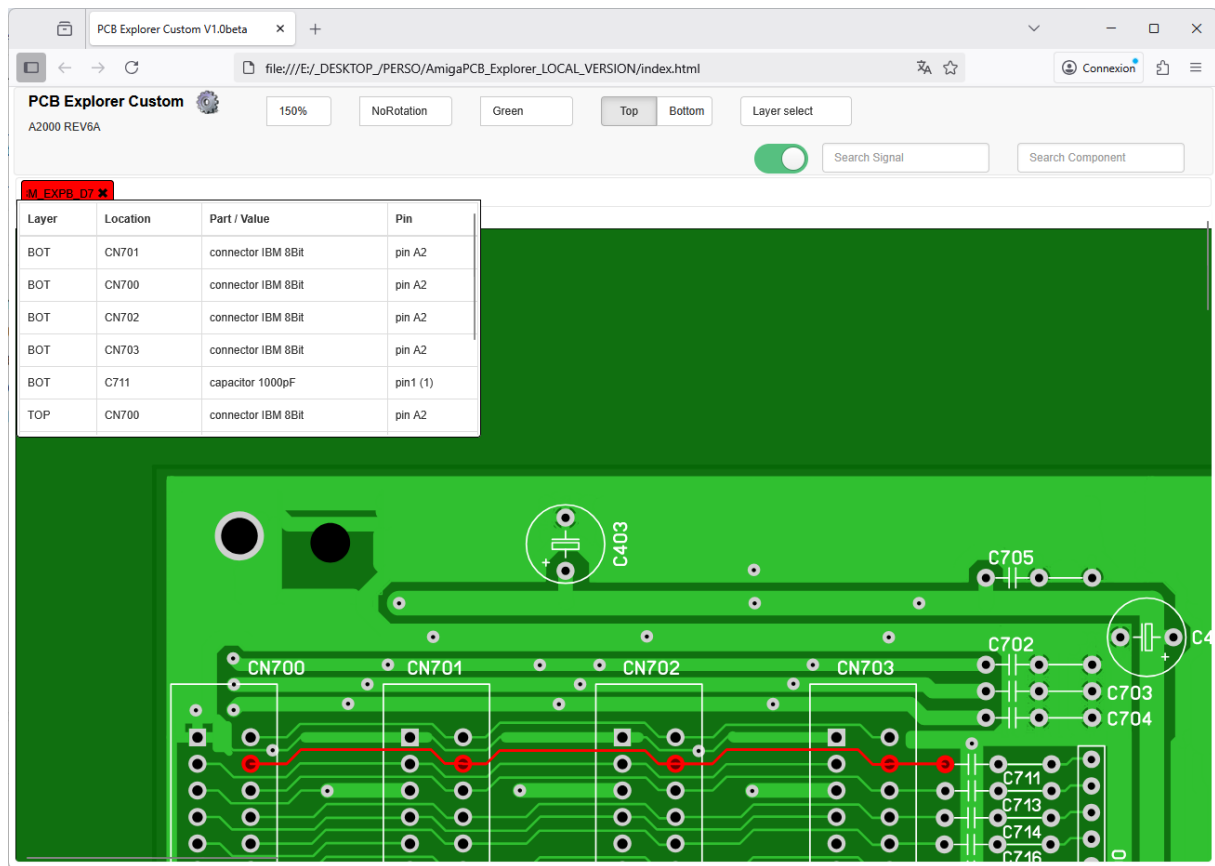

As before, on click on 'location' and an automatic move will be performed to the Component.

With **gear icon**, you can also change all color assigned to each lines.

