Memory

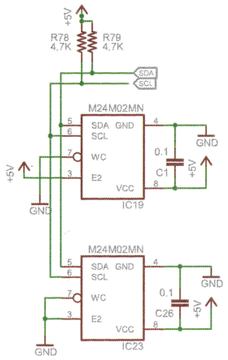

All PSU bypass capacitors are Ceramic 0.1uF

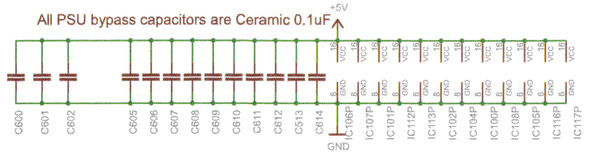

Encoder





DAC/Multiplexer

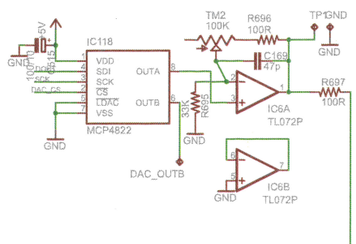

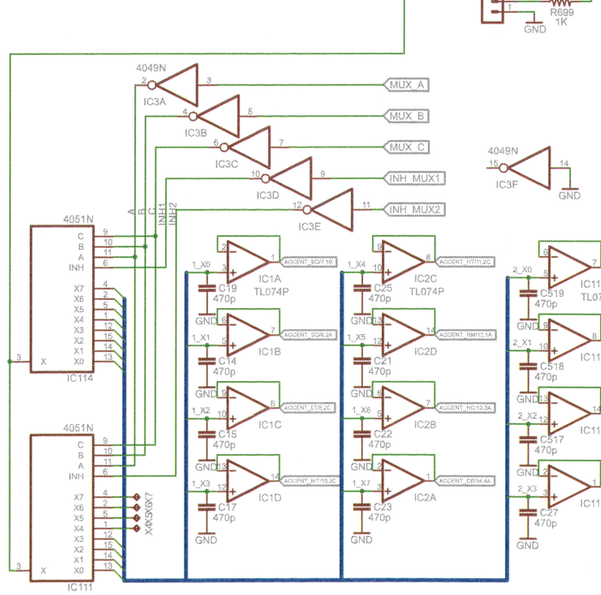

Atmega1284P

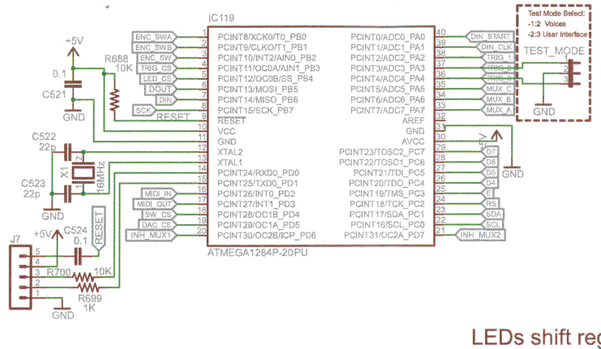



PSU Connector



shift register TRIG



Switches shift registers

All pull-down resistors are 10Kohm

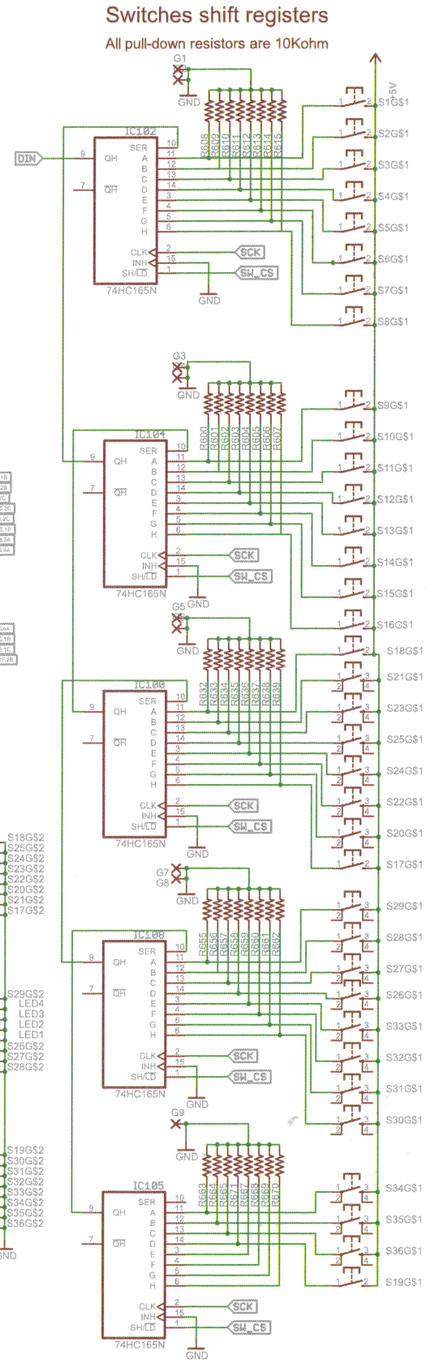

LEDs shift registers

All LEDs resistors are 1K2ohm

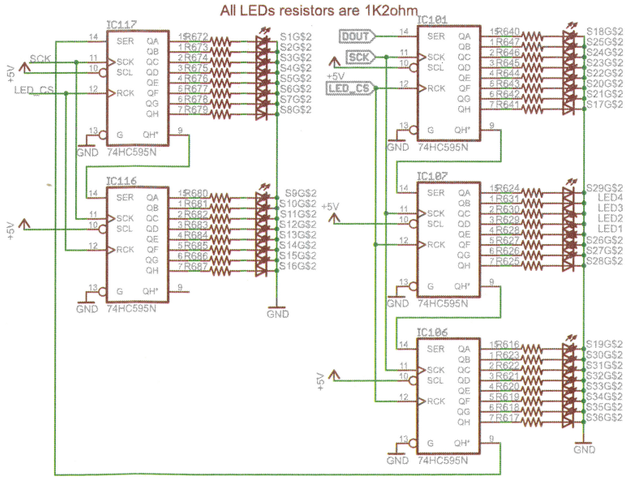



TITLE: Yocto v2.007	
Document Number:	REV:
Date: 05/05/2017 09:33:17	Sheet: 1/18

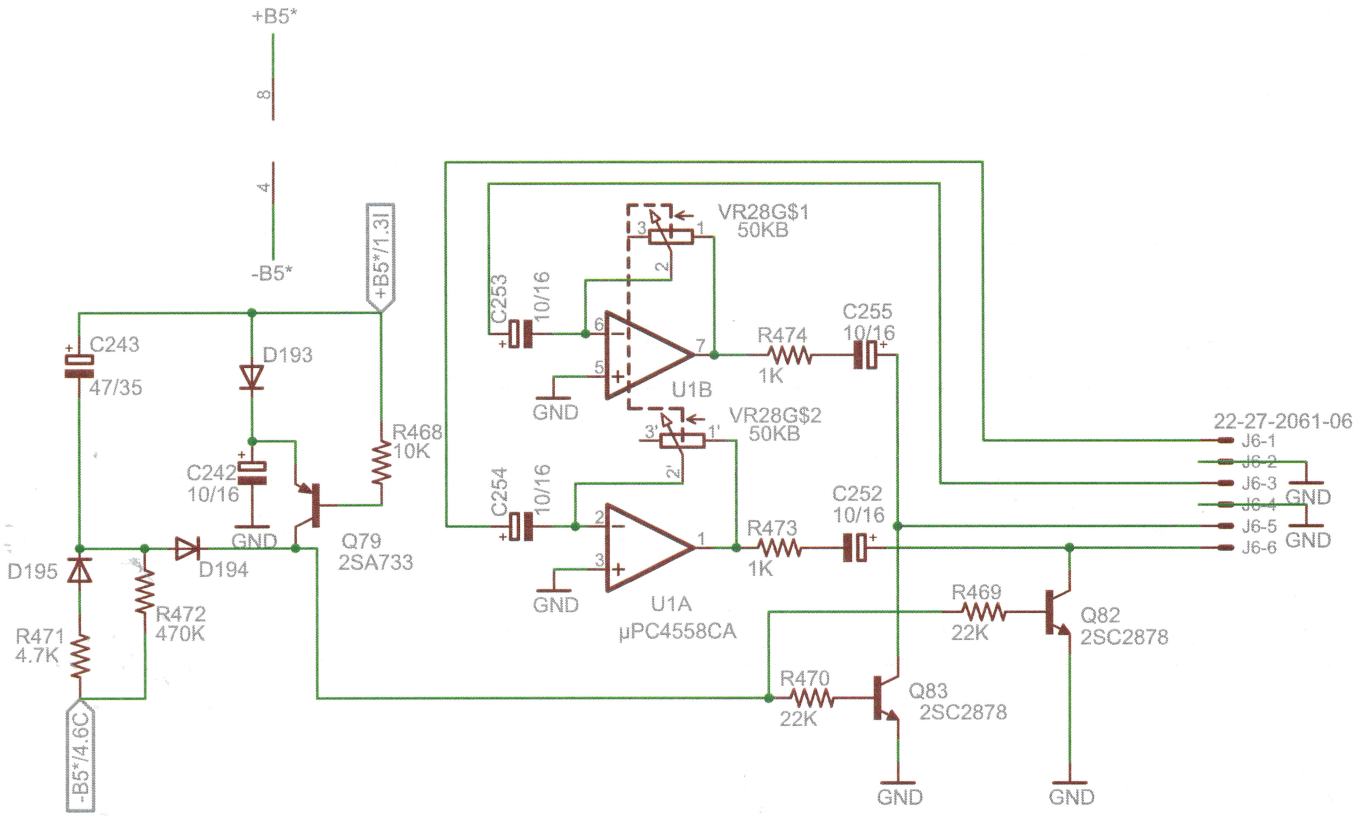

→ Sheet 5

MASTER VOLUME

Yocto v2.007

05/05/2017 09:33:17

Sheet: 2/18

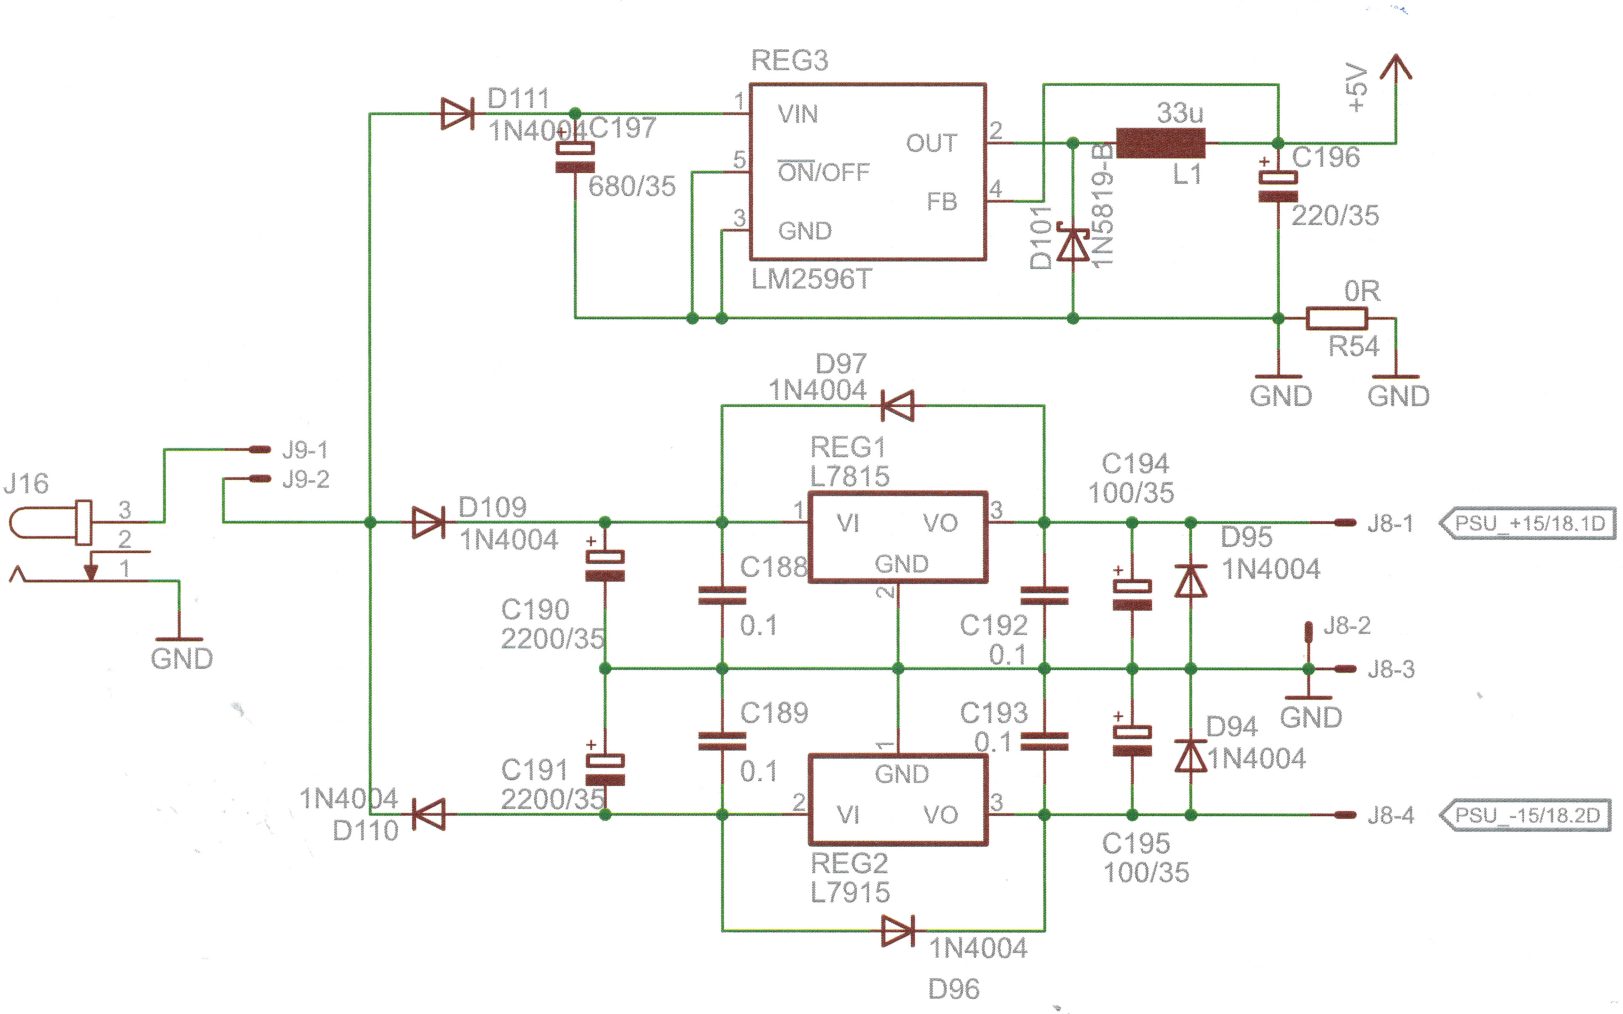

PSU

Yocto v2.007

05/05/2017 09:33:17

Sheet: 3/18

PSU Busses

All PSU busses resistors are 0 ohm

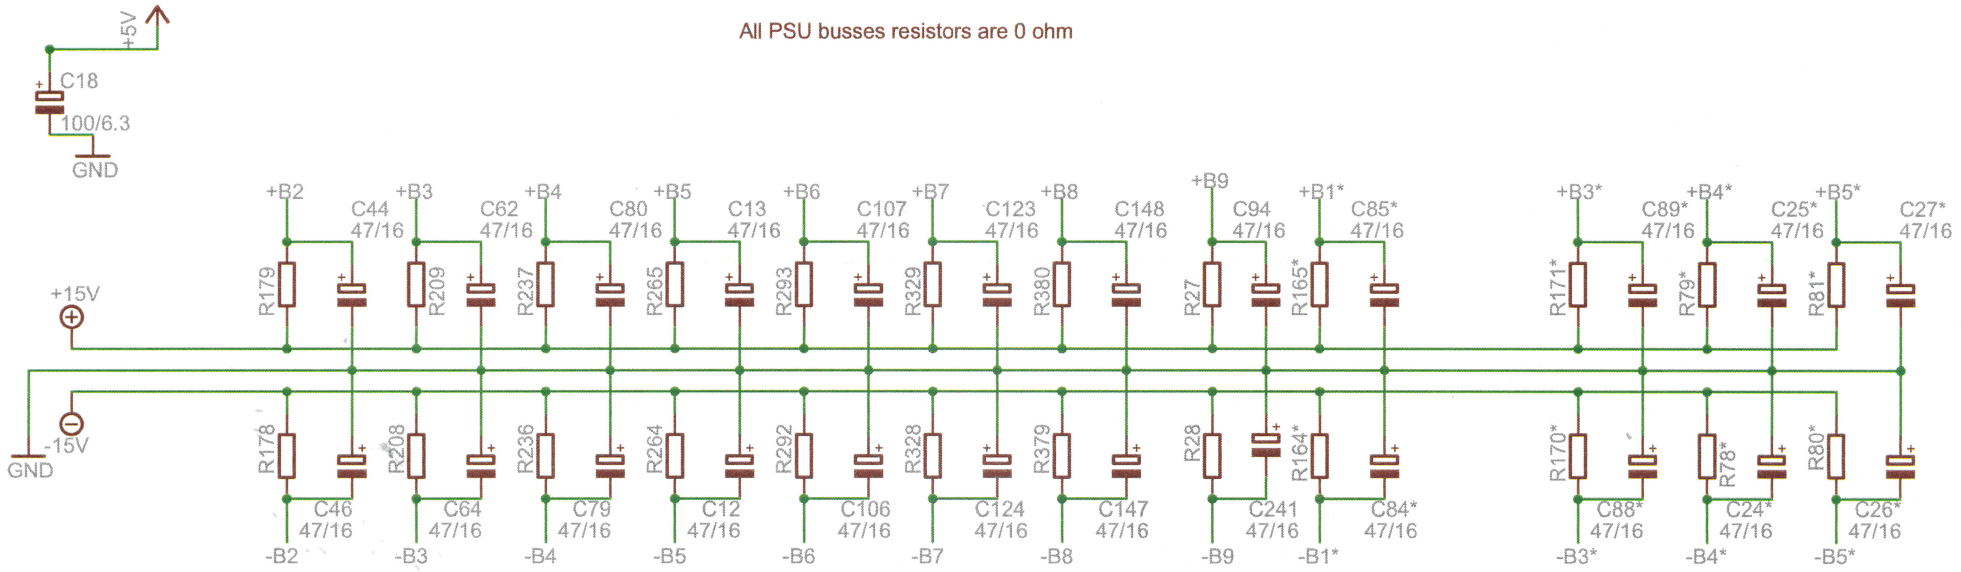

PSU Busses

Yocto v2.007

05/05/2017 09:33:17

Sheet: 4/18

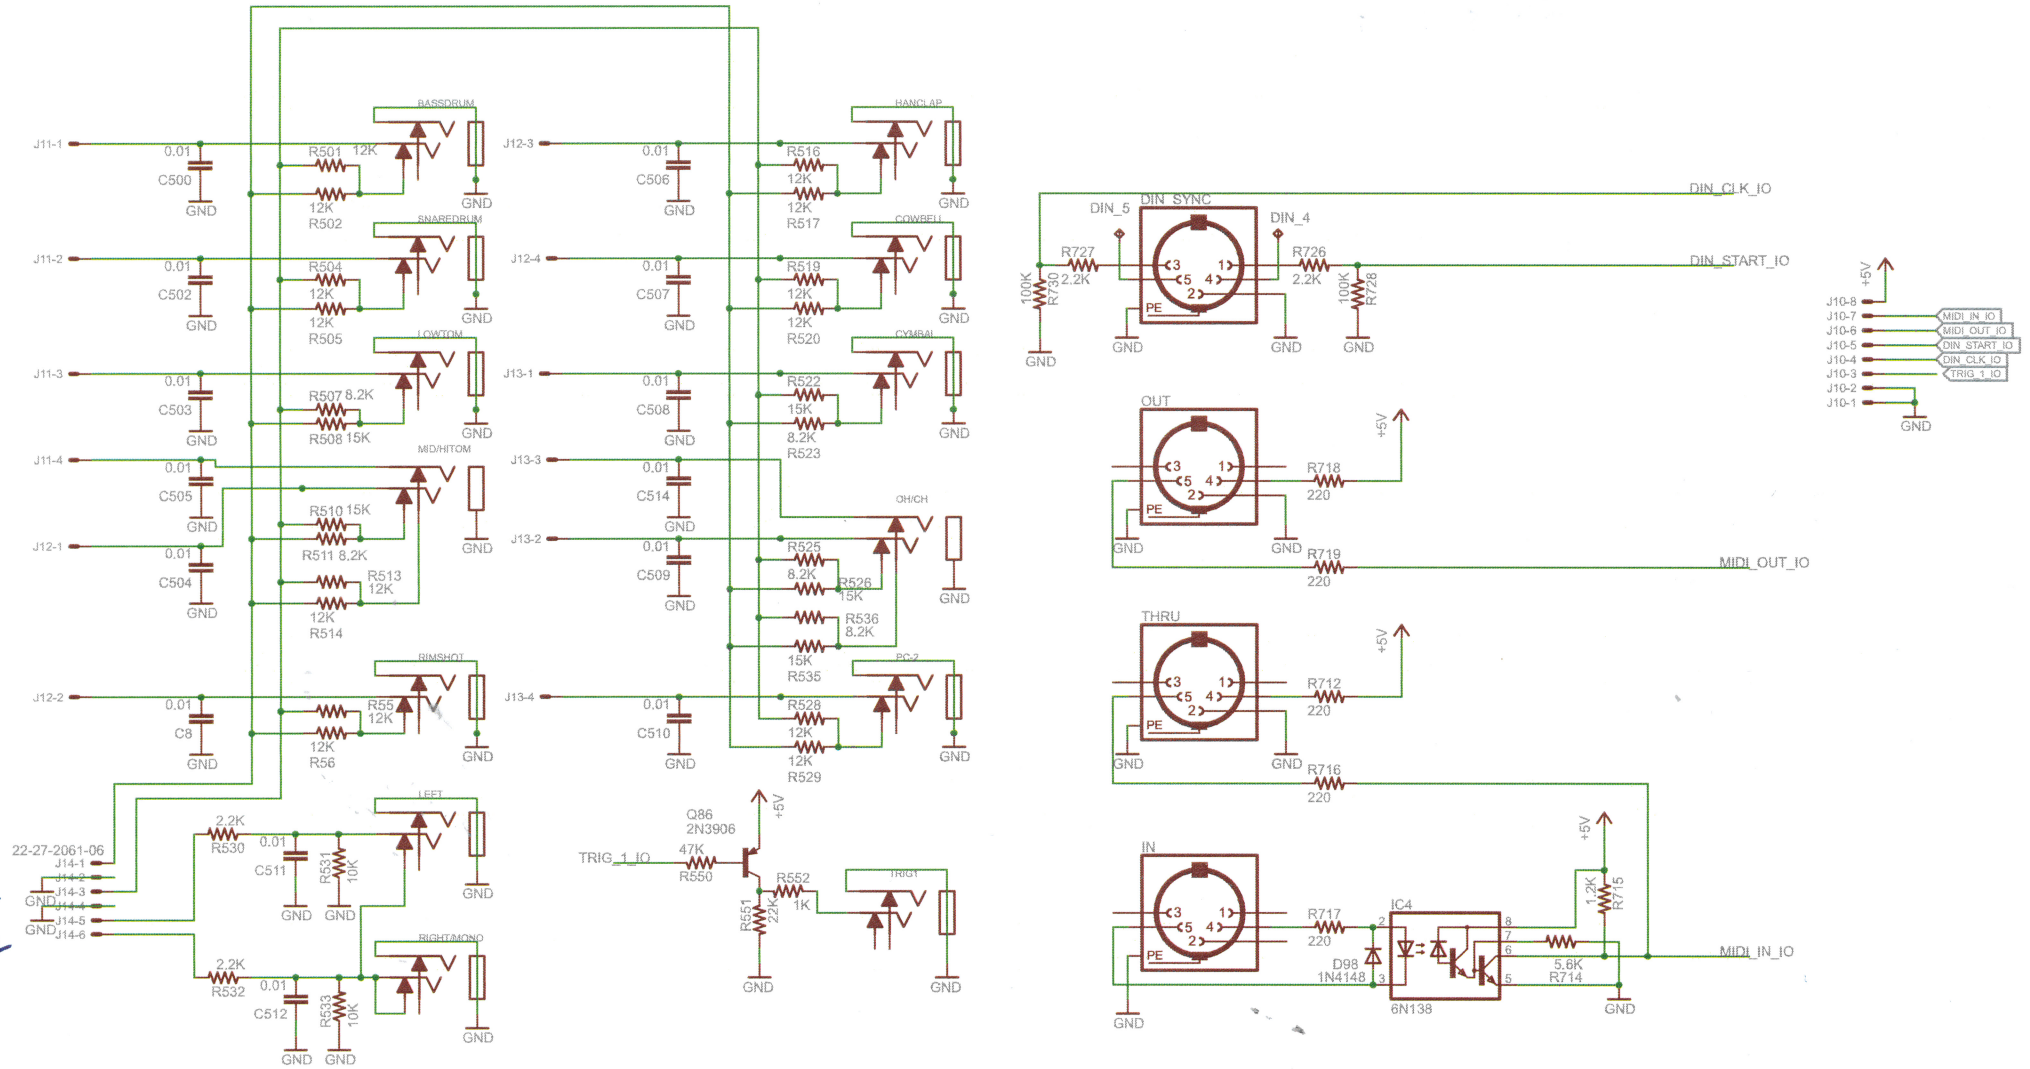

Sheet 2

JACK BOARD.

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 5/18	

Noise

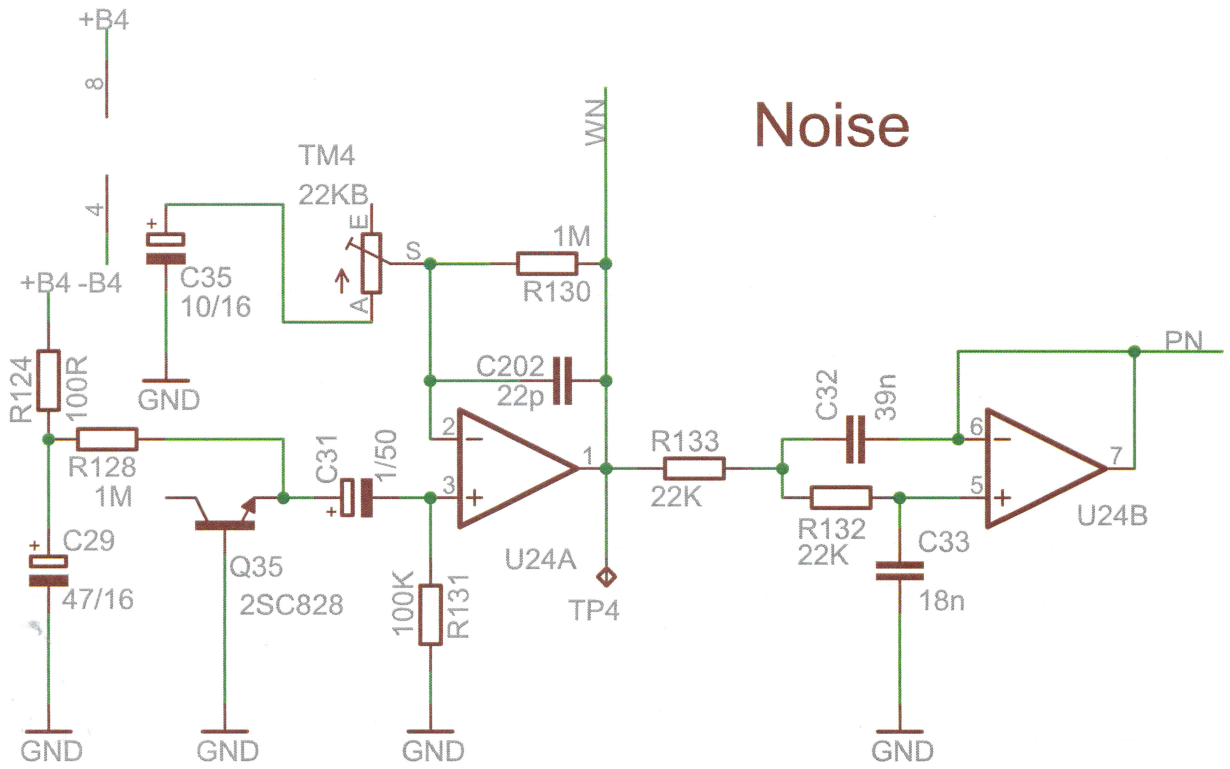

Noise section

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 6/18	

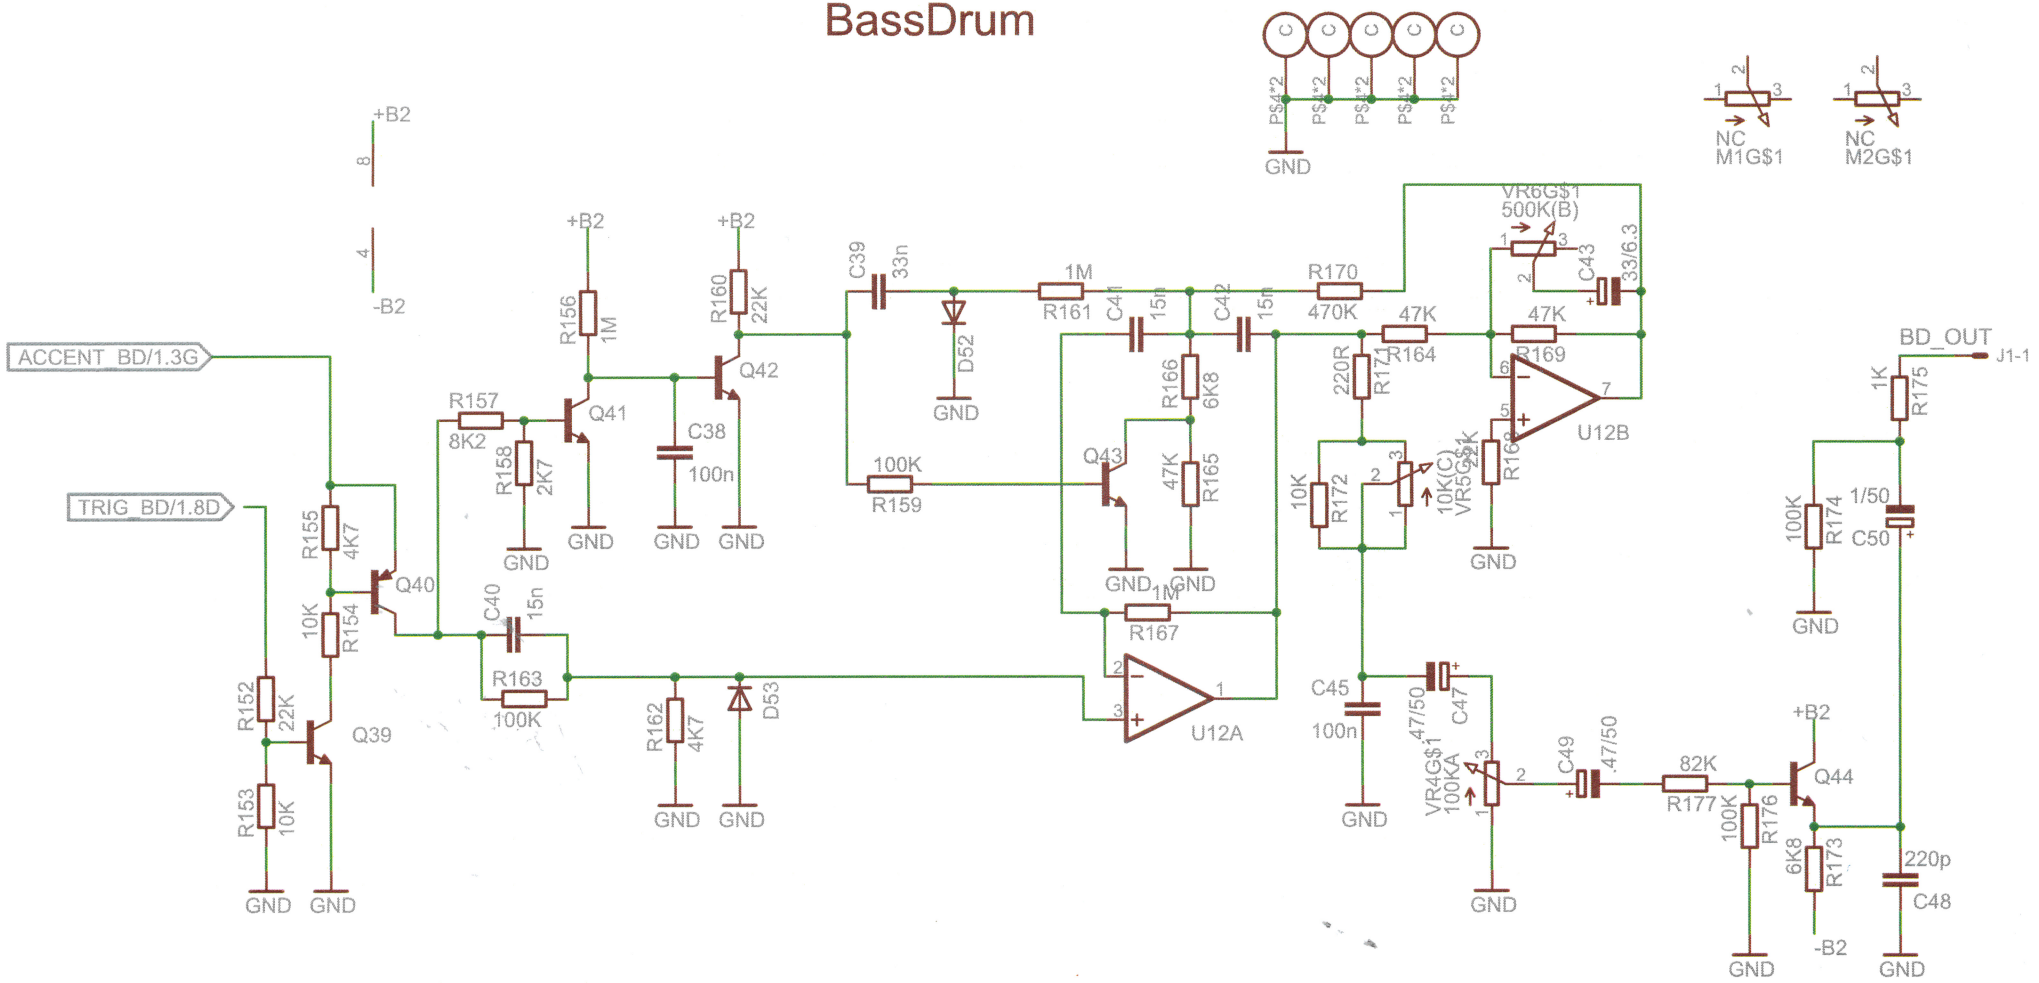
BassDrum
ACCENT_BD/1.3G
TRIG_BD/1.8D
+B2
-B2
GND
R152 22K
R153 10K
R154 10K
R155 4K7
Q39
Q40
R156 1M
R157 8K2
R158 2K7
Q41
C38 100n
R160 22K
Q42
C39 33n
D52
R159 100K
R161 1M
C41 15n
C42 15n
R162 4K7
C40 15n
R163 100K
D53
R164 47K
R165 47K
R166 6K8
Q43
R167 1M
U12A
R170 470K
R171 220R
R172 10K
10K(C) VR5G$1
R168 22K
R169 47K
U12B
VR6G$1 500K(B)
C43 33/6.3
C45 100n
C47 47/50
VR4G$1 100KA
C49 .47/50
82K R177
100K R176
Q44
6K8 R173
220p C48
R174 100K
C50 1/50
R175 1K
BD_OUT
J1-1
PS4*2
PS3*2
PS2*2
PS1*2
PS5*2
NC M1G$1
NC M2G$1
BD
Yocto v2.007
05/05/2017 09:33:17
Sheet: 7/18

SNARE DRUM

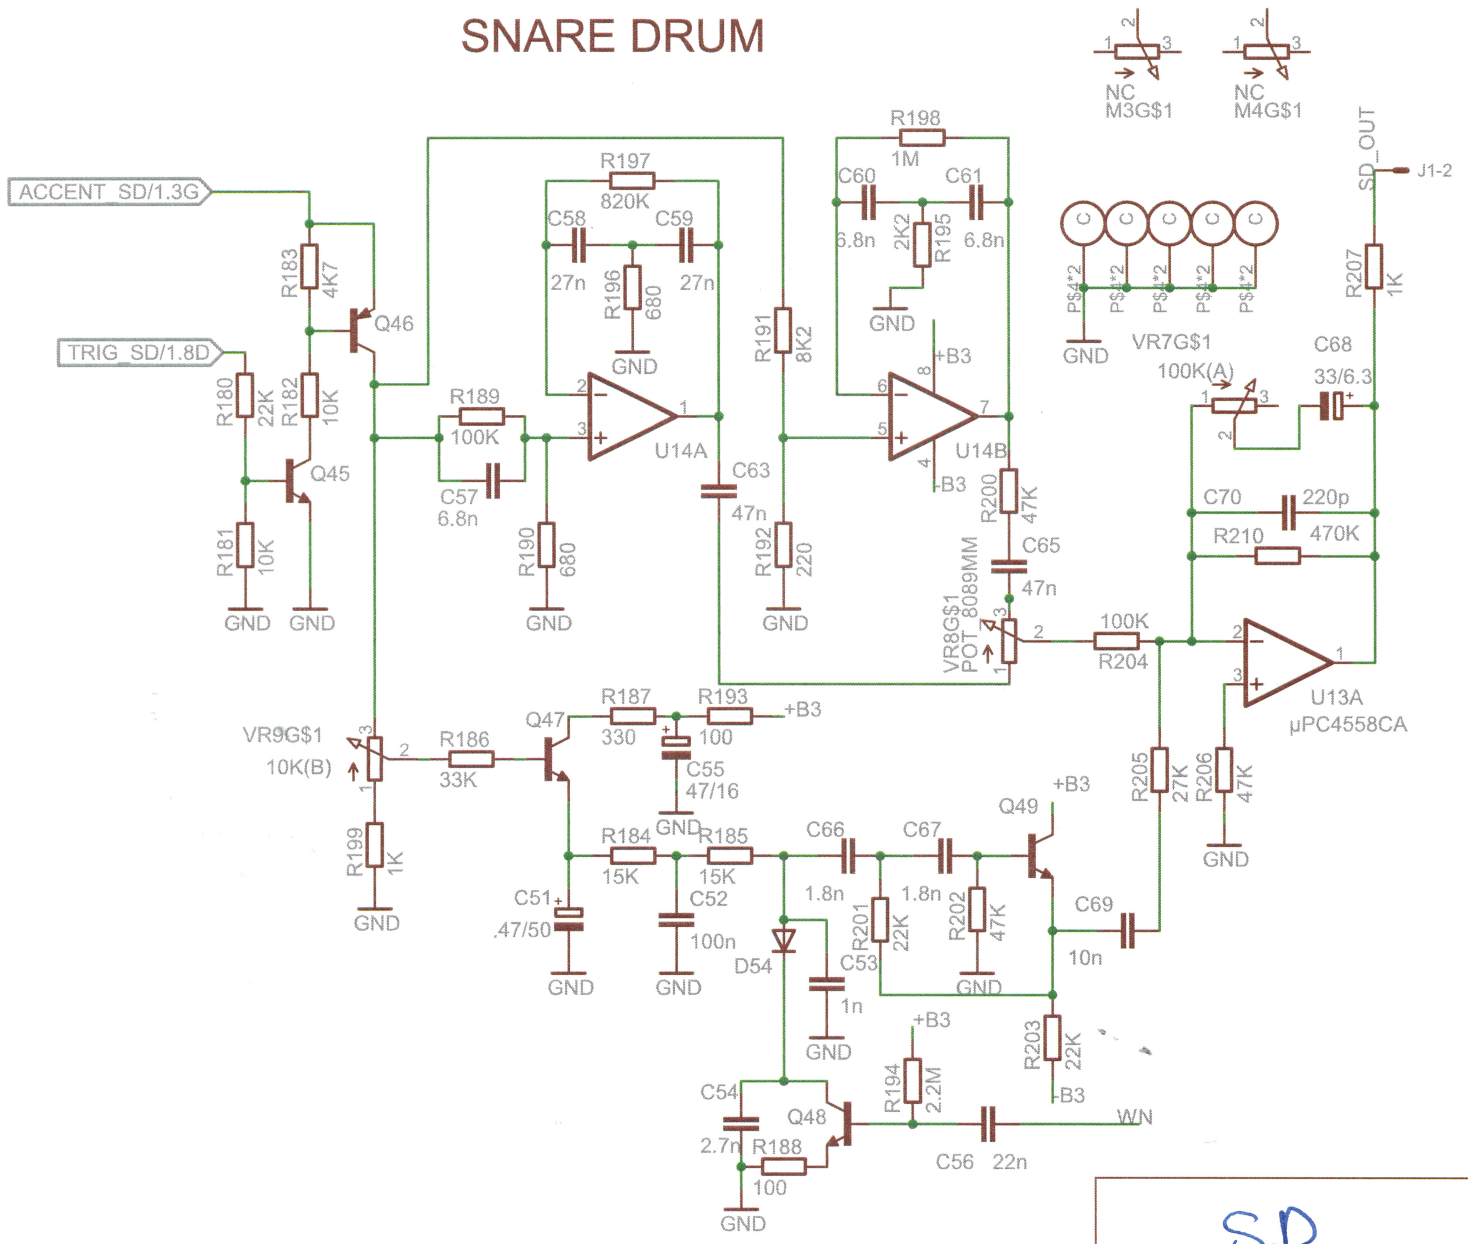

SD

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 8/18	

LOW TOM LOW CONGA

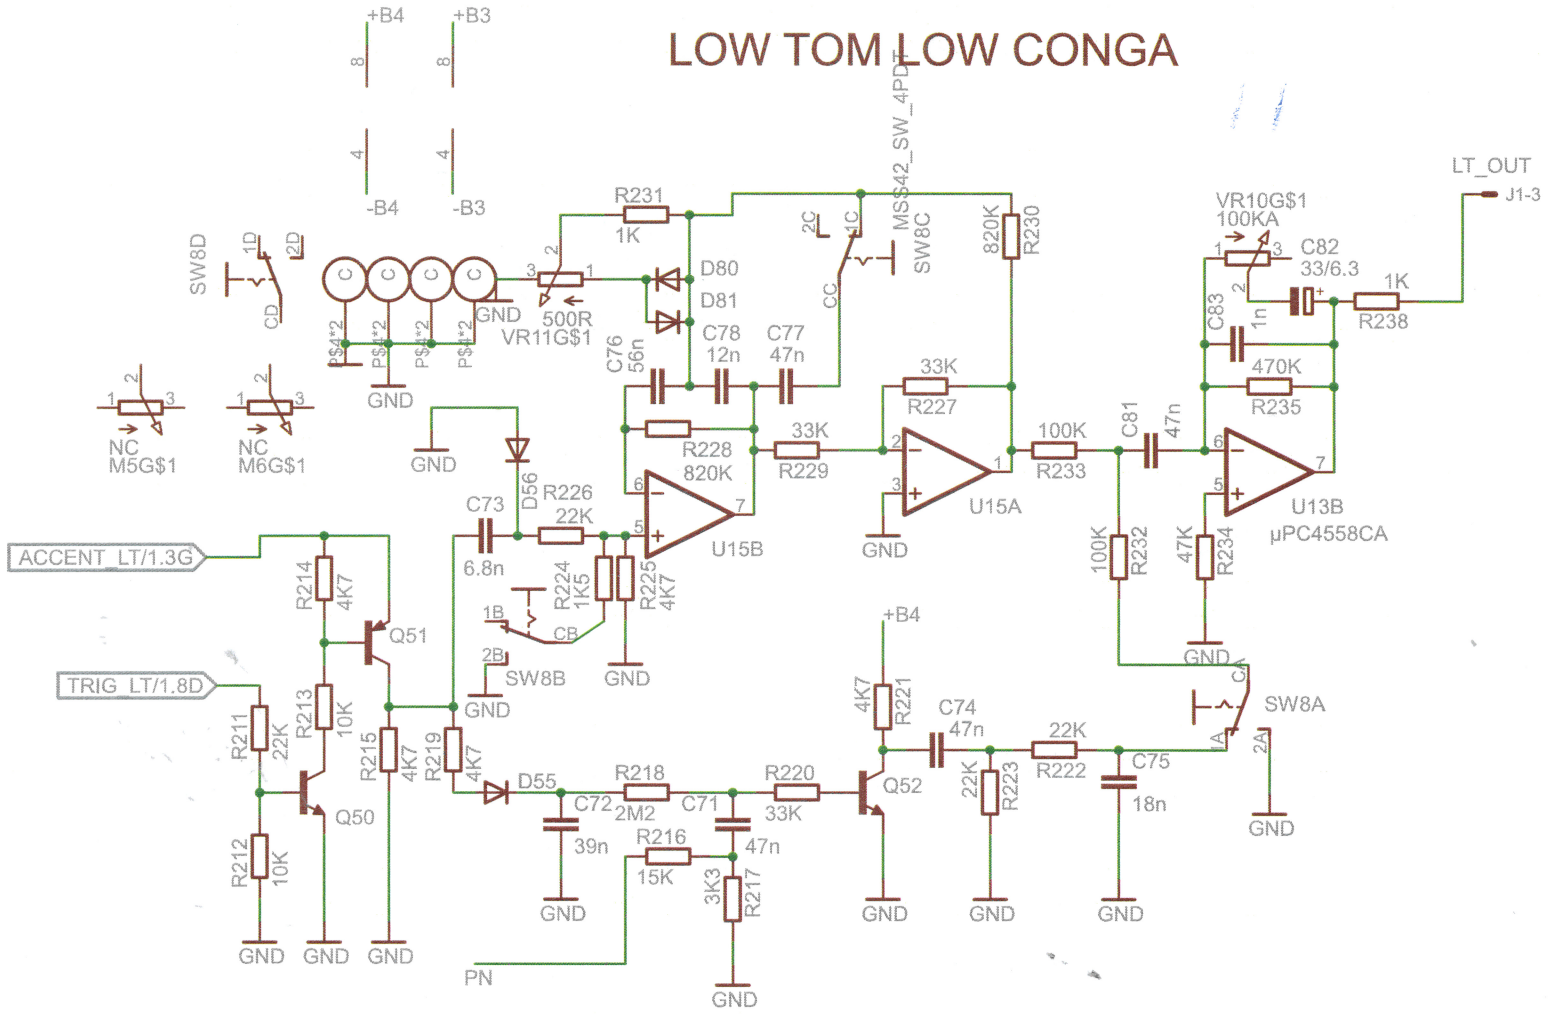

LT

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 9/18	

MID TOM MID CONGA

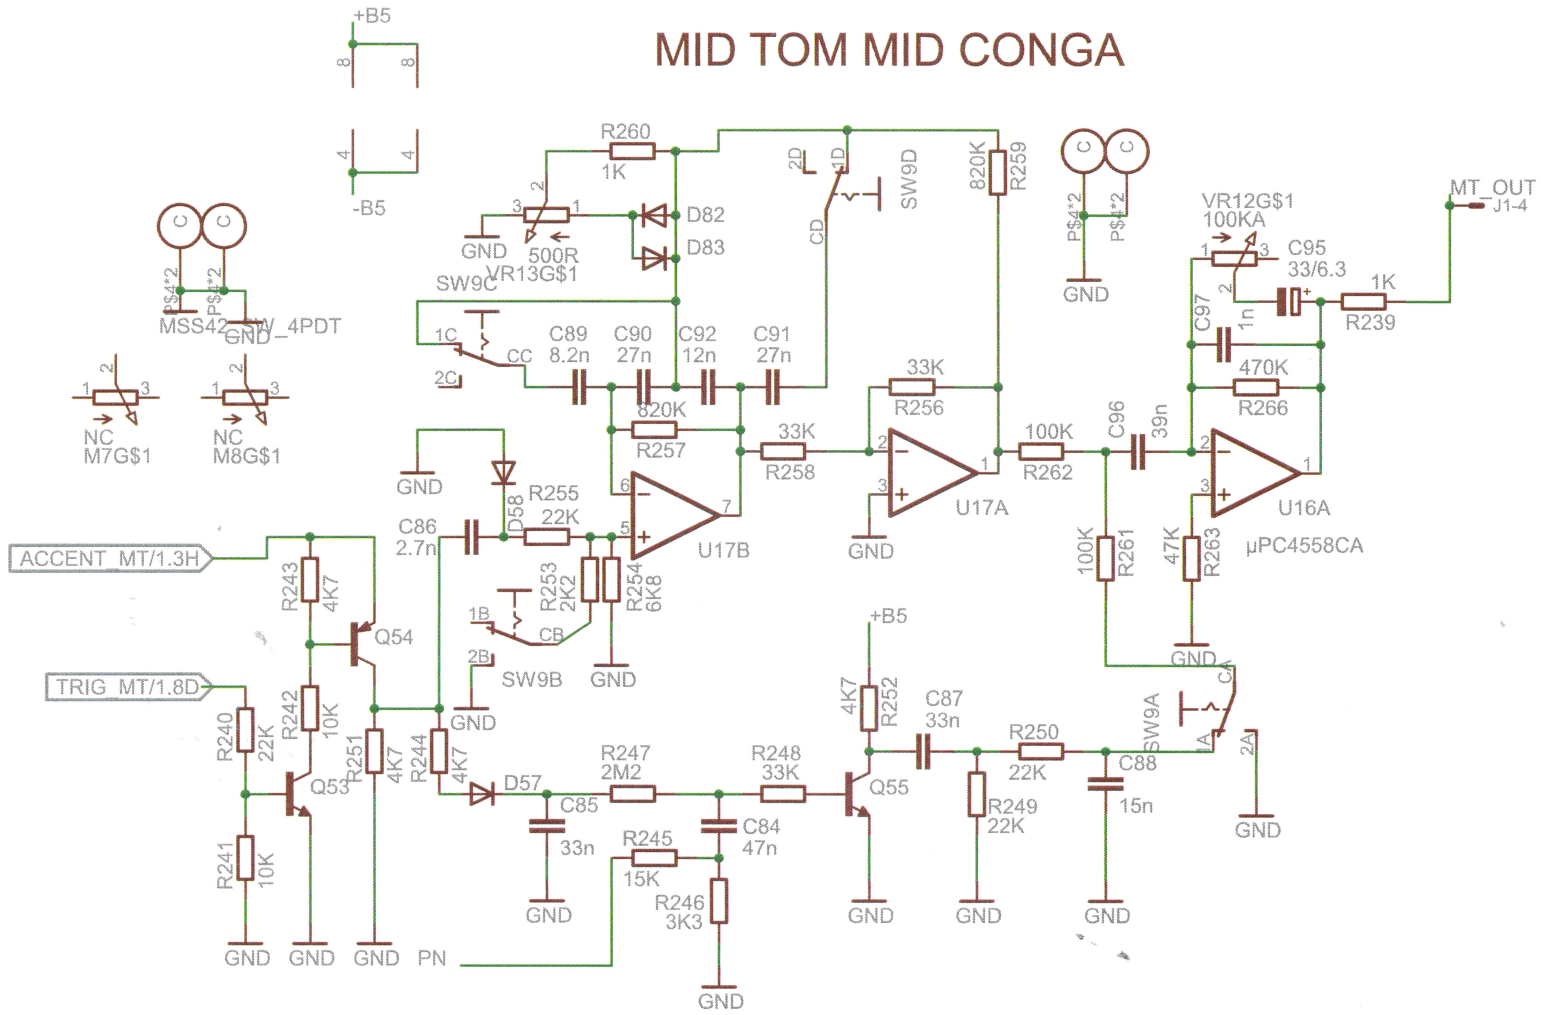

MT

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 10/18	

HI TOM HI CONGA

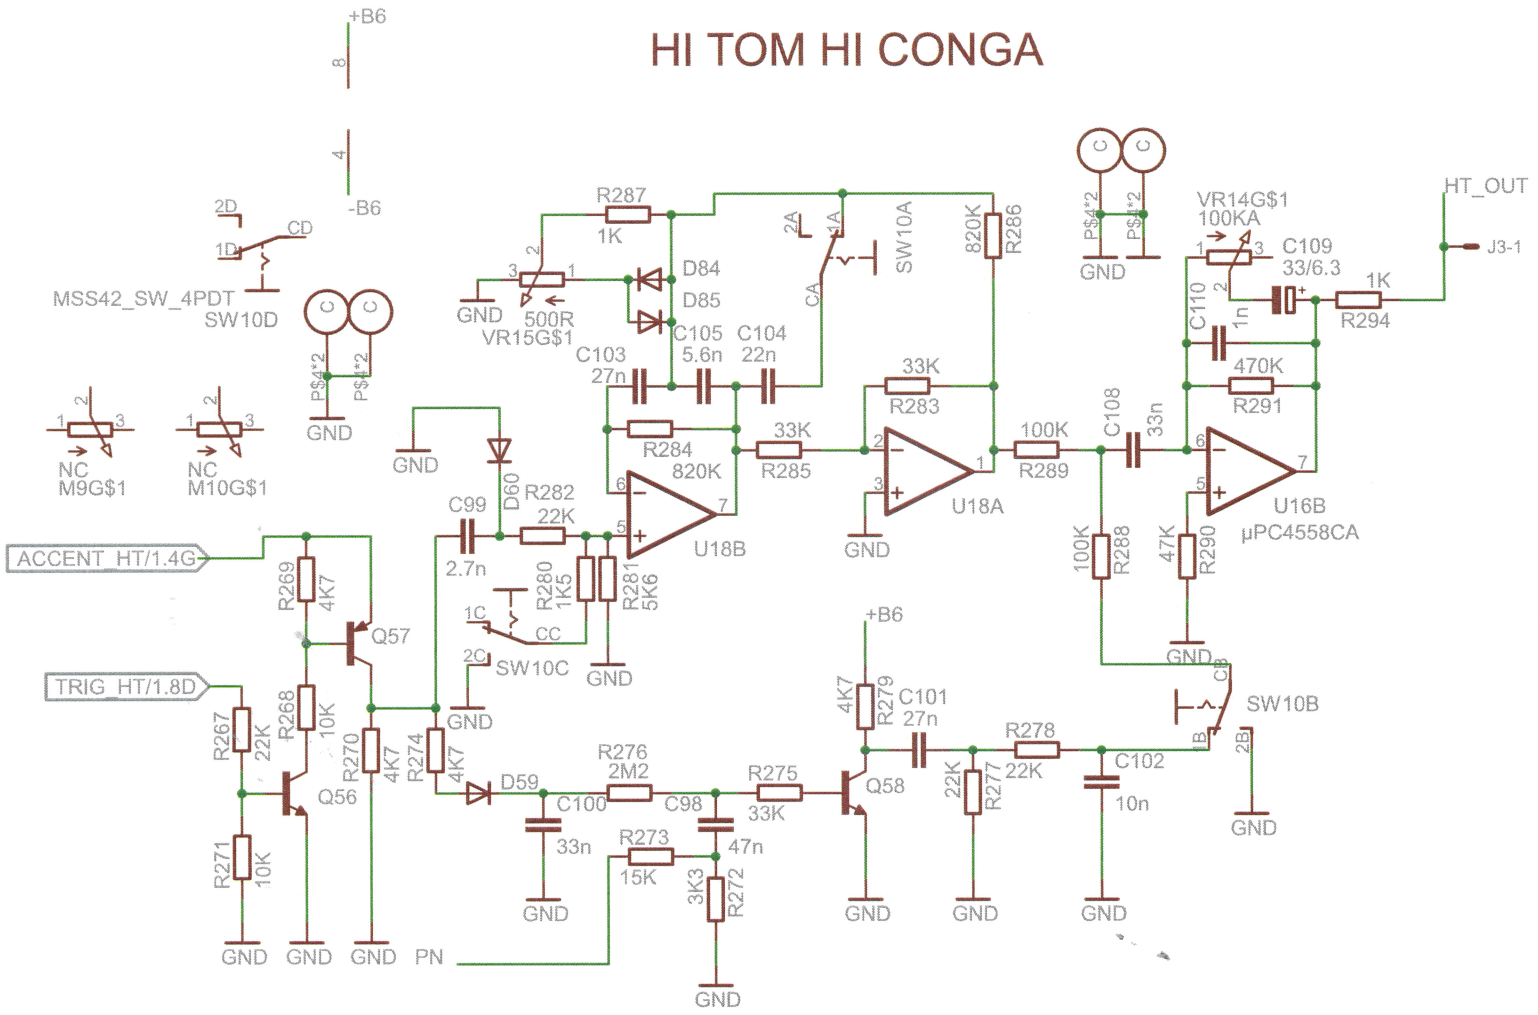

HT

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 11/18	

RimShot Clave

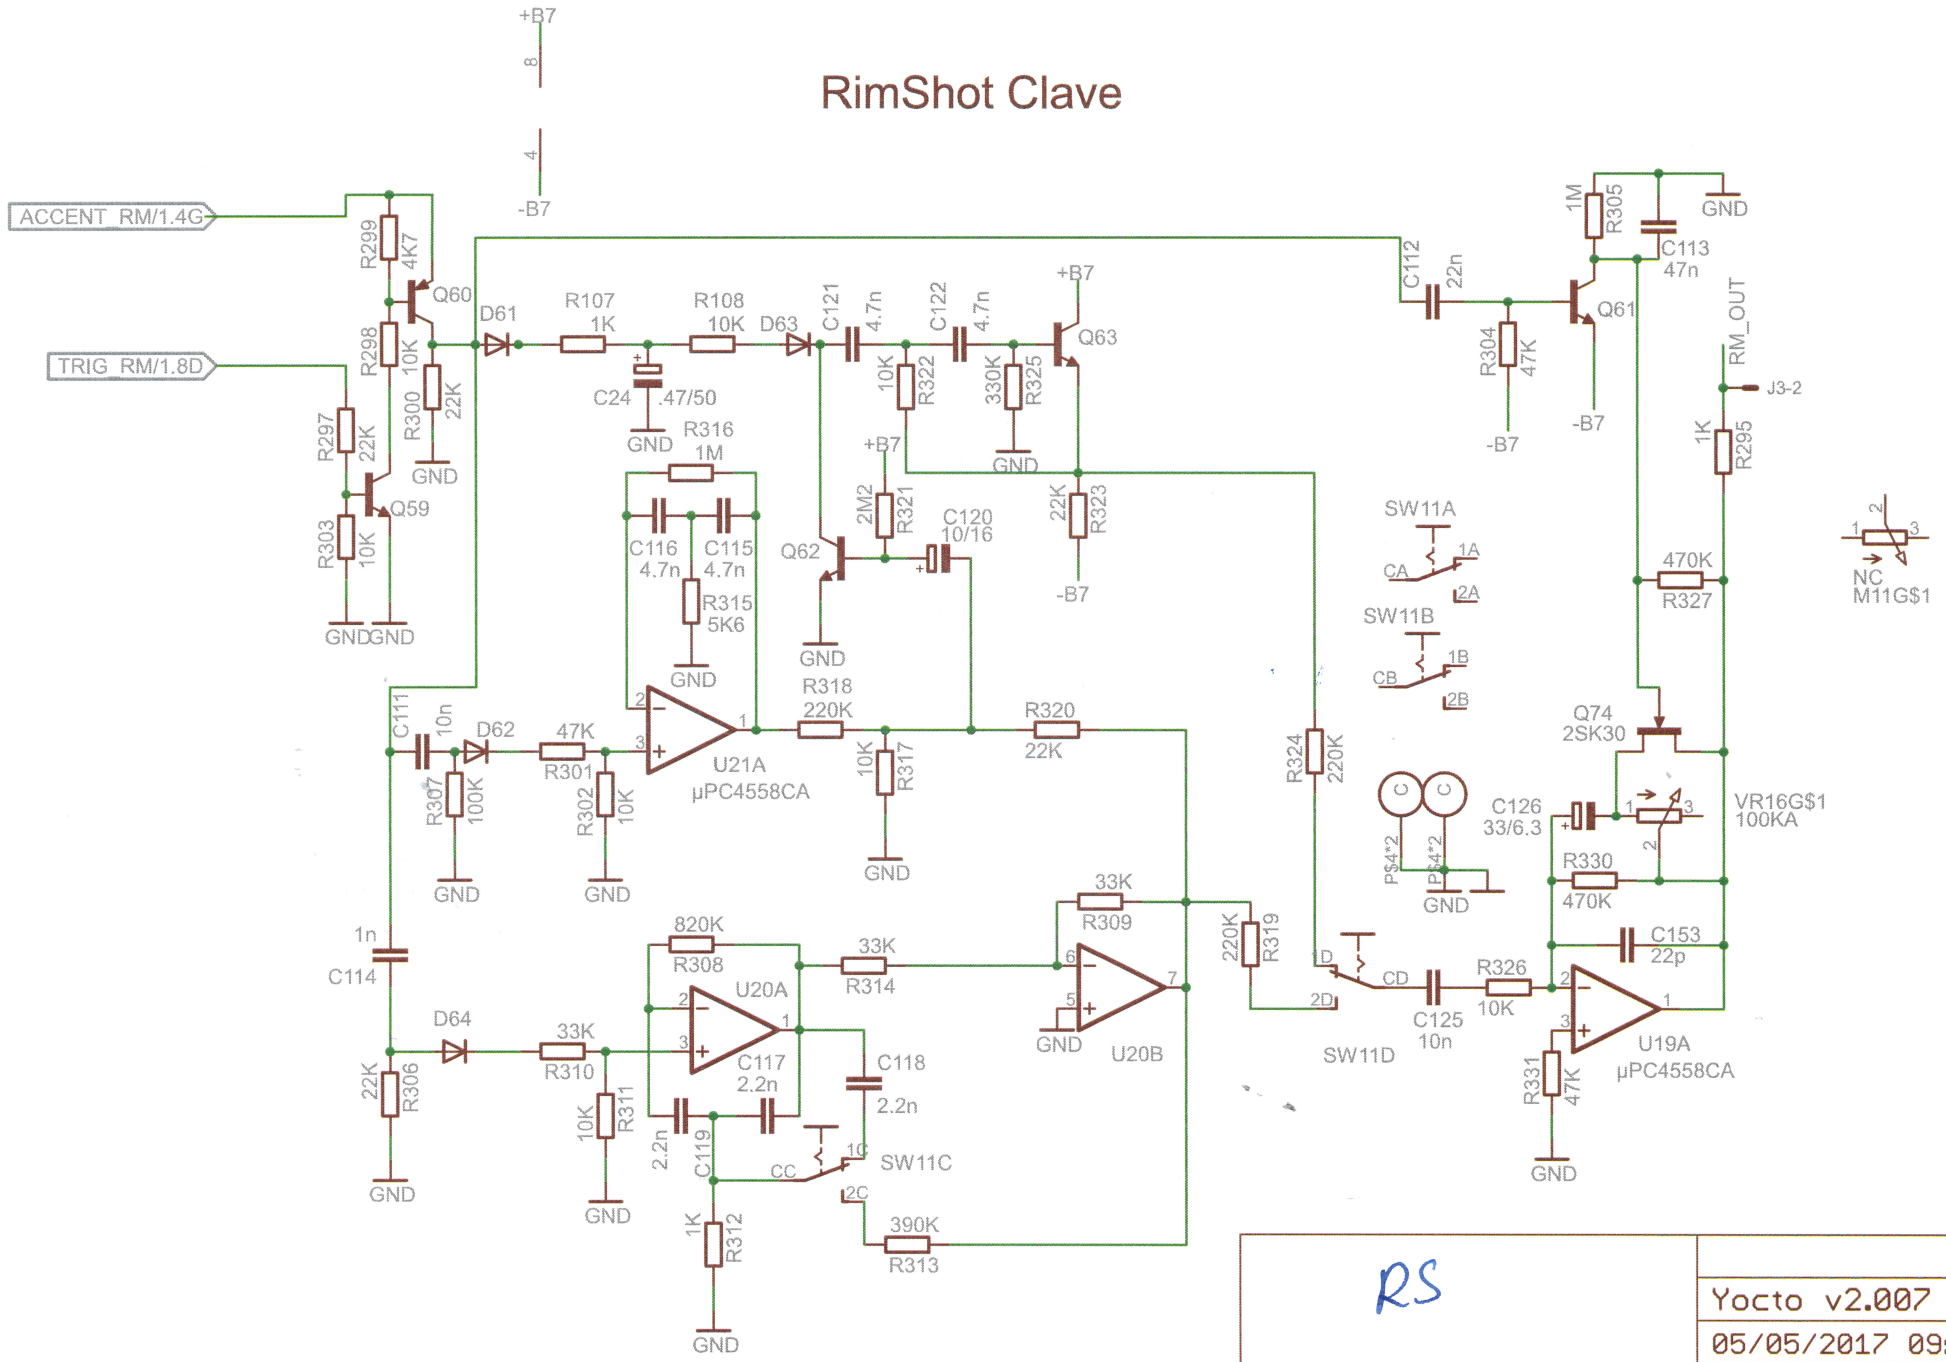

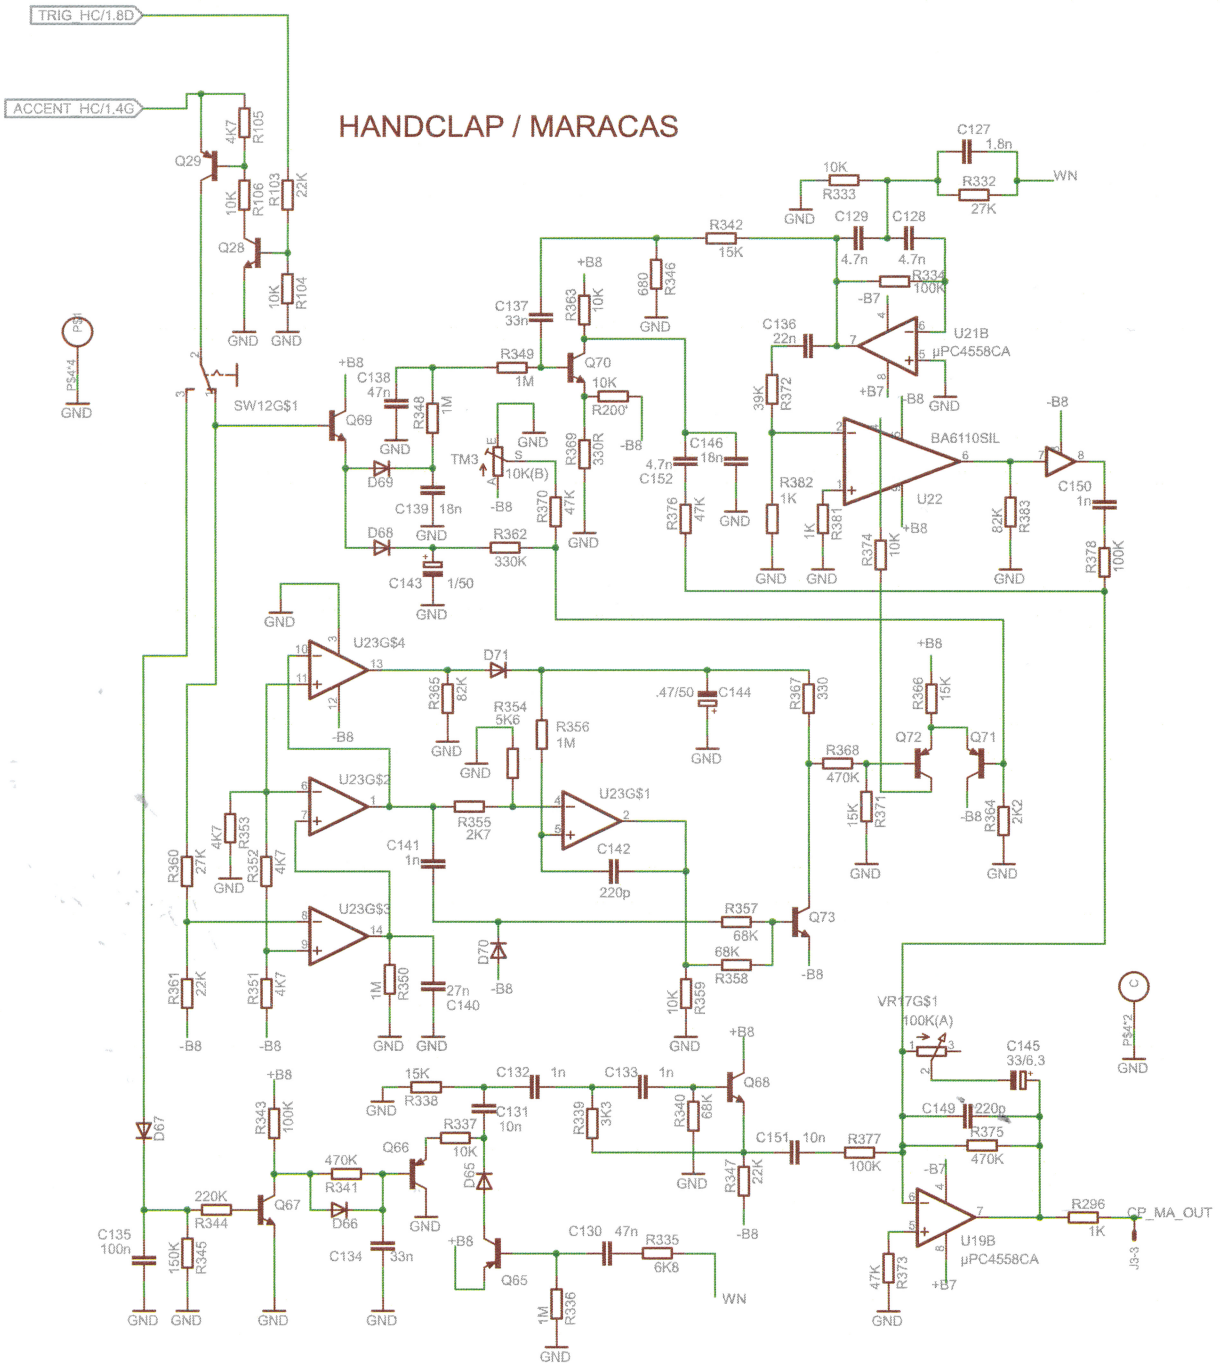
HANDCLAP / MARACAS
TRIG_HC/1.8D
ACCENT_HC/1.4G
SW12G$1
U23G$4
U23G$2
U23G$1
U23G$3
BA6110SIL
U21B
μPC4558CA
U22
U19B
μPC4558CA
VR17G$1
100K(A)
TM3
10K(B)
WN
CP_MA_OUT
GND
+B8
-B8
+B7
-B7
HC
Yocto v2.007
05/05/2017 09:33:17
Sheet: 13/18

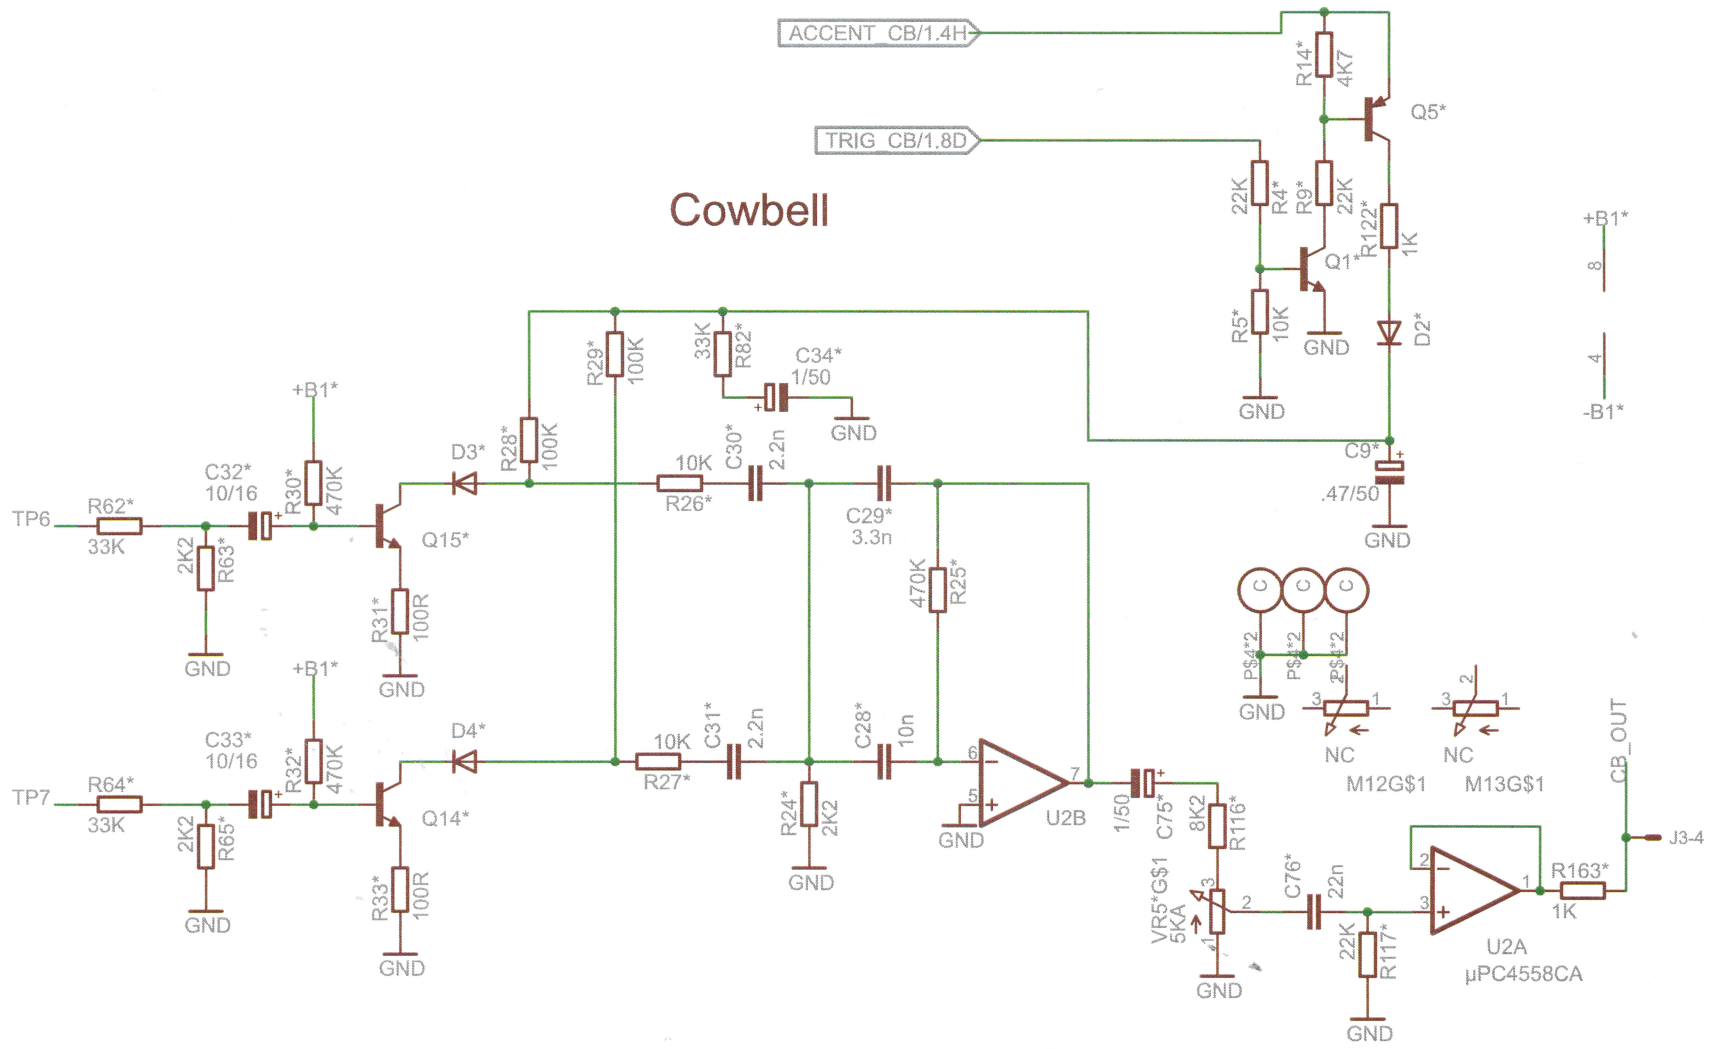

CB

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 14/18	

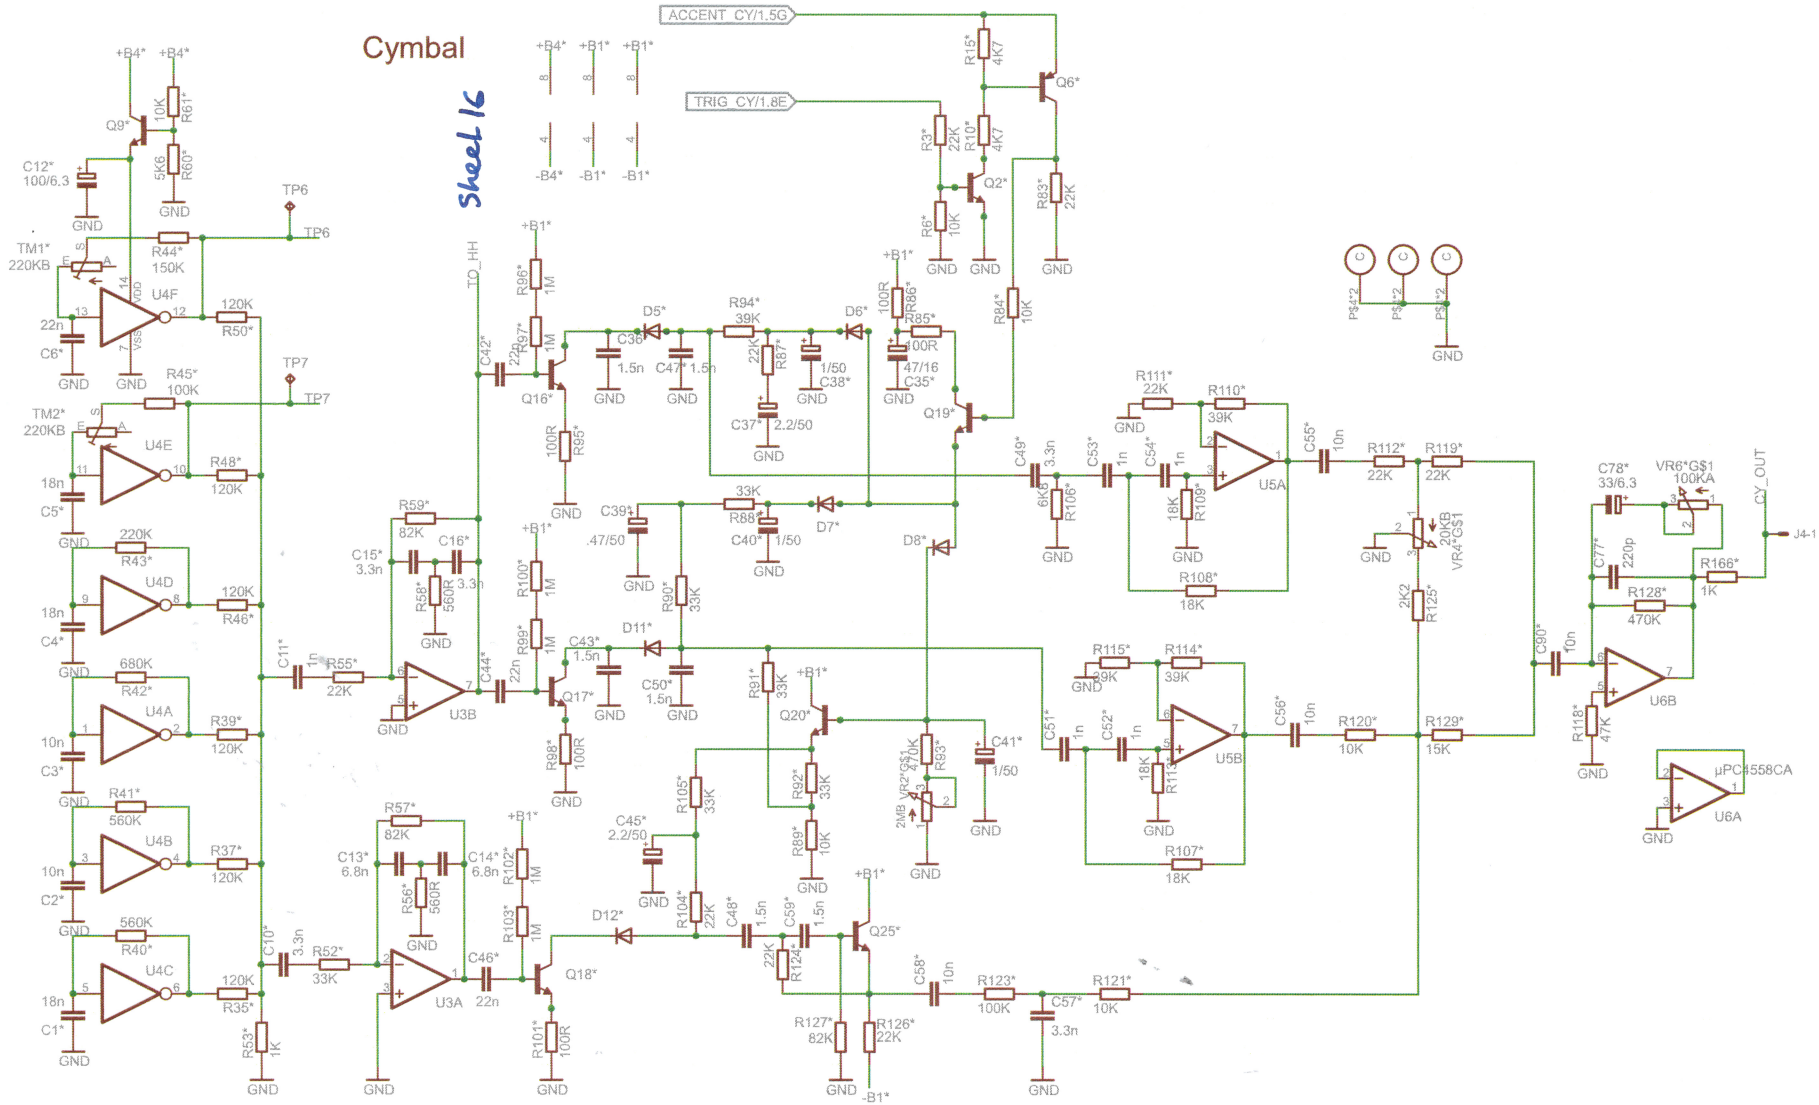

CY

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 15/18	

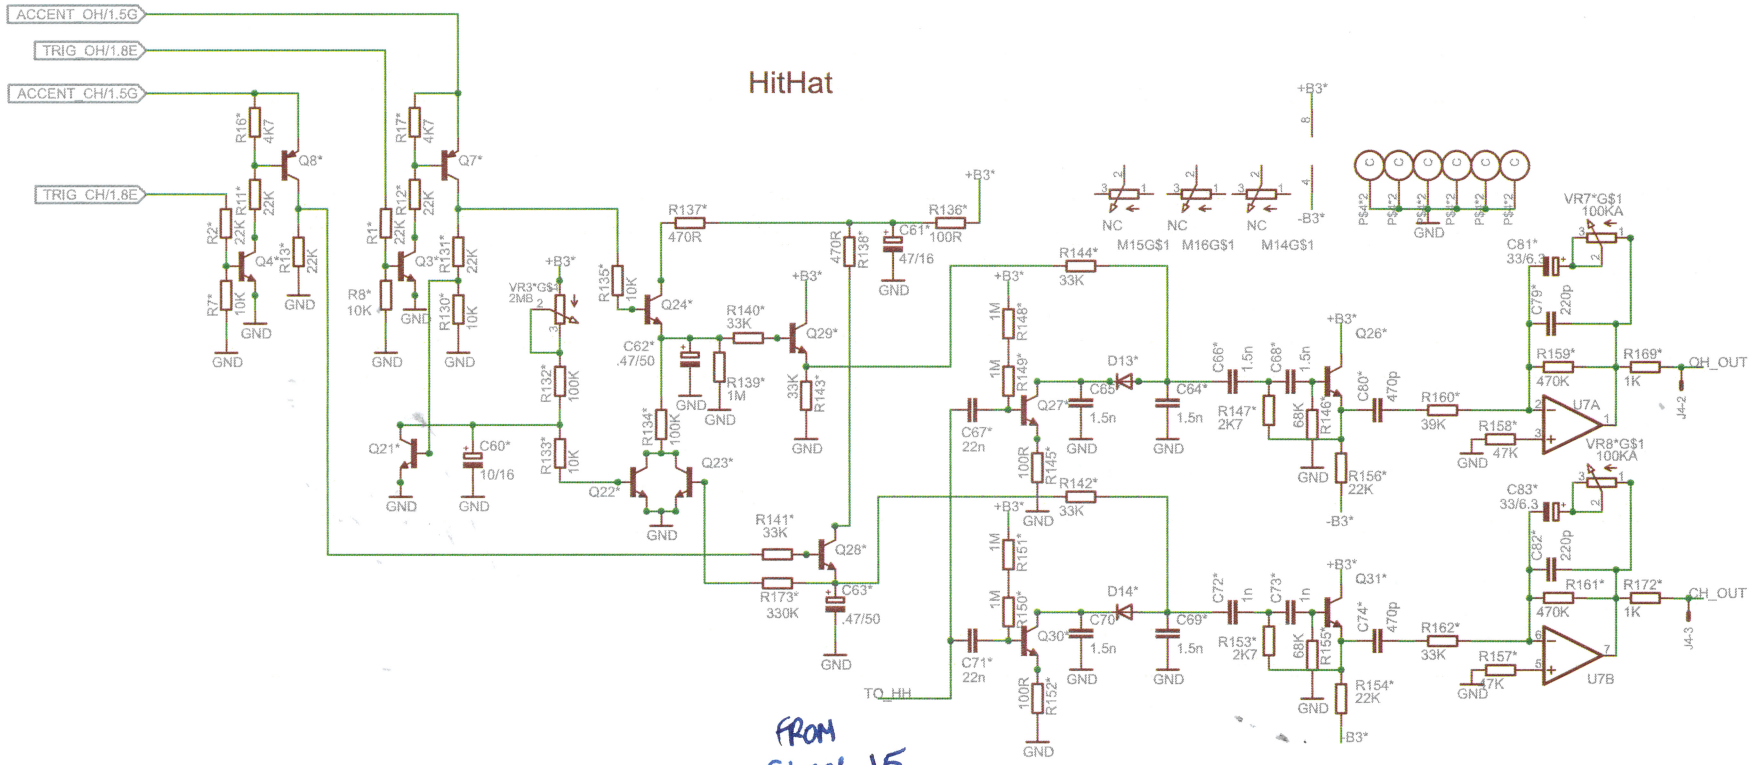

HH

Yocto v2.007	
05/05/2017 09:33:17	
Sheet: 16/18	

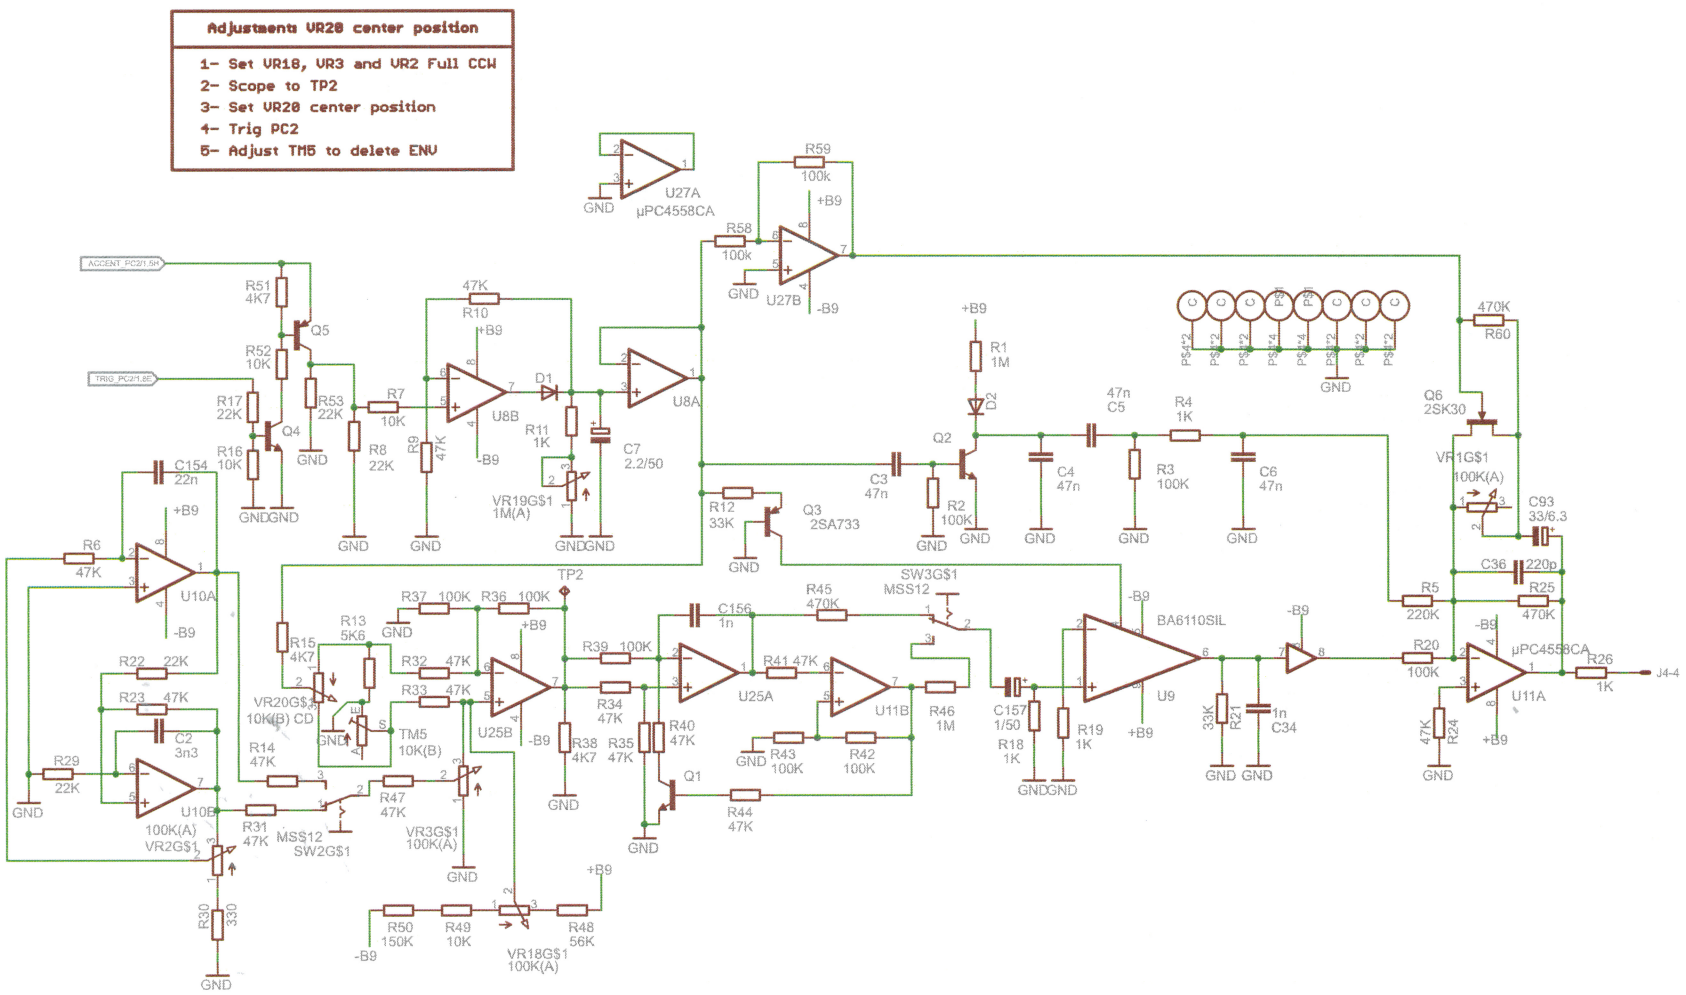
Adjustments VR20 center position
1- Set VR18, VR3 and VR2 Full CCW
2- Scope to TP2
3- Set VR20 center position
4- Trig PC2
5- Adjust TM5 to delete ENV
U27A
µPC4558CA
R59
100k
R58
100k
U27B
+B9
-B9
GND
ACCENT_PC2/1.5K
TRIG_PC2/1.8E
R51
4K7
R52
10K
R53
22K
Q5
Q4
R17
22K
R16
10K
R10
47K
R7
10K
U8B
D1
U8A
R11
1K
VR19G$1
1M(A)
C7
2.2/50
R8
22K
R9
47K
R12
33K
Q3
2SA733
R1
1M
D2
Q2
C3
47n
R2
100K
C5
47n
R4
1K
C4
47n
R3
100K
C6
47n
470K
R60
Q6
2SK30
VR1G$1
100K(A)
C93
33/6.3
C36
220p
R5
220K
R25
470K
R6
47K
U10A
C154
22n
R22
22K
R23
47K
C2
3n3
R29
22K
U10B
R14
47K
R31
47K
MSS12
SW2G$1
R47
47K
VR3G$1
100K(A)
VR2G$1
100K(A)
R30
330
TP2
R37
100K
R36
100K
R13
5K6
R15
4K7
VR20G$1
10K(B) CD
TM5
10K(B)
R32
47K
R33
47K
U25B
R39
100K
C156
1n
R45
470K
SW3G$1
MSS12
U25A
R41
47K
U11B
R46
1M
R34
47K
R38
4K7
R35
47K
R40
47K
Q1
R44
47K
R43
100K
R42
100K
R50
150K
R49
10K
R48
56K
VR18G$1
100K(A)
BA6110SIL
U9
C157
1/50
R18
1K
R19
1K
33K
R21
1n
C34
R20
100K
µPC4558CA
U11A
R24
47K
R26
1K
J4-4
PC2
Yocto v2.007
05/05/2017 09:33:17
Sheet: 17/18

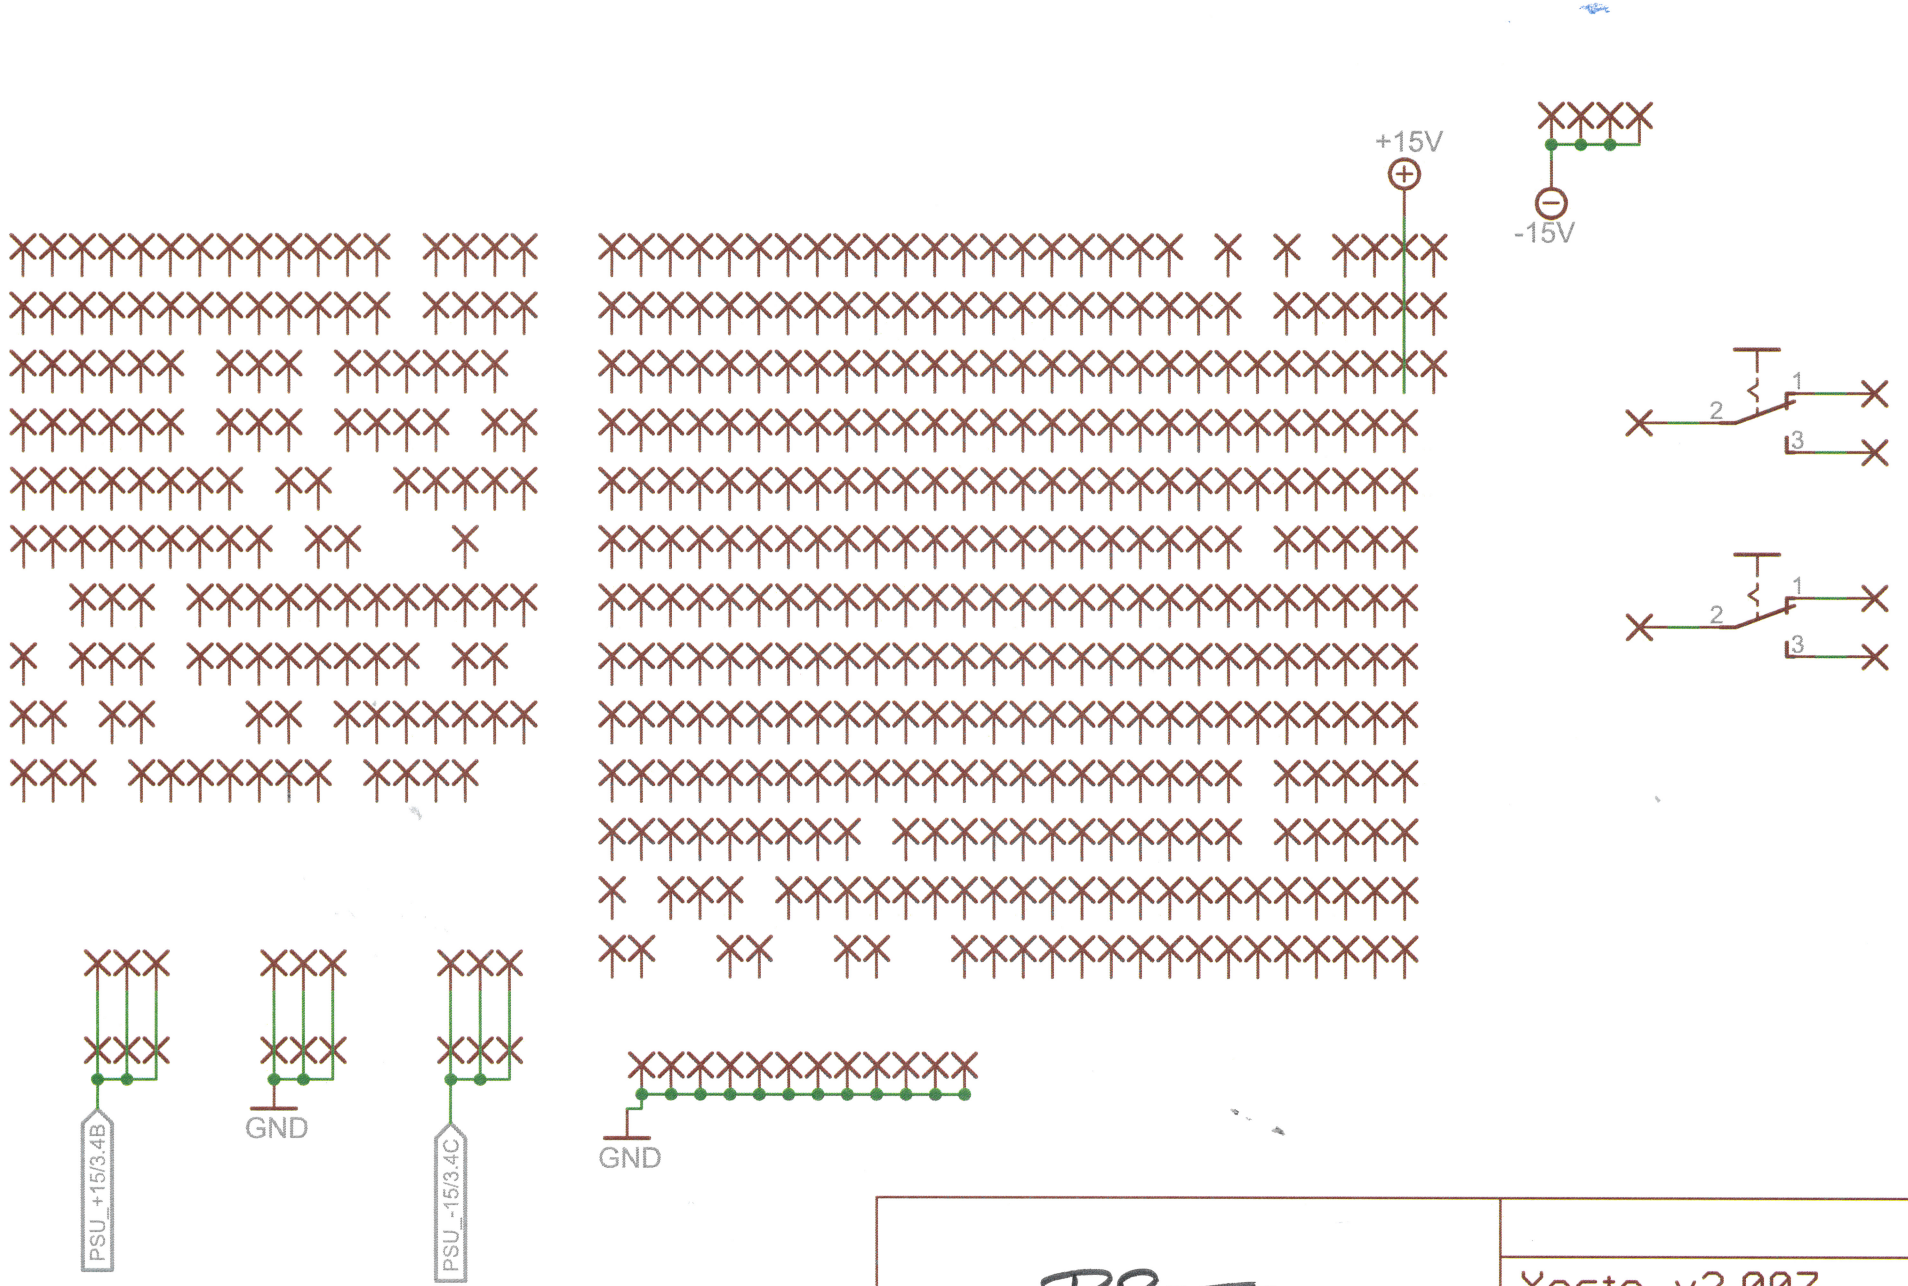

PROTO

Yocto v2.007

05/05/2017 09:33:17

Sheet: 18/18