Digital Signal Processing

J Sai Sri Hari Vamshi
AI21BTECH11014

Contents

1 Software Installation

Run the following commands

```
sudo apt−get update
sudo apt−get install libffi−dev libsndfile1 python3
    −scipy python3−numpy python3−matplotlib
sudo pip install cffi pysoundfile
```

2 Digital Filter

2.1 Download the sound file from

```
wget https://github.com/HARI−donk−EY/
    sig_pros/blob/main/codes/2/sound_files/
    Sound_Noise.wav
```

2.2 You will find a spectrogram at https://academo.org/demos/spectrum-analyzer.
Upload the sound file that you downloaded in Problem 2.1 in the spectrogram and play. Observe the spectrogram. What do you find?
Solution: There are a lot of yellow lines between 440 Hz to 5.1 KHz. These represent the synthesizer key tones. Also, the key strokes are audible along with background noise.

2.3 Write the python code for removal of out of band noise and execute the code.
Solution:

```
import soundfile as sf
from scipy import signal

#read .wav file

input_signal,fs = sf.read('sound_files/
    Sound_Noise.wav')

#sampling frequency of Input signal

sampl_freq=fs

#order of the filter

order=4

#cutoff frquency 4kHz

cutoff_freq=4000.0

#digital frequency

Wn=2*cutoff_freq/sampl_freq

# b and a are numerator and
    denominatorpolynomials respectively

b, a = signal.butter(order,Wn, 'low')

#filter the input signal with butterworth filter

output_signal = signal.filtfilt(b, a,
    input_signal)

#output signal = signal.lfilter(b, a, input
    signal)
#write the output signal into .wav file

sf.write('sound_files/
    Sound_With_ReducedNoise.wav',
    output_signal, fs)
```

2.4 The output of the python script in Problem 2.3 is the audio file Sound_With_ReducedNoise.wav.
Play the file in the spectrogram in Problem 2.2. What do you observe?
Solution: The key strokes as well as background noise is subdued in the audio. Also, the signal is blank for frequencies above 5.1 kHz.

3 Difference Equation

3.1 Let

$$x(n) = \left\{\underset{\uparrow}{1}, 2, 3, 4, 2, 1\right\} \tag{3.1}$$

Sketch $x(n)$.

3.2 Let

$$y(n) + \frac{1}{2}y(n-1) = x(n) + x(n-2),$$
$$y(n) = 0, n < 0 \tag{3.2}$$

Sketch $y(n)$.
Solution: The following code yields Fig. 3.3.

```
wget https://github.com/HARI-donk-EY/
    sig_pros/blob/main/codes/3/xnyn.py
```

3.3 Repeat the above exercise using C code.
Solution: The following codes can be used, the C-code used to generate $y(n)$ and the plot yields the same Figure as that of 3.3

```
wget https://github.com/HARI-donk-EY/
    sig_pros/blob/main/codes/3/xnyn.c

wget https://github.com/HARI-donk-EY/
    sig_pros/blob/main/codes/3/xnyn2.py
```

4 Z-Transform

4.1 The Z-transform of $x(n)$ is defined as

$$X(z) = \mathcal{Z}\{x(n)\} = \sum_{n=-\infty}^{\infty} x(n)z^{-n} \tag{4.1}$$

Show that

$$\mathcal{Z}\{x(n-1)\} = z^{-1}X(z) \tag{4.2}$$

and find

$$\mathcal{Z}\{x(n-k)\} \tag{4.3}$$

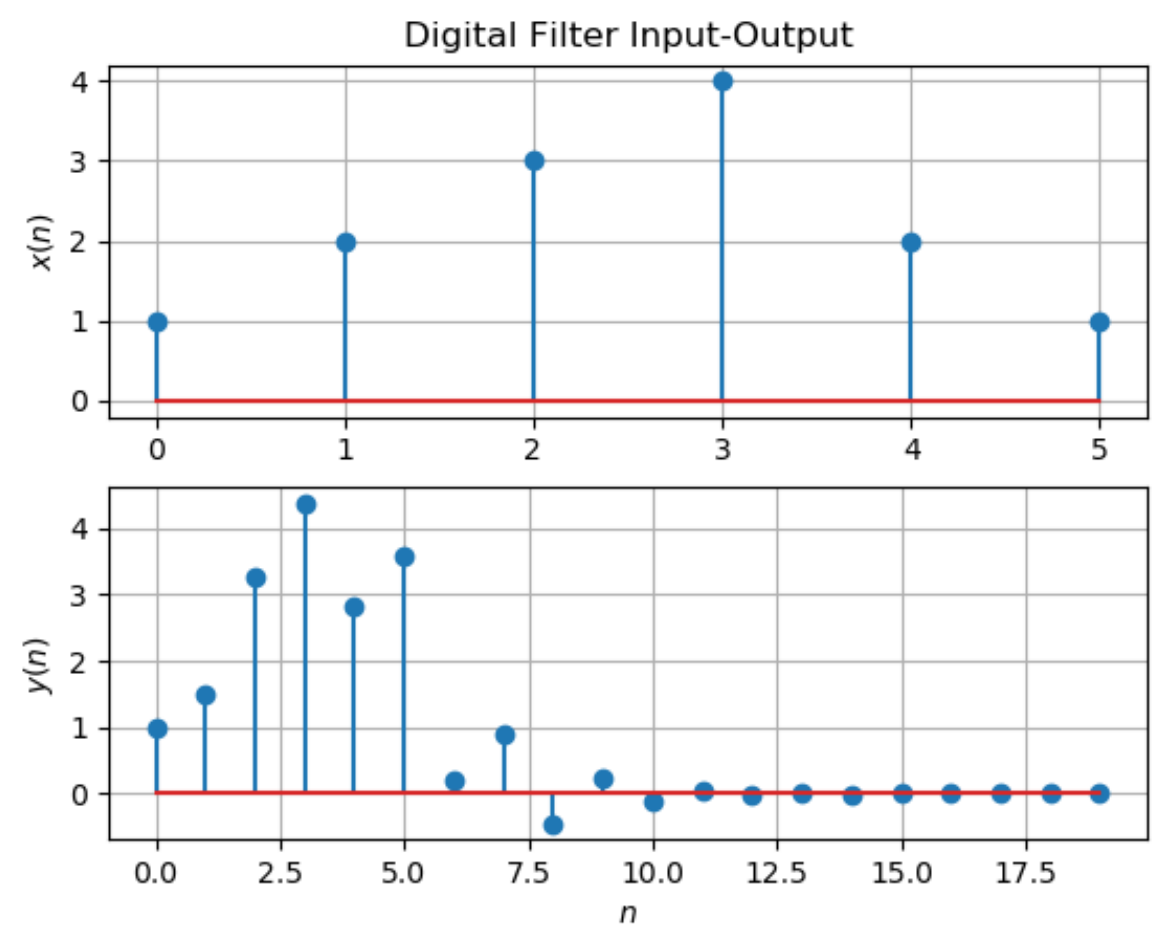

Fig. 3.3

Solution: From (4.1),

$$\mathcal{Z}\{x(n-1)\} = \sum_{n=-\infty}^{\infty} x(n-1)z^{-n} \tag{4.4}$$

$$= \sum_{n=-\infty}^{\infty} x(n)z^{-n-1} = z^{-1}\sum_{n=-\infty}^{\infty} x(n)z^{-n} \tag{4.5}$$

resulting in (4.2). Similarly, it can be shown that

$$\mathcal{Z}\{x(n-k)\} = z^{-k}X(z) \tag{4.6}$$

4.2 Find

$$H(z) = \frac{Y(z)}{X(z)} \tag{4.7}$$

from (3.2) assuming that the Z-transform is a linear operation.
Solution: Applying (4.6) in (3.2),

$$Y(z) + \frac{1}{2}z^{-1}Y(z) = X(z) + z^{-2}X(z) \tag{4.8}$$

$$\implies \frac{Y(z)}{X(z)} = \frac{1+z^{-2}}{1+\frac{1}{2}z^{-1}} \tag{4.9}$$

4.3 Find the Z transform of

$$\delta(n) = \begin{cases} 1 & n = 0 \\ 0 & \text{otherwise} \end{cases} \tag{4.10}$$

and show that the Z-transform of

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \tag{4.11}$$

is

$$U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \tag{4.12}$$

Solution: It is easy to show that

$$\delta(n) \overset{\mathcal{Z}}{\rightleftharpoons} 1 \tag{4.13}$$

and from (4.11),

$$U(z) = \sum_{n=0}^{\infty} z^{-n} \tag{4.14}$$

$$= \frac{1}{1 - z^{-1}}, \quad |z| > 1 \tag{4.15}$$

using the fomula for the sum of an infinite geometric progression.

4.4 Show that

$$a^n u(n) \overset{\mathcal{Z}}{\rightleftharpoons} \frac{1}{1 - az^{-1}} \quad |z| > |a| \tag{4.16}$$

Solution: From (4.11), we get,

$$a^n u(n) = \begin{cases} a^n & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \tag{4.17}$$

from above,

$$U_a(z) = \sum_{n=0}^{\infty} a^n z^{-n} \tag{4.18}$$

$$= \sum_{n=0}^{\infty} (az^{-1})^n = \frac{1}{1 - az^{-1}}, \quad |z| > 1 \tag{4.19}$$

using the fomula for the sum of an infinite geometric progression.

4.5 Let

$$H\left(e^{\jmath\omega}\right) = H\left(z = e^{\jmath\omega}\right). \tag{4.20}$$

Plot $|H\left(e^{\jmath\omega}\right)|$. Comment. $H(e^{\jmath\omega})$ is known as the *Discret Time Fourier Transform* (DTFT) of $x(n)$.
Solution: The following code plots Fig. 4.5.

```
wget https://github.com/HARI−donk−EY/
    sig_pros/blob/main/codes/4/dtft.py
```

We can note that the graph in Fig. 4.5 is an even periodic function.
From the equations and we get,

$$|H\left(e^{\jmath\omega}\right)| = \left|\frac{1 + e^{-2\jmath\omega}}{1 + \frac{1}{2}e^{-\jmath\omega}}\right| \tag{4.21}$$

$$= \left|\frac{1 + \cos(-2\omega) + j\sin(-2\omega)}{1 + \frac{1}{2}(\cos(-\omega) + j\sin(-\omega))}\right| \tag{4.22}$$

$$= \sqrt{\frac{(1 + \cos 2\omega)^2 + (\sin 2\omega)^2}{\left(1 + \frac{1}{2}\cos\omega\right)^2 + \left(\frac{1}{2}\sin\omega\right)^2}} \tag{4.23}$$

$$= \sqrt{\frac{2\left(1 + \cos 2\omega\right)}{\frac{5}{4} + \cos\omega}} \tag{4.24}$$

$$= \sqrt{\frac{2\left(2\cos^2\omega\right)}{\frac{5}{4} + \cos\omega}} \tag{4.25}$$

$$= \frac{4|\cos\omega|}{\sqrt{5 + 4\cos\omega}} \tag{4.26}$$

and so its fundamental period is 2π.

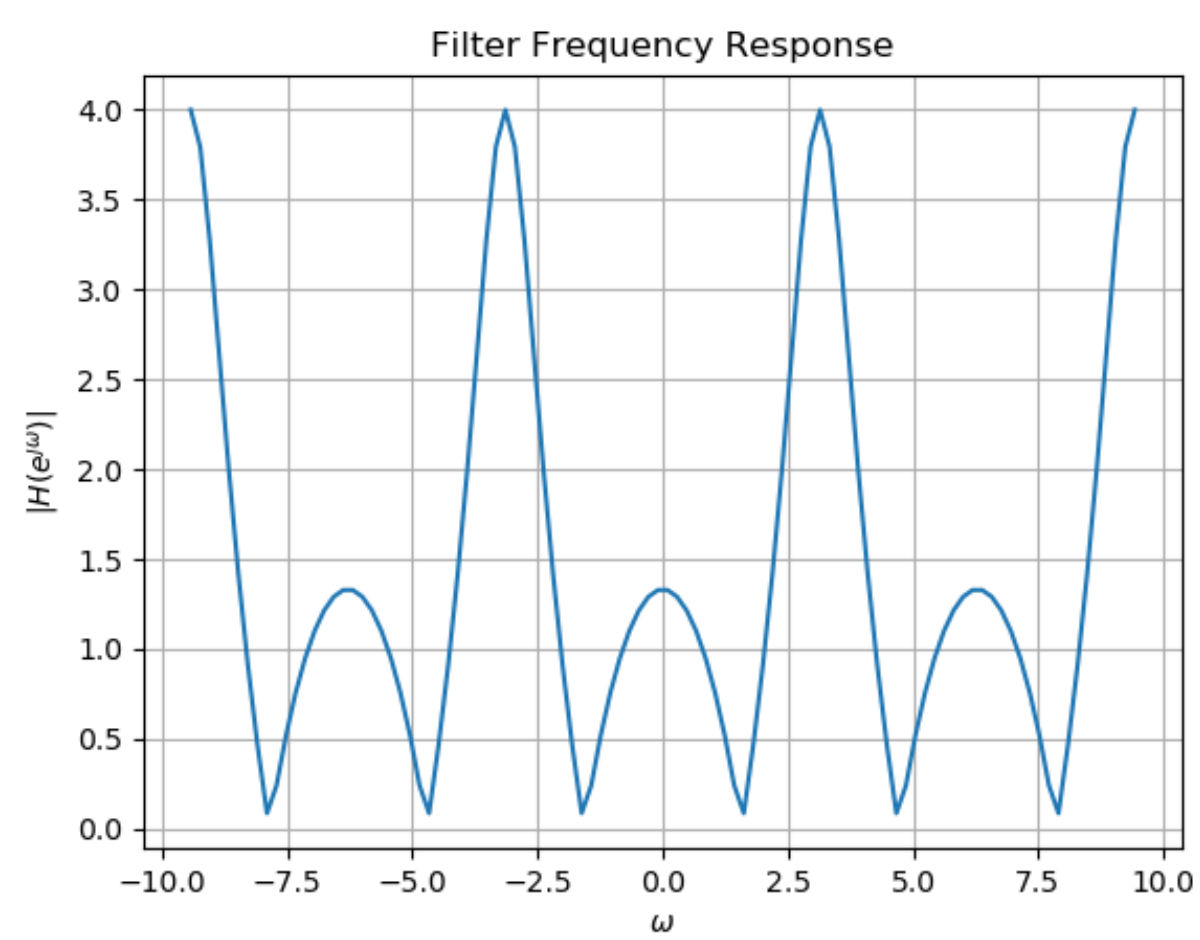

Fig. 4.5: $|H\left(e^{\jmath\omega}\right)|$

5 Impulse Response

5.1 Find an expression for $h(n)$ using $H(z)$, given that

$$h(n) \overset{\mathcal{Z}}{\rightleftharpoons} H(z) \tag{5.1}$$

and there is a one to one relationship between $h(n)$ and $H(z)$. $h(n)$ is known as the *impulse response* of the system defined by (3.2).

Take $H(z)$ from (4.5)
Solution: From (4.5),

$$H(z) = \frac{1}{1+\frac{1}{2}z^{-1}} + \frac{z^{-2}}{1+\frac{1}{2}z^{-1}} \tag{5.2}$$

$$\implies h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \tag{5.3}$$

using (4.16) and (4.6).

5.2 Sketch $h(n)$. Is it bounded? Convergent?
Solution: The following code plots Fig. 5.2.

```
wget https://github.com/HARI−donk−EY/
    sig_pros/blob/main/codes/5/hn.py
```

The plot is bounded and convergent.

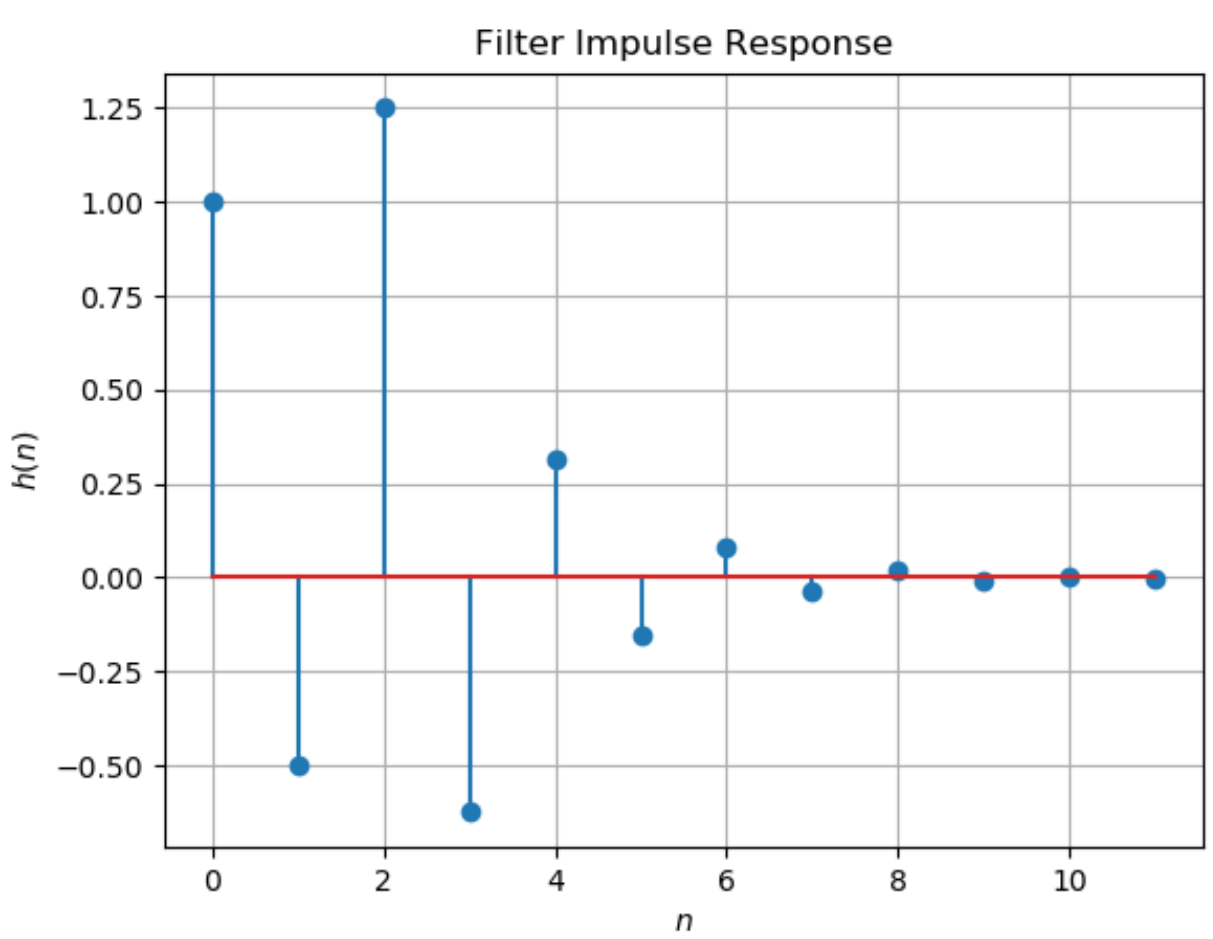

Fig. 5.2: $h(n)$ as the inverse of $H(z)$

5.3 Compute and sketch $h(n)$ using

$$h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2), \tag{5.4}$$

This is the definition of $h(n)$.
Solution: The following code plots Fig. 5.3. Note that this is the same as Fig. 5.2.

```
wget https://github.com/HARI−donk−EY/
    sig_pros/blob/main/codes/5/hndef.py
```

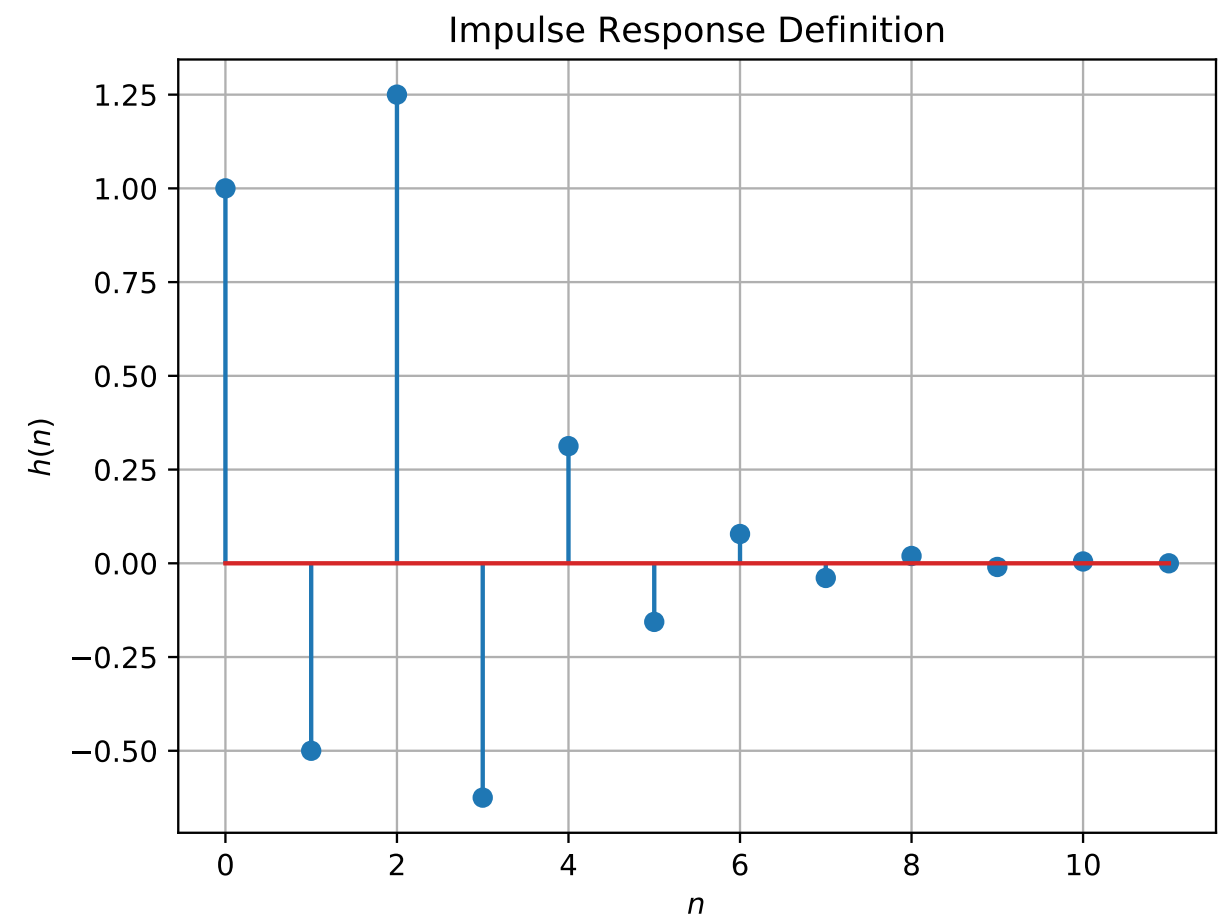

Fig. 5.3: $h(n)$ from the definition

5.4 Compute

$$y(n) = x(n) * h(n) = \sum_{n=-\infty}^{\infty} x(k)h(n-k) \tag{5.5}$$

Comment. The operation in (5.5) is known as *convolution*.

Solution: The following code plots Fig. 5.4. Note that this is the same as $y(n)$ in Fig. 3.3.

```
wget https://github.com/HARI−donk−EY/
    sig_pros/blob/main/codes/5/ynconv.py
```

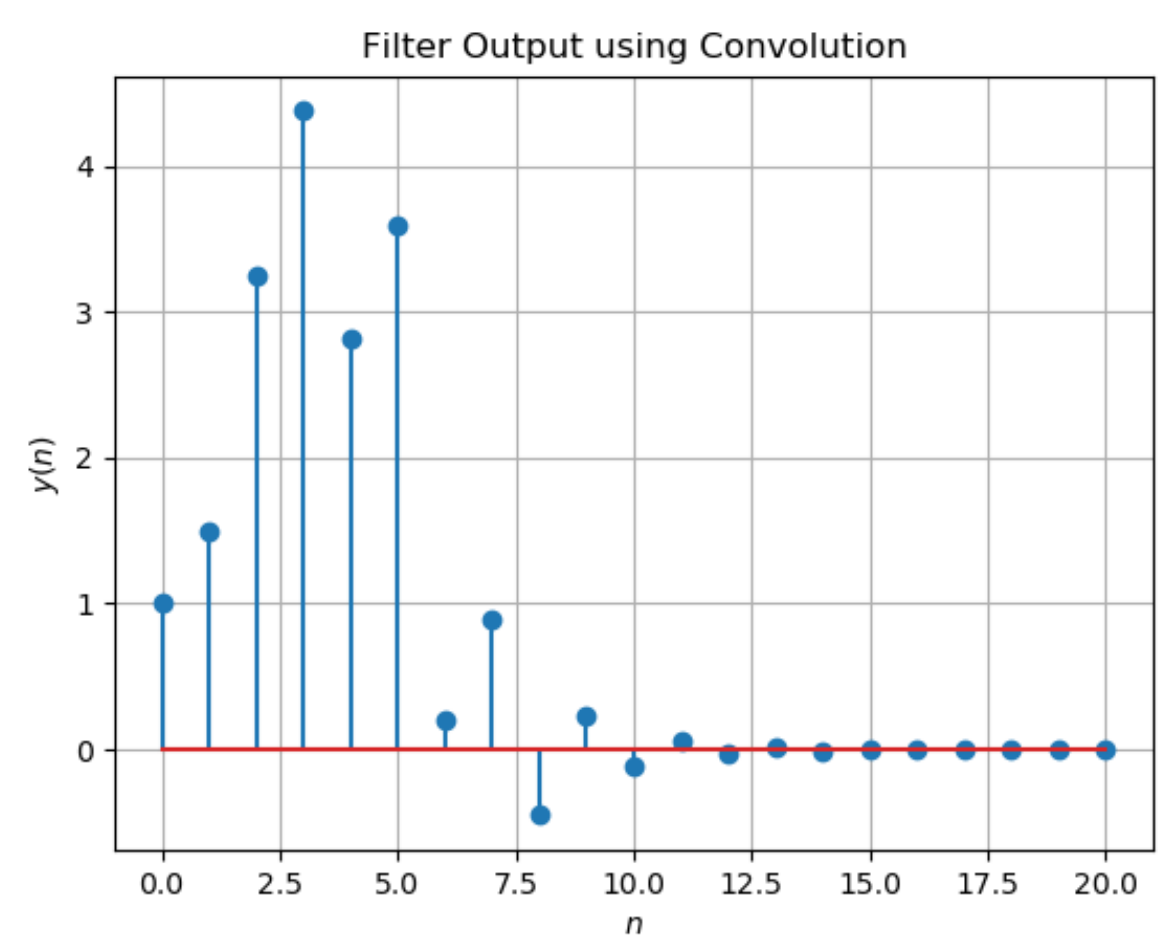

Fig. 5.4: $y(n)$ from the definition of convolution

5.5 Show that

$$y(n) = \sum_{n=-\infty}^{\infty} x(n-k)h(k) \tag{5.6}$$

Solution: From (5.5), we substitute $k := n - k$

to get

$$y(n) = \sum_{k=-\infty}^{\infty} x(k)\, h(n-k) \qquad (5.7)$$

$$= \sum_{n-k=-\infty}^{\infty} x(n-k)\, h(k) \qquad (5.8)$$

$$= \sum_{k=-\infty}^{\infty} x(n-k)\, h(k) \qquad (5.9)$$