

5V 9V 12V Type-C 18650 Lithium Battery Boost Step Up Module UPS Uninterruptible Power Supply Charge Discharge Same Time 1A

Product Features:

Input:5V

Output: 5V/9V/12V optiona

When output 5V: current maximum 1000mA;

When outputting 9V: the maximum current is 500mA:

when outputting 12V: the maximum current is 350mA

Note: The charging power supply current should be greater than> theoutput current.

Load power: UpS output +-connected to the load recommended thenormal state is <5W, and the transientstate<8W.

The main function:

1)Lithium battery charging

2)Lithium battery protection (short circuit, overvoltage undervoltage)

3)Boost output 5v/9v/12v optional


4) At the same time equipped with universal Micro USB charging interface, direct DC5VEnter to charge the lithium battery

5)2 LED indicator, the red light is always on during charging, the green light is always onwhen it is full, andthe charging stops automatically

6) The principle of UpS uninterrupted power supply functionWhen the power supply is turned on, the power supply directly supplies power to theload via the booster circuit Once the power is cut off, the battery will automatically start tosupply power to the load via the boost circuit After the power comes on,it resumes thepower supply to the load from the

power supply and also charges the battery

7)Interface description (refer to below picture): TYPE-C port and standard input 5V+,5V-are external power supply ports, you can choose one of the two. The output ports are marked with USP+ and Ups-.Connect the 18650 lithium battery to the welding batterybox on the back. You can also wire out to connect other lithium batteries

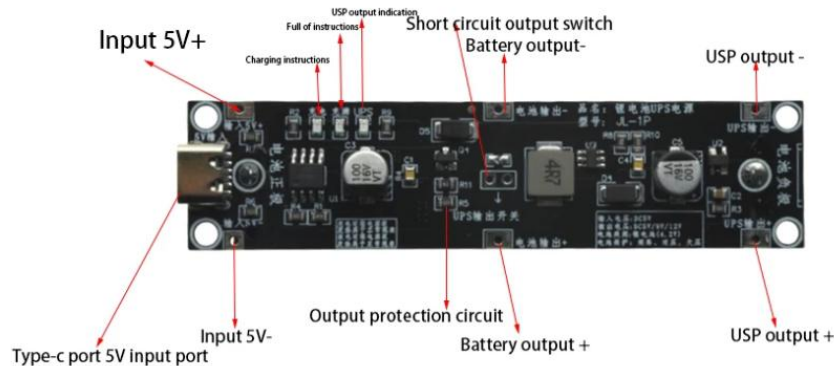

Needing Attention


Boost board description: The boost part uses a switch to control its work and close, can also be shorted directly through jumper pads. (The switch needs to be equipped by yourself)

1. When used as a UpS, the UPS output switch needs to be short-circuited, and the output is kept on in real time. The battery can be started at any time when the power is cut off

2. Used as a mobile power supply, you can add a switch to the UPS output switch interface, and it will be turned off when not in use, and there is no static loss. If you don't want to connect the switch, you can also short-circuit it. After the test is completed, removing the output indicator can reduce the current consumption of

more than ten or twenty mA.

Used as UPS, this solder joint can be shorted

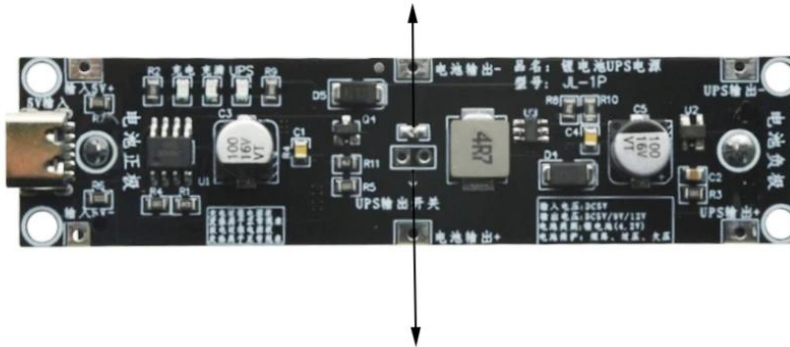

You can also add switches in the two spaces to contro

3. During use and operation, it is possible that the board enters the protection state and does not output (lithium battery overcharge protection, overdischarge protection, current limit protection, over temperature protection, output short circuit protection) due to (mistouch, wrong connection, short circuit, etc.). After troubleshooting the problem, connect 5V to the charging port to activate the re-output.

4. If you can continue to discharge after the power is disconnected, you can connect a 1K resistor in parallel to the 5V input port to solve the problem. When welding, make sure that the soldering iron is grounded (and the ground wire is connected), and it is best to wear anti-static gloves for operation.

Product Size

89*22*22.4mm(SMD battery box);

89*22*38.5mm (in-line battery box on the back);

The module mounting hole diameter is 3mm; Product Features

- 1) It can be powered by a single battery, and the battery can be plugged and replaced at any time
- 2) It is suitable for uninterrupted power supply schemes such as low-power DC equipment and meters, and self-starting after power failure, and self-charging upon incoming power.
- 3) Not limited to UPS function, it can be expanded for multiple purposes; fully charged can

be used as a low-power mobile power source, and can be used as a temporary emergency charger for lithium batteries