

A


B



D



J2
USB_C_Receptacle_PowerOnly_6P

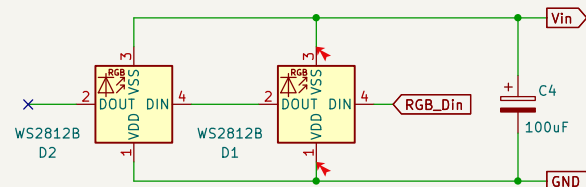

- Add a GND Pour somewhere inside and connect all components
- Check if ESP LED is 3V3 rail powered and remove
- TP4056 must include protection circuit (DW01A IC and etc.)
- Check if BL draws current or is it just PWM pin
- The USB_C_Receptacle_PowerOnly_6P is just a visual representation
- Only 1 push button is currently in use for the present version

Title:

Date:

Rev:

Id: 1/1