

CMT804XC High-Speed, Quad-Channel Digital Isolator

1 Features

- Safety-related certifications
 - DIN VDE V 0884-11: 2017-01
 - UL 1577 component recognition program
 - CSA certification according to IEC 60950-1, IEC 62368-1, IEC 61010-1 and IEC 60601-1 end equipment standards
 - CQC approval per GB4943.1-2022
 - TUV certification according to EN 60950-1, EN 62368-1 and EN 61010-1
- Robust electromagnetic compatibility
 - System-level ESD, EFT, and surge immunity
 - ± 8 kV IEC 61000-4-2 contact discharge protection across isolation barrier
 - Low emissions
- Data rate: up to 150 Mbps
- Wide supply range: 2.5 to 5.5 V
- Operation temperature: -40°C to 125°C
- Robust isolation barrier
 - More than 40-year projected lifetime
 - Up to 5 kV_{RMS} isolation rating
 - Up to 8 kV surge capability
 - ± 200 kV/ μ s typical CMTI
- Default output high or low options
- Low power consumption, typical 1.5 mA per channel at 1 Mbps
- Low propagation delay: 9 ns typical (5 V supplies)
- SOIC 16 package (wide body and narrow body)

2 Applications

- Industrial automatic control
- New energy vehicles
- Solar inverters
- Motor control
- Isolated SPI
- General purpose multichannel isolation

3 Description

The CMT804XC series devices are high-performance, quad channel digital isolators with as high as 5 kV_{rms} isolation voltage by means of silicon-dioxide (SiO₂) insulation barrier.

The digital isolator is used to communicate between two different power supply domains while prevents noise currents on a data bus or other circuits from entering the local ground and interfering with or damaging sensitive circuitry.

The CMT804XC device has four forward and up to two reverse-direction channels. If the input power or signal is lost, the default output is high for the CMT804XC1 device and low for the CMT804XC0 device. See the Device Functional Modes section for further details.

The isolator provides high electromagnetic immunity and low emissions at low-power consumption. Through innovative chip design and layout techniques, electromagnetic compatibility of the CMT804XC device has been significantly enhanced to ease system-level ESD, EFT, surge, and emissions compliance.

The CMT804XC series device is available in both narrow-body (NB) and wide-body (WB) 16-pin SOIC packages.

Device Information

Part No.	Package	Body Size (mm x mm)
CMT804XC	NB(N) SOIC-16	9.9 x 3.9
	WB(W) SOIC-16	10.4 x 7.5
Refer to section 13 for ordering information.		

Simplified Schematic

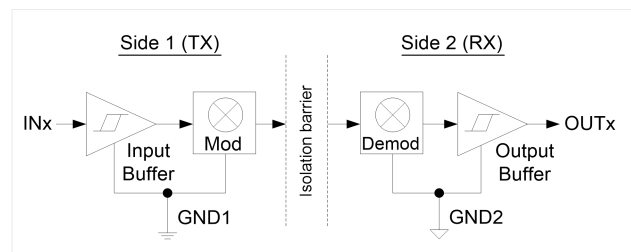


Table of Contents

1 Features	1
2 Applications	1
3 Description	1
4 Absolute Maximum Ratings	3
5 Recommended Operating Conditions	3
6 ESD Ratings	4
7 Pin Description	5
8 Typical Application	5
8.1 Typical Application Schematic	5
8.2 PCB Layout Guidelines	6
9 Parameter Measurement Circuit Setup	7
10 Electrical Specifications	8
10.1 Electrical Characteristics	8
10.2 Supply Current Characteristics with 5 V Supply	8
10.3 Supply Current Characteristics with 3.3 V Supply	10
10.4 Supply Current Characteristics with 2.5 V Supply	12
10.6 Insulation Specifications	16
10.7 Safety-related Certifications	18
10.8 Safety Limiting Values	18
10.9 Thermal Information	19
11 Function Description	20
11.1 Function Overview	20
11.2 Functional Modes	20
11.3 Insulation Lifetime	20
12 Packaging Information	21
12.1 CMT804XC Narrow Body SOIC-16 Packaging	21
12.2 CMT804XC Wide Body SOIC-16 Packaging	22
13 Ordering Information	24
14 Tape and Reel Information	25
15 Revise History	27
16 Contacts	28

4 Absolute Maximum Ratings

Table 1. Absolute Maximum Ratings^[1]

Parameters	Symbol	Condition	Min.	Max.	Unit
Power supply voltage ^[2]	VDD1, VDD2		-0.5	6.5	V
Maximum input voltage	INx	x = A, B, C, D	-0.4	VDD+0.4	V
Maximum output voltage	OUTx	x = A, B, C, D	-0.4	VDD+0.4	V
Maximum Input / output pulse voltage	-	Pulse width should be less than 100 ns, and the duty cycle should be less than 10%	-0.8	VDD+0.8	V
Common-mode transients immunity	CMTI			± 200	kV/us
Output current	I _O		-15	15	mA
Maximum surge immunity	-			8	kV
Operating temperature	T _A		-40	125	°C
Storage temperature	T _{STG}		-40	150	°C

Notes:

- [1]. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute maximum rated conditions for extended periods may affect device reliability.
- [2]. All voltage values except differential I/O bus voltages are with respect to the local ground terminal (GND1 or GND2) and are peak voltage values.

5 Recommended Operating Conditions

Table 2. Recommended Operating Conditions

Parameters	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	VDD1, VDD2	2.5	5	5.5	V
High level input voltage	V _{IH}	0.7*VDD	0.6*VDD		V
Low level input voltage	V _{IL}		0.4*VDD	0.3*VDD	V
Data rate	DR	0		150	Mbps
Operating temperature	T _A	-40	25	125	°C
Junction temperature	T _J	-40		150	°C


6 ESD Ratings

Table 3. ESD Ratings

Parameter	Symbol	Condition	Max.	Unit
Electrostatic discharge	V_{ESD}	Human-body model (HBM)	± 8000	V
		Charged-device model (CDM)	± 2000	

Notes:

1. IEC ESD strike is applied across the barrier with all pins on each side tied together creating a two-terminal device.
2. Testing is carried out in air or oil to determine the intrinsic contact discharge capability of the device.



Caution! ESD sensitive device. Precaution should be used when handling the device in order to prevent performance degradation or loss of functionality.

7 Pin Description

Both narrow-body (N) and wide-body (W) 16-pin SOIC packages are available for the series part number CMT8040XC, CMT8041XC and CMT8042XC. The pin lists are shown as below.

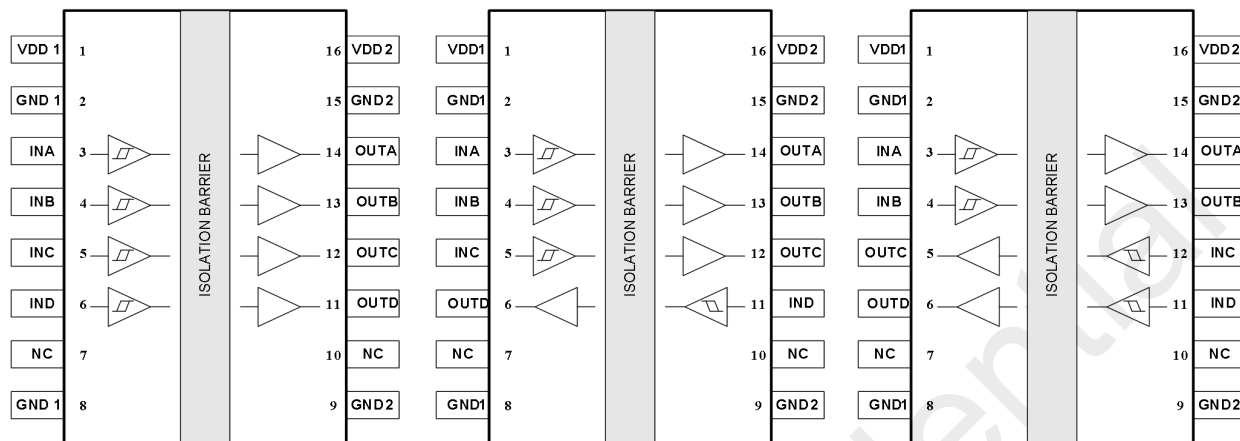


Figure 1. CMT8040XC Pin List

Figure 2. CMT8041XC Pin List

Figure 3. CMT8042XC Pin List

Table 4. CMT8040 / 41 / 42XC Pin Description

Pin Name	Pin Number			Description
	CMT8040	CMT8041	CMT8042	
VDD1	1	1	1	Power supply for isolator side 1
GND1	2	2	2	The ground reference for isolator side 1
INA	3	3	3	Input, channel A
INB	4	4	4	Input, channel B
INC	5	5	12	Input, channel C
IND	6	11	11	Input, channel D
NC	7,10	7,10	7,10	No connection for CMT8040XC.
GND1	8	8	8	Ground 1, the ground reference for isolator side 1
GND2	9	9	9	Ground 2, the ground reference for isolator side 2
OUTD	11	6	6	Output, channel D
OUTC	12	12	5	Output, channel C
OUTB	13	13	13	Output, channel B
OUTA	14	14	14	Output, channel A
GND2	15	15	15	Ground 2, the ground reference for isolator side 2
VDD2	16	16	16	Power supply for isolator side 2

8 Typical Application

8.1 Typical Application Schematic

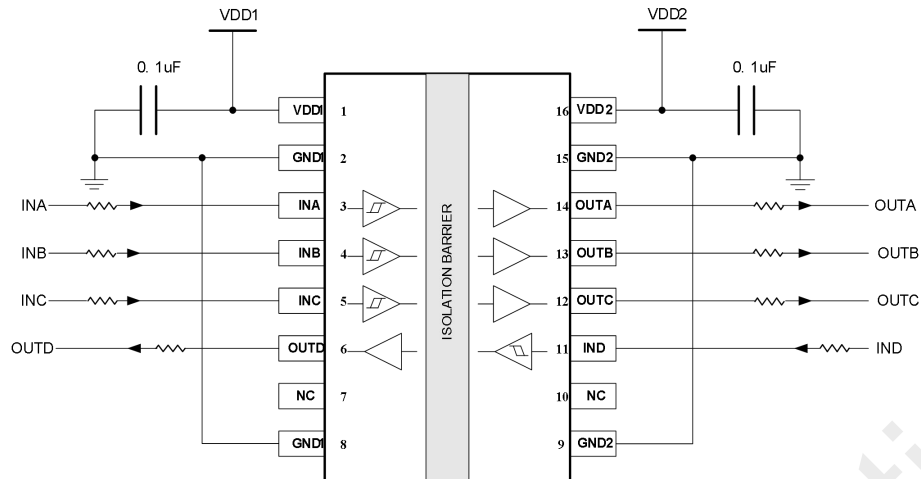


Figure 4. Typical Application Schematic (Take the CMT8041XC as an example)

Note: users should be careful not to connect ground and VDD reversely.

8.2 PCB Layout Guidelines

The CMT804XC requires a 0.1 μF bypass capacitor in both input side and output side. The capacitor should be placed as close as possible to the package pin of VDD1 and VDD2 respectively. The figures below show the recommended PCB layout. Please make sure the space under the chip keeps free from planes, traces, pads and via. To enhance the robustness of design, users may also include resistors (50 ~ 300 Ω) in series with the inputs and outputs if the system is excessively noisy. The series resistors also improve the system reliability such as latch-up immunity.

The typical output impedance of an isolator driver channel is approximately $50\ \Omega \pm 40\%$. When driving loads where transmission line effects will be a factor, output pins should be appropriately terminated with controlled impedance PCB traces.

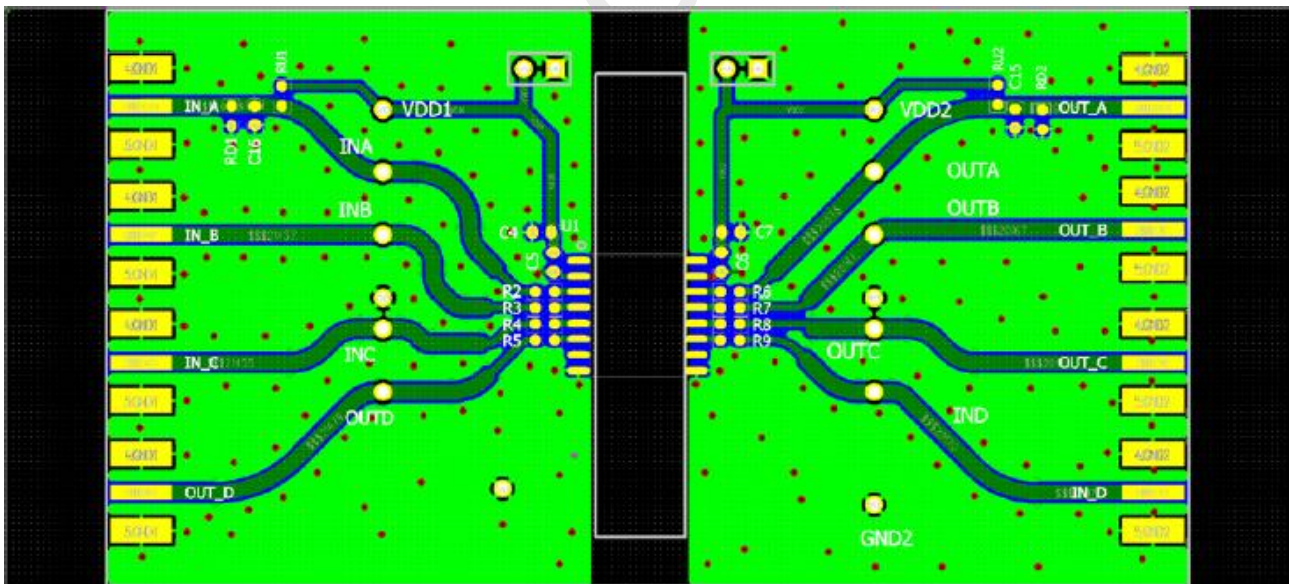


Figure 5. Recommended PCB Layout

9 Parameter Measurement Circuit Setup

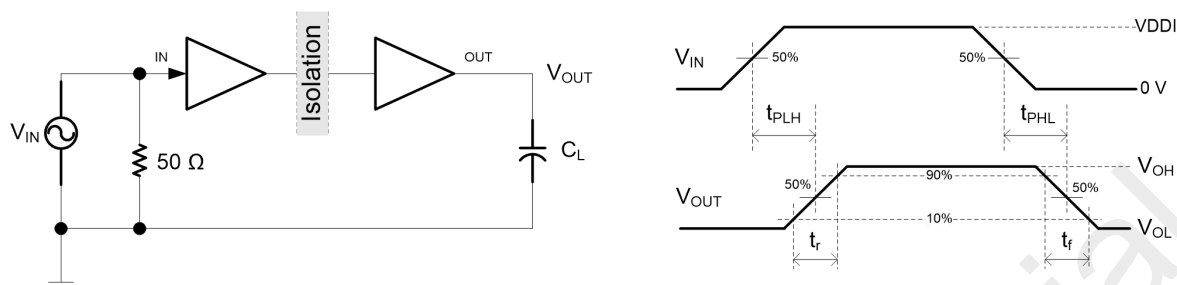


Figure 6. Switching Characteristics Test Circuit and Voltage Waveforms

Notes:

1. The input pulse is supplied by a generator V_{IN} having the following characteristics: $f_{PULSE} \leq 100$ kHz, 50% duty cycle, $t_r \leq 3$ ns, $t_f \leq 3$ ns, $Z_O = 50 \Omega$. At the input, 50Ω resistor is required to terminate input generator signal. It is not needed in actual application.
2. Load capacitance influences the measurement results quite a lot, including instrumentation and fixture capacitance, totally no more than 15 pF loading is preferred.

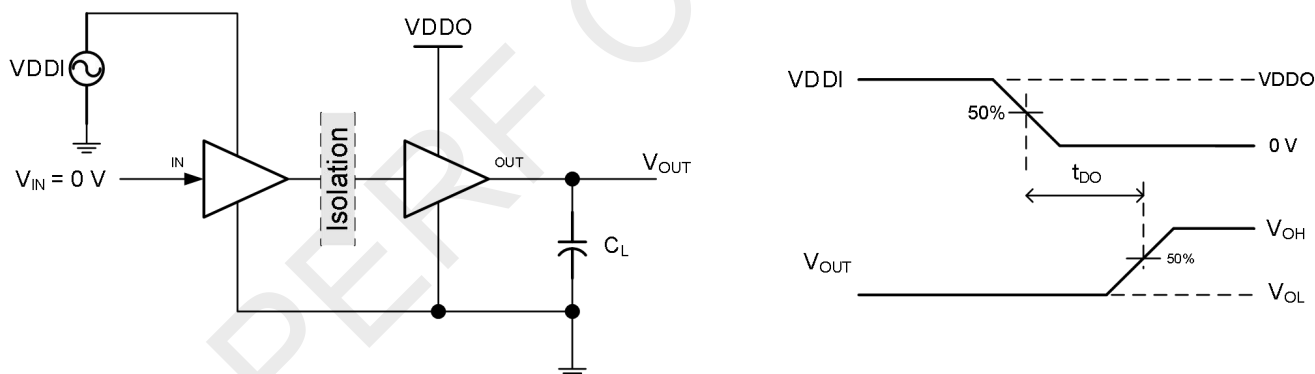


Figure 7. Default Output Delay Time Test Circuit and Voltage Waveforms

Notes:

1. $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.
2. Power supply ramp rate = 10 mV/ns.

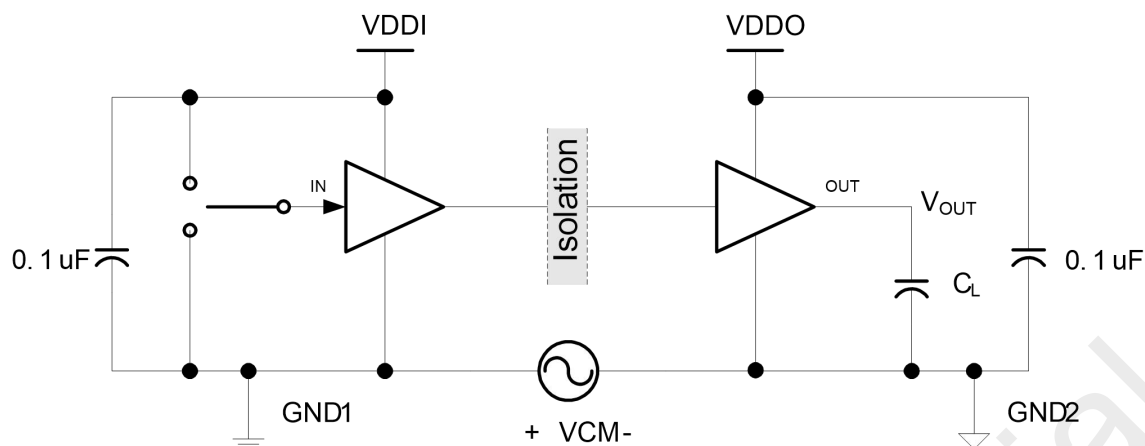


Figure 8. Common-Mode Transient Immunity Test Circuit

Notes:

1. $C_L = 15 \text{ pF}$ and includes instrumentation and fixture capacitance within $\pm 20\%$.

10 Electrical Specifications

10.1 Electrical Characteristics

$V_{DD1} = 2.5\text{V} \sim 5.5\text{V}$, $V_{DD2} = 3.0\text{V} \sim 5.5\text{V}$, $T_A = -40$ to 125°C . Unless otherwise noted, typical values are at $V_{DD1} = 5\text{V}$, $V_{DD2} = 5\text{V}$, $T_A = 25^\circ\text{C}$.

Table 5. Electrical Characteristics

Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Power on reset	V_{POR}	POR threshold as during power- up		2.3		V
	V_{HYS}	POR threshold hysteresis		0.1		V
Input threshold	V_{IT}	Input threshold at rising edge		0.6		V
	V_{ITHYS}	Input threshold hysteresis		0.4		V
High level input voltage	V_{IH}			$0.6 \cdot V_{DD}$	V_{DD}	V
Low level input voltage	V_{IL}		0	$0.4 \cdot V_{DD}$		V
High level output voltage	V_{OH}	$I_{OH} = -4\text{mA}$	$V_{DD} - 0.3$			V
Low level output voltage	V_{OL}	$I_{OL} = 4\text{mA}$			0.3	V
Output impedance	R_O			50		Ω
Input pull high or low current	I_{pull}		3	8.9	15	μA
Start-up time after POR	t_{rbs}			10		μs
Common mode transient	CMTI		100		150	kV/ μs

10.2 Supply Current Characteristics with 5 V Supply

$V_{DD1} = V_{DD2} = 5\text{V}$, $T_A = -40$ to 125°C .

Table 6. Supply Current Characteristics with 5 V Supply

Parameter	Symbol	Typ.	Max.	Unit
CMT8040XC				
Supply current $V_{IN}=0\text{ V}$	I_{DD1}	0.91		mA
	I_{DD2}	2.53		mA
Supply current: device is disabled. $V_{IN}=V_{DDI}$,	I_{DD1}	4.98		mA
	I_{DD2}	2.61		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	2.98		mA
	I_{DD2}	2.77		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	3.06		mA
	I_{DD2}	4.51		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	3.91		mA
	I_{DD2}	37.05		mA
CMT8041XC				
Supply current $V_{IN}=0\text{ V}$	I_{DD1}	1.49		mA
	I_{DD2}	2.55		mA
Supply current: device is disabled. $V_{IN}=V_{DDI}$,	I_{DD1}	4.34		mA
	I_{DD2}	3.59		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	3.12		mA
	I_{DD2}	3.39		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	3.09		mA
	I_{DD2}	6.27		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	13.24		mA
	I_{DD2}	32.90		mA
CMT8042XC				
Supply current $V_{IN}=0\text{ V}$	I_{DD1}	1.94		mA
	I_{DD2}	1.98		mA
Supply current: device is disabled. $V_{IN}=V_{DDI}$,	I_{DD1}	3.99		mA
	I_{DD2}	4.07		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	3.04		mA
	I_{DD2}	3.13		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	3.82		mA
	I_{DD2}	3.91		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, $C_L = 15\text{ pF}$	I_{DD1}	21.55		mA
	I_{DD2}	21.78		mA

Table 7. Supply Current with 5 V Supply- Characteristics of CMT804XC

Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Data rate	DR		0	150		Mbps
Minimum pulse width	PW	See figure 6, $C_L = 15\text{ pF}$		5	5	ns
Propagation delay rising	t_{PLH}	See figure 6, $C_L = 15\text{ pF}$		9.1	15	ns

Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Propagation delay falling	t_{PHL}	See figure 6, $C_L = 15$ pF		7.8	15	ns
Pulse width distortion $ t_{PHL} - t_{PLH} $	PWD	See figure 6, $C_L = 15$ pF		1.2	5	ns
Rising time	t_r	See figure 6, $C_L = 15$ pF		0.91	5	ns
Falling time	t_f	See figure 6, $C_L = 15$ pF		0.89	5	ns
Peak eye diagram Jitter	$t_{JIT}(PK)$			400		ps
Channel-to-channel delay Skew	$t_{SK}(c2c)$			0.6	2.5	ns
Part-to-part delay skew	$t_{SK}(p2p)$				5	ns

10.3 Supply Current Characteristics with 3.3 V Supply

$V_{DD1} = V_{DD2} = 3.3V$, $T_A = -40$ to 125 °C.

Table 8. Supply Current Characteristics with 3.3 V Supply

Parameter	Symbol	Typ.	Max.	Unit
CMT8040XC				
Supply current $V_{IN} = 0$ V	I_{DD1}	0.91		mA
	I_{DD2}	2.52		mA
Supply current: device is disabled. $V_{IN} = V_{DDI}$,	I_{DD1}	4.98		mA
	I_{DD2}	2.61		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	2.97		mA
	I_{DD2}	2.78		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	3.07		mA
	I_{DD2}	4.59		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	2.41		mA
	I_{DD2}	20.85		mA
CMT8041XC				
Supply current $V_{IN} = 0$ V	I_{DD1}	1.47		mA
	I_{DD2}	2.53		mA
Supply current: device is disabled. $V_{IN} = V_{DDI}$,	I_{DD1}	4.45		mA
	I_{DD2}	3.62		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	3.07		mA
	I_{DD2}	3.19		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	3.72		mA
	I_{DD2}	5.00		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	10.51		mA
	I_{DD2}	22.86		mA
CMT8042XC				
Supply current $V_{IN} = 0$ V	I_{DD1}	1.95		mA

Parameter	Symbol	Typ.	Max.	Unit
	I_{DD2}	1.99		mA
Supply current: device is disabled. $V_{IN} = V_{DDI}$,	I_{DD1}	4.01		mA
	I_{DD2}	4.09		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	3.08		mA
	I_{DD2}	3.17		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	4.04		mA
	I_{DD2}	4.36		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, $C_L = 15$ pF	I_{DD1}	14.60		mA
	I_{DD2}	15.46		mA

Table 9. Supply Current with 3.3 V Supply - Characteristics of CMT804XC

Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Data rate	DR		0	150		Mbps
Minimum pulse width	PW	See figure 6, $C_L = 15$ pF			5	ns
Propagation delay rising	t_{PLH}	See figure 6, $C_L = 15$ pF		9.15	15	ns
Propagation delay falling	t_{PHL}	See figure 6, $C_L = 15$ pF		7.8	15	ns
Pulse width distortion $ t_{PHL} - t_{PLH} $	PWD	See figure 6, $C_L = 15$ pF		1.35	5	ns
Rising time	t_r	See figure 6, $C_L = 15$ pF		1.01	5	ns
Falling time	t_f	See figure 6, $C_L = 15$ pF		1.05	5	ns
Peak eye diagram Jitter	$t_{JIT(PK)}$			400		ps
Channel-to-channel Delay Skew	$t_{SK(c2c)}$			0.8	2.5	ns
Part-to-part delay skew	$t_{SK(p2p)}$				5	ns

10.4 Supply Current Characteristics with 2.5 V Supply

VDD1 = VDD2 = 2.5 V, T_A = -40 to 125 °C.

Table 10. Supply Current Characteristics with 2.5 V Supply

Parameter	Symbol	Typ.	Max.	Unit
CMT8040XC				
Supply current V _{IN} = 0 V	I _{DD1}	0.90		mA
	I _{DD2}	2.52		mA
Supply current: device is disabled. V _{IN} = VDDI,	I _{DD1}	4.98		mA
	I _{DD2}	2.61		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, C _L = 15 pF	I _{DD1}	2.97		mA
	I _{DD2}	2.78		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, C _L = 15 pF	I _{DD1}	3.06		mA
	I _{DD2}	4.59		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, C _L = 15 pF	I _{DD1}	3.36		mA
	I _{DD2}	19.95		mA
CMT8041XC				
Supply current V _{IN} = 0 V	I _{DD1}	1.41		mA
	I _{DD2}	2.49		mA
Supply current: device is disabled. V _{IN} = VDDI,	I _{DD1}	4.43		mA
	I _{DD2}	2.60		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, C _L = 15 pF	I _{DD1}	2.91		mA
	I _{DD2}	3.16		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, C _L = 15 pF	I _{DD1}	3.43		mA
	I _{DD2}	4.53		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, C _L = 15 pF	I _{DD1}	7.91		mA
	I _{DD2}	18.80		mA
CMT8042XC				
Supply current V _{IN} = 0 V	I _{DD1}	1.94		mA
	I _{DD2}	1.98		mA
Supply current: device is disabled. V _{IN} = VDDI,	I _{DD1}	3.99		mA
	I _{DD2}	4.07		mA
Supply current: 1 Mbps square wave clock input AC signal. All channels switching with 1 Mbps square wave input, C _L = 15 pF	I _{DD1}	3.04		mA
	I _{DD2}	3.12		mA
Supply current: 10 Mbps square wave clock input AC signal. All channels switching with 10 Mbps square wave input, C _L = 15 pF	I _{DD1}	3.82		mA
	I _{DD2}	3.91		mA
Supply current: 100 Mbps square wave clock input AC signal. All channels switching with 100 Mbps square wave input, C _L = 15 pF	I _{DD1}	6.74		mA
	I _{DD2}	12.60		mA

Table 11. Supply Current with 2.5 V Supply - Characteristics of CMT804XC

Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Data rate	DR		0	150		Mbps
Minimum pulse width	PW	See figure 6, $C_L = 15 \text{ pF}$			5	ns
Propagation delay rising	t_{PLH}	See figure 6, $C_L = 15 \text{ pF}$		9.3	15	ns
Propagation delay falling	t_{PHL}	See figure 6, $C_L = 15 \text{ pF}$		7.75	15	ns
Pulse width distortion $ t_{PHL} - t_{PLH} $	PWD	See figure 6, $C_L = 15 \text{ pF}$		1.55	5	ns
Rising time	t_r	See figure 6, $C_L = 15 \text{ pF}$		1.04	5	ns
Falling time	t_f	See figure 6, $C_L = 15 \text{ pF}$		1.23	5	ns
Peak eye diagram Jitter	$t_{JIT(PK)}$			400		ps
Channel-to-channel Delay Skew	$t_{SK(c2c)}$			0.7	2.5	ns
Part-to-part delay skew	$t_{SK(p2p)}$			0	5	ns

10.5 Typical Characteristics

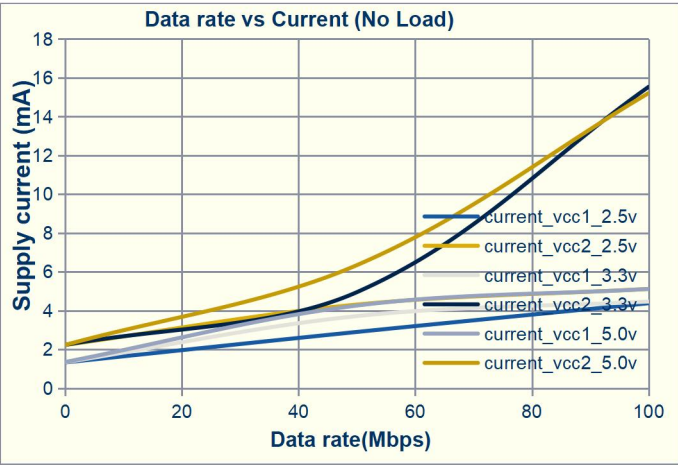


图 9-1. 数据速率与电流关系曲线
(无负载)

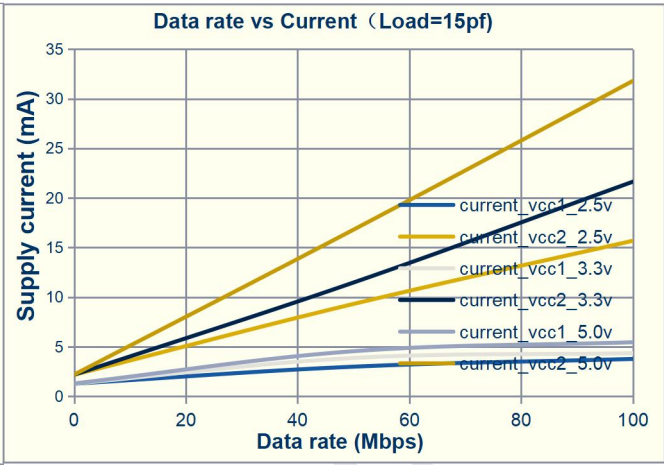


图 9-2. 数据速率与电流关系曲线
(负载=15pf)

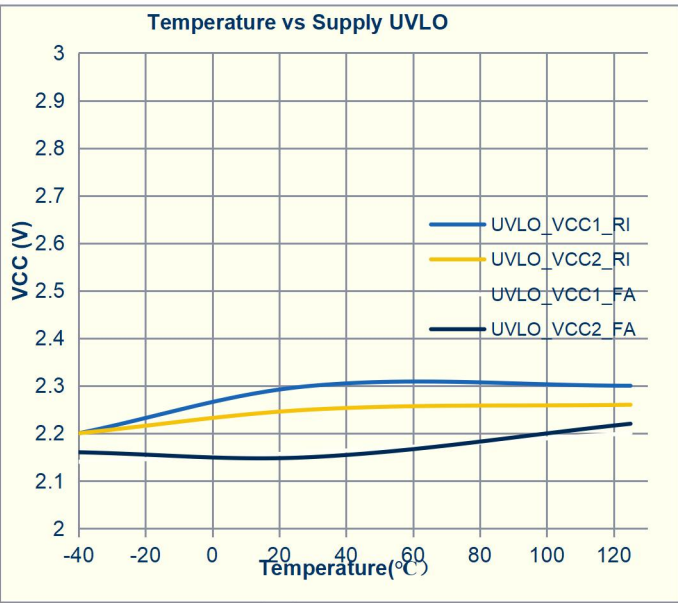


图 9-3. 温度与电源欠压锁定阈值关系曲线

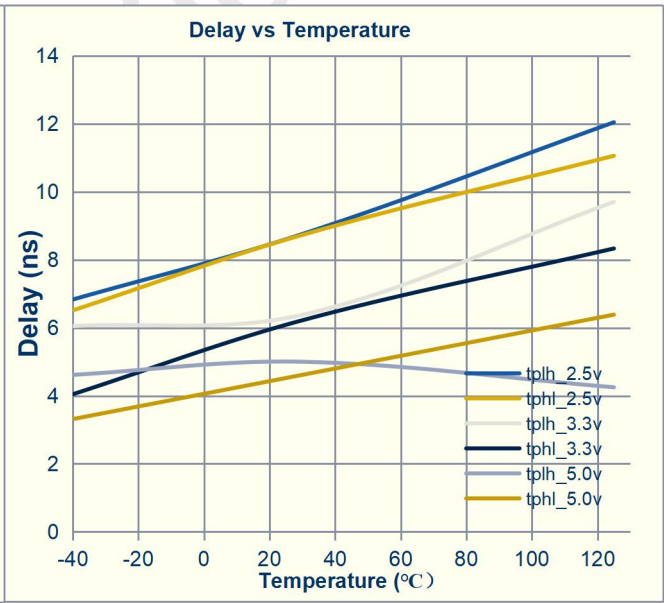


图 9-4. 延迟随温度变化特性

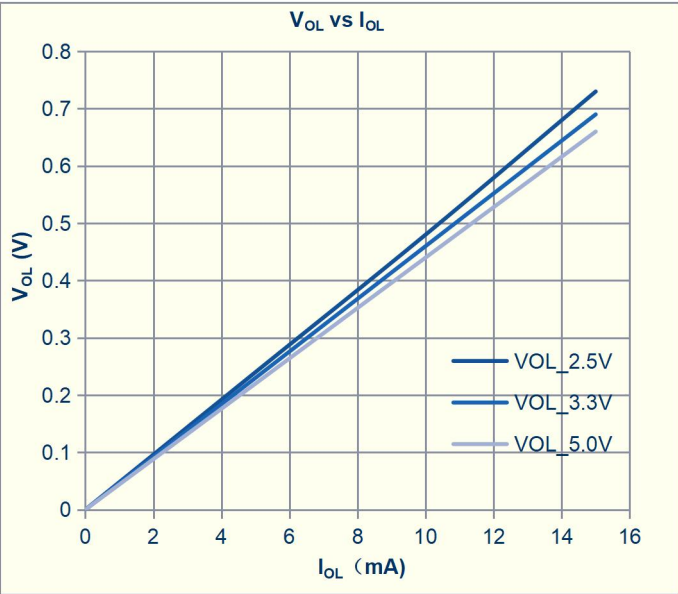


图 9-5. 输出低电平电压与输出低电平电流的变化曲线

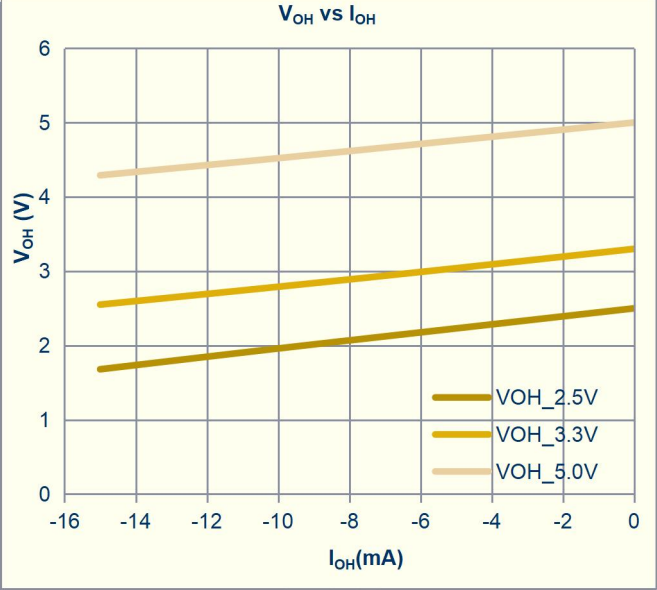


图 9-6. 输出高电平电压与输出高电平电流的变化曲线

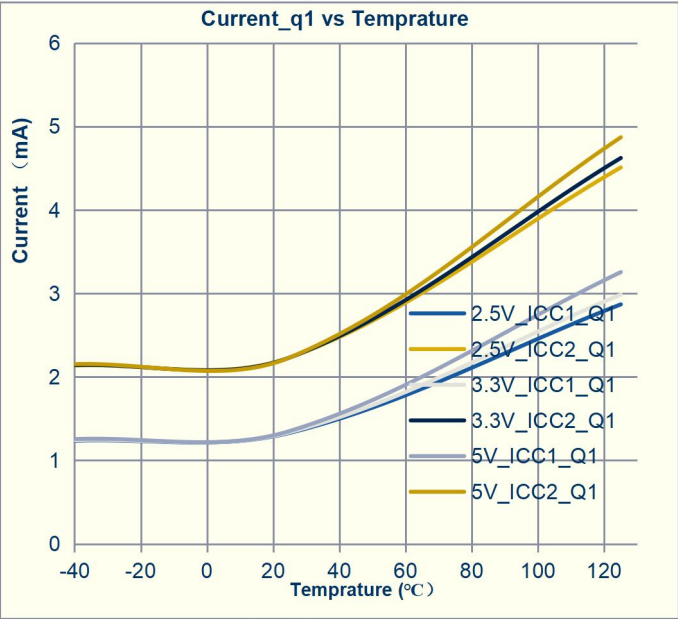


图 9-7. Q1 电流随温度变化曲线

10.6 Insulation Specifications

Table 12. Insulation Specifications

Parameters	Sym.	Condition	Value		Unit
			NB SOIC-16	WB SOIC-16	
External clearance ^[1]	CLR	The shortest terminal-to-terminal distance through air	4.0	8.0	mm
External creepage ^[1]	CRP	The shortest terminal-to-terminal distance across the package surface	4.0	8.0	mm
Distance through insulation	DTI	Minimum internal gap	> 25	> 25	um
Comparative tracking index	CTI	DIN EN 60112 (VDE 0303-11); IEC 60112	> 400	> 400	V
Material group	-		1	1	-
Overvoltage category per IEC 60664-1	-	Rated mains voltage ≤ 300 V _{RMS}	I	I	-
		Rated mains voltage ≤ 600 V _{RMS}	I-IV	I-IV	-
		Rated mains voltage ≤ 1000 V _{RMS}	I-III	I-III	-
DIN VDE V 0884-11:2017-01 ^[2]					
Maximum repetitive isolation voltage	V _{IORM}		565	1414	V _{pk}
Maximum isolation working voltage	V _{IOWM}	AC voltage (sine wave); Time dependent dielectric breakdown (TDDb) test	400	1000	V _{RMS}
		DC voltage		1414	V _{DC}
Maximum transient isolation voltage	V _{IOTM}	V _{TEST} = V _{IOTM} , t = 60 s (qualification); t = 1 s (100% production)	5300	7000	V _{pk}
Maximum surge isolation voltage ^[3]	V _{IOSM}	Test method per IEC60065, 1.2/50 us waveform, V _{TEST} = 1.6 x V _{IOSM} (qualification)	5300	7000	V _{pk}
Apparent charge ^[4]	q _{pd}	Method a: After I/O safety test subgroup 2/3, V _{ini} = V _{IOTM} , t _{ini} = 60 s; V _{pd(m)} = 1.2 x V _{IORM} , t _m = 10 s		< 5	pC
		Method a: After environmental tests subgroup 1, V _{ini} = V _{IOTM} , t _{ini} = 60 s; V _{pd(m)} = 1.6 x V _{IORM} , t _m = 10 s		< 5	
		Method b1: At routine test (100% production) and preconditioning (type test) V _{ini} = V _{IOTM} , t _{ini} = 1 s; V _{pd(m)} = 1.875 x V _{IORM} , t _m = 1 s		< 5	
Isolation capacitance, input to output ^[5]	C _{IO}	V _{IO} = 0.4 x sin (2πft), f = 1 MHz	0.8	0.8	pF
Isolation resistance, input to output ^[5]	R _{IO}	V _{IO} = 500 V	>10 ¹⁰	>10 ¹⁰	Ω
UL 1577					
Withstand isolation voltage	V _{ISO}	V _{TEST} = V _{ISO} , t = 60 s (qualification); V _{TEST} = 1.2 x V _{ISO} , t = 1 s (100% production)		5000	V _{RMS}

Notes:

- [1]. Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves and/or ribs on a printed-circuit board are used to help increase these specifications.
- [2]. This coupler is suitable for safe electrical insulation only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.
- [3]. Testing is carried out in air or oil to determine the intrinsic surge immunity of the isolation barrier.
- [4]. Apparent charge is electrical discharge caused by a partial discharge (pd).
- [5]. All pins on each side of the barrier are tied together creating a two-terminal device.

10.7 Safety-related Certifications

Table 13. Safety-related Certifications

VDE	UL		CQC	TUV
DIN VDE V0884-11:2017-01 (Patents pending)	UL 1577 Component Recognition Program	Approved under CSA Component Acceptance Notice 5A	GB 4943.1-2011	EN 61010-1:2010 (3rd Ed) and EN 60950-1:2006/A2: 2013 (Patents pending)
Certificate number: pending	Certificate number: E541580		Certificate number: CQC23001382478	Client ID number: pending

10.8 Safety Limiting Values

Safety limiting intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry. A failure of the I/O can allow low resistance to ground or the supply and, without current limiting, dissipate sufficient power to overheat the die and damage the isolation barrier potentially leading to secondary system failures

Table 14. Safety Limiting Values

Parameters	Symbol	Test Condition	Value		Unit
			NB SOIC-16	WB SOIC-16	
Safety input, output, or supply current	Is	$R_{\theta JA} = 140\text{ }^{\circ}\text{C/W}$, $V_I = 5.5\text{ V}$, $T_J = 125\text{ }^{\circ}\text{C}$, $T_A = 25\text{ }^{\circ}\text{C}$	160		mA
		$R_{\theta JA} = 84\text{ }^{\circ}\text{C/W}$, $V_I = 5.5\text{ V}$, $T_J = 125\text{ }^{\circ}\text{C}$, $T_A = 25\text{ }^{\circ}\text{C}$		237	mA
Total power dissipation at 25°C	Ps			1499	mW
Case temperature	Ts		125	125	°C

10.9 Thermal Information

Table 15. Thermal Information

Parameter	Symbol	Value		Unit
		NB SOIC-16	WB SOIC-16	
Junction-to-ambient thermal resistance	θ_{JA}	78.9	78.9	°C/W
Junction-to-case (top) thermal resistance	$\theta_{JC (top)}$	41.1	41.6	°C/W
Junction-to-board thermal resistance	θ_{JB}	49.5	43.6	°C/W

11 Function Description

11.1 Function Overview

The CMT804XC device is a high-performance, quad-channel digital isolator with 5000 V_{RMS} isolation ratings. The CMT804XC has an On-Off keying (OOK) modulation scheme to transmit the digital data across a silicon dioxide based isolation barrier. The transmitter sends a high-frequency carrier across the barrier to represent one digital state and sends no signal to represent the other digital state. The receiver demodulates the signal after advanced signal conditioning and produces the output through a buffer stage. The CMT804XC also incorporates advanced circuit techniques to maximize the CMTI performance and minimize the radiated emissions due to the high frequency carrier and IO buffer switching. The figure below shows a conceptual detail of how the On-Off keying scheme works.

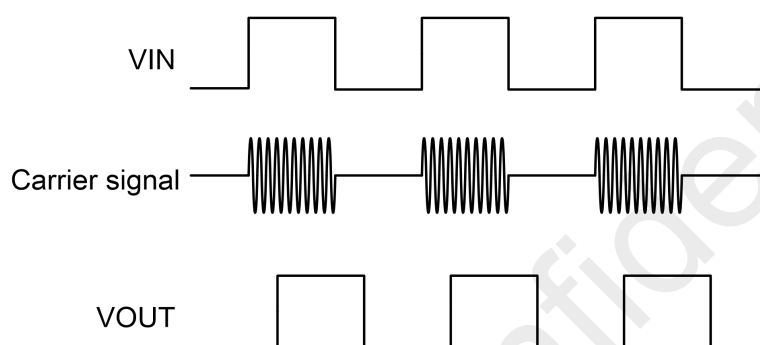


Figure 10. On-Off Keying Based Modulation Scheme

11.2 Functional Modes

The table below lists the functional modes of the CMT804XC.

Table 16. Function Table^[1]

VDD1	VDD2	Input (IN _x) ^[2]	Output (OUT _x)	Comment
PU	PU	H	H	Normal operation: A channel output assumes the logic state of its input
		L	L	
		Open	Default	Default mode: when IN _x is open, the corresponding channel output goes to its default logic state
PD	PU	X	Default	Default mode: when VDD1 is unpowered, a channel output assumes the logic state based on the selected default option. When VDD1 transitions from unpowered to powered-up, a channel output assumes the logic state of the input. When VDD1 transitions from powered-up to unpowered, channel output assumes the selected default state
X	PD	X	Undetermined	When VDD2 is unpowered, a channel output is undetermined ^[3] . When VDD2 transitions from unpowered to powered-up, a channel output assumes the logic state of the input

11.3 Insulation Lifetime

Insulation lifetime projection data is collected by using industry-standard Time Dependent Dielectric Breakdown (TDDB) test method. In this test, all pins on each side of the barrier are tied together creating a two-terminal device and high voltage applied between the two sides; See the figure below for TDDB test setup. The insulation breakdown data is collected at various high

voltages switching at 60 Hz over temperature. For reinforced insulation, VDE standard requires the use of TDDb projection line with failure rate of less than 1 part per million (ppm). Even though the expected minimum insulation lifetime is 20 years at the specified working isolation voltage, VDE reinforced certification requires additional safety margin of 20% for working voltage and 87.5% for lifetime which translates into minimum required insulation lifetime of 37.5 years at a working voltage that's 20% higher than the specified value.

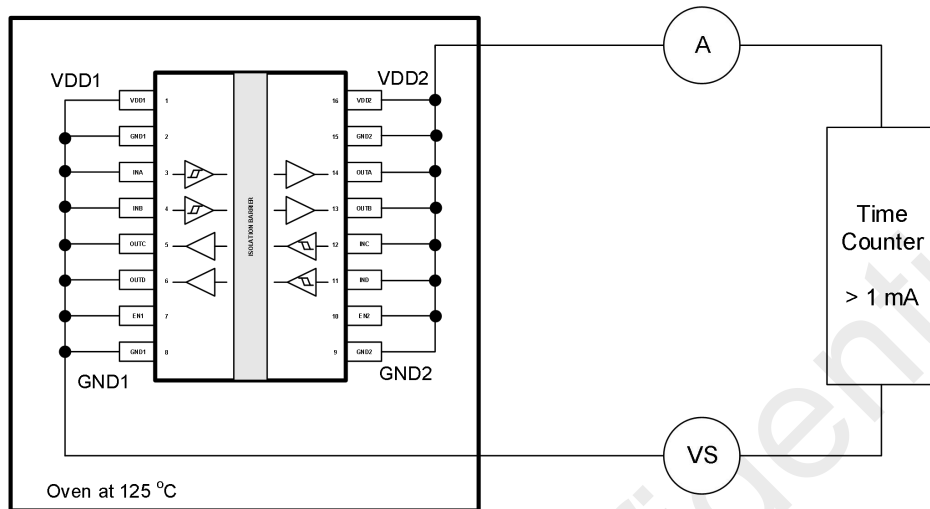


Figure 11. Test Setup for Insulation Lifetime Measurement

12 Packaging Information

The packaging information of the CMT804XC SOIC16 is shown in the figures below.

12.1 CMT804XC Narrow Body SOIC-16 Packaging

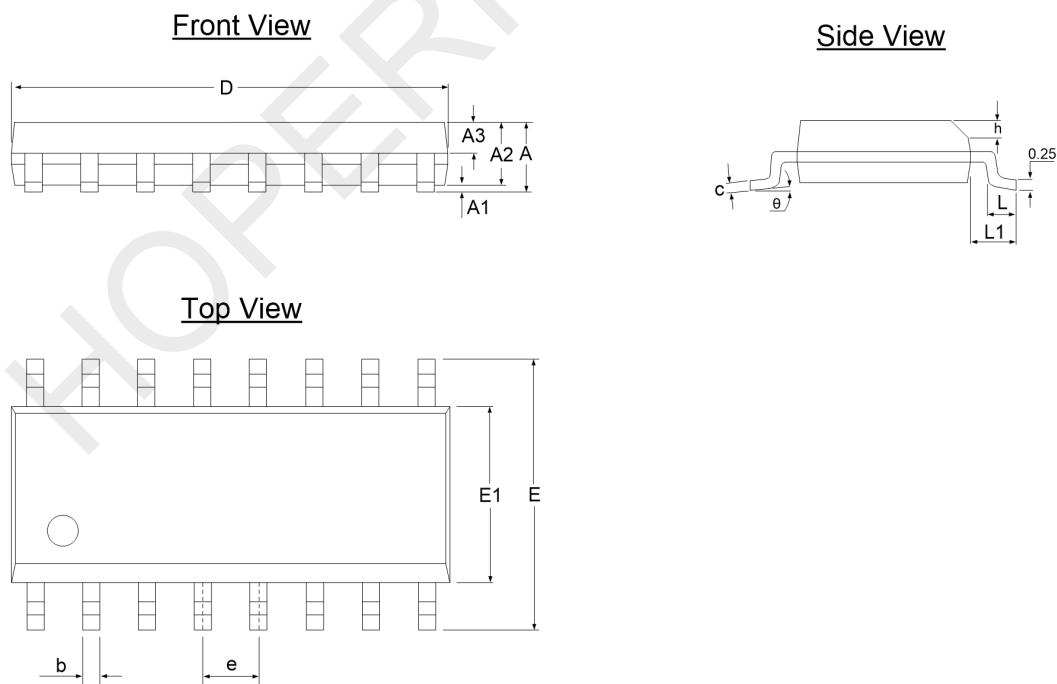


Figure 12. Narrow Body SOIC-16 Packaging

Table 17. Narrow Body SOIC-16 Packaging Scale

Symbol	Scale (mm)		
	Min.	Typ.	Max.
A	-	-	1.75
A1	0.10	-	0.25
b	0.36	-	0.49
c	0.19	-	0.25
D	9.80	9.90	10.0
E	5.80	-	6.20
E1	3.80	3.90	4.00
e	1.27		
L	0.40	-	1.00
L1	1.05		
θ	0	-	8°

12.2 CMT804XC Wide Body SOIC-16 Packaging

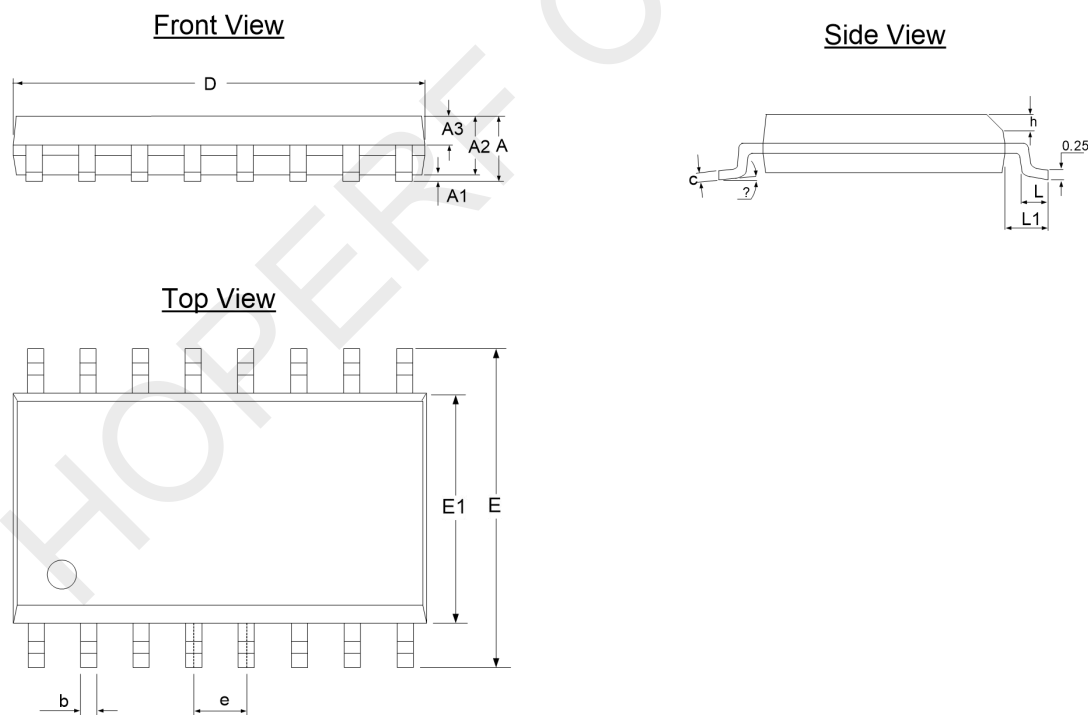


Figure 13. Wide Body SOIC-16 Packaging

Table 18. Wide Body SOIC-16 Packaging Scale


Symbol	Scale (mm)		
	Min.	Typ.	Max.
A	-	-	2.65
A1	0.10	0.20	0.30
A2	2.25	2.30	2.35
A3	1.00	1.05	1.10
b	0.35	0.37	0.43
c	0.15	0.20	0.30
D	10.30	10.40	10.50
E	10.10	10.30	10.50
E1	7.40	7.50	7.60
e	1.14	1.27	1.40
L	0.65	0.70	0.85
L1	1.40		
θ	0	-	8°

13 Ordering Information

Table 19. Part Number List

Part Number	MOQ	Isolation Rating (kV)	Total Channel Number	Forward Channel Number	Reverse Channel Number	Max Data Rate (Mbps)	Default Output State	Automotive Grade	Package	MSL
CMT8040N0C	3000	3.75	4	4	0	150	Low	No	NB SOIC-16	3
CMT8040N1C	3000	3.75	4	4	0	150	High	No	NB SOIC-16	3
CMT8041N0C	3000	3.75	4	3	1	150	Low	No	NB SOIC-16	3
CMT8041N1C	3000	3.75	4	3	1	150	High	No	NB SOIC-16	3
CMT8042N0C	3000	3.75	4	2	2	150	Low	No	NB SOIC-16	3
CMT8042N1C	3000	3.75	4	2	2	150	High	No	NB SOIC-16	3
CMT8040W0C	1000	5	4	4	0	150	Low	No	WB SOIC-16	3
CMT8040W1C	1000	5	4	4	0	150	High	No	WB SOIC-16	3
CMT8041W0C	1000	5	4	3	1	150	Low	No	WB SOIC-16	3
CMT8041W1C	1000	5	4	3	1	150	High	No	WB SOIC-16	3
CMT8042W0C	1000	5	4	2	2	150	Low	No	WB SOIC-16	3
CMT8042W1C	1000	5	4	2	2	150	High	No	WB SOIC-16	3

Part Number Naming Rule:

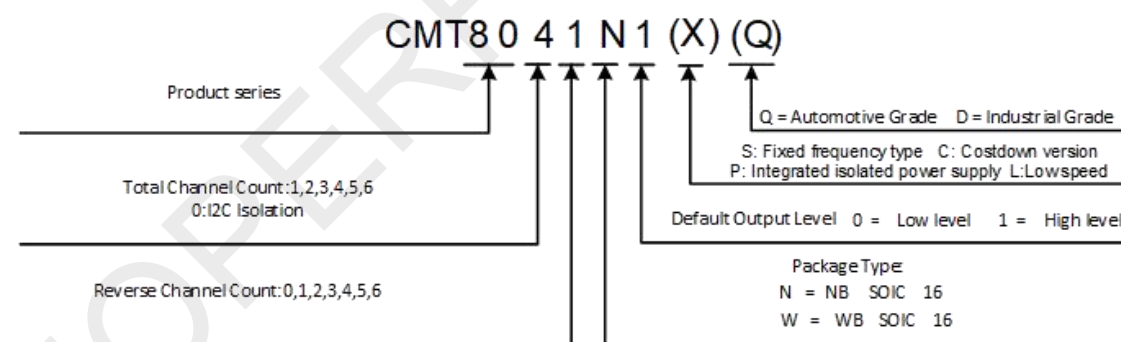

Please visit www.hoperf.com for more product/product line information.

Please contact sales@hoperf.com or your local sales representative for sales or pricing requirements.

14 Tape and Reel Information

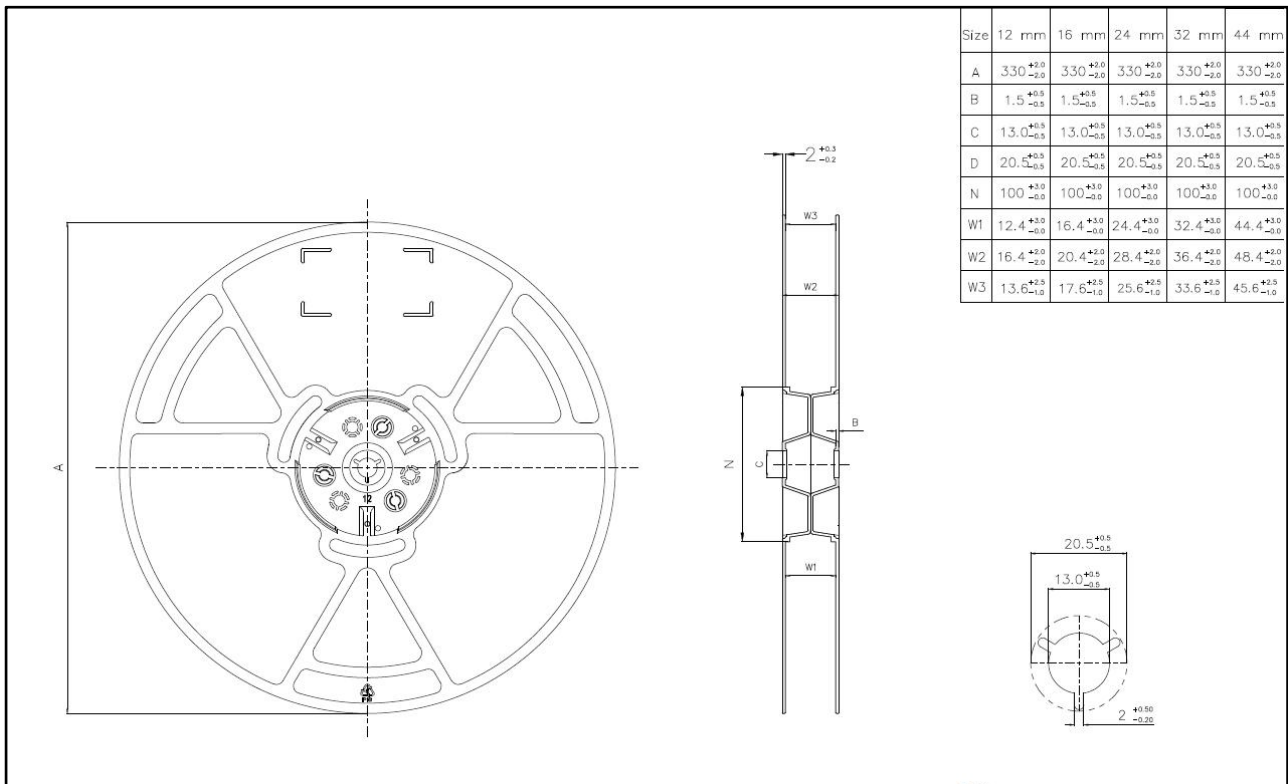


Figure 15. CMT804XC WB SOIC-16 Tape and Reel Information

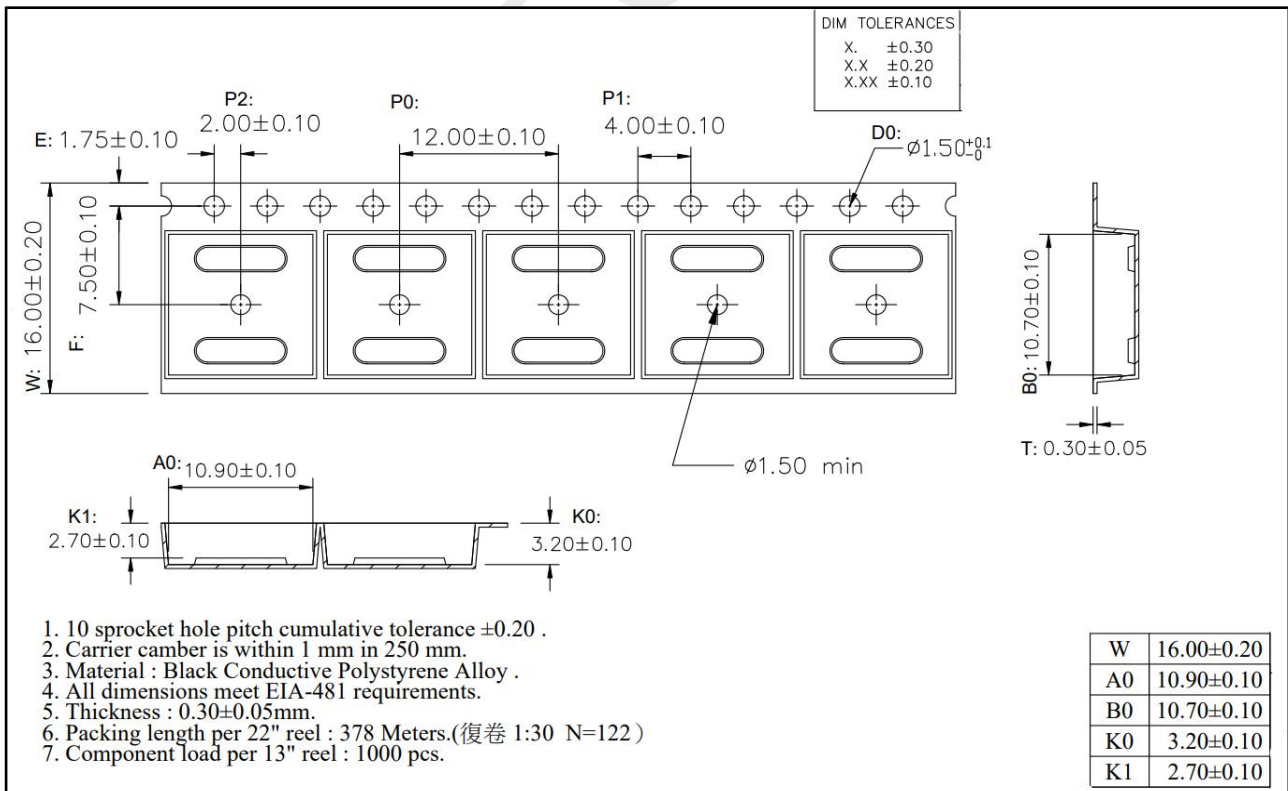


Figure 16. CMT804XC WB SOIC-16 Tape and Reel Information

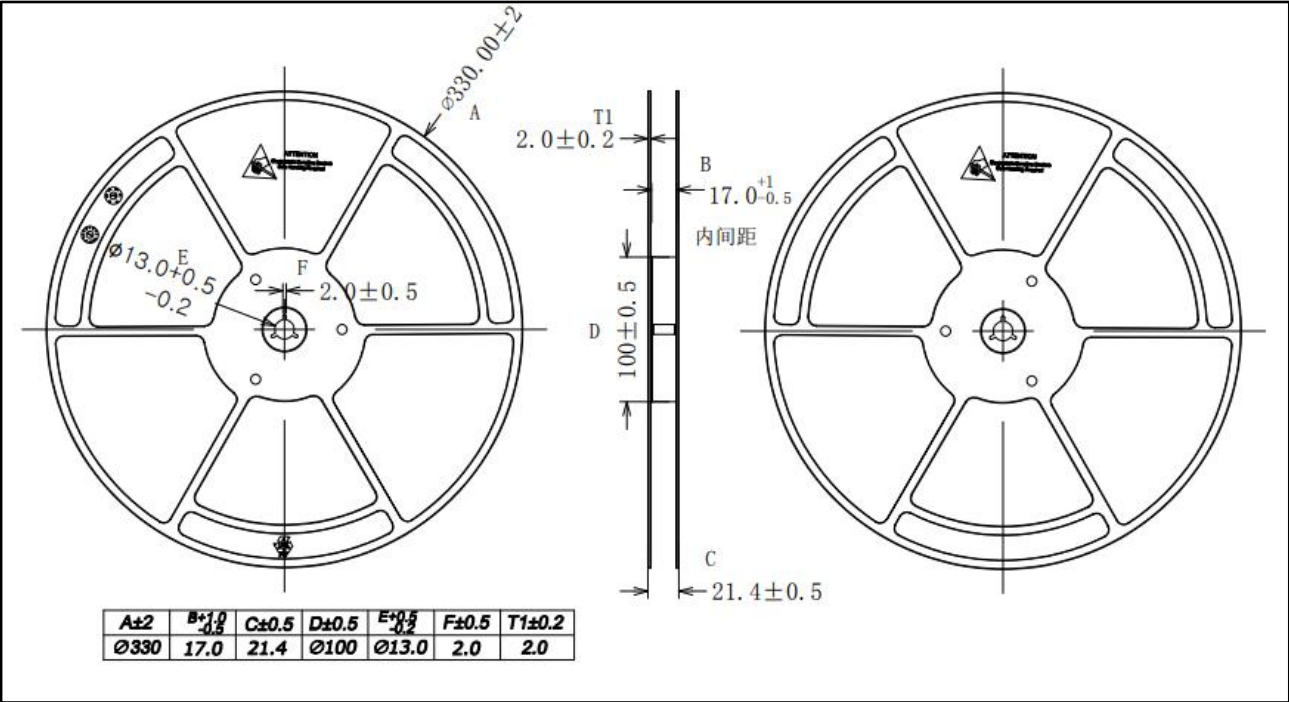


Figure 17. CMT804XC NB SOIC-16 Tape and Reel Information

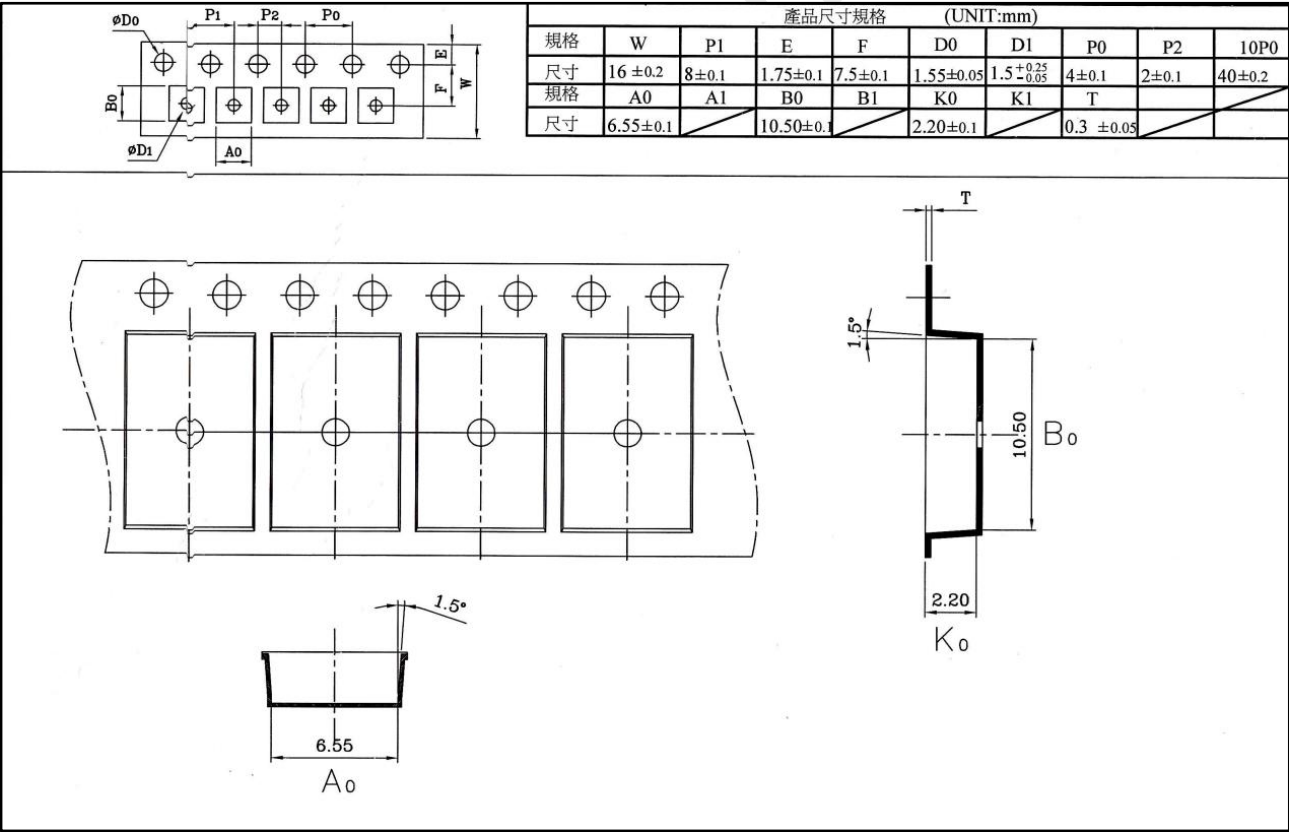


Figure 18. CMT804XC NB SOIC-16 Tape and Reel Information

15 Revise History

Table 20. Revise Records

Version No.	Chapter	Description	Date
0.1	All	Initial version	2025/02/27

HOPERF Confidential

16 Contacts

Shenzhen Hope Microelectronics Co., Ltd.

Address: 30th floor of 8th Building, C Zone, Vanke Cloud City, Xili Sub-district, Nanshan, Shenzhen, GD, P.R. China

Tel: +86-755-82973805 / 4001-189-180

Fax: +86-755-82973550

Post Code: 518052

Sales: sales@hoperf.com

Website: www.hoperf.com

Copyright. Shenzhen Hope Microelectronics Co., Ltd. All rights are reserved.

The information furnished by HOPERF is believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies and specifications within this document are subject to change without notice. The material contained herein is the exclusive property of HOPERF and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of HOPERF. HOPERF products are not authorized for use as critical components in life support devices or systems without express written approval of HOPERF. The HOPERF logo is a registered trademark of Shenzhen Hope Microelectronics Co., Ltd. All other names are the property of their respective owners.