

FIELD KIT CHECKLIST

- ☐ Radio
- ☐ Spare battery or charger
- ☐ Alternate antenna
- ☐ Coax adapters
- ☐ Notebook and pencil
- ☐ Printed frequency list
- ☐ Map / grid reference
- ☐ Headset
- ☐ Weather protection
- ☐ Signal log sheet
- ☐ License copy

COMMON FREQUENCIES

USAGE	BAND/FREQ
US simplex hailing	146.520 MHz (VHF)
EU simplex hailing	145.500 MHz (VHF)
VHF repeaters	144–146 MHz (VHF)
UHF repeaters	430–440 MHz (UHF)
Foxhunting	144–148 / 430–440 MHz
US Handheld	462 / 467 MHz
EU Handheld	446.0–446.2 MHz
CB (US/EU)	~47 MHz (AM/FM)
Marine Distress	156.8 MHz (Ch 16)
Aircraft	118–137 MHz (AM)

145 MHz SLIM JIM

(Lamp cord antenna)

Cut

- 152 cm

Ends (both)

- Split 2 cm

- Strip 1 cm

- Fold & solder adjacent

Match (C)

- Remove 2 cm

Feedpoint (D)

- Strip both 0.5 cm

- Shield → C segment

- Center → opposite C

- Choke (optional)

Deploy


- Vertical

- Away from metal

Dimensions:

A 151 | B 99.3


C 49.7 | D 5

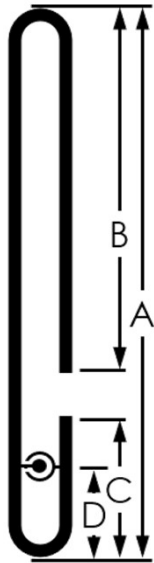

COMMUNICATION PROTOCOL

Alpha	November	1	---
Bravo	Oscar	2	..-
Charlie	Papa	3	...-
Delta	Quebec	4	-
Echo	Romeo	5	
Foxtrot	Sierra	6	---..
Golf	Tango	7	---.-
Hotel	Uniform	8	---..-
India	Victor	9	---...
Juliet	Whiskey	0	-----
Kilo	X-ray		
Lima	Yankee		
Mike	Zulu		

CALL	RESPONSE	NEXT
HAILING: CQ CQ CQ, this is AD5UAP, Alpha-Delta-Five-Uniform-Alpha-Papa, standing by.	AD5UAP, this is N2EEC, November-Two-Echo-Echo-Charlie.	N2EEC, this is AD5UAP. Go ahead.
DIRECTED CALL: N2EEC, N2EEC, this is AD5UAP. Over.	AD5UAP, this is N2EEC. Go ahead.	Continue exchange
COMM CHECK: This is AD5UAP requesting a comm check on 145.130 megahertz.	AD5UAP, this is N2EEC. Read you four by five.	Acknowledge or adjust as needed
TEST TRANSMISSION: This is AD5UAP performing a test transmission. No response required.	(No response expected)	End
BASIC EXCHANGE: N2EEC, this is AD5UAP. You are five by four. Name [your name], [city]. Over.	AD5UAP, this is N2EEC. Copy. five by five. Name Chris, New York. Over.	Continue or close
CLOSING: N2EEC, this is AD5UAP. Thanks for the contact. 73.	73 / Acknowledged	AD5UAP clear

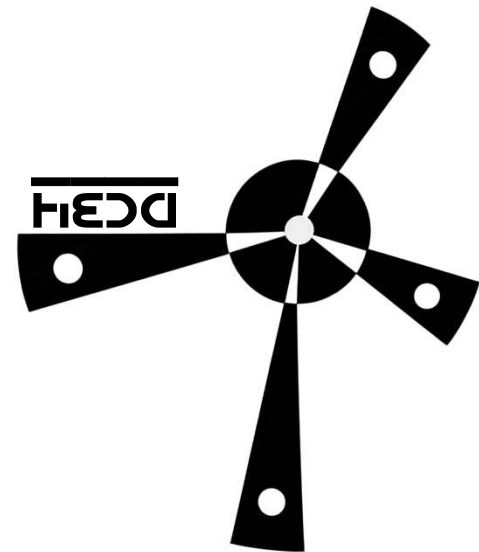


Radio Operator
Field Guide



<https://github.com/HamRadioVillage/field-guide>
v2.01

- FOXHUNTING**
- For long range (>100m), use YAGI antenna or monopole held close to your body.
 - Slowly sweep across horizon until signal strongest. This is direction of fox.
 - Move to second location (move perpendicular, over a long(fish) distance), repeat sweep to find new direction.
 - Where directions intersect is rough location of fox.
 - For short range (<100m), switch to LOOP antenna.
 - Rotate until signal is weakest (deepest null). This is direction of fox.
 - Use horizontal sweep or walk towards null.
- NOTE: Some foxes move.
NOTE: Use attenuator to decrease antenna sensitivity when close to fox.

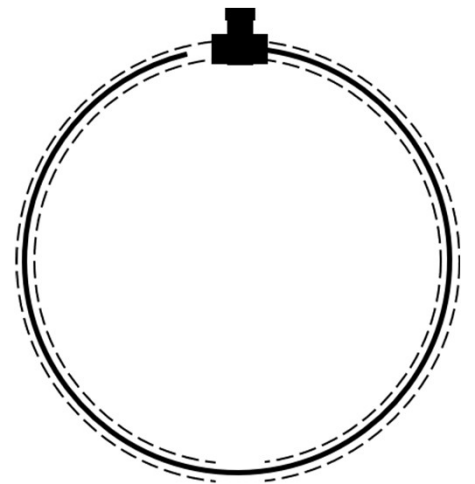

- DIRECTION-FINDING LOOP**
- Cut a 90 cm section of coax
 - Remove a 2 cm section of the outer sheath and braid from the middle.
 - Insulate and reinforce with tape.
 - Terminate one end normally
 - Terminate other end without center wire
 - Connect both ends to a Tee
 - Sharp null through center of loop