


5. System Response and LTI Properties

Experiment 5.1

Impulse Response of the System

```
% Impulse Response of the
System
clc;
clear;
close all;
% Sample index
n = 0:10;
% Unit impulse input
x = [1 zeros(1,10)];
% System:  $y(n)=x(n)+0.5x(n-1)$ 
b = [1 0.5];
a = [1];
% Impulse response
h = filter(b,a,x);
% Display result
disp('Impulse Response
h(n):');
disp(h);
% Plot
figure;
stem(n,h,'filled');
grid on;
title('Impulse Response of
the System');
xlabel('n');
ylabel('h(n)');
```

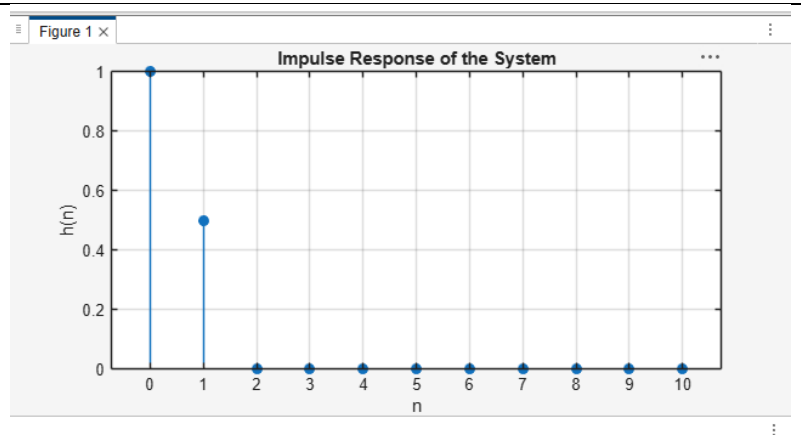

```
% Step Response of the System
clc;
clear;
close all;
% Sample index
n = 0:10;
```

Program

```
% Unit step input
x = ones(1,length(n));
% System:  $y(n)=x(n)+0.5x(n-1)$ 
b = [1 0.5];
a = [1];
% Step response
y = filter(b,a,x);
% Display result
disp('Step Response y(n):');
disp(y);
% Plot
figure;
subplot(2,1,1);
stem(n,x,'filled');
grid on;
title('Unit Step Input u(n)');
xlabel('n');
ylabel('Amplitude');
subplot(2,1,2);
stem(n,y,'filled');
grid on;
title('Step Response of the System');
xlabel('n');
ylabel('y(n)');
```

Output

