

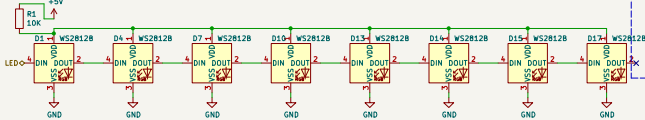




Ideally, should have GND between each signal pin and decoupling at 3V3 plus.





Upstream USB



STM32F1 Microcontroller

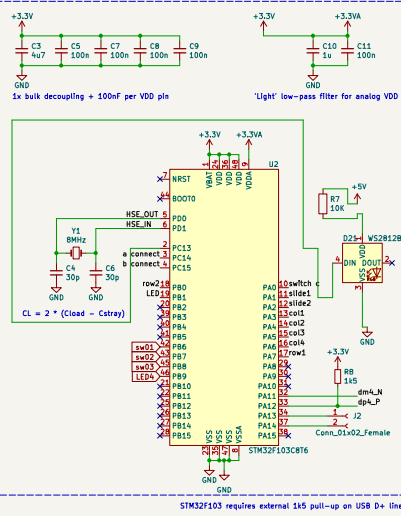

STM32F103 requires external 1k5 pull-up on USB D+ line.

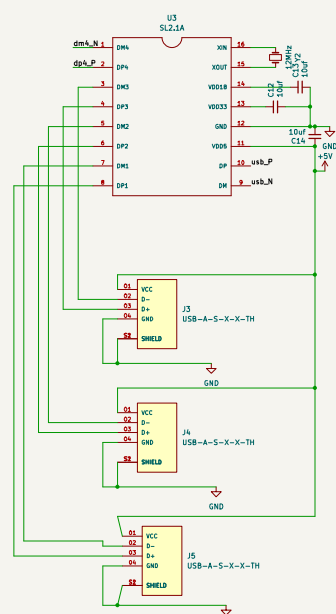

- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole



