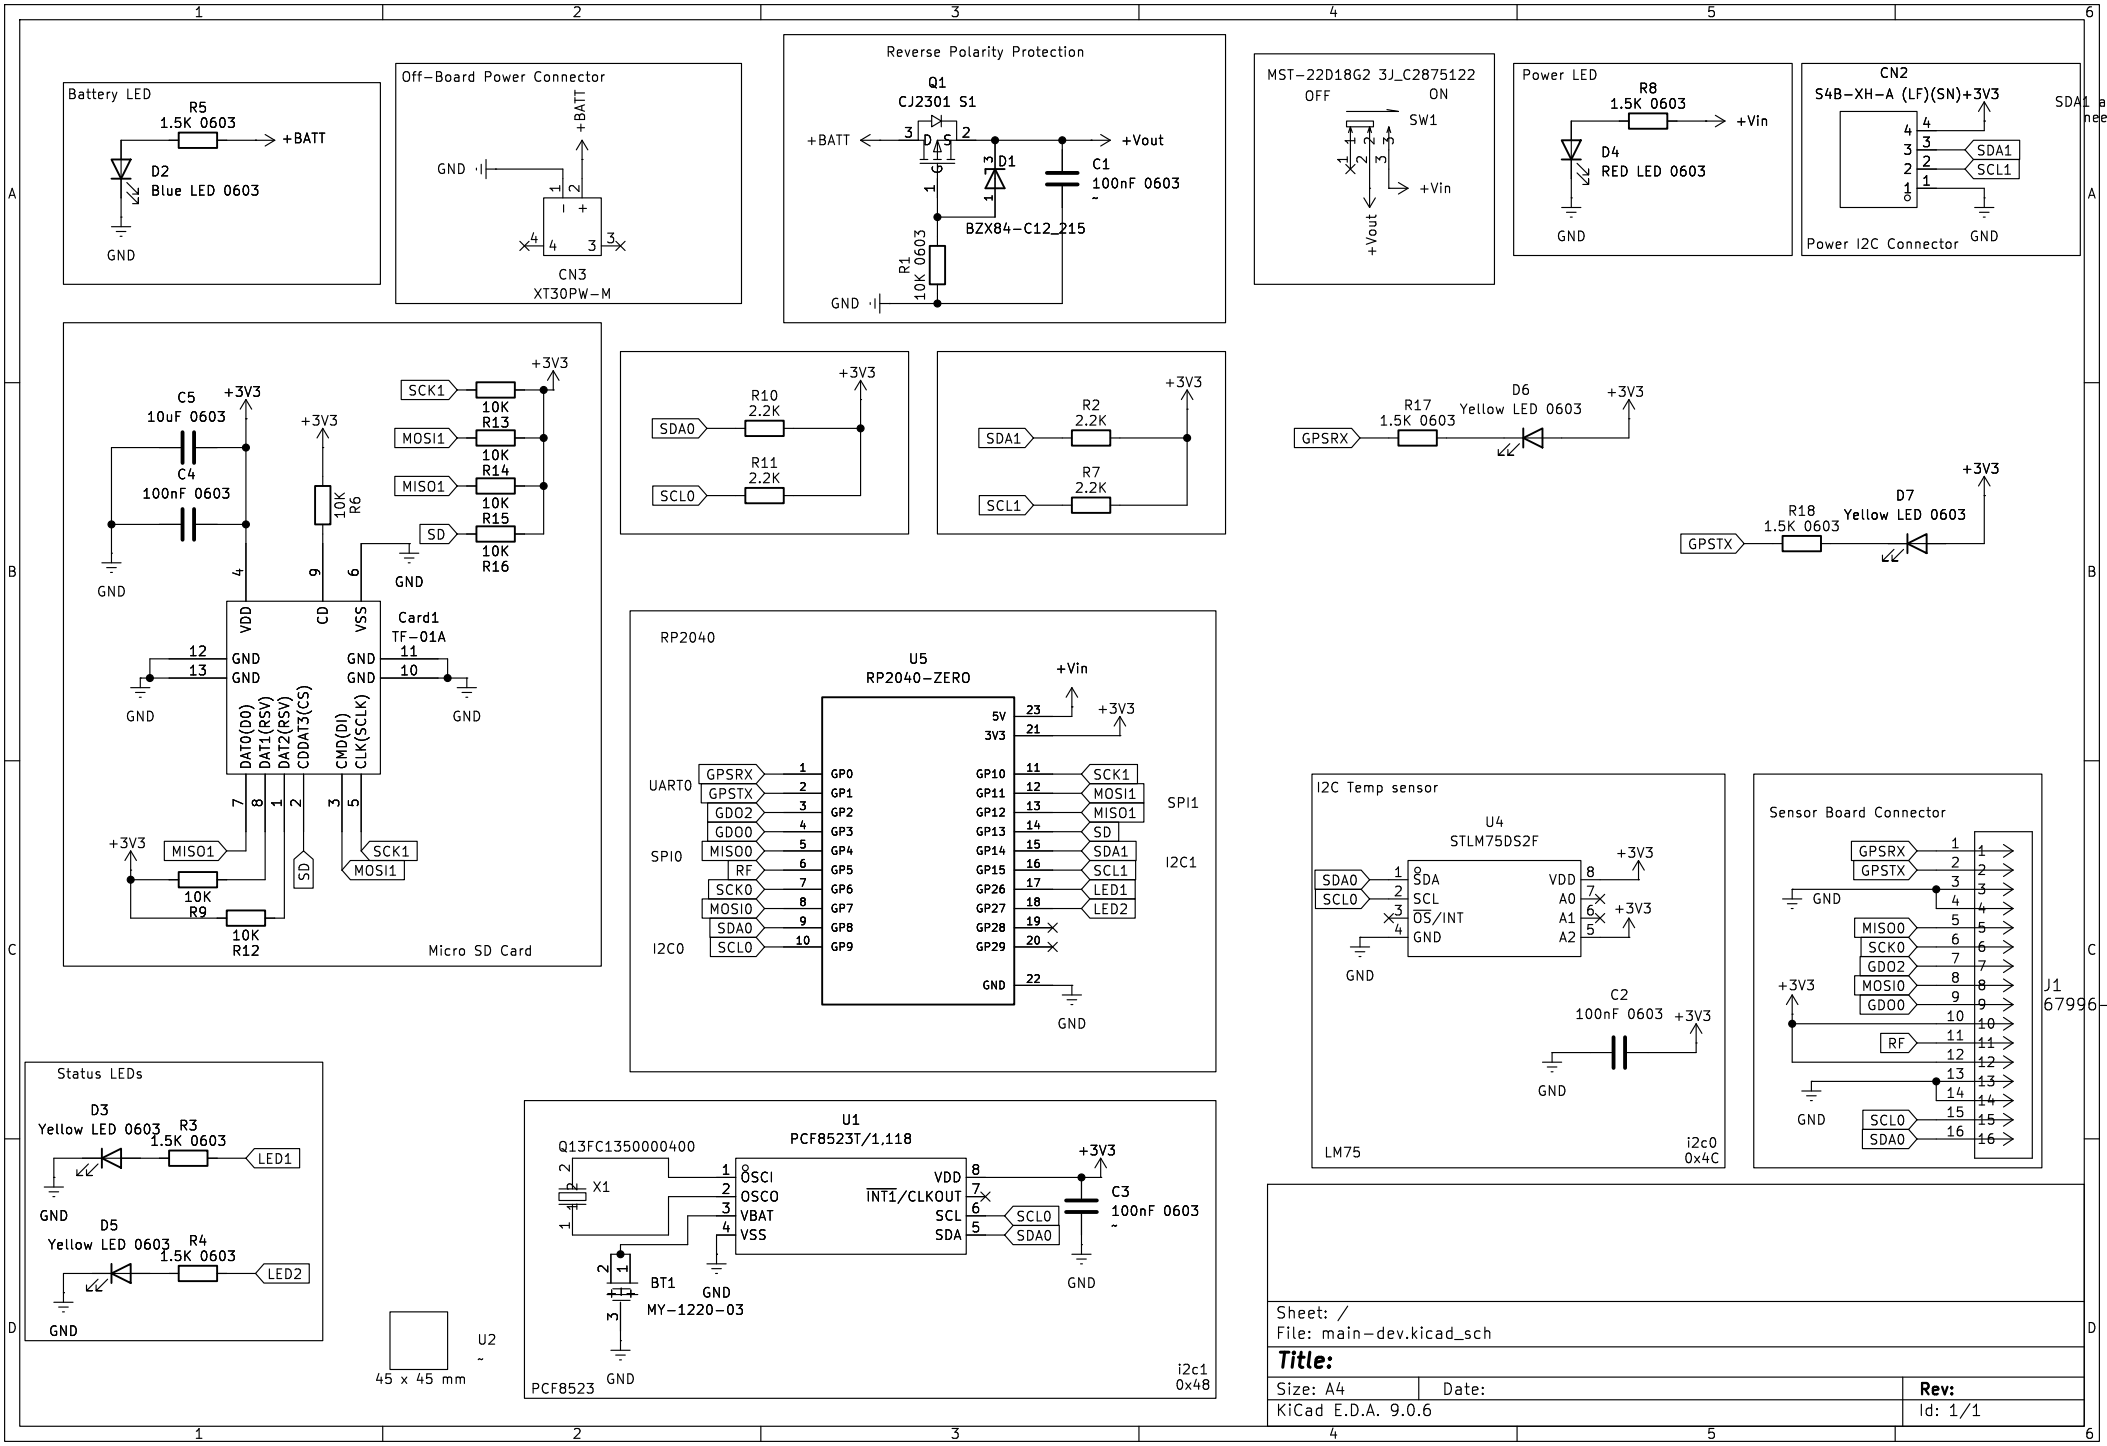

Battery LED
R5
1.5K 0603
+BATT
D2
Blue LED 0603
GND
Off-Board Power Connector
+BATT
GND
CN3
XT30PW-M
Reverse Polarity Protection
Q1
CJ2301 S1
+BATT
+Vout
D1
C1
100nF 0603
BZX84-C12_215
R1
10K 0603
GND
MST-22D18G2 3J_C2875122
OFF
ON
SW1
+Vin
+Vout
Power LED
R8
1.5K 0603
+Vin
D4
RED LED 0603
GND
CN2
S4B-XH-A (LF)(SN)+3V3
SDA1
SCL1
GND
Power I2C Connector
SDA1 and SCL1 needs to be
C5
10uF 0603
C4
100nF 0603
+3V3
GND
10K R6
SCK1
MOSI1
MISO1
SD
10K R13
10K R14
10K R15
10K R16
Card1
TF-01A
VDD
CD
VSS
GND
DAT0(DO)
DAT1(RSV)
DAT2(RSV)
CDDAT3(CS)
CMD(DI)
CLK(SCLK)
10K R9
10K R12
Micro SD Card
R10
2.2K
R11
2.2K
SDA0
SCL0
R2
2.2K
R7
2.2K
SDA1
SCL1
R17
1.5K 0603
D6
Yellow LED 0603
GPSRX
R18
1.5K 0603
D7
Yellow LED 0603
GPSTX
RP2040
U5
RP2040-ZERO
+Vin
5V
3V3
UART0
SPI0
SPI1
I2C1
I2C0
GPSRX
GPSTX
GDO2
GDO0
MISO0
RF
SCK0
MOSI0
SDA0
SCL0
SCK1
MOSI1
MISO1
SD
SDA1
SCL1
LED1
LED2
GP0
GP1
GP2
GP3
GP4
GP5
GP6
GP7
GP8
GP9
GP10
GP11
GP12
GP13
GP14
GP15
GP26
GP27
GP28
GP29
GND
I2C Temp sensor
U4
STLM75DS2F
SDA0
SCL0
SDA
SCL
OS/INT
GND
VDD
A0
A1
A2
+3V3
C2
100nF 0603
LM75
i2c0
0x4C
Sensor Board Connector
GPSRX
GPSTX
MISO0
SCK0
GDO2
MOSI0
GDO0
RF
SCL0
SDA0
J1
67996-416HLF
Status LEDs
D3
Yellow LED 0603
R3
1.5K 0603
LED1
D5
Yellow LED 0603
R4
1.5K 0603
LED2
U2
45 x 45 mm
U1
PCF8523T/1,118
Q13FC1350000400
X1
OSCI
OSCO
VBAT
VSS
VDD
INT1/CLKOUT
SCL
SDA
C3
100nF 0603
BT1
MY-1220-03
PCF8523
i2c1
0x48
Sheet: /
File: main-dev.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 9.0.6
Id: 1/1