

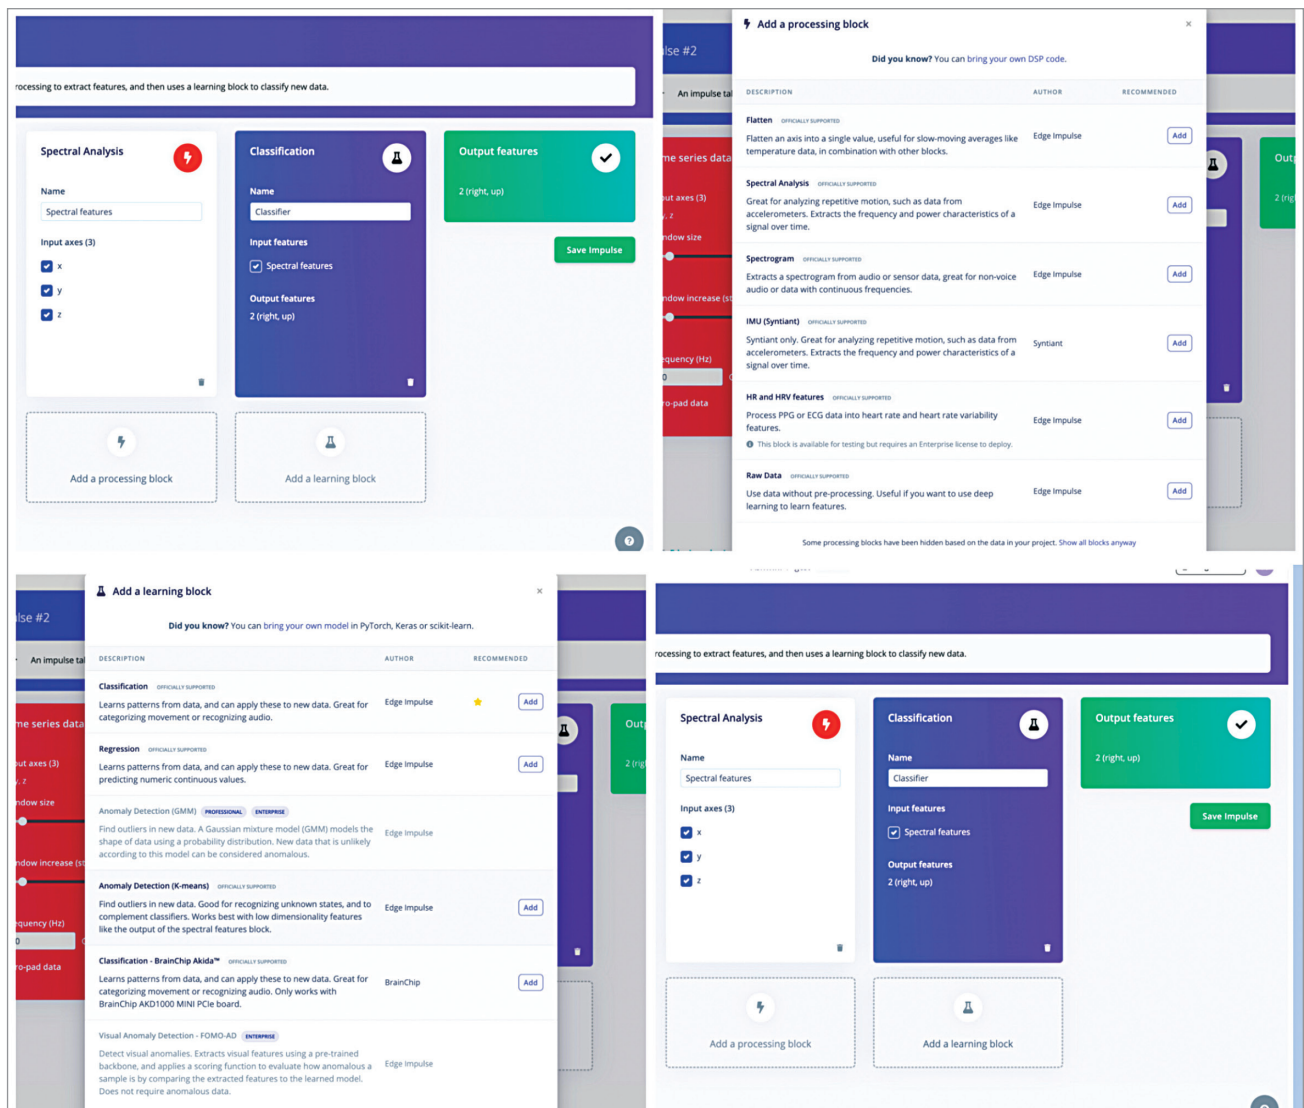


Fig. 6: Designing the impulse

following command. For macOS and Linux, you might need to use `sudo` for superuser access, but it is not needed for Windows:

```
edge-impulse-data-forwarder --clean
```

Then, the system prompts the email ID to log in, followed by a request for the password. A list of models associated with the account is displayed, allowing the selection of the desired model to connect to. The process involves detecting the computer's hardware. If successful, the system automatically connects. If not, a list of available ports is displayed, prompting

the selection of the correct one.

Next, the system detects sensor values from the IndusBoard. If multiple values exist, the system requests their names, separated by commas. For instance, the ACC sensor provides three-axis values. Input "x,y,z" in the terminal (see Fig. 3). Fig. 3 shows Edge Impulse connecting with IndusBoard using the data forwarder in the terminal.

Collecting dataset

Now, in the terminal, either follow the provided link to open the dataset

sample or navigate to the model in the devices section, where the IndusBoard will appear. Then, go to the data acquisition section to collect the dataset. Click 'Start Sampling,' perform the gesture, assign the appropriate label, and collect the test and training data. Fig. 4 shows the device connection status in Edge Impulse. Fig. 5 shows the dataset collection.

Impulse design

Design the impulse according to the requirements. Here, there is an option to choose whether it's a model for a