

```

2 // Load side code
3 #include <ESP8266WiFi.h>
4 #include <FirebaseESP8266.h>
5
6 // WiFi credentials
7 const char* ssid = "vivo";
8 const char* password = "muru555999";
9
10 // Firebase credentials
11 #define DATABASE_URL "https://esp32camsecurity-default-rtdb.asia-southeast1.firebaseio.com/"
12 #define API_KEY "AIzaSyCtkhhd_AuunmePvratXXXXXXXXXX"
13
14 // Relay Pins
15 #define IMPORTANT_LOAD_RELAY_PIN D1
16 #define UNIMPORTANT_LOAD_RELAY_PIN D2
17
18 FirebaseData firebaseData;
19 FirebaseAuth auth;
20 FirebaseConfig config;
21
22 void setup() {
23   Serial.begin(115200);
24   WiFi.begin(ssid, password);
25   Serial.print("Connecting");
26   while (WiFi.status() != WL_CONNECTED) {
27     Serial.print(".");
28     delay(1000);
29   }
30   Serial.println("\nConnected to WiFi!");
31
32   config.api_key = API_KEY;
33   config.database_url = DATABASE_URL;
34   Firebase.begin(&config, &auth);
35   Firebase.reconnectWiFi(true);
36
37   pinMode(IMPORTANT_LOAD_RELAY_PIN, OUTPUT);
38   pinMode(UNIMPORTANT_LOAD_RELAY_PIN, OUTPUT);
39   digitalWrite(IMPORTANT_LOAD_RELAY_PIN, HIGH); // OFF (NC relay)

```

Fig. 6: Load-side code snippet configuration

<https://console.firebase.google.com>

2. Click Add Project→Enter Project Name.
3. Click Continue→Disable Google Analytics (optional).
4. Create Project→Wait→Click Continue.

### Step 2: Add an App (Web/Android/iOS/ESP32/API)

For ESP32/Web: Add a Web App  
1. Go to Project Overview→Add App→Web

2. Give an app name (Example: esp32camsecurity)

3. Click Register app

You will get this configuration:

```

const firebaseConfig = {
  apiKey: "YOUR_API_KEY",
  authDomain: "YOUR_PROJECT_ID.firebaseio.com",
  databaseURL: "https://YOUR_PROJECT_ID-default-rtdb.firebaseio.com",
  projectId: "YOUR_PROJECT_ID",
  storageBucket: "YOUR_PROJECT_ID.appspot.com",
  messagingSenderId: "YOUR_SENDER_ID",
  appId: "YOUR_APP_ID";

```

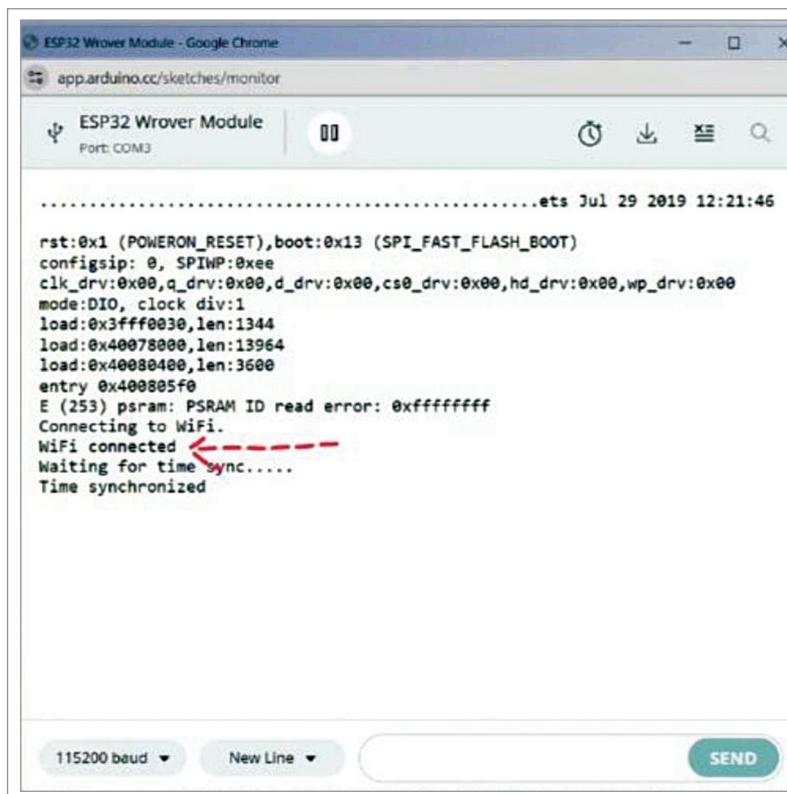


Fig. 7: Firebase view

