


- All materials used in electrical fitting should be of approved quality of make and from a reputed manufacturer as per ISI specification.
- For low power operations 5 Ampere small size sockets, and for heavy power operations 15 ampere large size sockets should be used. Multi-plug adaptors are used for temporary usage only i.e., for a short period of time. No socket or extension box should be overloaded.
- Most of the imported equipments function in two different settings 110-120V and 220-240V. These equipments have switch for setting the input supply voltage. Hence, make sure that the switch in equipment is in 220-240V position.
- The wiring of a plug is colour coded to help guard against electrical accidents. The colour codes in India as per Indian Electricity Rules are: Phase (Line) is Red, Blue or Yellow, Neutral is Black and Earth (Ground) Green or Green with Yellow lines.
- If there are only two wires in the power cable, no earth connection is required. If there are three conductors then the equipment needs to be earthed properly.
- Always make sure that the earth wire is longer than the other two so that if the cable is accidently pulled out of the plug, the earth wire is the last wire to become disconnected.



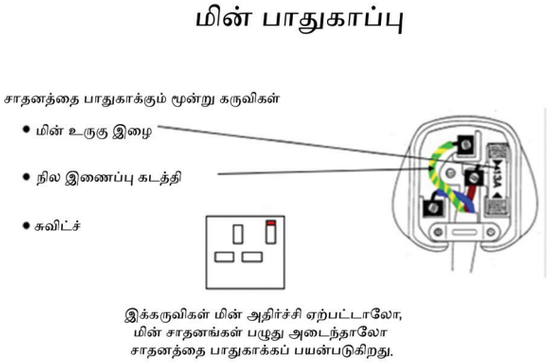

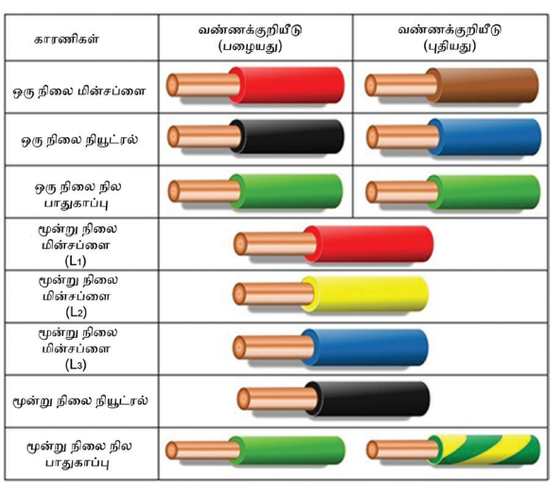

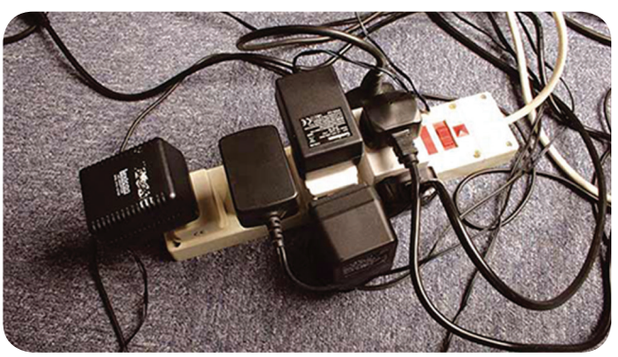

EMA_English_Practical.indd 202 11/9/2020 3:56:08 PM