
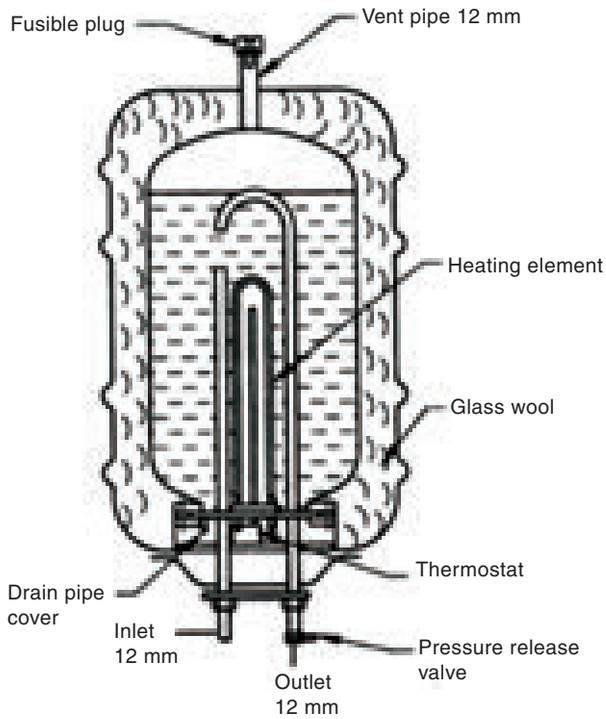


The thermostat fitted in the geyser controls the temperature of the water automatically and thus, safeguards the whole unit from overheating. As soon as the temperature of the water inside the tank reaches to the temperature of 85 degree, the heating element is automatically disconnected. Electric connection is restarted as soon as the temperature of the water falls. According to the size and capacity of a geyser, the power consumption vary. A typical rating for a geyser is 230 to 250 volts.

Hand tools and apparatus required

Sl. No.	Hand tools and apparatus required	Quantity
1	Electric geyser	1
2	Tools box	1
3	Tester	1
4	Megger	1
5	Multimeter	1

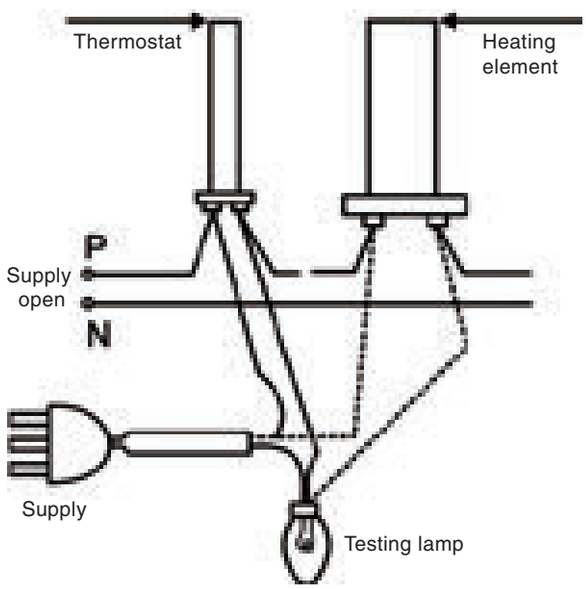

Connection diagram of an electric geyser

Dismantling procedure

1. Disconnect the main supply of the geyser.
2. Drain out the stored water from the geyser.

BEE_ENG_Pratical.indd 183 12/27/2019 10:54:34 AM