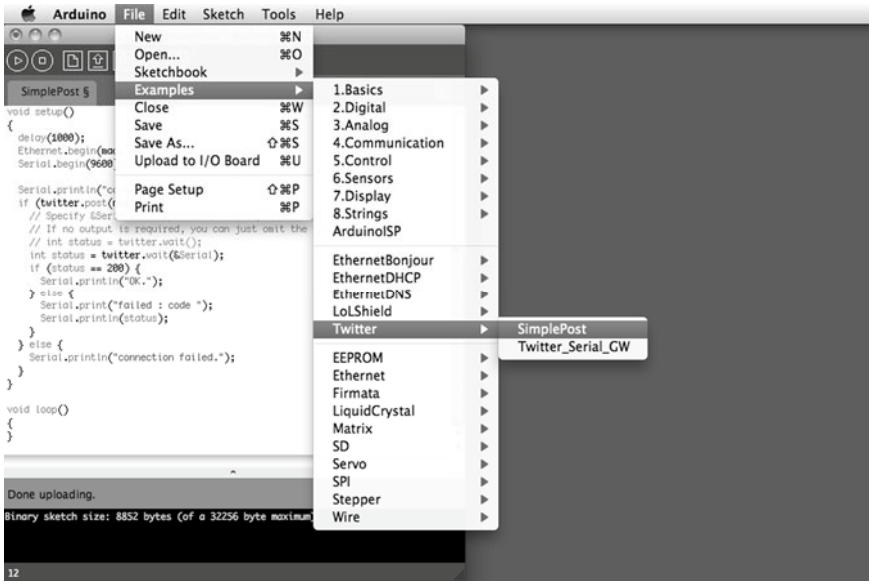


Figure 11-2. *Twitter library example*

When the libraries are placed correctly in the libraries folder, the example sketch will show up in the File ➤ Examples ➤ Twitter menu, as shown. If not, you might need to hunt down the correct library folder.

■ **Note** You might have noticed that we're using the 0022 version of Arduino in Figure 11-2. At the time of this writing, the Twitter library did not play nice with the 1.0 beta but the Arduino developers are working hard and I'm sure this will be fixed by the time this book is published.

Making It Work

With our sketch open, we need to set three things to make this work. The first thing to set is the MAC address of the Ethernet adapter. This is usually printed on a little label on the bottom of the Ethernet shield and entered in the array `mac[]`. Second, we need to find an available IP address on our network and enter it into the array named `ip[]`. Finally, we need to obtain an authorization token from Twitter to be able to use its services and enter this token in the `Twitter twitter()` object. To obtain this token, our example sketch uses the Arduino-tweet application at `http://arduino-tweet.appspot.com`. With all of that in place, we can upload the sketch to the interface board and then open up the Serial Monitor to see what's going on. When everything works, we should see the tweet posted by our Arduino, as shown in Figure 11-3.