








31. Y-axis: Assembling the belt

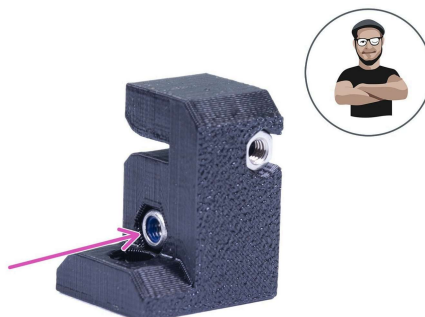

-  Take the Y-belt-holder (smaller of the two printed parts).
-  Insert M3n nut, all the way in.
-  Insert M3nN nyloc nut, all the way in.
-  Use the screw pulling technique.



Next →

