






## 12. X-axis: assembling the motor

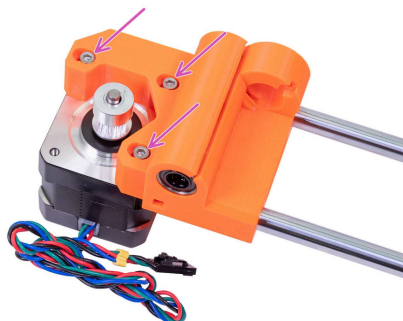

-  Prepare M3x18 screws (3x)
-  Prepare the motor for X-axis with an assembled pulley.
-  Place the X-axis on the motor as shown in the picture.
-  Insert the M3x18 screws and tighten them so that their positions are at the back of the oval hole like in the picture.



Next →

