


board is doing. It's very useful for showing debugging data when developing the application.


Just a disclaimer: This isn't a snazzy LCD display like that on a mobile phone with good graphics, but a simple one to start working and get the work done.

The display is also called a 16x2 LCD display

| LCD NUMBERING SEQUENCE |       |       |     |        |        |
|------------------------|-------|-------|-----|--------|--------|
| (0,0)                  | (0,1) | (0,2) | ... | (0,14) | (0,15) |
| (1,0)                  | (1,1) | (1,2) | ... | (1,14) | (1,15) |

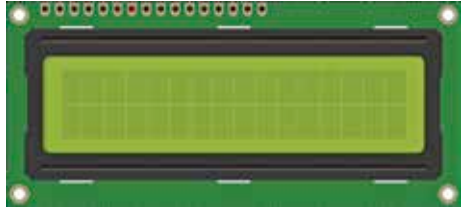

16 x 2LCD display

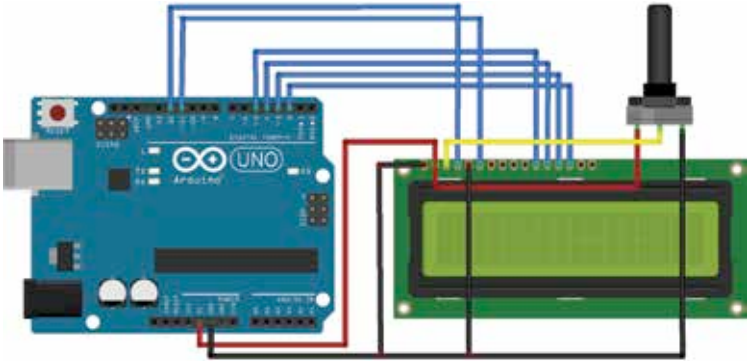

Connecting an LCD to the Arduino™ board

|                                         |                                                                       |
|-----------------------------------------|-----------------------------------------------------------------------|
| #include <LiquidCrystal.h>              | Include the Liquid Crystal Display Library                            |
| LiquidCrystal lcd (12, 11, 5, 4, 3, 2); | Initialise the library with the numbers of the pins of LCD connection |
| void setup () {                         |                                                                       |
| lcd.begin (16, 2);                      | Set the number of columns and rows on the LCD                         |
| lcd.print ("hello, world!");            | Print a message on first line of the LCD.                             |
| }                                       |                                                                       |
| void loop () {                          |                                                                       |
| lcd.setCursor (0, 1);                   | Set the cursor to column 0, line 1 (i.e. second row)                  |
| lcd.print ("have a nice time");         | Print on the position mentioned above                                 |
| }                                       |                                                                       |