

The board has the following ports:

USB-A port

20 Digital input/output pins (7 of 20 can be used as PWM outputs and 12 can be used as analog inputs)

Hardware specs

The specifications for the Linux part of hardware:


- ◆ Processor: Atheros AR9331
- ◆ Architecture MIPS @400MHz
- ◆ Ethernet IEEE 802.3 10/100Mbit/s
- ◆ Wi-Fi IEEE 802.11b/g/n
- ◆ USB Type-A 2.0 Host
- ◆ Card Reader Micro-SD only
- ◆ RAM 64 MB DDR2 memory
- ◆ Flash Memory 16 MB

The Yún combines the power of Linux with the user friendliness of the Arduino™ platform. It can communicate with the Linux distribution on board, offering a powerful networked computer. Linux shell scripts and other programming languages such as Python scripts can also be used. It also allows the use of Linux commands that allow data transfer to and from a server, using protocols like DICT, FILE, [FTP](#), [FTPS](#), GOPHER, [HTTP](#), [HTTPS](#), IMAP, IMAPS, LDAP, LDAPS, POP3, POP3S, RTMP, RTSP, SCP, [SFTP](#), SMTP, SMTPS, TELNET and TFTP via the 'cURL' command.

The ATmega32u4 on the Yún has built-in USB communication. This eliminates the need for a secondary processor. Thus, in addition to being a virtual serial/COM port, the Arduino™ Yún board can appear as a peripheral (such as a mouse and keyboard) to a connected computer.

The Bridge

The Arduino™ Yún combines the power of Linux running on the Atheros AR9331 processor and the Arduino™ platform directly supported by the ATmega32u4 microcontroller. This makes it necessary to allow communication between the

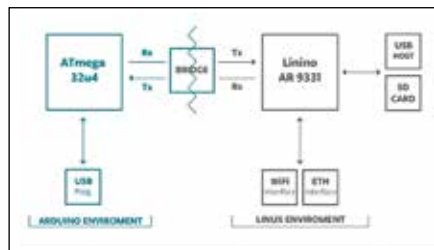

Arduino™ bridge and interfacing of ports