

INDUSTRY'S BEST
INSULATION TESTERS

Now available on

DGS&D

RATE CONTRACT 2013-14

Megger

Now@

DGS&D
RATE CONTRACT 2013-14Prices like **NEVER BEFORE!****MIT 515****5kV DC Insulation
Resistance Tester****Insulation Testing
upto 10 TQ.****CATIV 600V, IP65**

Features

- PI, DAR, User Selectable time
- Predefined voltage range from 250V, 500V, 1kV, 2.5kV, 5kV
- Insulation Testing upto 10 TQ.
- User Define Test Voltage 10V step from 100V to 1000V
- Dedicated voltmeter function (30V to 660V)

**MIT 410****1kV Industrial Insulation
Tester with PI & DAR****Insulation Testing
upto 100 GQ.****CATIV 600V, IP54**

Features

- Test Voltage Range from 50V, 100V, 250V, 500V, 1kV
- PI, DAR & Timer Functions
- Insulation Testing upto 100 GQ with leakage current measurement.
- TRMS & DC Voltage measurement
- Continuity testing at 200mA down to 0.01Q and resistance measurement

**Megger (India) Pvt Limited**

211, Crystal Paradise Mall,

Off Veera Desai Road,

Andheri (W), Mumbai - 400 053.

T + 91 22 26740468 F + 91 22 26740465

E Nupoor.Charde@megger.com

W www.megger.com

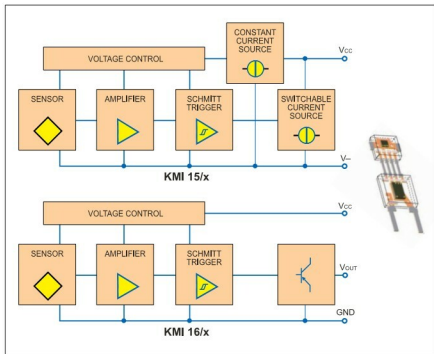


Fig. 1: Block diagrams of the KMI 15/x and KMI 16/x rotational speed sensors with integrated signal conditioning circuit, from Philips Semiconductors. The KMI 16/x sensor modules provide an open-collector output, while KMI 15/x sensor modules have a current interface that requires only two wires to connect them in the application

tachometer measures the rate at which the light beam is reflected back.

Stroboscopic. It has clear advantages over other measuring methods using mechanical or optical sensors. According to the stroboscopic principle, objects are stationary in the eyes of the observer when the frequency of high-speed flashes is in synchronisation with the RPM of the object. A stroboscopic light source provides high-intensity flashes of light, which can be caused to occur at a precise frequency. When this light source is made to fall on an object with periodic motion, it appears that the motion has slowed down or stopped when both frequencies bear a definite relationship.

Stroboscopic tachometers employ this effect for RPM measurement. Mechanical RPM measurement is not good for small objects. Although optical method is superior to mechanical method, practically it is not always possible to bond reflective tapes on the objects. But with stroboscopic method, it is always possible to measure the RPM of even very small objects.

Sensor modules for unique speed sensing solutions

Today's advanced sensor modules (and sensing techniques) provide simple and cost-efficient solutions for rotational speed measurement in many applications including automotive, industrial and medical.

Variable reluctance speed sensor.

A variable reluctance (VR) sensor is composed of a wire wound around a cylindrical magnetic material, typically made of some type of ferrous material that is referred to as a pole piece. A magnet is attached behind the pole piece, creating a magnetic field through the pole piece and winding. This magnetic field projects out from the pole piece front, also known as the sensor tip. When ferrous material passes through and disrupts this magnetic field, a sine wave is generated. The frequency of the signal is directly proportional to the speed of rotation.

VR speed sensors are passive devices that do not require any external source of power to generate a signal.