


Toshiba BLE Scatternet Solution for Home Lighting Application

Example of scatternet uses case

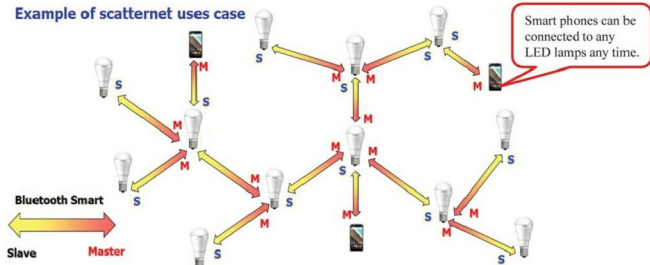

Specification	TC35667-006	TC35676-001
Act as LE Master and LE Slave at the same time	Yes	Yes
Act as LE Slave to more than one LE Master at the same time.	2	2
Act as LE Master to more than one LE Slave at the same time.	4	4
Maximum number of connections	5	6

TC35667-006	TC35676-001
Bluetooth low energy v4.1 Supports 2 remote masters.	Bluetooth low energy v4.1 Supports 2 remote masters.
Ultra Low Power Consumption Peak Power Consumption = 6.3 mA Deep Sleep Power Consumption < 0.1 uA	Ultra Low Power Consumption Peak Power Consumption = 6.3 mA Deep Sleep Power Consumption < 0.1 uA
Various Interfaces UART: 1 ch, I2C/SPI: 1 ch (selectable) 10-bit ADC: 3 ch for ext/1 ch for int (VDD Monitor) PWM: 3 ch for beep, LED, etc. External interrupts: 12 ch	Various Interfaces UART: 1ch, I2C/SPI: 1ch (selectable) 10-bit ADC: 5 ch for ext/1 ch for int (VDD Monitor) PWM: 3 ch for beep, LED, etc. External interrupts: 12 ch
32-KB User Program for Single-Chip Operation Stored in an external EEPROM.	64-KB User Program for Single-Chip Operation Stored in the built-in 192-KB flash ROM.
On Chip DCDC with 1.8 to 3.6-V Input Simplifies external power supply circuit.	On Chip DCDC with 1.8 to 3.6-V Input Simplifies external power supply circuit.
Small Packages QFN40, 6 mm, 0.5-mm pitch, 0.9-mm thickness QFN40, 5 mm, 0.4-mm pitch, 0.9-mm thickness WCSP41 3 mm, 0.4-mm pitch, 0.3-mm thickness	Small Packages QFN40, 6 mm, 0.5-mm pitch, 0.9-mm thickness QFN40, 5 mm, 0.4-mm pitch, 0.9-mm thickness

Bluetooth SMART and Bluetooth are registered trademarks of Bluetooth SIG.

ARM is a registered trademark of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved