

GUI to control outputs of PLC, RS232 devices via PLC, we use Wonderware InTouch SCADA. A simple GUI can be made in Wonderware by following simple steps:

1. Open Wonderware Development tool by double-clicking on Desktop icon.
2. Start a new project.
3. From the palette on the right

side, choose the appropriate graphical object to be inserted.

4. Click on the screen to insert the object.

5. Double-click on the object to add a suitable tag name and type of object. Type defines usage; it may be analogue or discrete.

6. Double-click on the tag to assign properties to the object. Different operations like visibility or blink can be controlled on the basis of scripting.

7. If the tag is I/O type (meant to read or control a device), specify the address of the device.

8. Address of the device can be obtained from registers of the PLC, which can be viewed in RSLogix.

9. In Modify Access Name window, keep the access name as KEPServerEX_SL. KEPServer acts as a communicator between RSLogix and Wonderware InTouch.

10. In this fashion, develop the entire GUI with specific tag names,

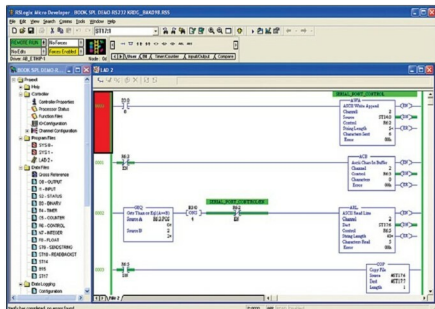


Fig. 15: PLC in Run mode

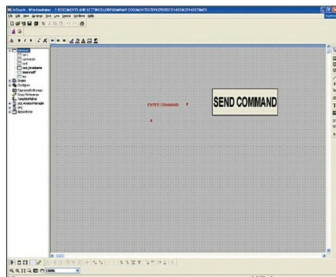


Fig. 16: Wonderware development tool

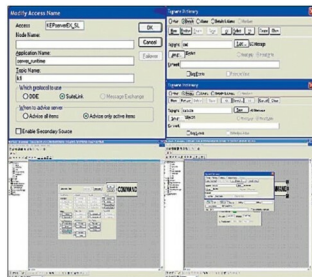


Fig. 17: Setting tag properties

THE COMPLETE MAGAZINE ON OPEN SOURCE

OpenSource
ForYou

Your favourite Magazine on
Open Source is now on the Web, too.

OpenSourceForU.com

Follow us on Twitter@LinuxForYou