

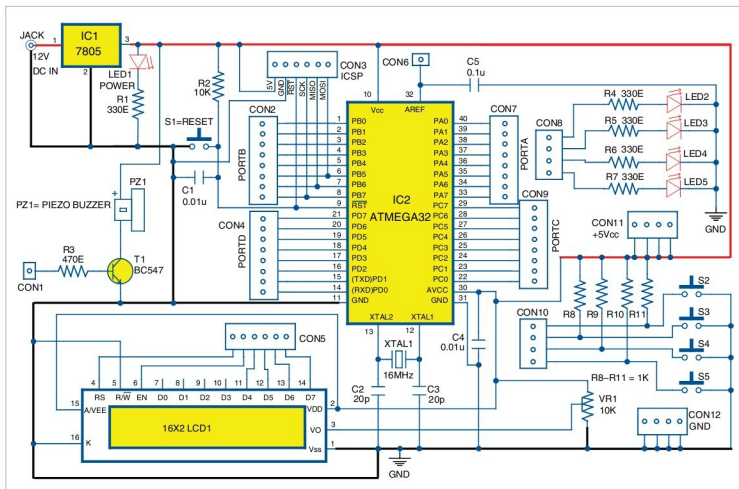


Fig. 3: Circuit diagram of Arduino for ATmega32

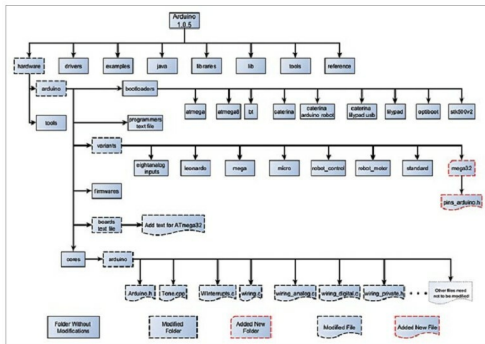


Fig. 4: Directory tree of Arduino 1.0.5 IDE

needs to be modified/added. Details of modifications, that is, where/which lines are to be changed/added are given here for reference.

But first make a copy of Arduino version 1.0.5 software and make required changes in it. If you do not have 1.0.5 version, go to www.arduino.cc.

arduino.cc and click Download Link. From Previous Release box click Arduino 1.0.x and then click Windows option for version 1.0.5. Save this file and expand it.

Follow the instructions given below for making modifications:

Directory structure of Arduino.

Go through it and verify it with Arduino version 1.0.5 so that you get overall idea of the changes required in the files and folders of Arduino. For editing relevant files (like boards.txt, pins_arduino.h and so on), use Programmer's Notepad and use/toggle line number display so that you can view line numbers in the opened file.

Modify the files in this directory structure as per the steps below.

Go to Hardware\Arduino directory. Open the text file named boards.txt and add the following lines at the end of this file:

```
atmega32.name=Arduino ATmega32
```