

To write images to an SD card, the tutorial found on following link might be helpful: www.raspberrypi.org/documentation/installation/installing-images/windows.md

Plug the MicroSD card into RPi and interface the camera to it. Make sure that power adaptor is unplugged. Now plug in your keyboard and mouse, and power on RPi. From the terminal, edit startup.sh file in RPi as given below:

```
$ sudo nano /home/pi/scripts/startup.sh
```

Change the following line:

```
java -jar /home/pi/butterflypi.jar  
[DeviceName] [Security Code] &
```

Here, enter your device name and security code as Balboa. Press Ctrl + o to save it and Ctrl + x to exit the program.

Press Alt + Ctrl + F2, and you will get Command prompt. Enter pi as login user name and butterflypi as password.

Set up your Wi-Fi network from

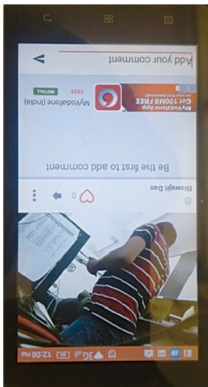


Fig. 7: Video capture on the smartphone

Menu→Preferences→Wi-Fi Configuration. Enter your Wi-Fi SSID and password and click OK. Check your Internet connection and reboot your system. Your Butterfly TV will become online (Fig. 6).

To watch live video streams being captured by RPi camera, click Play (Fig. 6).

If Butterfly TV is still off, find startup.sh file in path/home/pi/scripts and open it to verify the device name and security code. Security code is a kind of password for your camera.

Live video streaming will be automatically saved in your mobile. So you now have a mobile app controlled smart security camera. **EFY**



Biswajit Das was manager - R&D, EFY Labs, till recently

www.diyexpo.in

an **EFY GROUP** event



India's first
and only
show focused
on DIY

DIY EXPO

For the MAKER in you

March 2-4, 2017, BIEC, Bengaluru

Highlights

- "New Product" demo zone on the expo floor
- Rapid prototyping conference
- Co-located IoT and other technology conferences

For more details, write to growmybiz@efy.in or call us on +91 11 40596600
Sponsorship/ stall bookings open

**INDIA
ELECTRONICS
WEEK**

March 2-4, 2017, BIEC, Bengaluru