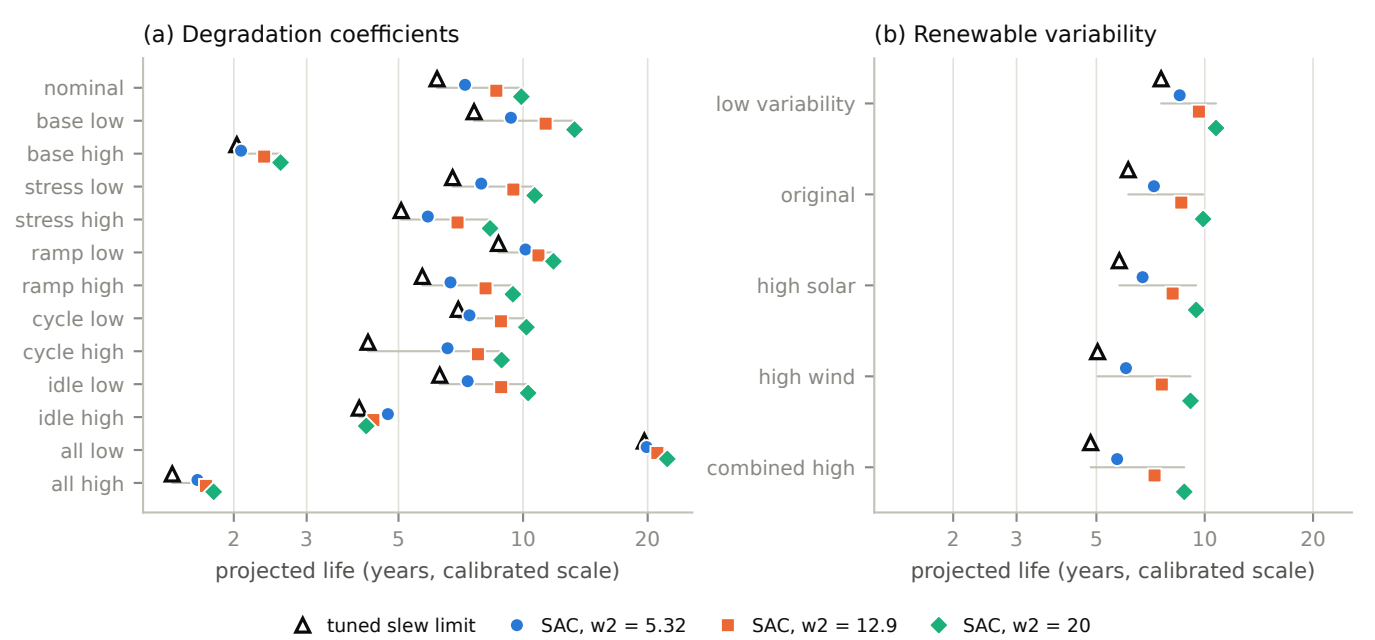
(a) Degradation coefficients
nominal
base low
base high
stress low
stress high
ramp low
ramp high
cycle low
cycle high
idle low
idle high
all low
all high
2
3
5
10
20
projected life (years, calibrated scale)
(b) Renewable variability
low variability
original
high solar
high wind
combined high
2
3
5
10
20
projected life (years, calibrated scale)
tuned slew limit
SAC, w2 = 5.32
SAC, w2 = 12.9
SAC, w2 = 20