


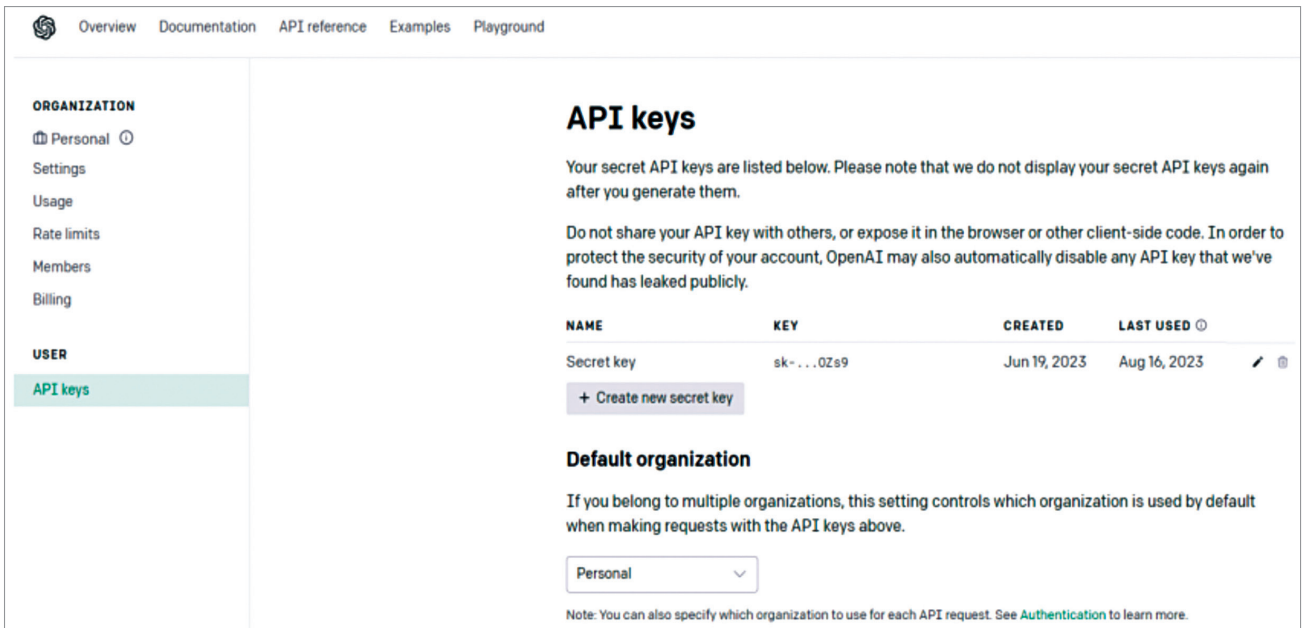

Organization

- Personal
- Settings
- Usage
- Rate limits
- Members
- Billing

User

- API keys

API keys

Your secret API keys are listed below. Please note that we do not display your secret API keys again after you generate them.

Do not share your API key with others, or expose it in the browser or other client-side code. In order to protect the security of your account, OpenAI may also automatically disable any API key that we've found has leaked publicly.

NAME	KEY	CREATED	LAST USED
Secret key	sk-...0Zs9	Jun 19, 2023	Aug 16, 2023

[+ Create new secret key](#)

Default organization

If you belong to multiple organizations, this setting controls which organization is used by default when making requests with the API keys above.

Personal

Note: You can also specify which organization to use for each API request. See [Authentication](#) to learn more.

Fig. 5: OPEN-AI API creation

```

26 byte x, y; // track lcd position
27 int datalength;
28
29 int a=0;
30 int b=5;
31 String msg="";
32 const char backslash = 3;
33 char c;
34
35 const char* ssid = "****";
36 const char* password = "*****";
37 const char* api_key = "*****";
38
39 void connectToWiFi() {
40     WiFi.begin(ssid, password);
41     while (WiFi.status() != WL_CONNECTED) {
42         delay(1000);
43         Serial.println("Connecting to WiFi...");
44     }
45     Serial.println("Connected to WiFi!");
46 }
47
48 // currently un-used:
49 #define is_printable(c) (!(c&0x80)) // don't print if top bit is set
50
51 void setup() {
52     delay(300);
53     keyboard.begin(DataPin, IRQpin);
54     Serial.begin(115200);
55     tft.init();
56     audio.setPinout(I2S_BCLK, I2S_LRC, I2S_DOUT);
57     audio.setVolume(50);

```

Fig. 6: Snippet of source code

ESP8266SAM.h, AudioOutputI2S.h, and AudioGeneratorRTTTL.h, although they work for ESP32, the sound quality of ESP8266SAM.h is disappointing. For extended speech, it is challenging to discern, as it sounds like it is speaking through a long pipe. While AudioGeneratorRTTTL.H produces beautiful ringtones, it cannot speak. Therefore, Google TTS is the only choice for this system.

Only three GPIO pins and an internet connection are required to make the I2S amplifier work with Google TTS; 4 header files (available on GitHub) are also necessary to activate the amplifier. These header files have been compiled into a zip file for ease of use with this terminal.

Google TTS can speak one million characters per month free for your account. Speaking 'EFY' is a 3-character expense but speaking 'Electronics For You' is a 17-character expense! Also, Google will speak only 200 characters at a time. Beyond 200 characters, a paid account from Google is required.