

EFY Note

The source code of this project is included in this month's EFY DVD and is also available for free download at source.efymag.com

DO-IT-YOURSELF

is uploaded to the microcontroller using STK500. ProgISP programmer was used to burn the hex code at EFY Lab. Before uploading the hex code (touchscreen.hex), set the following fuse bits:

LOW = C1

HIGH = 99

Construction and testing

An actual-size PCB layout for the transmitter section is shown in Fig. 5 and its components layout in Fig. 6. Assemble the components—including the touchscreen, GLCD, ANT.1 and TX1—on the PCB. Note that only secondary terminals of X1 (12V AC) are shown in the PCB. Place X1 at a suitable location inside the enclosure.

An actual-size PCB layout for

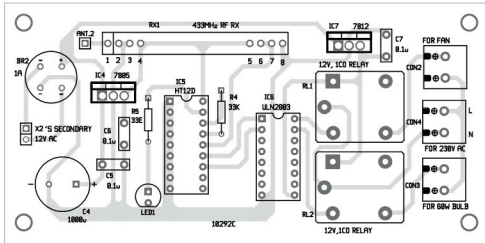


Fig. 8: Components layout for the PCB (receiver section)

receiver section is shown in Fig. 7 and its components layout in Fig. 8. Assemble the components on the PCB. Connect the secondary terminals of X2 (12V AC) to the PCB.

After loading the code, insert IC2 into the PCB. Place the receiver unit at a distance of about 10 to 30 metres away from the transmitter. Connect the two appliances across RL1 and RL2 in the receiver unit. Connect

power supplies to the transmitter and receiver circuits. Now the user can touch the symbols on the touchscreen in the transmitter unit to switch on/off the appliances. **EFY**



Hemang Pandhi is assistant system engineer at Tata Consultancy Services, Pune

KORE
Total LED Lighting Solutions

KEY OPERATION & ELECTROCOMPONENTS PVT. LTD.
AN ISO 9001:2008 CERTIFIED COMPANY

OSRAM

DISON

MLS INDIA

RISHANG

SHOWIN

PHILIPS

SLV LIGHTSTRA

LED Flood Light Fixtures
10W/20W/50W/
100W/150W/180W



LED High Bay Light Fixtures
50W/120W/
150W/180W



PHILIPS DRIVER
9W,10W,12W,20W



- LEDs: High watt, SMD etc.
- LED BULBS—MR16, B22, GU10, E27.
- LED Downlighters / Fixtures.

- LED Modules, Rigid Strip, Strip Light.
- Modules for Street Lights & Bulbs.
- LED Street Lights/Bay Lights & Flood Light Fixtures.

- Wide range of Complete T8 / T5 LED Tube lights.
- Complete solutions of LED Bulbs ranging from 5W/7W/9W.
- Customised in different Color Temperatures as per requirement.

OFFICE: Plot no-48, 1st Floor, Street No-3, Rajasthan Udyog Nagar,
Near Jahangirpuri Metro Station, G T Karnal Road, Delhi-110033.
Ph. No.: 011-45380073/47481516 Mob.: 9953557477
Email: sales@keyoperation.in, Website : www.keyoperation.co.in

SHOWROOM: 426, Old Lajpat Rai Market,
Deewan Hall Road,
Delhi -110006
Phone: 011-23861005