



Fig. 6: Default Answer

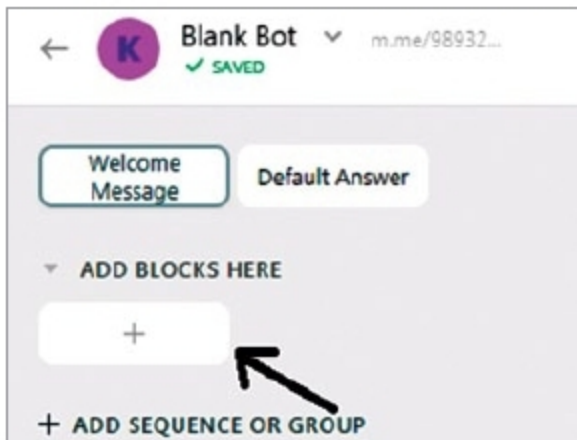


Fig. 7: Add blocks

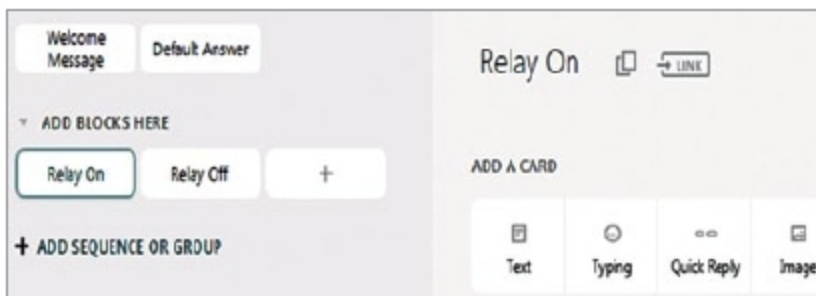


Fig. 8: Create Relay On and Relay Off blocks



Fig. 9: Edit text card for Relay On



Fig. 10: AI setup

page (Fig. 3) from the following link:

www.facebook.com/pages/creation/

Click on Get Started under Community or public figure option. Add page name and category. You can also add profile and cover images to the page. Keep the page

hidden from public.

Chatfuel setup

Go to Chatfuel (<https://dashboard.chatfuel.com/#/bots>) and sign up with the same Facebook profile that you created for the page above. Then, go to Dashboard and select Create from Template and then Blank Bot (Fig. 4). Now, the blank bot is created in Dashboard. Click on Connect to connect it to the Facebook page.

Select the Facebook page you want to connect with. To start AI of the chatbot, go to Automate and edit Welcome Message by changing the user's first name (Fig. 5).

Click on Default Answer and edit the name in the same way. The default answer is the automated response for commands not programmed in your chatbot, or for unexpected errors.

Add blocks for all instructions (Fig. 7). Blocks are functions that get executed with chat commands. Click

on + symbol (shown in Fig. 7) to add these blocks. These functional blocks hit the APIs of IFTTT server.

Create two blocks and rename these as Relay On and Relay Off (Fig. 8). Select Relay On and add a text card to it (Fig. 9). This text card is the reply that your chatbot gives corresponding to the block. Click on Text to edit the text card for your preferred answer.

Make similar settings for Relay Off with Light Off message.

Click on Set Up AI and select + ADD AI RULE, as shown in Fig. 10. This is the main set up for AI.

Add AI rules by writing all permissible words or phrases a user may use, as shown using the first arrow in Fig. 11. The AI must reply with blocks.

Add the corresponding block, as shown using the third arrow. To add each phrase, type the phrase and press Enter.

Further settings in Chatfuel are done after setting up IFTTT server.

Adafruit IO setup

Adafruit IO server is at the IoT end. ESP8266 gets connected with Adafruit IO server and executes the desired commands. Sign up or sign in to your Adafruit IO account from <https://io.adafruit.com/>

After creating Adafruit account, you will be taken to Adafruit Home Screen. Select Feeds from Menu, and click Action > Create a New Feed from the drop-down menu (Fig. 12).

Give the feed a name, such as OnOff. Select Dashboards > Actions > Create a New Dashboard.

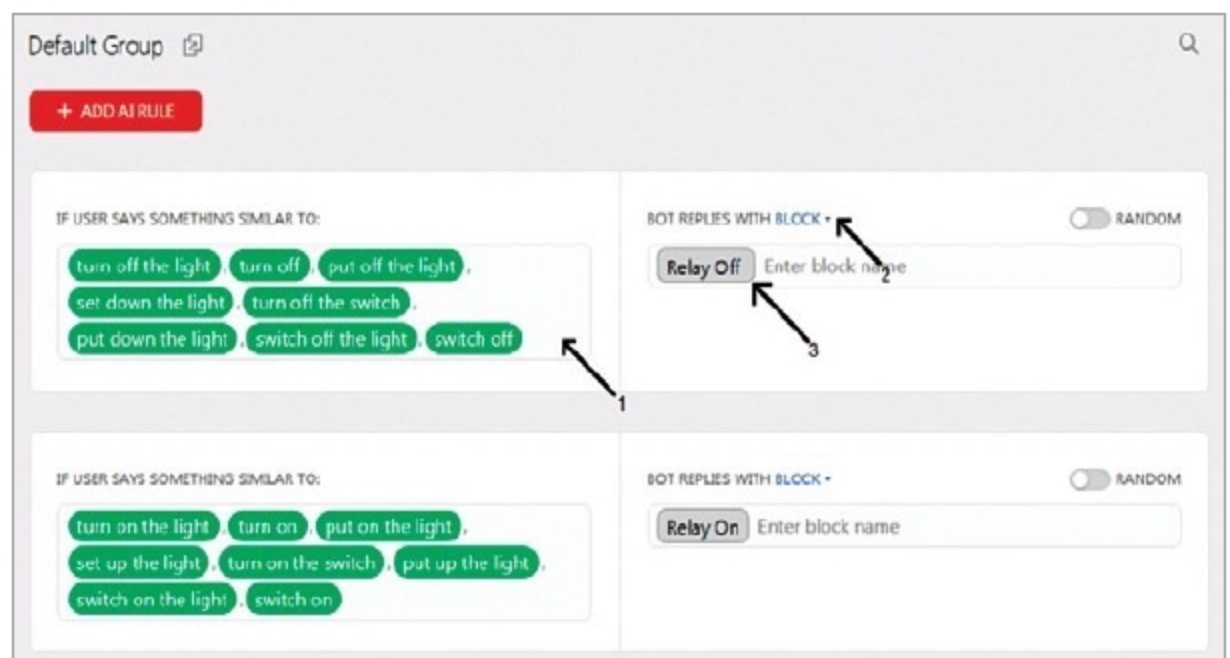


Fig. 11: Set up AI rules