


Original, innovative circuit ideas are invited

from designers and
experimenters
for publication in EFY magazine

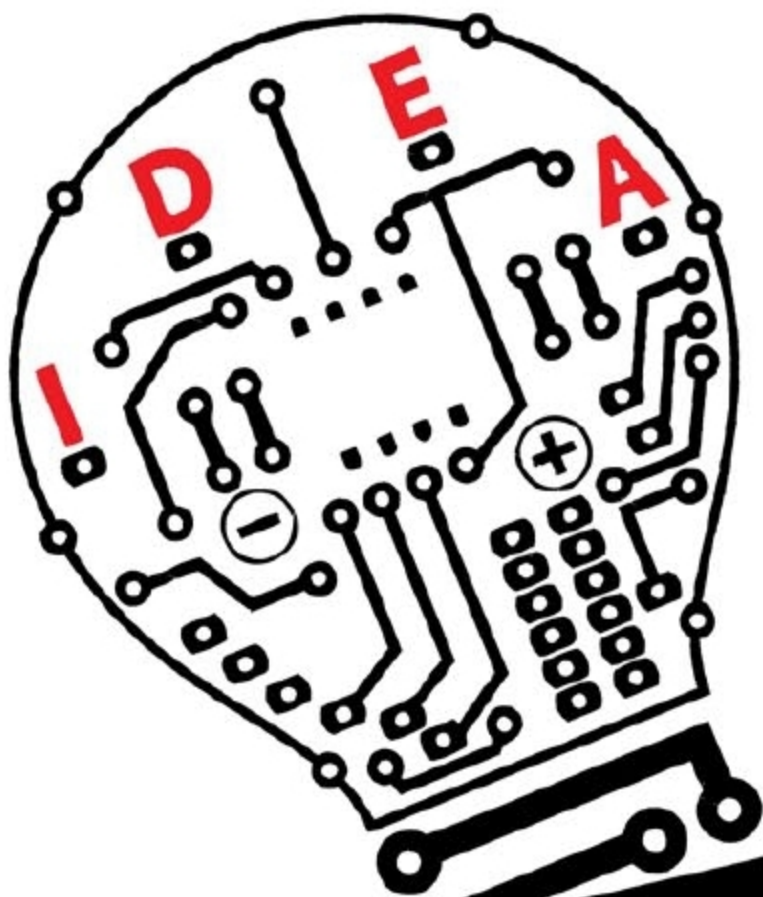

**Honorarium (minimum ₹1,000)
will be paid to the contributors soon
after publication of their articles.**

Complete details may be sent to the
'Editor, Electronics For You,
D-87/1, Okhla Industrial Area Phase 1, New Delhi 110020'
or emailed to editsec@efy.in

For editorial guidelines, visit
http://efymag.com/Guidelines_for_EFY_authors.doc

DO-IT-YOURSELF

```
--aggressive    More CPU for more messages (two bits fixes, ...)
--mlat         display raw messages in Beast ascii mode
--stats        With --ifile print stats at exit. No other output
--onlyaddr     Show only ICAO addresses (testing purposes)
--metric       Use metric units (meters, km/h, ...)
--snip <level> Strip IQ file removing samples < level
--debug <flags> Debug mode (verbose), see README for details
--quiet        Disable output to stdout. Use for daemon applications
--ppm <error>  Set receiver error in parts per million (default 0)
--help         Show this help
```

Debug mode flags: d = Log frames decoded with errors

D = Log frames decoded with zero errors

c = Log frames with bad CRC

C = Log frames with good CRC

p = Log frames with bad preamble

n = Log network debugging info

j = Log frames to frames.js, loadable by debug.html

Using this manual, an interactive session can be carried out to view incoming decoded ADS-B signals from the airplanes in a tabular format. For that, type '--interactive' as one of the commands on the terminal.

Apart from receiving decoded information from ADS-B signals, plot and see it graphically on a map. To do so,

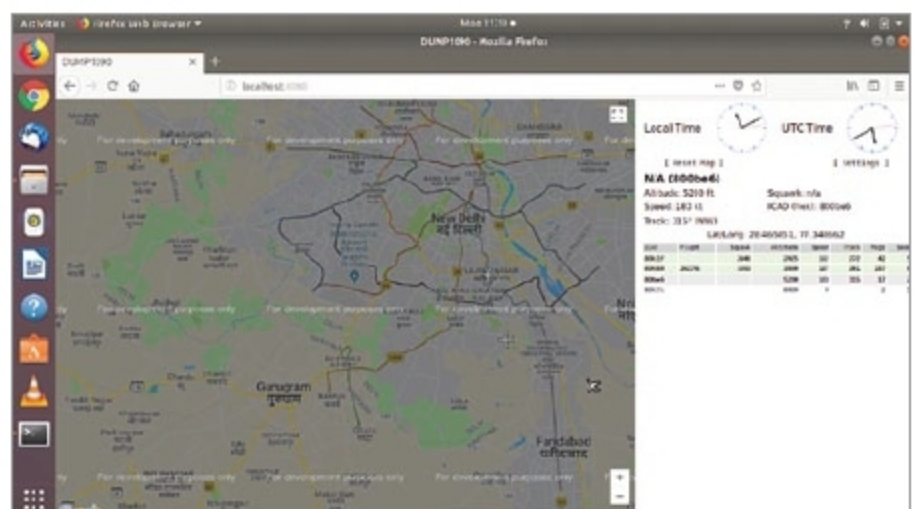


Fig. 2: Three airplanes captured on Google Maps during testing, with ADS-B signals on the right

type the argument '--net' on the terminal. This will create a Google Maps Web server on which the points where the airplanes are located can be plotted using the data from dump1090.

Enter the following command:

```
$ ./dump1090 --interactive --net
```

The following will appear on the terminal:

```
Hex      Mode Sqwk Flight Alt Spd Hdg  Lat  Long Sig Msgs Ti|
```

On the browser go to <http://localhost:8080>. All nearby airplanes will appear on Google Maps, along with other relevant data such as latitude, longitude and altitude.

A screenshot of Google Maps captured during testing is shown in Fig. 2. **EFY**



Varun Kumar is an electronics hobbyist and a circuit designer. His interests include wireless communication and computer programming