

Sending REAL-TIME SENSOR DATA Through e-Mail

ABUTHAHIR TAJUDEEN

This project is based on Raspberry Pi and Python programming, and sends real-time sensor data via Gmail. Raspberry Pi is a single-board computer with several features. Connection details of the ultrasonic sensor with Raspberry Pi are shown in Fig. 1.

Hardware includes Raspberry Pi 3, ultrasonic sensor HC-SR04, Internet connection and some hookup wires. The author's prototype is shown in Fig. 2.

Software

Software required is Python Interpreter. Code is written in Python programming language. Make sure you have an updated version of Python in Raspbian operating system (Jessie) of Raspberry Pi. If not, update it by typing the following commands on the terminal:

```
$ sudo apt-get update
$ sudo apt-get upgrade
$ sudo apt-get install python3
```

In case you are using an older version of Python, you may

need SMTP library. Type the command given below on the terminal to install the library.

```
$ pip install smtplib
```

Now, write mailer.py code in Python Editor, or open the code (mailer.py) either via the terminal or Python Editor. This code is available on source.efymag.com

After opening the code, make the following changes:

1. In sender field, type your e-mail address.
2. In senpass field, type the pass-

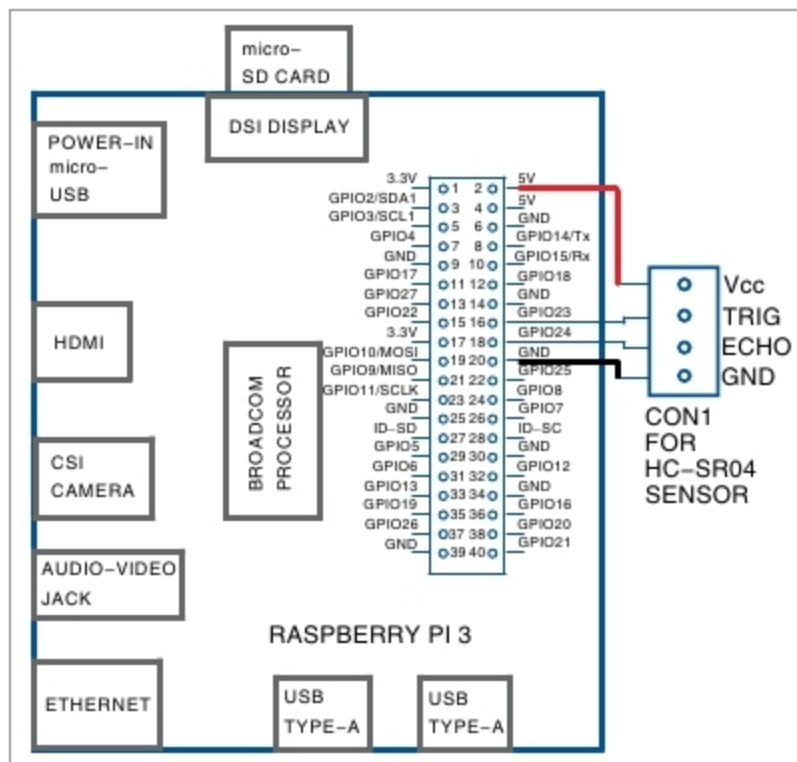


Fig. 1: Pin connections between sensor and Raspberry Pi



Fig. 2: Author's prototype

THE COMPLETE MAGAZINE ON OPEN SOURCE

OpenSource
ForYou

The latest from the Open Source world is here.

OpenSourceForU.com

Join the community at facebook.com/opensourceforu

Follow us on Twitter @OpenSourceForU