

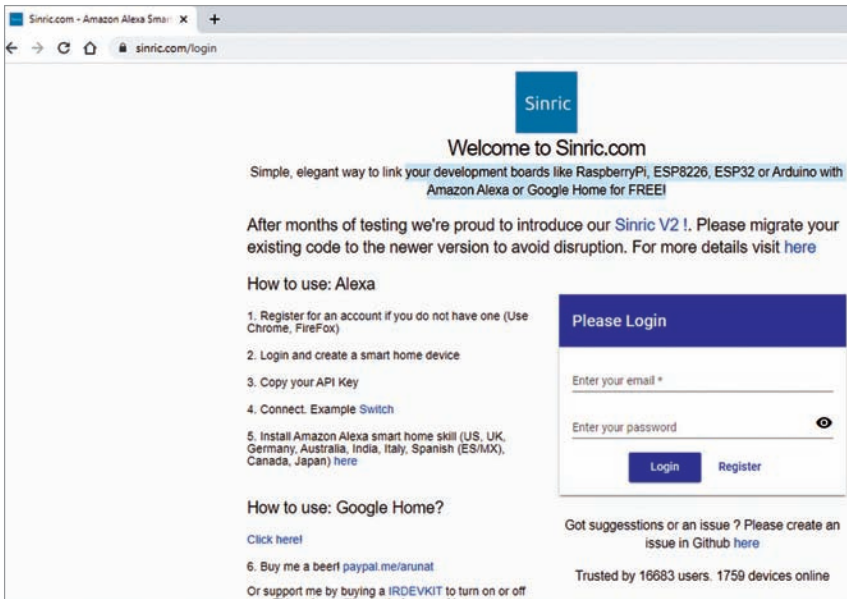


Fig. 7: Sinric webpage

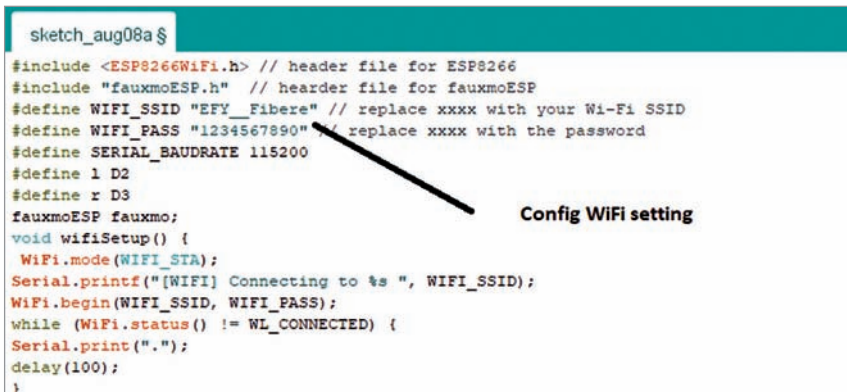


Fig. 8: Code snippet setting Wi-Fi and password

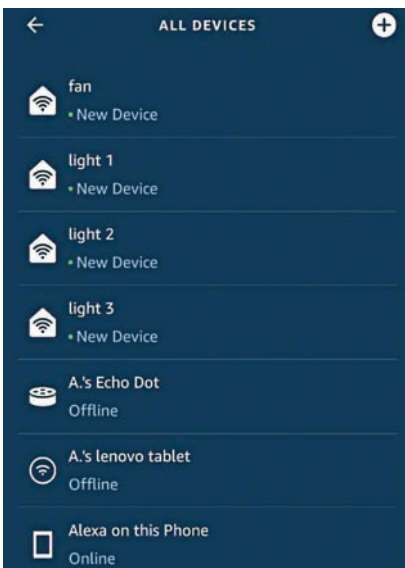


Fig. 9: Discovered devices

our NodeMCU with Arduino IDE. So, now we need to set the Sinric to get our Alexa and NodeMCU connected to each other.

Install Alexa app in your Android or iOS and complete the setup of

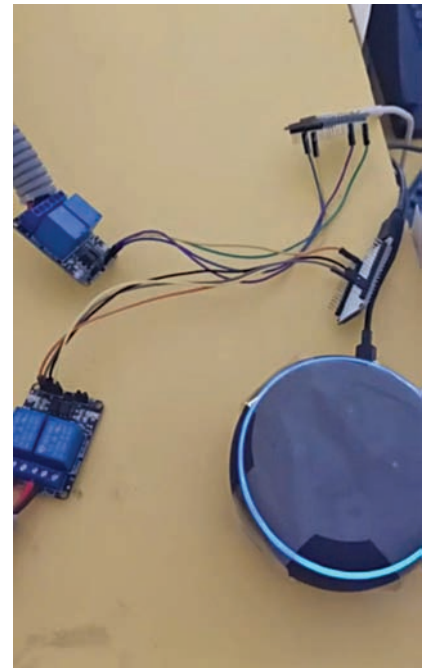


Fig. 11: Echo Dot ready to receive commands

Amazon Alexa. Open Chrome or Firefox and copy the link [www.sinric.com](http://www.sinric.com), which on clicking appears as shown in Fig. 7.

Register for a free account and login into this account. There you can find your API key, which is unique, and options to generate smart home devices.

Create the code for NodeMCU. Open the .ino code file (check [source.efymag.com](http://source.efymag.com)) and then configure the Wi-Fi SSID and password of your home network. In the code, select the NodeMCU board and upload the code to the board. Image of the code snippet setting Wi-Fi and password is shown in Fig. 8.

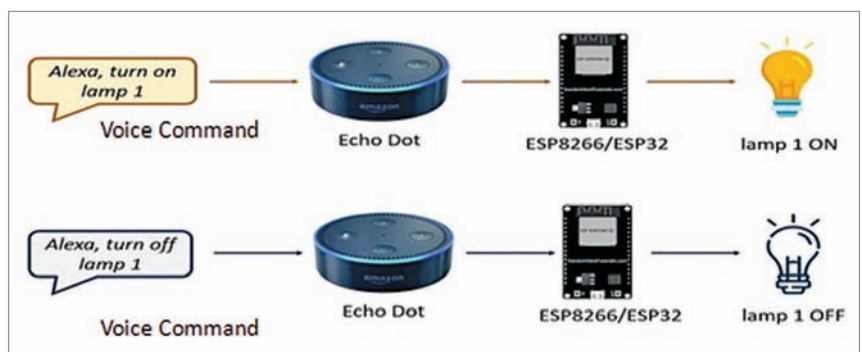


Fig. 10: Working of the project